

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332586-930

Luminaire Tested: **SA4XXDIP-C795D365U930-4F0-1E-UDD-F**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332586-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C795D365U930-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 365 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3970.1 lumens  
Efficiency: N/A  
Efficacy: 113.4 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 35  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332586-930  
CATALOG NUMBER: SA4XXDIP-C795D365U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

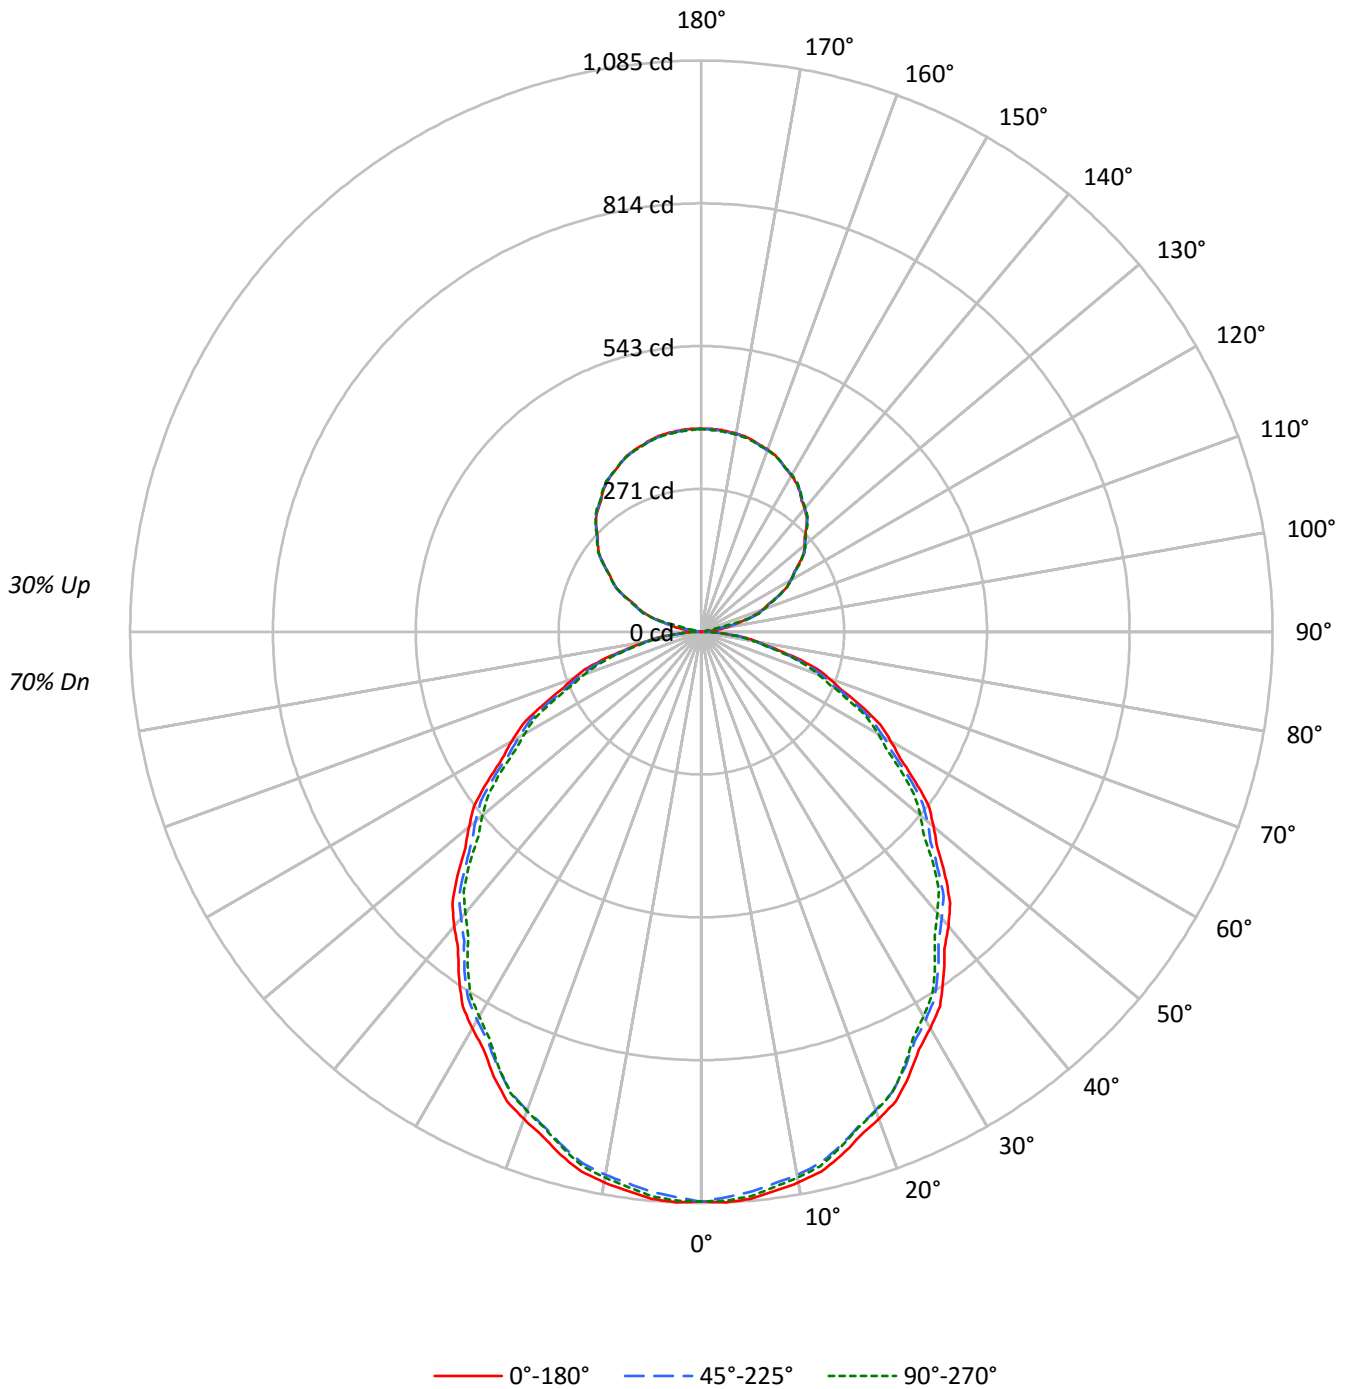



TEST NUMBER: P332586-930

CATALOG NUMBER: SA4XXDIP-C795D365U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	74	74	74	70
1	102	98	94	90	96	93	89	86	83	80	78	74	72	70	66	64	63	59
2	93	85	79	74	88	81	75	70	73	68	64	65	62	58	58	55	53	49
3	85	75	67	61	80	71	64	59	64	59	54	57	53	49	51	48	45	42
4	78	67	58	52	73	63	56	50	57	51	46	51	46	42	46	42	39	36
5	72	59	51	45	67	57	49	43	51	45	40	46	41	37	41	37	34	31
6	66	53	45	39	62	51	43	38	46	40	35	42	36	32	38	33	30	27
7	61	48	40	34	58	46	39	33	42	36	31	38	33	29	34	30	27	24
8	57	44	36	31	54	42	35	30	38	32	28	35	30	26	32	27	24	22
9	53	40	33	27	50	39	31	26	35	29	25	32	27	23	29	25	22	20
10	50	37	30	25	47	36	29	24	33	27	22	30	25	21	27	23	20	18

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8737	8737	8737
5°	8763	8658	8721
10°	8708	8588	8630
15°	8603	8466	8487
20°	8463	8314	8322
25°	8304	8141	8118
30°	8108	7938	7866
35°	7906	7727	7624
40°	7695	7484	7347
45°	7476	7247	7108
50°	7232	7036	6818
55°	6970	6763	6542
60°	6707	6455	6260
65°	6411	6162	5914
70°	6080	5773	5549
75°	5571	5303	5168
80°	4956	4756	4635
85°	4335	4177	4094



TEST NUMBER: P332586-930

CATALOG NUMBER: SA4XXDIP-C795D365U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	101.9	2.6
10°-20°	287.2	7.2
20°-30°	422.7	10.6
30°-40°	491.4	12.4
40°-50°	491.4	12.4
50°-60°	429.8	10.8
60°-70°	319.2	8.0
70°-80°	181.4	4.6
80°-90°	53.5	1.3
90°-100°	13.2	0.3
100°-110°	84.0	2.1
110°-120°	160.7	4.0
120°-130°	204.0	5.1
130°-140°	218.3	5.5
140°-150°	204.1	5.1
150°-160°	164.6	4.1
160°-170°	106.2	2.7
170°-180°	36.6	0.9
0°-30°	811.8	20.4
0°-40°	1303.1	32.8
0°-60°	2224.4	56.0
0°-90°	2778.4	70.0
90°-120°	257.9	6.5
90°-150°	884.3	22.3
90°-180°	1192.0	30.0
0°-180°	3970.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1082	1082	1082	1082	1082	
5°	1081	1078	1068	1077	1076	103
15°	1029	1025	1013	1018	1016	290
25°	932	926	914	915	911	429
35°	802	796	784	778	774	501
45°	655	648	635	626	623	505
55°	495	492	480	470	465	443
65°	336	331	323	314	310	332
75°	179	174	170	167	166	190
85°	47	47	45	45	44	52
90°	1	4	6	8	9	3
95°	16	7	6	8	8	20
105°	87	88	90	92	82	91
115°	162	163	162	163	163	159
125°	228	229	228	229	229	203
135°	282	282	283	284	284	217
145°	326	326	326	327	327	203
155°	357	357	356	357	357	165
165°	377	375	375	377	375	106
175°	385	384	384	386	383	37
180°	385	385	385	385	385	



TEST NUMBER: P332586-930

CATALOG NUMBER: SA4XXDIP-C795D365U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3
2.5°	1085.1	1084.6	1084.1	1083.7	1083.2	1082.1	1080.4	1078.7	1077.0	1075.4	1076.8
5°	1081.4	1080.7	1079.9	1079.1	1078.3	1076.8	1074.7	1072.6	1070.5	1068.4	1070.5
7.5°	1071.4	1070.6	1069.8	1069.0	1068.3	1066.7	1064.4	1062.0	1059.6	1057.3	1059.0
10°	1062.3	1061.6	1060.8	1060.1	1059.2	1057.6	1055.1	1052.6	1050.1	1047.6	1049.1
12.5°	1050.5	1049.8	1049.0	1048.2	1047.5	1045.7	1043.1	1040.4	1037.8	1035.1	1036.8
15°	1029.4	1028.6	1027.8	1027.0	1026.3	1024.5	1021.6	1018.7	1015.8	1012.9	1014.1
17.5°	1003.9	1002.9	1001.9	1001.0	1000.0	998.2	995.5	992.7	989.9	987.2	988.0
20°	985.1	984.1	983.3	982.3	981.3	979.3	976.5	973.5	970.7	967.8	968.4
22.5°	965.1	963.8	962.5	961.2	959.9	957.9	955.0	952.1	949.2	946.3	947.4
25°	932.2	930.9	929.5	928.2	926.8	924.8	922.1	919.4	916.7	914.0	914.2
27.5°	894.8	893.4	892.0	890.6	889.2	887.3	884.8	882.3	879.8	877.3	876.8
30°	869.8	868.3	866.7	865.2	863.6	861.6	859.1	856.6	854.1	851.6	850.8
32.5°	843.4	842.0	840.7	839.3	837.9	835.8	833.2	830.5	827.9	825.2	824.3
35°	802.2	800.8	799.5	798.1	796.8	794.8	792.1	789.4	786.7	784.0	782.6
37.5°	758.6	757.4	756.2	755.0	753.7	751.6	748.8	745.8	743.0	740.0	738.6
40°	730.2	728.6	727.1	725.5	724.0	721.8	718.9	716.0	713.1	710.2	708.3
42.5°	699.7	698.7	697.8	696.9	695.9	693.9	690.7	687.5	684.3	681.1	678.9
45°	654.8	653.4	652.1	650.7	649.4	647.1	644.1	641.0	637.9	634.8	632.7
47.5°	607.7	606.8	605.9	605.0	604.1	602.2	599.3	596.5	593.6	590.8	588.3
50°	575.8	575.0	574.3	573.5	572.7	571.0	568.3	565.7	562.9	560.2	557.5
52.5°	544.6	543.7	542.7	541.8	540.9	539.0	536.1	533.3	530.4	527.6	525.2
55°	495.2	494.6	494.0	493.4	492.8	491.2	488.5	485.8	483.1	480.5	478.1
57.5°	448.0	447.4	446.7	446.1	445.4	443.7	441.1	438.4	435.8	433.1	430.9
60°	415.4	414.4	413.4	412.5	411.6	409.8	407.3	404.8	402.3	399.8	398.0
62.5°	383.5	382.7	381.9	381.1	380.3	378.5	375.9	373.2	370.6	367.9	366.3
65°	335.6	334.7	333.7	332.7	331.7	330.3	328.4	326.4	324.5	322.6	320.7
67.5°	287.4	286.5	285.6	284.7	283.9	282.5	280.6	278.8	277.0	275.1	273.2
70°	257.6	256.2	254.9	253.5	252.2	250.7	249.2	247.6	246.1	244.6	243.0
72.5°	225.7	224.3	223.0	221.6	220.2	219.0	217.8	216.5	215.2	214.0	212.8
75°	178.6	177.7	176.8	175.8	174.8	173.8	172.8	171.9	171.0	170.0	169.2
77.5°	133.7	133.3	132.9	132.5	132.0	131.4	130.5	129.7	128.8	128.0	127.8
80°	106.6	106.1	105.5	104.9	104.4	103.9	103.5	103.1	102.7	102.3	101.9
82.5°	80.3	80.1	79.7	79.5	79.2	79.1	79.0	78.9	78.8	78.8	78.5
85°	46.8	46.8	46.8	46.8	46.8	46.6	46.2	45.9	45.5	45.1	45.1
87.5°	18.2	18.2	18.2	18.2	18.2	18.1	18.1	18.0	17.9	17.9	18.0
90°	0.9	1.5	2.3	3.0	3.7	4.3	4.8	5.3	5.8	6.4	6.7
92.5°	3.7	3.7	3.7	3.8	3.8	4.1	4.6	5.1	5.6	6.1	6.5
95°	15.8	13.7	11.5	9.3	7.2	6.1	6.1	6.2	6.3	6.4	6.7
97.5°	33.7	35.0	36.4	37.7	39.1	36.2	29.0	21.9	14.8	7.6	7.7
100°	47.3	48.4	49.6	50.7	51.9	48.0	39.2	30.3	21.5	12.7	11.6
102.5°	62.5	63.3	64.2	65.0	65.9	65.7	64.6	63.4	62.2	61.1	49.3
105°	86.7	87.1	87.5	87.9	88.3	88.6	88.9	89.3	89.6	89.9	90.5
107.5°	109.3	109.4	109.7	109.8	110.1	110.3	110.8	111.2	111.6	112.1	112.3
110°	124.5	124.7	124.8	125.1	125.2	125.6	125.9	126.3	126.7	127.1	127.2



TEST NUMBER: P332586-930

CATALOG NUMBER: SA4XXDIP-C795D365U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	139.3	139.6	139.9	140.2	140.6	140.9	141.0	141.2	141.4	141.6	141.5
115°	161.9	162.2	162.3	162.5	162.7	162.7	162.7	162.7	162.6	162.5	162.7
117.5°	182.4	182.6	182.9	183.2	183.4	183.6	183.8	183.9	184.0	184.2	184.2
120°	196.2	196.5	196.7	197.0	197.2	197.3	197.3	197.2	197.1	197.1	197.2
122.5°	209.1	209.3	209.5	209.6	209.8	209.9	209.9	210.0	210.1	210.3	210.3
125°	227.6	227.9	228.1	228.4	228.7	228.7	228.6	228.4	228.4	228.2	228.4
127.5°	245.2	245.2	245.2	245.3	245.4	245.6	245.9	246.1	246.5	246.8	246.7
130°	256.4	256.5	256.6	256.7	256.7	256.8	257.0	257.2	257.4	257.6	257.6
132.5°	266.8	266.9	267.0	267.2	267.3	267.4	267.7	267.9	268.2	268.4	268.5
135°	282.3	282.3	282.3	282.2	282.1	282.2	282.5	282.7	283.0	283.2	283.4
137.5°	296.1	296.2	296.2	296.2	296.3	296.4	296.7	296.9	297.3	297.5	297.7
140°	305.2	305.2	305.4	305.5	305.7	305.7	305.9	306.1	306.1	306.3	306.5
142.5°	313.2	313.4	313.6	313.9	314.1	314.3	314.4	314.5	314.5	314.6	314.7
145°	325.6	325.8	326.0	326.2	326.4	326.4	326.4	326.4	326.4	326.4	326.5
147.5°	335.4	335.8	336.1	336.6	336.9	337.0	337.0	336.9	336.8	336.8	336.8
150°	342.6	342.8	343.1	343.4	343.6	343.7	343.6	343.6	343.5	343.5	343.5
152.5°	348.6	348.8	349.0	349.2	349.4	349.4	349.4	349.2	349.1	349.0	349.1
155°	357.0	357.1	357.1	357.2	357.3	357.2	357.0	356.8	356.6	356.4	356.7
157.5°	364.1	364.0	364.0	363.9	363.9	363.8	363.6	363.4	363.1	363.0	363.3
160°	368.3	368.0	367.9	367.7	367.5	367.4	367.3	367.2	367.1	367.0	367.5
162.5°	371.9	371.7	371.5	371.2	371.0	370.8	370.7	370.6	370.6	370.6	371.0
165°	376.6	376.3	375.9	375.6	375.3	375.1	375.1	375.1	375.1	375.1	375.7
167.5°	380.3	379.9	379.6	379.3	379.0	378.8	378.7	378.7	378.6	378.6	379.2
170°	382.4	382.0	381.6	381.2	380.8	380.7	380.7	380.8	380.8	380.9	381.4
172.5°	383.8	383.4	382.9	382.6	382.2	382.0	382.1	382.2	382.2	382.3	382.8
175°	385.2	384.8	384.5	384.1	383.7	383.5	383.6	383.7	383.8	383.8	384.4
177.5°	386.0	385.6	385.2	384.8	384.5	384.3	384.5	384.6	384.7	384.7	385.2
180°	385.2	385.2	385.2	385.2	385.2	385.2	385.2	385.2	385.2	385.2	385.2



TEST NUMBER: P332586-930

CATALOG NUMBER: SA4XXDIP-C795D365U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3
2.5°	1078.4	1079.9	1081.5	1082.2	1082.1	1081.9	1081.7	1081.6
5°	1072.6	1074.7	1076.8	1077.7	1077.3	1077.0	1076.6	1076.2
7.5°	1060.7	1062.4	1064.0	1064.8	1064.6	1064.4	1064.1	1063.9
10°	1050.7	1052.2	1053.8	1054.3	1053.9	1053.5	1053.2	1052.8
12.5°	1038.5	1040.2	1041.9	1042.4	1042.0	1041.4	1040.8	1040.3
15°	1015.2	1016.4	1017.5	1017.8	1017.2	1016.7	1016.1	1015.5
17.5°	988.7	989.4	990.2	990.3	989.9	989.5	989.2	988.8
20°	969.0	969.6	970.1	970.2	969.8	969.5	969.1	968.7
22.5°	948.4	949.4	950.5	950.6	949.9	949.3	948.5	947.9
25°	914.4	914.6	914.8	914.5	913.8	913.0	912.2	911.4
27.5°	876.4	875.9	875.4	874.7	873.8	872.8	871.8	870.8
30°	850.0	849.3	848.5	847.7	846.7	845.7	844.7	843.8
32.5°	823.4	822.5	821.6	820.6	819.6	818.6	817.7	816.8
35°	781.3	779.9	778.5	777.4	776.4	775.5	774.5	773.6
37.5°	737.1	735.6	734.3	732.9	731.6	730.3	729.0	727.7
40°	706.4	704.5	702.5	701.1	700.1	699.2	698.2	697.2
42.5°	676.6	674.4	672.1	670.7	670.1	669.4	668.8	668.1
45°	630.6	628.4	626.3	625.0	624.4	623.8	623.2	622.6
47.5°	586.0	583.6	581.1	579.3	577.8	576.3	574.9	573.4
50°	554.8	552.1	549.4	547.5	546.3	545.2	544.0	542.9
52.5°	522.9	520.4	518.0	516.2	514.7	513.2	511.8	510.3
55°	475.8	473.5	471.2	469.4	468.3	467.2	465.9	464.8
57.5°	428.7	426.5	424.3	422.7	421.5	420.4	419.3	418.2
60°	396.3	394.6	392.8	391.5	390.5	389.6	388.6	387.7
62.5°	364.7	363.1	361.6	360.3	359.3	358.3	357.4	356.4
65°	318.8	316.8	314.9	313.5	312.5	311.5	310.5	309.6
67.5°	271.4	269.5	267.7	266.6	266.4	266.1	265.8	265.5
70°	241.5	239.9	238.4	237.3	236.8	236.2	235.6	235.1
72.5°	211.6	210.3	209.1	208.2	207.6	207.0	206.4	205.9
75°	168.4	167.6	166.9	166.4	166.2	166.0	165.8	165.7
77.5°	127.5	127.3	127.1	126.7	126.2	125.7	125.2	124.7
80°	101.6	101.2	100.8	100.5	100.3	100.1	100.0	99.7
82.5°	78.3	78.0	77.8	77.6	77.5	77.2	77.0	76.8
85°	45.1	45.1	45.1	45.0	44.8	44.6	44.4	44.2
87.5°	18.1	18.2	18.3	18.3	18.3	18.3	18.3	18.3
90°	7.1	7.5	7.9	8.2	8.2	8.4	8.5	8.6
92.5°	6.8	7.3	7.7	7.8	7.9	7.9	7.9	8.0
95°	7.1	7.5	7.9	8.1	8.2	8.2	8.3	8.3
97.5°	7.7	7.7	7.7	7.8	7.9	7.9	8.0	8.1
100°	10.5	9.4	8.3	7.8	7.9	7.9	8.0	8.1
102.5°	37.6	25.8	14.1	8.2	8.2	8.2	8.3	8.3
105°	91.1	91.6	92.2	91.3	89.0	86.7	84.4	82.1
107.5°	112.7	112.9	113.2	113.5	113.7	114.0	114.2	114.5
110°	127.3	127.4	127.6	127.8	127.9	128.2	128.3	128.5





TEST NUMBER: P332586-930

CATALOG NUMBER: SA4XXDIP-C795D365U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	141.5	141.5	141.5	141.6	141.9	142.1	142.4	142.6
115°	162.7	162.9	163.1	163.1	163.1	163.1	163.1	163.1
117.5°	184.1	184.1	184.1	184.0	184.0	184.0	184.0	183.9
120°	197.3	197.5	197.6	197.6	197.5	197.3	197.2	197.1
122.5°	210.3	210.4	210.5	210.5	210.3	210.3	210.1	210.0
125°	228.6	228.8	228.9	229.1	229.2	229.3	229.3	229.3
127.5°	246.7	246.6	246.6	246.5	246.5	246.5	246.4	246.4
130°	257.7	257.8	257.9	257.9	257.9	257.9	257.9	257.9
132.5°	268.6	268.6	268.7	268.7	268.6	268.6	268.6	268.5
135°	283.5	283.6	283.7	283.9	284.0	284.1	284.3	284.4
137.5°	297.8	298.0	298.1	298.2	298.1	298.1	298.0	298.0
140°	306.6	306.9	307.0	307.2	307.3	307.3	307.4	307.4
142.5°	314.9	315.0	315.1	315.2	315.3	315.3	315.3	315.3
145°	326.6	326.7	326.7	326.8	326.9	327.1	327.2	327.3
147.5°	336.9	337.0	337.0	337.0	337.1	337.1	337.2	337.3
150°	343.5	343.5	343.5	343.5	343.6	343.6	343.6	343.7
152.5°	349.2	349.3	349.4	349.4	349.4	349.4	349.4	349.3
155°	356.9	357.2	357.4	357.5	357.3	357.1	356.9	356.7
157.5°	363.6	363.9	364.3	364.3	363.9	363.6	363.3	363.0
160°	367.9	368.3	368.6	368.6	368.3	367.9	367.5	367.0
162.5°	371.3	371.7	372.1	372.0	371.6	371.2	370.7	370.3
165°	376.2	376.7	377.2	377.2	376.6	376.0	375.4	374.9
167.5°	379.8	380.3	380.8	380.8	380.2	379.5	378.9	378.3
170°	382.0	382.5	382.9	382.9	382.3	381.6	381.0	380.3
172.5°	383.4	383.8	384.3	384.3	383.6	382.9	382.2	381.5
175°	385.0	385.6	386.1	386.0	385.2	384.5	383.7	382.9
177.5°	385.6	386.0	386.5	386.3	385.7	385.1	384.5	383.8
180°	385.2	385.2	385.2	385.2	385.2	385.2	385.2	385.2

(END OF REPORT)