

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332887-930

Luminaire Tested: **SA4XXRDIP-C350D1035U930-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332887-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C350D1035U930-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1035 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4086.9 lumens
Efficiency: N/A
Efficacy: 109.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332887-930

CATALOG NUMBER: SA4XXRDIP-C350D1035U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

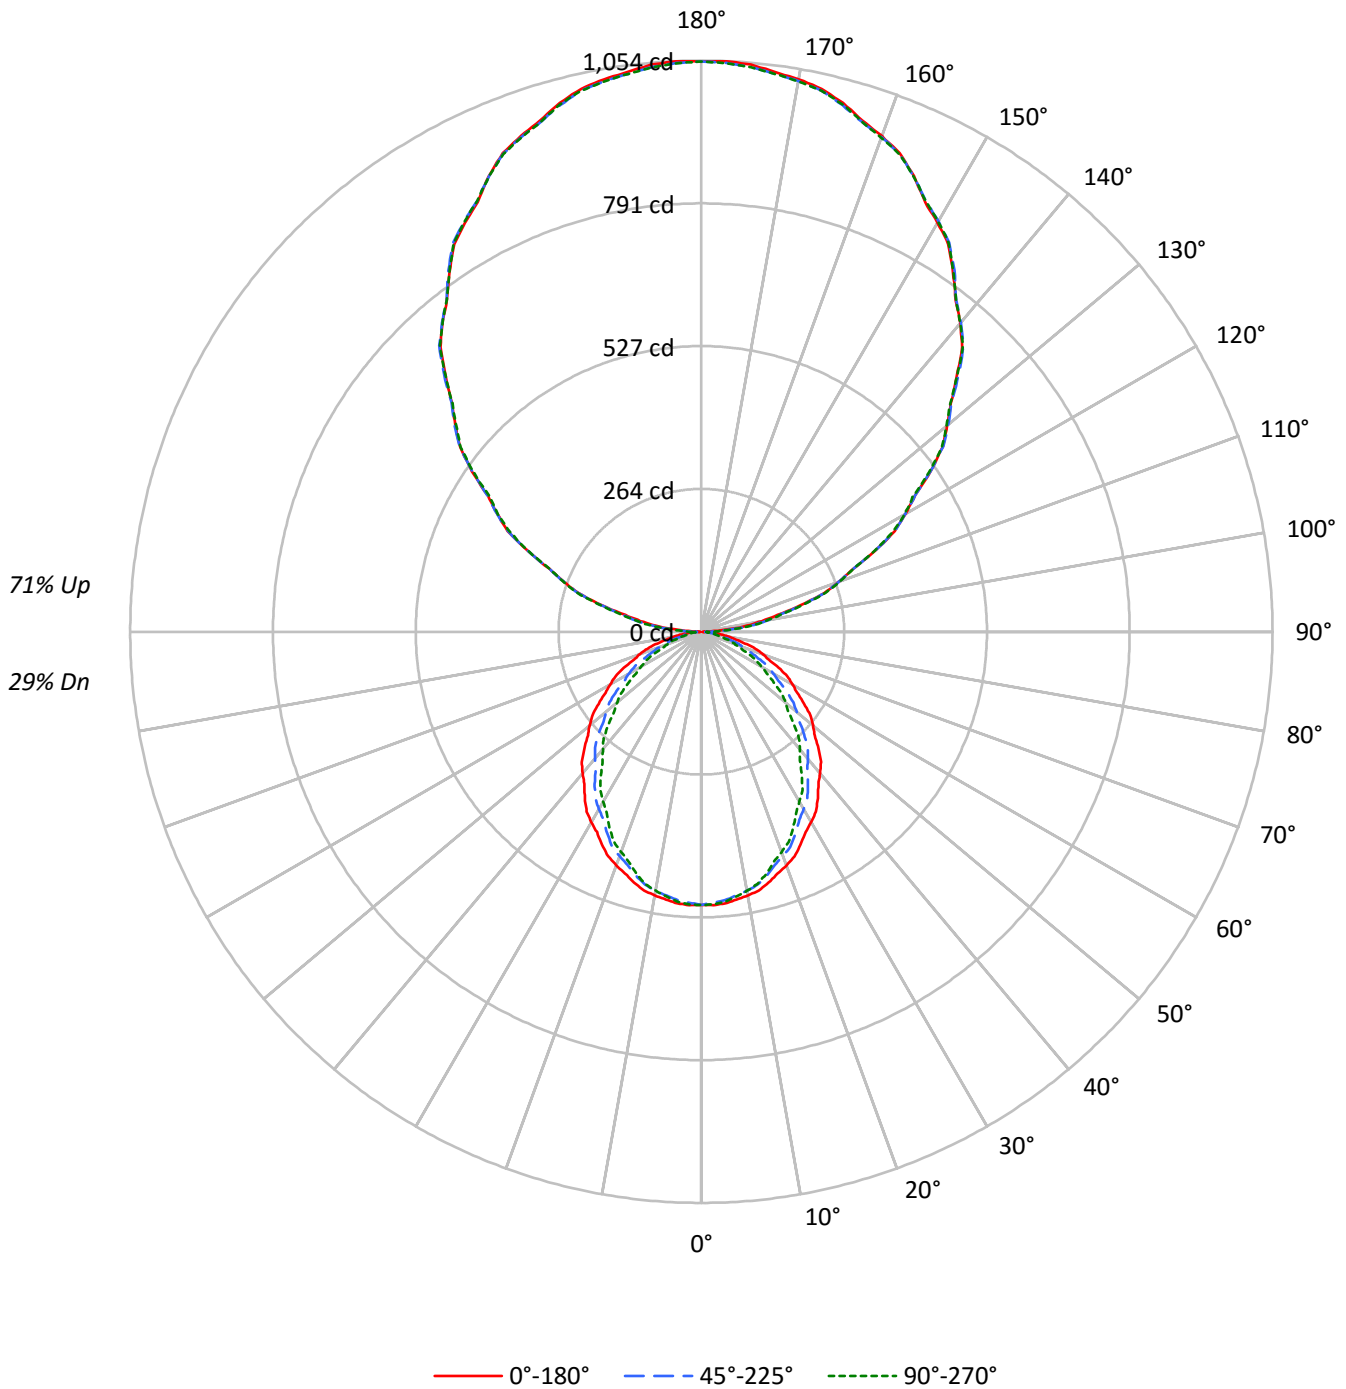



TEST NUMBER: P332887-930

CATALOG NUMBER: SA4XXRDIP-C350D1035U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	29
1	93	89	85	82	83	80	77	74	63	61	59	47	46	44	32	32	31	24
2	85	78	72	67	76	70	65	61	55	52	49	41	39	37	29	27	26	21
3	77	68	62	56	69	62	56	51	49	45	41	37	34	32	26	24	23	18
4	71	61	53	47	63	55	48	43	43	39	35	33	30	27	23	21	19	15
5	65	54	46	40	58	49	42	37	39	34	30	29	26	24	21	19	17	13
6	60	48	40	35	53	44	37	32	35	30	26	26	23	21	19	17	15	12
7	55	43	36	30	49	39	33	28	31	27	23	24	21	18	17	15	13	10
8	51	39	32	27	46	36	29	25	29	24	20	22	19	16	16	14	12	9
9	48	36	29	24	43	32	26	22	26	21	18	20	17	14	14	12	11	9
10	44	33	26	21	40	30	24	20	24	19	16	19	15	13	13	11	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4069	4069	4069
5°	4078	4028	4053
10°	4052	3980	3980
15°	4006	3896	3867
20°	3942	3786	3716
25°	3861	3657	3564
30°	3781	3522	3375
35°	3693	3381	3183
40°	3587	3222	2977
45°	3490	3062	2767
50°	3378	2880	2545
55°	3258	2688	2303
60°	3127	2480	2055
65°	3007	2220	1813
70°	2832	1931	1539
75°	2611	1603	1251
80°	2278	1223	1148
85°	1936	1112	1037



TEST NUMBER: P332887-930

CATALOG NUMBER: SA4XXRDIP-C350D1035U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.3	1.2
10°-20°	132.0	3.2
20°-30°	190.6	4.7
30°-40°	216.1	5.3
40°-50°	208.7	5.1
50°-60°	173.5	4.2
60°-70°	119.8	2.9
70°-80°	60.7	1.5
80°-90°	18.7	0.5
90°-100°	69.4	1.7
100°-110°	205.6	5.0
110°-120°	348.9	8.5
120°-130°	460.1	11.3
130°-140°	516.7	12.6
140°-150°	507.8	12.4
150°-160°	427.1	10.4
160°-170°	284.1	7.0
170°-180°	99.5	2.4
0°-30°	370.0	9.1
0°-40°	586.1	14.3
0°-60°	968.3	23.7
0°-90°	1167.6	28.6
90°-120°	623.9	15.3
90°-150°	2108.6	51.6
90°-180°	2919.0	71.4
0°-180°	4086.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	504	504	504	504	504	
5°	503	502	497	501	500	48
15°	479	475	466	465	463	135
25°	433	426	411	404	400	200
35°	375	362	343	330	323	234
45°	306	291	268	250	242	236
55°	232	216	191	172	164	207
65°	157	140	116	100	95	155
75°	84	69	51	43	40	88
85°	21	13	12	11	11	24
90°	2	11	18	23	24	4
95°	49	56	62	64	64	54
105°	190	191	194	196	198	201
115°	355	355	353	352	352	350
125°	517	517	516	514	513	460
135°	666	671	671	670	667	515
145°	810	813	814	813	810	507
155°	928	928	927	930	927	427
165°	1010	1008	1006	1010	1008	285
175°	1051	1047	1046	1051	1046	100
180°	1052	1052	1052	1052	1052	



TEST NUMBER: P332887-930

CATALOG NUMBER: SA4XXRDIP-C350D1035U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	504.0	504.0	504.0	504.0	504.0	504.0	504.0	504.0	504.0	504.0	504.0
2.5°	505.2	504.9	504.7	504.4	504.1	503.6	502.9	502.1	501.3	500.6	501.3
5°	503.2	502.9	502.6	502.2	501.8	501.2	500.1	499.1	498.1	497.1	497.9
7.5°	498.6	498.3	498.0	497.6	497.3	496.4	495.0	493.7	492.4	491.1	491.5
10°	494.3	493.9	493.5	493.1	492.6	491.6	490.1	488.5	487.0	485.5	485.8
12.5°	488.8	488.3	487.8	487.3	486.8	485.7	483.8	482.0	480.2	478.3	478.6
15°	479.3	478.5	477.8	477.0	476.2	474.7	472.6	470.4	468.3	466.2	466.0
17.5°	467.8	466.7	465.5	464.5	463.3	461.5	458.9	456.3	453.8	451.2	450.7
20°	458.9	457.7	456.6	455.5	454.4	452.4	449.5	446.5	443.6	440.7	440.0
22.5°	449.0	447.7	446.5	445.2	443.9	441.7	438.6	435.5	432.4	429.3	428.3
25°	433.4	431.9	430.3	428.8	427.2	424.7	421.2	417.7	414.1	410.6	409.1
27.5°	417.0	415.1	413.1	411.2	409.3	406.4	402.7	398.9	395.2	391.4	389.6
30°	405.6	403.4	401.3	399.2	397.1	394.0	389.9	385.9	381.8	377.8	375.7
32.5°	393.5	391.1	388.7	386.3	383.8	380.6	376.4	372.3	368.1	363.9	361.4
35°	374.7	371.9	369.2	366.5	363.7	360.2	356.0	351.6	347.4	343.1	340.1
37.5°	354.6	351.7	348.9	346.1	343.2	339.5	334.7	330.0	325.2	320.5	317.2
40°	340.4	337.5	334.7	331.9	329.1	325.2	320.3	315.4	310.5	305.7	302.1
42.5°	326.8	323.8	320.8	317.9	315.0	310.9	305.8	300.7	295.6	290.5	286.8
45°	305.7	302.5	299.3	296.1	292.9	288.8	283.6	278.5	273.4	268.2	264.0
47.5°	283.8	280.5	277.3	273.9	270.7	266.4	261.1	255.7	250.3	245.0	240.6
50°	269.0	265.6	262.3	258.9	255.6	251.2	245.7	240.2	234.7	229.3	224.9
52.5°	253.9	250.5	247.3	244.0	240.8	236.3	230.6	225.0	219.4	213.8	209.5
55°	231.5	228.1	224.7	221.3	217.8	213.3	207.7	202.2	196.6	191.0	186.5
57.5°	209.5	205.9	202.4	198.8	195.2	190.7	185.2	179.7	174.2	168.7	164.2
60°	193.7	190.3	186.9	183.4	180.0	175.5	170.1	164.5	159.1	153.6	149.1
62.5°	179.5	175.9	172.4	168.8	165.3	160.7	155.1	149.4	143.8	138.2	134.0
65°	157.4	153.8	150.1	146.4	142.7	138.1	132.6	127.1	121.6	116.2	112.5
67.5°	134.5	131.0	127.4	123.9	120.4	116.1	111.0	105.9	100.8	95.7	92.5
70°	120.0	116.4	112.8	109.3	105.6	101.3	96.4	91.6	86.7	81.8	79.0
72.5°	104.6	101.3	98.1	94.8	91.6	87.6	83.0	78.4	73.8	69.1	66.8
75°	83.7	80.6	77.4	74.2	71.0	67.4	63.4	59.4	55.4	51.4	49.3
77.5°	62.6	59.9	57.2	54.5	51.9	48.8	45.6	42.3	39.1	35.8	34.7
80°	49.0	46.6	44.0	41.6	39.1	36.5	34.0	31.4	28.8	26.3	26.0
82.5°	37.3	35.0	32.7	30.4	28.1	26.3	24.8	23.3	21.9	20.4	20.2
85°	20.9	19.2	17.4	15.7	13.9	13.0	12.7	12.5	12.2	12.0	11.8
87.5°	7.6	7.4	7.3	7.2	7.0	7.0	7.3	7.5	7.7	7.9	8.1
90°	2.4	4.4	6.4	8.4	10.4	12.1	13.5	15.0	16.5	17.9	19.0
92.5°	17.4	19.7	21.9	24.2	26.5	28.2	29.2	30.2	31.2	32.2	32.9
95°	48.8	50.5	52.1	53.7	55.4	56.7	58.0	59.4	60.6	61.9	62.4
97.5°	85.3	86.6	87.9	89.2	90.5	91.9	93.4	94.8	96.4	97.8	98.5
100°	113.9	114.6	115.4	116.1	116.8	118.0	119.6	121.2	122.9	124.5	124.9
102.5°	143.9	144.1	144.5	144.7	145.0	145.9	147.4	148.9	150.3	151.9	152.4
105°	189.6	189.8	190.0	190.1	190.4	190.8	191.5	192.2	193.0	193.7	194.2
107.5°	237.7	237.8	238.1	238.3	238.5	238.6	238.8	238.9	239.0	239.1	239.6
110°	270.2	270.5	270.9	271.3	271.7	271.7	271.5	271.3	271.2	271.0	270.6



TEST NUMBER: P332887-930

CATALOG NUMBER: SA4XXRDIP-C350D1035U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	304.0	304.1	304.2	304.3	304.4	304.2	303.9	303.5	303.2	302.9	302.8
115°	354.8	354.8	354.8	354.8	354.8	354.7	354.2	353.9	353.5	353.2	353.0
117.5°	402.7	402.8	402.9	403.1	403.2	403.2	402.9	402.7	402.4	402.2	401.5
120°	434.6	435.3	436.0	436.8	437.5	437.6	437.0	436.4	435.9	435.4	434.5
122.5°	467.7	468.1	468.3	468.6	468.9	469.0	468.7	468.4	468.1	467.9	467.3
125°	516.7	516.7	516.7	516.7	516.7	516.7	516.5	516.3	516.1	515.9	515.6
127.5°	561.2	561.7	562.2	562.8	563.4	563.5	563.2	562.9	562.6	562.3	562.0
130°	592.4	593.0	593.5	594.0	594.6	594.8	594.8	594.8	594.8	594.8	594.5
132.5°	624.4	624.8	625.1	625.5	625.9	626.1	625.9	625.7	625.6	625.5	625.1
135°	666.5	667.6	668.6	669.8	670.8	671.4	671.4	671.4	671.4	671.4	671.0
137.5°	712.4	712.9	713.4	713.9	714.4	714.8	715.1	715.4	715.7	716.0	715.5
140°	743.0	743.3	743.7	744.0	744.4	744.6	744.6	744.6	744.6	744.6	744.4
142.5°	770.9	771.4	771.7	772.1	772.4	772.5	772.4	772.3	772.1	771.9	771.9
145°	809.7	810.4	811.1	811.9	812.6	813.0	813.3	813.4	813.6	813.8	813.6
147.5°	848.2	849.0	849.9	850.8	851.6	852.0	851.8	851.7	851.5	851.4	851.3
150°	871.6	872.3	873.0	873.8	874.5	874.8	874.8	874.8	874.8	874.8	874.8
152.5°	893.7	894.1	894.5	895.0	895.4	895.7	895.9	896.0	896.2	896.3	896.7
155°	927.7	927.7	927.7	927.7	927.7	927.6	927.4	927.2	927.1	926.9	927.6
157.5°	956.3	956.0	955.7	955.4	955.0	954.9	954.8	954.8	954.8	954.7	955.3
160°	973.3	973.1	972.9	972.7	972.6	972.4	972.2	972.0	971.8	971.7	972.2
162.5°	988.9	988.5	988.0	987.5	987.0	986.7	986.5	986.3	986.2	985.9	986.9
165°	1009.9	1009.3	1008.9	1008.3	1007.7	1007.3	1006.9	1006.6	1006.2	1005.8	1006.9
167.5°	1026.1	1025.2	1024.5	1023.8	1023.0	1022.6	1022.6	1022.7	1022.7	1022.8	1023.9
170°	1035.1	1034.2	1033.3	1032.4	1031.5	1031.1	1031.4	1031.5	1031.7	1031.8	1033.0
172.5°	1041.6	1040.9	1040.2	1039.3	1038.6	1038.2	1038.3	1038.3	1038.4	1038.4	1039.6
175°	1050.6	1049.7	1048.8	1047.9	1047.0	1046.4	1046.3	1046.0	1045.9	1045.7	1047.0
177.5°	1053.5	1052.8	1052.1	1051.3	1050.6	1050.3	1050.3	1050.3	1050.3	1050.3	1051.2
180°	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2



TEST NUMBER: P332887-930

CATALOG NUMBER: SA4XXRDIP-C350D1035U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	504.0	504.0	504.0	504.0	504.0	504.0	504.0	504.0
2.5°	502.1	502.9	503.6	503.9	503.9	503.9	503.8	503.7
5°	498.8	499.6	500.5	500.8	500.7	500.5	500.3	500.1
7.5°	492.1	492.7	493.3	493.3	493.1	492.8	492.5	492.3
10°	486.2	486.5	486.8	486.8	486.5	486.2	485.8	485.5
12.5°	478.7	479.0	479.2	479.1	478.6	478.1	477.6	477.1
15°	465.9	465.7	465.5	465.1	464.5	463.9	463.3	462.7
17.5°	450.2	449.8	449.3	448.6	447.7	446.8	445.9	445.0
20°	439.4	438.6	438.0	437.1	435.9	434.8	433.7	432.6
22.5°	427.2	426.2	425.2	424.2	423.3	422.4	421.5	420.5
25°	407.6	406.3	404.8	403.7	402.8	401.9	401.0	400.1
27.5°	387.8	386.0	384.2	382.7	381.4	380.2	379.0	377.7
30°	373.5	371.4	369.2	367.5	366.1	364.8	363.4	362.0
32.5°	359.0	356.4	354.0	352.0	350.7	349.4	348.1	346.8
35°	337.2	334.4	331.4	329.2	327.7	326.1	324.6	323.0
37.5°	314.0	310.7	307.4	305.0	303.5	301.9	300.4	298.8
40°	298.4	294.8	291.2	288.7	287.1	285.6	284.1	282.5
42.5°	283.2	279.5	275.8	273.2	271.6	269.9	268.3	266.8
45°	259.8	255.6	251.4	248.5	247.0	245.4	243.9	242.4
47.5°	236.3	231.9	227.6	224.5	222.8	221.1	219.4	217.8
50°	220.6	216.4	212.1	209.1	207.5	205.9	204.2	202.6
52.5°	205.0	200.7	196.4	193.3	191.7	190.0	188.3	186.5
55°	182.1	177.7	173.2	170.2	168.5	166.9	165.3	163.6
57.5°	159.6	155.2	150.6	147.7	146.5	145.3	144.0	142.8
60°	144.6	140.2	135.7	132.8	131.4	130.1	128.7	127.3
62.5°	130.0	125.8	121.7	119.1	118.0	116.9	115.8	114.7
65°	108.8	105.1	101.4	99.1	98.0	97.0	96.0	94.9
67.5°	89.4	86.2	83.0	80.9	79.7	78.6	77.5	76.3
70°	76.1	73.3	70.5	68.6	67.8	66.9	66.0	65.2
72.5°	64.3	61.9	59.5	57.9	57.1	56.3	55.5	54.7
75°	47.4	45.4	43.5	42.2	41.7	41.2	40.7	40.1
77.5°	33.5	32.4	31.2	30.6	30.4	30.2	30.1	29.9
80°	25.8	25.4	25.2	25.0	24.9	24.9	24.8	24.7
82.5°	20.0	19.8	19.6	19.5	19.4	19.3	19.2	19.2
85°	11.7	11.4	11.3	11.2	11.2	11.2	11.2	11.2
87.5°	8.2	8.3	8.5	8.6	8.8	8.9	9.0	9.2
90°	20.1	21.2	22.3	23.0	23.3	23.7	24.1	24.4
92.5°	33.5	34.2	34.8	35.3	35.5	35.7	36.0	36.1
95°	62.9	63.5	64.0	64.3	64.3	64.3	64.3	64.3
97.5°	99.1	99.8	100.4	100.8	100.8	100.8	100.8	100.8
100°	125.2	125.6	126.0	126.1	126.1	126.1	126.1	126.1
102.5°	152.9	153.4	153.8	154.2	154.3	154.5	154.7	154.7
105°	194.8	195.3	195.8	196.4	196.9	197.5	198.0	198.5
107.5°	240.1	240.6	241.1	241.3	241.3	241.2	241.2	241.2
110°	270.3	269.9	269.5	269.6	270.2	270.7	271.3	271.8



TEST NUMBER: P332887-930

CATALOG NUMBER: SA4XXRDIP-C350D1035U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	302.7	302.6	302.6	302.6	302.7	302.8	303.0	303.0
115°	352.8	352.6	352.5	352.3	352.1	351.9	351.7	351.6
117.5°	401.0	400.3	399.7	399.3	398.8	398.5	398.1	397.8
120°	433.6	432.7	431.8	431.5	431.9	432.2	432.6	432.9
122.5°	466.7	466.1	465.5	464.8	464.1	463.5	462.8	462.2
125°	515.2	514.9	514.5	514.1	513.8	513.4	513.1	512.7
127.5°	561.6	561.3	560.8	560.5	560.3	559.9	559.7	559.4
130°	594.2	593.8	593.5	592.9	592.2	591.4	590.7	590.0
132.5°	624.8	624.4	624.0	623.7	623.4	623.1	622.8	622.6
135°	670.7	670.3	669.9	669.4	669.0	668.4	667.8	667.3
137.5°	715.0	714.5	714.1	713.9	714.0	714.1	714.2	714.4
140°	744.3	744.0	743.9	743.7	743.6	743.3	743.1	743.0
142.5°	771.8	771.8	771.8	771.8	771.8	771.7	771.7	771.6
145°	813.4	813.3	813.0	812.7	812.1	811.6	811.1	810.5
147.5°	851.1	850.9	850.8	850.6	850.4	850.3	850.1	849.9
150°	874.8	874.8	874.8	874.7	874.6	874.3	874.2	874.0
152.5°	897.2	897.6	898.1	898.1	897.6	897.1	896.6	896.1
155°	928.4	929.0	929.8	929.8	929.0	928.4	927.6	926.9
157.5°	955.8	956.3	956.9	956.8	956.3	955.6	955.0	954.4
160°	972.7	973.3	973.8	973.6	972.7	971.8	970.9	970.0
162.5°	987.9	988.9	989.9	989.9	989.0	988.1	987.2	986.3
165°	1008.0	1009.1	1010.2	1010.3	1009.7	1008.9	1008.2	1007.5
167.5°	1024.9	1026.1	1027.1	1027.1	1026.0	1024.8	1023.7	1022.6
170°	1034.0	1035.1	1036.2	1036.1	1034.9	1033.6	1032.3	1031.0
172.5°	1040.8	1042.0	1043.3	1043.3	1042.0	1040.7	1039.5	1038.2
175°	1048.2	1049.5	1050.8	1050.8	1049.5	1048.2	1047.0	1045.7
177.5°	1052.3	1053.3	1054.3	1054.3	1053.1	1051.9	1050.8	1049.6
180°	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2

(END OF REPORT)