

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332950-930

Luminaire Tested: **SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332950-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6122.0 lumens  
Efficiency: N/A  
Efficacy: 107.6 lumens/watt  
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39  
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 56.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

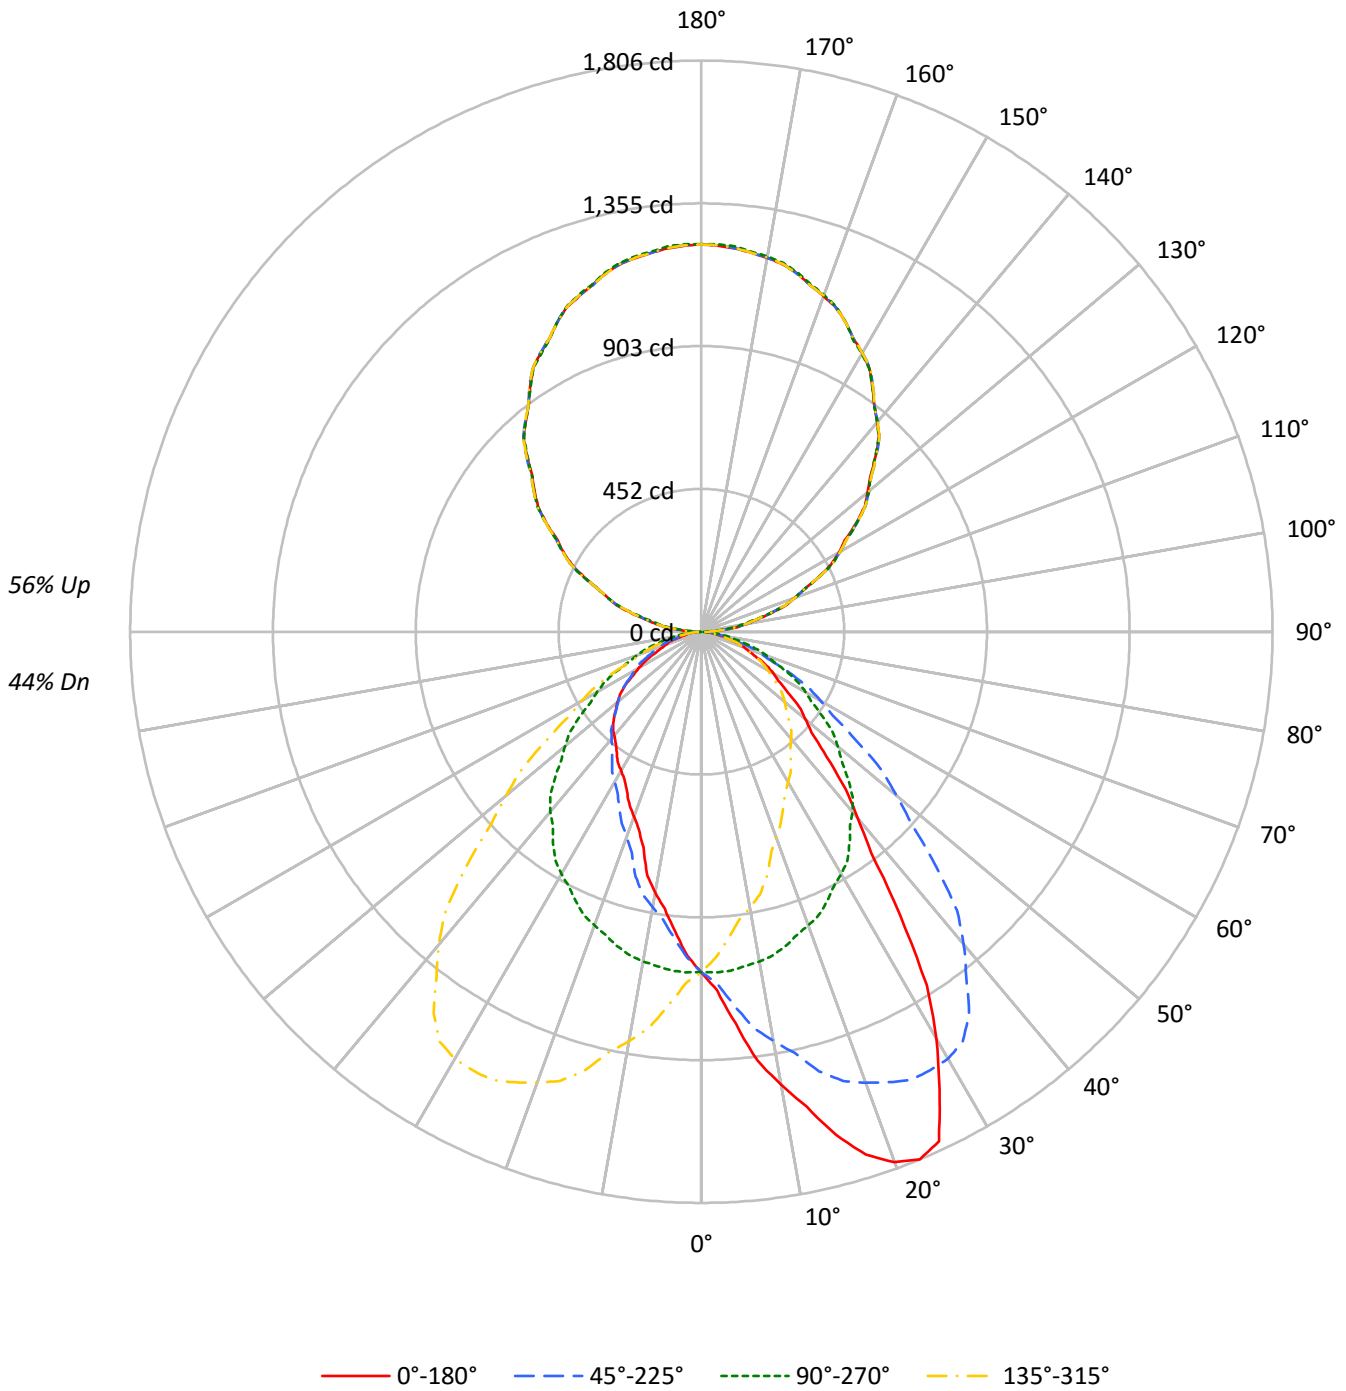



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44				
1	97	93	89	86	89	85	82	79	71	69	67	58	56	55	46	45	44	38				
2	89	82	76	71	81	75	70	66	63	59	56	51	49	47	41	39	38	33				
3	81	72	65	59	74	66	60	55	56	51	47	46	42	40	36	34	32	28				
4	74	64	56	50	68	59	52	47	50	45	41	41	37	34	33	30	28	24				
5	68	57	49	43	62	53	46	41	44	39	35	37	33	30	30	27	25	21				
6	63	51	43	38	58	47	40	35	40	35	31	33	29	26	27	24	22	19				
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	25	22	20	17				
8	54	42	35	29	50	39	32	28	33	28	24	28	24	21	23	20	18	15				
9	50	38	31	26	46	36	29	25	31	25	22	26	22	19	21	18	16	14				
10	47	35	28	23	43	33	26	22	28	23	20	24	20	17	20	17	15	13				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	8688	8688	8688	8688
5°	10078	8715	7703	8715
10°	11922	8676	6874	8676
15°	13771	8596	5907	8596
20°	15332	8485	5342	8485
25°	15828	8378	4960	8378
30°	13856	8245	4729	8245
35°	10787	8051	4590	8051
40°	8088	7827	4515	7827
45°	6387	7470	4475	7470
50°	5392	7058	4346	7058
55°	4700	6602	4114	6602
60°	4229	6132	3641	6132
65°	3727	5624	3131	5624
70°	3356	5098	2825	5098
75°	2813	4517	2408	4517
80°	2380	3849	2259	3849
85°	2010	3010	2010	3010



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	104.3	1.7
10°-20°	314.5	5.1
20°-30°	492.0	8.0
30°-40°	546.9	8.9
40°-50°	485.2	7.9
50°-60°	378.1	6.2
60°-70°	247.6	4.0
70°-80°	121.7	2.0
80°-90°	33.7	0.6
90°-100°	80.8	1.3
100°-110°	239.3	3.9
110°-120°	406.2	6.6
120°-130°	535.6	8.7
130°-140°	601.5	9.8
140°-150°	591.0	9.7
150°-160°	497.1	8.1
160°-170°	330.7	5.4
170°-180°	115.8	1.9
0°-30°	910.8	14.9
0°-40°	1457.7	23.8
0°-60°	2321.1	37.9
0°-90°	2724.1	44.5
90°-120°	726.2	11.9
90°-150°	2454.3	40.1
90°-180°	3398.0	55.5
0°-180°	6122.0	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1076	1076	1076	1076	1076	
5°	1244	1075	950	1075	1244	126
15°	1648	1028	707	1028	1648	469
25°	1777	940	557	940	1777	788
35°	1094	817	466	817	1094	686
45°	559	654	392	654	559	443
55°	334	469	292	469	334	304
65°	195	294	164	294	195	196
75°	90	145	77	145	90	99
85°	22	32	22	32	22	25
90°	28	3	28	3	28	15
95°	75	57	75	57	75	78
105°	231	221	231	221	231	244
115°	409	413	409	413	409	404
125°	597	601	597	601	597	532
135°	777	776	777	776	777	600
145°	944	942	944	942	944	590
155°	1079	1080	1079	1080	1079	497
165°	1173	1176	1173	1176	1173	330
175°	1217	1223	1217	1223	1217	116
180°	1225	1225	1225	1225	1225	



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1135.1	1138.3	1135.1	1134.8	1131.4	1130.3	1128.9	1124.5	1116.1	1111.3	1112.3
5°	1243.6	1254.4	1248.4	1247.5	1238.0	1228.4	1222.3	1208.4	1193.7	1183.7	1175.5
7.5°	1369.0	1375.2	1371.4	1365.3	1349.9	1341.2	1327.1	1308.8	1282.4	1262.2	1243.7
10°	1454.3	1459.5	1457.8	1446.5	1435.3	1412.3	1399.2	1373.7	1340.3	1313.9	1289.2
12.5°	1538.2	1543.9	1528.5	1529.1	1507.7	1489.6	1469.0	1436.8	1398.2	1364.2	1333.2
15°	1647.7	1640.8	1640.8	1632.1	1608.3	1583.1	1561.9	1528.0	1479.4	1438.7	1395.8
17.5°	1733.4	1735.8	1732.3	1711.8	1693.1	1667.0	1628.1	1588.6	1543.5	1488.8	1445.0
20°	1784.7	1784.7	1780.9	1766.9	1742.7	1714.9	1672.8	1629.9	1572.7	1517.6	1468.2
22.5°	1805.6	1806.9	1802.3	1790.9	1769.0	1742.0	1706.2	1662.6	1603.5	1541.6	1480.3
25°	1776.9	1785.2	1786.0	1783.0	1776.5	1760.0	1729.2	1684.6	1631.7	1564.5	1498.5
27.5°	1631.4	1641.8	1650.9	1665.9	1685.9	1696.2	1697.6	1675.0	1628.8	1564.1	1497.8
30°	1486.4	1495.1	1523.2	1560.1	1588.8	1614.8	1637.3	1643.4	1617.4	1559.3	1489.5
32.5°	1325.4	1337.3	1365.5	1405.1	1452.8	1496.8	1547.4	1573.3	1572.6	1537.7	1473.2
35°	1094.5	1103.1	1129.1	1170.8	1228.0	1293.5	1373.7	1436.1	1478.6	1475.5	1436.1
37.5°	882.6	892.4	918.8	953.2	1008.8	1089.8	1167.4	1253.4	1332.0	1376.1	1363.0
40°	767.5	767.9	793.5	829.1	881.1	951.8	1036.3	1131.7	1219.3	1290.9	1304.7
42.5°	676.6	676.7	693.6	731.9	769.4	835.9	916.6	1011.4	1113.9	1196.5	1233.3
45°	559.4	563.3	577.2	600.1	629.6	686.0	750.6	838.6	953.5	1051.5	1112.6
47.5°	473.7	479.4	488.2	507.0	530.4	568.0	621.4	700.5	794.0	901.8	988.8
50°	429.3	430.2	441.4	451.8	472.2	502.1	548.9	614.8	700.7	804.4	901.1
52.5°	391.1	390.9	397.7	410.9	427.5	450.8	488.6	548.6	624.8	717.6	817.4
55°	333.9	336.1	341.3	351.6	364.2	380.7	410.6	455.8	515.6	594.9	685.5
57.5°	290.3	291.5	295.5	299.9	311.5	323.5	345.9	377.2	427.7	492.7	577.2
60°	261.9	262.4	263.7	270.1	279.2	290.5	305.7	332.2	374.6	434.1	500.8
62.5°	234.2	234.9	236.9	241.7	248.7	256.5	272.4	293.7	328.8	379.6	439.8
65°	195.1	195.6	198.6	200.3	205.9	212.9	224.6	238.9	263.2	305.7	351.2
67.5°	163.1	163.1	163.2	165.6	169.4	174.1	181.1	192.5	210.8	236.9	277.0
70°	142.2	142.2	143.1	144.4	146.6	150.4	154.3	163.1	176.5	197.7	228.5
72.5°	122.8	123.1	124.0	124.3	125.4	128.6	131.5	137.1	147.0	163.1	187.9
75°	90.2	91.5	93.7	95.4	97.6	97.1	100.2	103.6	106.6	116.2	130.5
77.5°	67.1	66.4	66.7	68.2	68.4	68.9	71.0	73.7	76.0	80.5	85.6
80°	51.2	51.2	52.5	52.9	52.5	52.9	55.0	56.3	57.2	58.9	63.8
82.5°	38.6	39.4	39.0	39.4	39.6	40.0	41.9	42.2	43.0	43.7	45.7
85°	21.7	22.1	22.6	21.7	21.7	21.7	22.6	23.0	23.9	23.4	24.3
87.5°	13.3	12.9	13.1	13.0	13.3	12.8	12.9	13.4	12.4	12.5	12.1
90°	28.5	28.0	27.6	27.1	26.7	25.9	24.6	23.4	22.1	20.9	19.2
92.5°	42.1	41.8	41.6	41.3	41.0	40.5	39.8	39.1	38.2	37.5	36.4
95°	74.8	74.8	74.8	74.8	74.8	74.5	73.9	73.2	72.6	72.0	70.5
97.5°	117.2	117.2	117.2	117.2	117.2	116.9	116.1	115.4	114.6	113.8	112.1
100°	146.8	146.8	146.8	146.8	146.8	146.6	146.2	145.8	145.4	145.0	143.0
102.5°	180.2	180.0	179.9	179.7	179.4	179.1	178.6	177.9	177.3	176.8	175.0
105°	231.1	230.5	229.8	229.3	228.6	228.0	227.3	226.7	226.1	225.4	224.6
107.5°	280.8	280.8	280.9	280.9	281.0	280.6	280.1	279.5	278.9	278.3	278.2
110°	316.3	315.8	315.1	314.5	313.8	313.7	314.1	314.5	315.0	315.4	315.6



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	352.8	352.6	352.5	352.4	352.2	352.2	352.3	352.4	352.5	352.5	352.9
115°	409.2	409.4	409.6	409.9	410.0	410.3	410.4	410.7	410.9	411.1	411.5
117.5°	463.0	463.4	463.8	464.2	464.7	465.2	465.9	466.7	467.4	468.1	468.4
120°	503.9	503.5	503.0	502.6	502.2	502.6	503.6	504.7	505.7	506.8	507.4
122.5°	538.0	538.7	539.6	540.3	541.0	541.8	542.5	543.2	544.0	544.6	544.9
125°	596.7	597.1	597.6	598.0	598.4	598.8	599.2	599.7	600.1	600.5	600.7
127.5°	651.1	651.4	651.8	652.2	652.5	652.8	653.3	653.7	654.1	654.5	654.8
130°	686.7	687.5	688.4	689.3	690.1	690.7	691.1	691.5	692.0	692.4	692.4
132.5°	724.6	725.0	725.3	725.6	725.9	726.4	726.8	727.2	727.6	728.1	728.2
135°	776.7	777.3	778.0	778.6	779.3	779.8	780.2	780.6	781.1	781.5	781.5
137.5°	831.4	831.4	831.2	831.1	831.0	831.2	831.7	832.3	832.8	833.3	833.0
140°	864.8	865.0	865.2	865.4	865.7	865.8	866.1	866.3	866.5	866.7	866.7
142.5°	898.1	898.2	898.2	898.3	898.3	898.4	898.4	898.5	898.5	898.5	898.7
145°	943.5	944.0	944.7	945.3	945.9	946.4	946.6	946.8	947.0	947.2	947.0
147.5°	989.3	989.4	989.7	989.9	990.1	990.3	990.5	990.7	990.8	991.0	991.2
150°	1017.3	1017.5	1017.7	1017.9	1018.1	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2
152.5°	1043.1	1043.6	1044.2	1044.7	1045.3	1045.3	1044.8	1044.2	1043.7	1043.3	1043.1
155°	1078.9	1079.7	1080.6	1081.4	1082.2	1082.2	1081.4	1080.6	1079.7	1078.9	1079.0
157.5°	1110.9	1111.6	1112.3	1113.0	1113.8	1113.8	1113.1	1112.6	1111.9	1111.3	1111.3
160°	1129.1	1130.2	1131.1	1132.2	1133.3	1133.5	1132.9	1132.2	1131.6	1131.0	1131.1
162.5°	1148.0	1149.1	1150.1	1151.2	1152.3	1152.2	1151.0	1149.9	1148.8	1147.6	1147.9
165°	1172.6	1173.5	1174.4	1175.2	1176.0	1175.8	1174.5	1173.3	1172.0	1170.8	1171.2
167.5°	1190.3	1191.6	1192.9	1194.2	1195.5	1195.5	1194.3	1192.9	1191.7	1190.4	1190.4
170°	1200.1	1201.6	1203.1	1204.5	1206.0	1206.2	1204.8	1203.6	1202.3	1201.1	1200.9
172.5°	1208.4	1209.9	1211.4	1212.8	1214.4	1214.4	1212.9	1211.5	1210.1	1208.7	1208.6
175°	1217.2	1218.6	1220.1	1221.6	1223.0	1223.0	1221.6	1220.1	1218.6	1217.2	1217.4
177.5°	1221.7	1223.0	1224.4	1225.7	1227.1	1227.2	1226.0	1224.8	1223.7	1222.5	1222.5
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1108.8	1104.0	1101.6	1096.0	1089.4	1085.9	1082.8	1078.3	1072.4	1066.2	1061.6
5°	1165.1	1154.7	1141.7	1126.1	1112.2	1098.8	1087.0	1075.4	1061.9	1048.0	1034.1
7.5°	1222.9	1202.4	1180.3	1154.7	1129.8	1107.2	1086.4	1066.4	1043.8	1023.7	1005.3
10°	1263.1	1235.3	1204.5	1172.1	1139.5	1111.3	1083.6	1058.4	1030.7	1006.0	985.1
12.5°	1295.7	1263.1	1226.0	1185.5	1146.5	1112.4	1080.4	1047.7	1016.1	989.3	961.6
15°	1349.8	1305.1	1255.3	1206.7	1156.0	1109.6	1066.7	1028.5	992.5	954.8	928.4
17.5°	1387.0	1334.0	1273.4	1215.0	1155.1	1100.4	1050.9	1005.4	963.9	925.4	893.9
20°	1409.2	1350.7	1283.4	1217.2	1149.9	1091.4	1038.0	987.7	944.9	903.2	870.7
22.5°	1421.7	1356.9	1283.4	1214.0	1144.4	1081.0	1022.5	970.0	923.3	881.7	845.7
25°	1425.7	1356.3	1281.3	1201.5	1125.2	1058.0	997.3	940.5	888.4	846.9	808.7
27.5°	1420.2	1338.5	1261.6	1179.7	1101.0	1030.1	966.5	906.8	854.7	810.0	770.9
30°	1411.9	1324.2	1241.9	1156.8	1077.1	1009.0	941.8	884.5	830.4	784.0	744.5
32.5°	1393.8	1306.9	1218.2	1131.2	1050.4	980.2	916.5	858.9	805.8	758.3	716.4
35°	1358.0	1270.1	1173.8	1084.4	1005.1	932.2	872.5	816.9	766.2	715.4	671.2
37.5°	1311.0	1221.1	1125.3	1027.4	948.0	879.3	824.3	772.3	722.8	676.5	627.5
40°	1266.6	1184.6	1085.7	988.6	907.1	840.7	790.0	742.7	692.9	646.9	597.9
42.5°	1212.8	1143.0	1043.1	945.6	865.1	801.2	754.0	707.8	662.3	617.8	566.7
45°	1123.1	1070.2	976.5	882.8	801.8	738.4	695.0	654.3	614.4	571.9	523.8
47.5°	1020.2	984.4	903.5	807.6	732.6	675.6	633.7	600.5	566.7	524.2	482.0
50°	948.8	925.8	847.7	760.1	688.6	636.1	593.2	562.0	533.8	493.0	455.3
52.5°	872.5	860.2	794.3	710.5	641.4	590.0	553.3	525.2	496.7	462.8	427.5
55°	756.2	762.7	706.8	634.4	569.3	525.9	492.6	469.1	444.9	416.3	389.0
57.5°	637.4	661.1	623.6	560.0	499.0	459.0	433.9	414.2	393.8	370.1	346.7
60°	566.3	586.2	565.0	509.1	455.8	418.4	395.0	379.8	359.5	337.8	320.0
62.5°	496.9	518.3	505.6	460.5	411.0	378.9	358.2	344.1	329.0	310.1	291.6
65°	409.8	423.6	417.6	386.4	351.2	323.9	304.8	294.4	280.5	266.7	250.2
67.5°	313.8	340.6	337.1	320.5	290.2	268.8	256.3	247.1	234.5	224.2	213.0
70°	258.0	282.7	282.3	268.8	252.3	232.4	223.7	216.0	204.6	194.7	185.6
72.5°	211.2	233.8	237.2	226.9	215.6	200.5	192.2	186.8	175.9	169.0	161.7
75°	147.9	164.4	168.7	168.7	163.5	155.6	148.3	144.8	137.1	130.9	126.6
77.5°	96.9	107.4	114.1	115.7	116.5	113.9	107.8	105.3	99.4	97.2	93.0
80°	68.5	75.4	83.2	85.9	88.1	87.2	84.5	82.8	77.2	75.0	73.3
82.5°	47.4	51.2	57.6	63.3	62.7	65.0	62.7	61.3	57.1	56.3	54.5
85°	24.7	25.1	26.0	29.9	32.1	32.9	33.4	32.5	31.2	31.2	28.2
87.5°	11.8	11.2	11.5	11.1	11.0	11.9	12.5	12.4	11.8	11.2	10.6
90°	17.4	15.8	14.1	12.1	9.8	7.5	5.1	2.9	5.1	7.5	9.8
92.5°	35.1	34.0	32.8	30.9	28.2	25.6	22.9	20.3	22.9	25.6	28.2
95°	69.1	67.6	66.1	64.4	62.5	60.7	58.7	56.8	58.7	60.7	62.5
97.5°	110.4	108.7	107.0	105.3	103.8	102.3	100.8	99.3	100.8	102.3	103.8
100°	141.1	139.3	137.4	136.0	135.1	134.3	133.5	132.6	133.5	134.3	135.1
102.5°	173.3	171.5	169.8	168.8	168.4	168.1	167.8	167.5	167.8	168.1	168.4
105°	223.7	222.9	222.1	221.5	221.4	221.1	220.9	220.7	220.9	221.1	221.4
107.5°	278.0	277.9	277.8	277.6	277.4	277.1	276.9	276.5	276.9	277.1	277.4
110°	315.8	316.1	316.3	316.2	315.8	315.3	314.9	314.5	314.9	315.3	315.8





TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	353.4	353.7	354.1	354.2	354.2	354.1	354.0	353.8	354.0	354.1	354.2
115°	412.0	412.4	412.8	412.9	412.9	412.9	412.9	412.9	412.9	412.9	412.9
117.5°	468.7	469.0	469.3	469.4	469.2	469.0	468.9	468.7	468.9	469.0	469.2
120°	508.0	508.7	509.3	509.2	508.3	507.5	506.6	505.8	506.6	507.5	508.3
122.5°	545.3	545.5	545.8	545.8	545.4	545.1	544.8	544.5	544.8	545.1	545.4
125°	601.0	601.2	601.4	601.4	601.4	601.4	601.4	601.4	601.4	601.4	601.4
127.5°	655.2	655.5	655.9	655.7	655.1	654.4	653.9	653.2	653.9	654.4	655.1
130°	692.4	692.4	692.4	692.1	691.5	690.8	690.2	689.6	690.2	690.8	691.5
132.5°	728.4	728.6	728.7	728.6	728.1	727.7	727.2	726.7	727.2	727.7	728.1
135°	781.5	781.5	781.5	780.8	779.6	778.3	777.1	775.8	777.1	778.3	779.6
137.5°	832.7	832.3	832.0	831.5	831.0	830.4	829.8	829.2	829.8	830.4	831.0
140°	866.7	866.7	866.7	866.5	866.1	865.7	865.2	864.8	865.2	865.7	866.1
142.5°	898.9	899.0	899.2	899.1	898.6	898.2	897.8	897.4	897.8	898.2	898.6
145°	946.8	946.6	946.4	945.8	945.0	944.2	943.3	942.5	943.3	944.2	945.0
147.5°	991.3	991.5	991.6	991.2	990.2	989.2	988.2	987.2	988.2	989.2	990.2
150°	1018.2	1018.2	1018.2	1017.8	1017.0	1016.2	1015.3	1014.5	1015.3	1016.2	1017.0
152.5°	1042.9	1042.8	1042.6	1042.3	1041.7	1041.2	1040.7	1040.2	1040.7	1041.2	1041.7
155°	1079.3	1079.5	1079.7	1079.8	1079.8	1079.8	1079.8	1079.8	1079.8	1079.8	1079.8
157.5°	1111.3	1111.4	1111.4	1111.7	1112.1	1112.4	1112.8	1113.1	1112.8	1112.4	1112.1
160°	1131.4	1131.6	1131.8	1132.0	1132.2	1132.5	1132.7	1132.9	1132.7	1132.5	1132.2
162.5°	1148.1	1148.3	1148.5	1148.8	1149.4	1150.0	1150.5	1151.0	1150.5	1150.0	1149.4
165°	1171.6	1172.0	1172.4	1173.0	1173.6	1174.2	1174.8	1175.5	1174.8	1174.2	1173.6
167.5°	1190.3	1190.3	1190.3	1190.7	1191.6	1192.5	1193.4	1194.3	1193.4	1192.5	1191.6
170°	1200.6	1200.4	1200.2	1200.6	1201.7	1202.7	1203.8	1204.8	1203.8	1202.7	1201.7
172.5°	1208.6	1208.5	1208.4	1208.9	1209.7	1210.6	1211.5	1212.4	1211.5	1210.6	1209.7
175°	1217.6	1217.8	1218.0	1218.6	1219.7	1220.7	1221.8	1222.9	1221.8	1220.7	1219.7
177.5°	1222.5	1222.5	1222.5	1222.9	1223.8	1224.6	1225.4	1226.3	1225.4	1224.6	1223.8
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1056.8	1053.3	1048.8	1043.6	1037.4	1031.8	1029.4	1031.4	1032.5	1029.7	1029.4
5°	1024.6	1013.7	1005.1	992.1	981.7	973.0	966.9	964.3	965.2	958.3	956.5
7.5°	988.5	975.6	961.4	946.0	931.6	918.8	912.2	908.5	901.2	898.0	892.7
10°	965.2	947.9	934.0	915.7	899.3	884.1	876.8	870.7	863.3	859.8	852.5
12.5°	941.3	921.1	905.9	887.0	870.2	851.8	844.8	833.6	822.1	814.7	805.3
15°	907.5	883.3	864.6	842.0	822.1	801.3	782.7	761.8	754.1	737.6	728.1
17.5°	868.0	843.4	820.4	790.1	759.4	733.5	713.6	693.7	681.8	671.2	666.3
20°	842.0	819.5	787.4	752.3	718.0	689.4	673.4	660.4	647.3	640.0	634.8
22.5°	817.4	788.6	751.4	713.5	679.2	656.8	643.2	629.8	619.3	612.3	605.3
25°	776.2	738.4	699.0	655.6	632.2	612.7	597.9	587.1	580.6	571.5	568.0
27.5°	733.8	688.0	644.5	615.4	591.0	573.2	560.3	552.1	543.9	538.1	533.6
30°	701.2	654.8	615.7	588.0	563.3	548.5	538.1	528.6	522.0	517.3	513.8
32.5°	668.9	622.5	589.7	559.9	540.4	525.9	514.9	507.8	502.6	496.5	494.4
35°	622.2	581.1	552.4	525.5	505.6	492.6	483.9	476.5	472.2	470.4	469.1
37.5°	577.4	543.6	512.9	490.8	473.0	462.8	452.6	449.0	446.0	442.9	444.3
40°	548.9	517.3	490.0	466.6	452.2	441.0	434.9	430.6	428.0	428.0	428.0
42.5°	524.3	493.3	466.8	445.7	431.5	421.9	415.2	411.5	410.6	410.3	412.4
45°	486.1	457.5	430.6	413.2	401.0	391.5	387.7	384.6	384.6	386.4	386.8
47.5°	448.2	421.3	399.8	380.3	369.2	363.3	359.9	358.3	358.5	360.3	362.2
50°	424.9	398.5	377.2	359.9	349.5	343.8	340.8	340.0	340.8	340.8	343.8
52.5°	399.6	375.9	355.1	340.5	328.6	323.3	321.7	320.5	321.1	322.5	323.8
55°	362.5	341.3	321.3	307.4	298.7	295.3	291.4	291.8	291.0	291.8	291.8
57.5°	325.3	306.2	287.6	276.6	269.0	264.0	259.8	261.0	259.7	259.5	258.8
60°	301.3	280.5	265.8	255.8	247.1	242.8	238.9	239.8	238.5	237.6	235.9
62.5°	275.3	258.0	243.9	234.3	227.4	222.3	218.4	217.6	214.6	211.6	207.8
65°	237.6	223.3	210.8	201.6	195.1	191.2	188.2	185.6	179.0	172.1	168.7
67.5°	201.0	190.6	178.9	171.2	165.9	160.8	155.0	150.6	144.5	140.6	138.5
70°	177.3	167.4	157.4	150.0	144.4	139.7	133.1	130.1	125.7	124.0	121.8
72.5°	154.8	145.5	136.2	129.6	123.6	119.8	114.7	111.7	109.8	109.1	107.0
75°	120.6	113.2	106.2	100.2	95.4	92.8	90.7	88.5	87.6	83.6	81.5
77.5°	88.0	83.1	78.8	74.4	71.0	69.3	65.1	62.6	61.1	59.4	58.9
80°	68.5	65.1	60.7	58.1	53.3	51.6	49.9	49.4	49.0	48.6	48.1
82.5°	51.5	48.0	43.7	42.2	40.8	39.8	38.7	38.3	37.9	38.2	38.1
85°	26.0	24.3	24.3	23.9	23.4	23.0	22.6	22.6	22.1	22.6	22.1
87.5°	11.1	11.2	11.5	11.1	11.8	12.1	12.1	12.3	12.9	12.5	12.6
90°	12.1	14.1	15.8	17.4	19.2	20.9	22.1	23.4	24.6	25.9	26.7
92.5°	30.9	32.8	34.0	35.1	36.4	37.5	38.2	39.1	39.8	40.5	41.0
95°	64.4	66.1	67.6	69.1	70.5	72.0	72.6	73.2	73.9	74.5	74.8
97.5°	105.3	107.0	108.7	110.4	112.1	113.8	114.6	115.4	116.1	116.9	117.2
100°	136.0	137.4	139.3	141.1	143.0	145.0	145.4	145.8	146.2	146.6	146.8
102.5°	168.8	169.8	171.5	173.3	175.0	176.8	177.3	177.9	178.6	179.1	179.4
105°	221.5	222.1	222.9	223.7	224.6	225.4	226.1	226.7	227.3	228.0	228.6
107.5°	277.6	277.8	277.9	278.0	278.2	278.3	278.9	279.5	280.1	280.6	281.0
110°	316.2	316.3	316.1	315.8	315.6	315.4	315.0	314.5	314.1	313.7	313.8



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	354.2	354.1	353.7	353.4	352.9	352.5	352.5	352.4	352.3	352.2	352.2
115°	412.9	412.8	412.4	412.0	411.5	411.1	410.9	410.7	410.4	410.3	410.0
117.5°	469.4	469.3	469.0	468.7	468.4	468.1	467.4	466.7	465.9	465.2	464.7
120°	509.2	509.3	508.7	508.0	507.4	506.8	505.7	504.7	503.6	502.6	502.2
122.5°	545.8	545.8	545.5	545.3	544.9	544.6	544.0	543.2	542.5	541.8	541.0
125°	601.4	601.4	601.2	601.0	600.7	600.5	600.1	599.7	599.2	598.8	598.4
127.5°	655.7	655.9	655.5	655.2	654.8	654.5	654.1	653.7	653.3	652.8	652.5
130°	692.1	692.4	692.4	692.4	692.4	692.4	692.0	691.5	691.1	690.7	690.1
132.5°	728.6	728.7	728.6	728.4	728.2	728.1	727.6	727.2	726.8	726.4	725.9
135°	780.8	781.5	781.5	781.5	781.5	781.5	781.1	780.6	780.2	779.8	779.3
137.5°	831.5	832.0	832.3	832.7	833.0	833.3	832.8	832.3	831.7	831.2	831.0
140°	866.5	866.7	866.7	866.7	866.7	866.7	866.5	866.3	866.1	865.8	865.7
142.5°	899.1	899.2	899.0	898.9	898.7	898.5	898.5	898.5	898.4	898.4	898.3
145°	945.8	946.4	946.6	946.8	947.0	947.2	947.0	946.8	946.6	946.4	945.9
147.5°	991.2	991.6	991.5	991.3	991.2	991.0	990.8	990.7	990.5	990.3	990.1
150°	1017.8	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.1
152.5°	1042.3	1042.6	1042.8	1042.9	1043.1	1043.3	1043.7	1044.2	1044.8	1045.3	1045.3
155°	1079.8	1079.7	1079.5	1079.3	1079.0	1078.9	1079.7	1080.6	1081.4	1082.2	1082.2
157.5°	1111.7	1111.4	1111.4	1111.3	1111.3	1111.3	1111.9	1112.6	1113.1	1113.8	1113.8
160°	1132.0	1131.8	1131.6	1131.4	1131.1	1131.0	1131.6	1132.2	1132.9	1133.5	1133.3
162.5°	1148.8	1148.5	1148.3	1148.1	1147.9	1147.6	1148.8	1149.9	1151.0	1152.2	1152.3
165°	1173.0	1172.4	1172.0	1171.6	1171.2	1170.8	1172.0	1173.3	1174.5	1175.8	1176.0
167.5°	1190.7	1190.3	1190.3	1190.3	1190.4	1190.4	1191.7	1192.9	1194.3	1195.5	1195.5
170°	1200.6	1200.2	1200.4	1200.6	1200.9	1201.1	1202.3	1203.6	1204.8	1206.2	1206.0
172.5°	1208.9	1208.4	1208.5	1208.6	1208.6	1208.7	1210.1	1211.5	1212.9	1214.4	1214.4
175°	1218.6	1218.0	1217.8	1217.6	1217.4	1217.2	1218.6	1220.1	1221.6	1223.0	1223.0
177.5°	1222.9	1222.5	1222.5	1222.5	1222.5	1222.5	1223.7	1224.8	1226.0	1227.2	1227.1
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1027.3	1028.0	1025.6	1024.8	1025.6	1028.0	1027.3	1029.4	1029.7	1032.5	1031.4
5°	953.1	952.2	950.1	950.5	950.1	952.2	953.1	956.5	958.3	965.2	964.3
7.5°	889.6	886.2	887.1	883.7	887.1	886.2	889.6	892.7	898.0	901.2	908.5
10°	850.8	846.0	842.0	838.6	842.0	846.0	850.8	852.5	859.8	863.3	870.7
12.5°	797.7	793.6	788.3	789.4	788.3	793.6	797.7	805.3	814.7	822.1	833.6
15°	722.4	715.9	705.5	706.8	705.5	715.9	722.4	728.1	737.6	754.1	761.8
17.5°	658.7	658.8	654.0	655.1	654.0	658.8	658.7	666.3	671.2	681.8	693.7
20°	625.7	622.6	623.1	621.8	623.1	622.6	625.7	634.8	640.0	647.3	660.4
22.5°	602.8	599.1	596.1	593.4	596.1	599.1	602.8	605.3	612.3	619.3	629.8
25°	564.1	561.5	557.6	556.8	557.6	561.5	564.1	568.0	571.5	580.6	587.1
27.5°	530.1	529.6	528.1	526.0	528.1	529.6	530.1	533.6	538.1	543.9	552.1
30°	510.4	509.5	508.6	507.3	508.6	509.5	510.4	513.8	517.3	522.0	528.6
32.5°	492.7	492.1	491.3	491.4	491.3	492.1	492.7	494.4	496.5	502.6	507.8
35°	467.4	467.0	466.1	465.7	466.1	467.0	467.4	469.1	470.4	472.2	476.5
37.5°	443.8	445.0	444.4	444.3	444.4	445.0	443.8	444.3	442.9	446.0	449.0
40°	427.5	428.0	428.8	428.4	428.8	428.0	427.5	428.0	428.0	428.0	430.6
42.5°	414.0	414.1	415.3	413.8	415.3	414.1	414.0	412.4	410.3	410.6	411.5
45°	389.8	392.4	392.0	392.0	392.0	392.4	389.8	386.8	386.4	384.6	384.6
47.5°	363.4	365.6	366.2	366.2	366.2	365.6	363.4	362.2	360.3	358.5	358.3
50°	346.0	345.1	346.4	346.0	346.4	345.1	346.0	343.8	340.8	340.8	340.0
52.5°	324.9	325.1	325.0	324.5	325.0	325.1	324.9	323.8	322.5	321.1	320.5
55°	292.3	292.7	291.8	292.3	291.8	292.7	292.3	291.8	291.8	291.0	291.8
57.5°	256.9	254.8	255.7	254.6	255.7	254.8	256.9	258.8	259.5	259.7	261.0
60°	231.5	228.0	227.2	225.5	227.2	228.0	231.5	235.9	237.6	238.5	239.8
62.5°	203.1	200.6	197.7	199.1	197.7	200.6	203.1	207.8	211.6	214.6	217.6
65°	165.2	163.5	162.2	163.9	162.2	163.5	165.2	168.7	172.1	179.0	185.6
67.5°	136.7	135.8	135.8	134.9	135.8	135.8	136.7	138.5	140.6	144.5	150.6
70°	121.8	120.6	120.6	119.7	120.6	120.6	121.8	121.8	124.0	125.7	130.1
72.5°	106.6	105.3	105.7	105.1	105.7	105.3	106.6	107.0	109.1	109.8	111.7
75°	78.9	76.7	76.7	77.2	76.7	76.7	78.9	81.5	83.6	87.6	88.5
77.5°	58.9	58.5	59.0	58.3	59.0	58.5	58.9	58.9	59.4	61.1	62.6
80°	48.1	47.7	47.3	48.6	47.3	47.7	48.1	48.1	48.6	49.0	49.4
82.5°	37.3	37.3	37.2	38.9	37.2	37.3	37.3	38.1	38.2	37.9	38.3
85°	22.6	21.7	22.6	21.7	22.6	21.7	22.6	22.1	22.6	22.1	22.6
87.5°	13.4	13.1	12.9	13.3	12.9	13.1	13.4	12.6	12.5	12.9	12.3
90°	27.1	27.6	28.0	28.5	28.0	27.6	27.1	26.7	25.9	24.6	23.4
92.5°	41.3	41.6	41.8	42.1	41.8	41.6	41.3	41.0	40.5	39.8	39.1
95°	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.5	73.9	73.2
97.5°	117.2	117.2	117.2	117.2	117.2	117.2	117.2	117.2	116.9	116.1	115.4
100°	146.8	146.8	146.8	146.8	146.8	146.8	146.8	146.8	146.6	146.2	145.8
102.5°	179.7	179.9	180.0	180.2	180.0	179.9	179.7	179.4	179.1	178.6	177.9
105°	229.3	229.8	230.5	231.1	230.5	229.8	229.3	228.6	228.0	227.3	226.7
107.5°	280.9	280.9	280.8	280.8	280.8	280.9	280.9	281.0	280.6	280.1	279.5
110°	314.5	315.1	315.8	316.3	315.8	315.1	314.5	313.8	313.7	314.1	314.5



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	352.4	352.5	352.6	352.8	352.6	352.5	352.4	352.2	352.2	352.3	352.4
115°	409.9	409.6	409.4	409.2	409.4	409.6	409.9	410.0	410.3	410.4	410.7
117.5°	464.2	463.8	463.4	463.0	463.4	463.8	464.2	464.7	465.2	465.9	466.7
120°	502.6	503.0	503.5	503.9	503.5	503.0	502.6	502.2	502.6	503.6	504.7
122.5°	540.3	539.6	538.7	538.0	538.7	539.6	540.3	541.0	541.8	542.5	543.2
125°	598.0	597.6	597.1	596.7	597.1	597.6	598.0	598.4	598.8	599.2	599.7
127.5°	652.2	651.8	651.4	651.1	651.4	651.8	652.2	652.5	652.8	653.3	653.7
130°	689.3	688.4	687.5	686.7	687.5	688.4	689.3	690.1	690.7	691.1	691.5
132.5°	725.6	725.3	725.0	724.6	725.0	725.3	725.6	725.9	726.4	726.8	727.2
135°	778.6	778.0	777.3	776.7	777.3	778.0	778.6	779.3	779.8	780.2	780.6
137.5°	831.1	831.2	831.4	831.4	831.4	831.2	831.1	831.0	831.2	831.7	832.3
140°	865.4	865.2	865.0	864.8	865.0	865.2	865.4	865.7	865.8	866.1	866.3
142.5°	898.3	898.2	898.2	898.1	898.2	898.2	898.3	898.3	898.4	898.4	898.5
145°	945.3	944.7	944.0	943.5	944.0	944.7	945.3	945.9	946.4	946.6	946.8
147.5°	989.9	989.7	989.4	989.3	989.4	989.7	989.9	990.1	990.3	990.5	990.7
150°	1017.9	1017.7	1017.5	1017.3	1017.5	1017.7	1017.9	1018.1	1018.2	1018.2	1018.2
152.5°	1044.7	1044.2	1043.6	1043.1	1043.6	1044.2	1044.7	1045.3	1045.3	1044.8	1044.2
155°	1081.4	1080.6	1079.7	1078.9	1079.7	1080.6	1081.4	1082.2	1082.2	1081.4	1080.6
157.5°	1113.0	1112.3	1111.6	1110.9	1111.6	1112.3	1113.0	1113.8	1113.8	1113.1	1112.6
160°	1132.2	1131.1	1130.2	1129.1	1130.2	1131.1	1132.2	1133.3	1133.5	1132.9	1132.2
162.5°	1151.2	1150.1	1149.1	1148.0	1149.1	1150.1	1151.2	1152.3	1152.2	1151.0	1149.9
165°	1175.2	1174.4	1173.5	1172.6	1173.5	1174.4	1175.2	1176.0	1175.8	1174.5	1173.3
167.5°	1194.2	1192.9	1191.6	1190.3	1191.6	1192.9	1194.2	1195.5	1195.5	1194.3	1192.9
170°	1204.5	1203.1	1201.6	1200.1	1201.6	1203.1	1204.5	1206.0	1206.2	1204.8	1203.6
172.5°	1212.8	1211.4	1209.9	1208.4	1209.9	1211.4	1212.8	1214.4	1214.4	1212.9	1211.5
175°	1221.6	1220.1	1218.6	1217.2	1218.6	1220.1	1221.6	1223.0	1223.0	1221.6	1220.1
177.5°	1225.7	1224.4	1223.0	1221.7	1223.0	1224.4	1225.7	1227.1	1227.2	1226.0	1224.8
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1029.4	1031.8	1037.4	1043.6	1048.8	1053.3	1056.8	1061.6	1066.2	1072.4	1078.3
5°	966.9	973.0	981.7	992.1	1005.1	1013.7	1024.6	1034.1	1048.0	1061.9	1075.4
7.5°	912.2	918.8	931.6	946.0	961.4	975.6	988.5	1005.3	1023.7	1043.8	1066.4
10°	876.8	884.1	899.3	915.7	934.0	947.9	965.2	985.1	1006.0	1030.7	1058.4
12.5°	844.8	851.8	870.2	887.0	905.9	921.1	941.3	961.6	989.3	1016.1	1047.7
15°	782.7	801.3	822.1	842.0	864.6	883.3	907.5	928.4	954.8	992.5	1028.5
17.5°	713.6	733.5	759.4	790.1	820.4	843.4	868.0	893.9	925.4	963.9	1005.4
20°	673.4	689.4	718.0	752.3	787.4	819.5	842.0	870.7	903.2	944.9	987.7
22.5°	643.2	656.8	679.2	713.5	751.4	788.6	817.4	845.7	881.7	923.3	970.0
25°	597.9	612.7	632.2	655.6	699.0	738.4	776.2	808.7	846.9	888.4	940.5
27.5°	560.3	573.2	591.0	615.4	644.5	688.0	733.8	770.9	810.0	854.7	906.8
30°	538.1	548.5	563.3	588.0	615.7	654.8	701.2	744.5	784.0	830.4	884.5
32.5°	514.9	525.9	540.4	559.9	589.7	622.5	668.9	716.4	758.3	805.8	858.9
35°	483.9	492.6	505.6	525.5	552.4	581.1	622.2	671.2	715.4	766.2	816.9
37.5°	452.6	462.8	473.0	490.8	512.9	543.6	577.4	627.5	676.5	722.8	772.3
40°	434.9	441.0	452.2	466.6	490.0	517.3	548.9	597.9	646.9	692.9	742.7
42.5°	415.2	421.9	431.5	445.7	466.8	493.3	524.3	566.7	617.8	662.3	707.8
45°	387.7	391.5	401.0	413.2	430.6	457.5	486.1	523.8	571.9	614.4	654.3
47.5°	359.9	363.3	369.2	380.3	399.8	421.3	448.2	482.0	524.2	566.7	600.5
50°	340.8	343.8	349.5	359.9	377.2	398.5	424.9	455.3	493.0	533.8	562.0
52.5°	321.7	323.3	328.6	340.5	355.1	375.9	399.6	427.5	462.8	496.7	525.2
55°	291.4	295.3	298.7	307.4	321.3	341.3	362.5	389.0	416.3	444.9	469.1
57.5°	259.8	264.0	269.0	276.6	287.6	306.2	325.3	346.7	370.1	393.8	414.2
60°	238.9	242.8	247.1	255.8	265.8	280.5	301.3	320.0	337.8	359.5	379.8
62.5°	218.4	222.3	227.4	234.3	243.9	258.0	275.3	291.6	310.1	329.0	344.1
65°	188.2	191.2	195.1	201.6	210.8	223.3	237.6	250.2	266.7	280.5	294.4
67.5°	155.0	160.8	165.9	171.2	178.9	190.6	201.0	213.0	224.2	234.5	247.1
70°	133.1	139.7	144.4	150.0	157.4	167.4	177.3	185.6	194.7	204.6	216.0
72.5°	114.7	119.8	123.6	129.6	136.2	145.5	154.8	161.7	169.0	175.9	186.8
75°	90.7	92.8	95.4	100.2	106.2	113.2	120.6	126.6	130.9	137.1	144.8
77.5°	65.1	69.3	71.0	74.4	78.8	83.1	88.0	93.0	97.2	99.4	105.3
80°	49.9	51.6	53.3	58.1	60.7	65.1	68.5	73.3	75.0	77.2	82.8
82.5°	38.7	39.8	40.8	42.2	43.7	48.0	51.5	54.5	56.3	57.1	61.3
85°	22.6	23.0	23.4	23.9	24.3	24.3	26.0	28.2	31.2	31.2	32.5
87.5°	12.1	12.1	11.8	11.1	11.5	11.2	11.1	10.6	11.2	11.8	12.4
90°	22.1	20.9	19.2	17.4	15.8	14.1	12.1	9.8	7.5	5.1	2.9
92.5°	38.2	37.5	36.4	35.1	34.0	32.8	30.9	28.2	25.6	22.9	20.3
95°	72.6	72.0	70.5	69.1	67.6	66.1	64.4	62.5	60.7	58.7	56.8
97.5°	114.6	113.8	112.1	110.4	108.7	107.0	105.3	103.8	102.3	100.8	99.3
100°	145.4	145.0	143.0	141.1	139.3	137.4	136.0	135.1	134.3	133.5	132.6
102.5°	177.3	176.8	175.0	173.3	171.5	169.8	168.8	168.4	168.1	167.8	167.5
105°	226.1	225.4	224.6	223.7	222.9	222.1	221.5	221.4	221.1	220.9	220.7
107.5°	278.9	278.3	278.2	278.0	277.9	277.8	277.6	277.4	277.1	276.9	276.5
110°	315.0	315.4	315.6	315.8	316.1	316.3	316.2	315.8	315.3	314.9	314.5



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	352.5	352.5	352.9	353.4	353.7	354.1	354.2	354.2	354.1	354.0	353.8
115°	410.9	411.1	411.5	412.0	412.4	412.8	412.9	412.9	412.9	412.9	412.9
117.5°	467.4	468.1	468.4	468.7	469.0	469.3	469.4	469.2	469.0	468.9	468.7
120°	505.7	506.8	507.4	508.0	508.7	509.3	509.2	508.3	507.5	506.6	505.8
122.5°	544.0	544.6	544.9	545.3	545.5	545.8	545.8	545.4	545.1	544.8	544.5
125°	600.1	600.5	600.7	601.0	601.2	601.4	601.4	601.4	601.4	601.4	601.4
127.5°	654.1	654.5	654.8	655.2	655.5	655.9	655.7	655.1	654.4	653.9	653.2
130°	692.0	692.4	692.4	692.4	692.4	692.4	692.1	691.5	690.8	690.2	689.6
132.5°	727.6	728.1	728.2	728.4	728.6	728.7	728.6	728.1	727.7	727.2	726.7
135°	781.1	781.5	781.5	781.5	781.5	781.5	780.8	779.6	778.3	777.1	775.8
137.5°	832.8	833.3	833.0	832.7	832.3	832.0	831.5	831.0	830.4	829.8	829.2
140°	866.5	866.7	866.7	866.7	866.7	866.7	866.5	866.1	865.7	865.2	864.8
142.5°	898.5	898.5	898.7	898.9	899.0	899.2	899.1	898.6	898.2	897.8	897.4
145°	947.0	947.2	947.0	946.8	946.6	946.4	945.8	945.0	944.2	943.3	942.5
147.5°	990.8	991.0	991.2	991.3	991.5	991.6	991.2	990.2	989.2	988.2	987.2
150°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1017.8	1017.0	1016.2	1015.3	1014.5
152.5°	1043.7	1043.3	1043.1	1042.9	1042.8	1042.6	1042.3	1041.7	1041.2	1040.7	1040.2
155°	1079.7	1078.9	1079.0	1079.3	1079.5	1079.7	1079.8	1079.8	1079.8	1079.8	1079.8
157.5°	1111.9	1111.3	1111.3	1111.3	1111.4	1111.4	1111.7	1112.1	1112.4	1112.8	1113.1
160°	1131.6	1131.0	1131.1	1131.4	1131.6	1131.8	1132.0	1132.2	1132.5	1132.7	1132.9
162.5°	1148.8	1147.6	1147.9	1148.1	1148.3	1148.5	1148.8	1149.4	1150.0	1150.5	1151.0
165°	1172.0	1170.8	1171.2	1171.6	1172.0	1172.4	1173.0	1173.6	1174.2	1174.8	1175.5
167.5°	1191.7	1190.4	1190.4	1190.3	1190.3	1190.3	1190.7	1191.6	1192.5	1193.4	1194.3
170°	1202.3	1201.1	1200.9	1200.6	1200.4	1200.2	1200.6	1201.7	1202.7	1203.8	1204.8
172.5°	1210.1	1208.7	1208.6	1208.6	1208.5	1208.4	1208.9	1209.7	1210.6	1211.5	1212.4
175°	1218.6	1217.2	1217.4	1217.6	1217.8	1218.0	1218.6	1219.7	1220.7	1221.8	1222.9
177.5°	1223.7	1222.5	1222.5	1222.5	1222.5	1222.5	1222.9	1223.8	1224.6	1225.4	1226.3
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1082.8	1085.9	1089.4	1096.0	1101.6	1104.0	1108.8	1112.3	1111.3	1116.1	1124.5
5°	1087.0	1098.8	1112.2	1126.1	1141.7	1154.7	1165.1	1175.5	1183.7	1193.7	1208.4
7.5°	1086.4	1107.2	1129.8	1154.7	1180.3	1202.4	1222.9	1243.7	1262.2	1282.4	1308.8
10°	1083.6	1111.3	1139.5	1172.1	1204.5	1235.3	1263.1	1289.2	1313.9	1340.3	1373.7
12.5°	1080.4	1112.4	1146.5	1185.5	1226.0	1263.1	1295.7	1333.2	1364.2	1398.2	1436.8
15°	1066.7	1109.6	1156.0	1206.7	1255.3	1305.1	1349.8	1395.8	1438.7	1479.4	1528.0
17.5°	1050.9	1100.4	1155.1	1215.0	1273.4	1334.0	1387.0	1445.0	1488.8	1543.5	1588.6
20°	1038.0	1091.4	1149.9	1217.2	1283.4	1350.7	1409.2	1468.2	1517.6	1572.7	1629.9
22.5°	1022.5	1081.0	1144.4	1214.0	1283.4	1356.9	1421.7	1480.3	1541.6	1603.5	1662.6
25°	997.3	1058.0	1125.2	1201.5	1281.3	1356.3	1425.7	1498.5	1564.5	1631.7	1684.6
27.5°	966.5	1030.1	1101.0	1179.7	1261.6	1338.5	1420.2	1497.8	1564.1	1628.8	1675.0
30°	941.8	1009.0	1077.1	1156.8	1241.9	1324.2	1411.9	1489.5	1559.3	1617.4	1643.4
32.5°	916.5	980.2	1050.4	1131.2	1218.2	1306.9	1393.8	1473.2	1537.7	1572.6	1573.3
35°	872.5	932.2	1005.1	1084.4	1173.8	1270.1	1358.0	1436.1	1475.5	1478.6	1436.1
37.5°	824.3	879.3	948.0	1027.4	1125.3	1221.1	1311.0	1363.0	1376.1	1332.0	1253.4
40°	790.0	840.7	907.1	988.6	1085.7	1184.6	1266.6	1304.7	1290.9	1219.3	1131.7
42.5°	754.0	801.2	865.1	945.6	1043.1	1143.0	1212.8	1233.3	1196.5	1113.9	1011.4
45°	695.0	738.4	801.8	882.8	976.5	1070.2	1123.1	1112.6	1051.5	953.5	838.6
47.5°	633.7	675.6	732.6	807.6	903.5	984.4	1020.2	988.8	901.8	794.0	700.5
50°	593.2	636.1	688.6	760.1	847.7	925.8	948.8	901.1	804.4	700.7	614.8
52.5°	553.3	590.0	641.4	710.5	794.3	860.2	872.5	817.4	717.6	624.8	548.6
55°	492.6	525.9	569.3	634.4	706.8	762.7	756.2	685.5	594.9	515.6	455.8
57.5°	433.9	459.0	499.0	560.0	623.6	661.1	637.4	577.2	492.7	427.7	377.2
60°	395.0	418.4	455.8	509.1	565.0	586.2	566.3	500.8	434.1	374.6	332.2
62.5°	358.2	378.9	411.0	460.5	505.6	518.3	496.9	439.8	379.6	328.8	293.7
65°	304.8	323.9	351.2	386.4	417.6	423.6	409.8	351.2	305.7	263.2	238.9
67.5°	256.3	268.8	290.2	320.5	337.1	340.6	313.8	277.0	236.9	210.8	192.5
70°	223.7	232.4	252.3	268.8	282.3	282.7	258.0	228.5	197.7	176.5	163.1
72.5°	192.2	200.5	215.6	226.9	237.2	233.8	211.2	187.9	163.1	147.0	137.1
75°	148.3	155.6	163.5	168.7	168.7	164.4	147.9	130.5	116.2	106.6	103.6
77.5°	107.8	113.9	116.5	115.7	114.1	107.4	96.9	85.6	80.5	76.0	73.7
80°	84.5	87.2	88.1	85.9	83.2	75.4	68.5	63.8	58.9	57.2	56.3
82.5°	62.7	65.0	62.7	63.3	57.6	51.2	47.4	45.7	43.7	43.0	42.2
85°	33.4	32.9	32.1	29.9	26.0	25.1	24.7	24.3	23.4	23.9	23.0
87.5°	12.5	11.9	11.0	11.1	11.5	11.2	11.8	12.1	12.5	12.4	13.4
90°	5.1	7.5	9.8	12.1	14.1	15.8	17.4	19.2	20.9	22.1	23.4
92.5°	22.9	25.6	28.2	30.9	32.8	34.0	35.1	36.4	37.5	38.2	39.1
95°	58.7	60.7	62.5	64.4	66.1	67.6	69.1	70.5	72.0	72.6	73.2
97.5°	100.8	102.3	103.8	105.3	107.0	108.7	110.4	112.1	113.8	114.6	115.4
100°	133.5	134.3	135.1	136.0	137.4	139.3	141.1	143.0	145.0	145.4	145.8
102.5°	167.8	168.1	168.4	168.8	169.8	171.5	173.3	175.0	176.8	177.3	177.9
105°	220.9	221.1	221.4	221.5	222.1	222.9	223.7	224.6	225.4	226.1	226.7
107.5°	276.9	277.1	277.4	277.6	277.8	277.9	278.0	278.2	278.3	278.9	279.5
110°	314.9	315.3	315.8	316.2	316.3	316.1	315.8	315.6	315.4	315.0	314.5





TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	354.0	354.1	354.2	354.2	354.1	353.7	353.4	352.9	352.5	352.5	352.4
115°	412.9	412.9	412.9	412.9	412.8	412.4	412.0	411.5	411.1	410.9	410.7
117.5°	468.9	469.0	469.2	469.4	469.3	469.0	468.7	468.4	468.1	467.4	466.7
120°	506.6	507.5	508.3	509.2	509.3	508.7	508.0	507.4	506.8	505.7	504.7
122.5°	544.8	545.1	545.4	545.8	545.8	545.5	545.3	544.9	544.6	544.0	543.2
125°	601.4	601.4	601.4	601.4	601.4	601.2	601.0	600.7	600.5	600.1	599.7
127.5°	653.9	654.4	655.1	655.7	655.9	655.5	655.2	654.8	654.5	654.1	653.7
130°	690.2	690.8	691.5	692.1	692.4	692.4	692.4	692.4	692.4	692.0	691.5
132.5°	727.2	727.7	728.1	728.6	728.7	728.6	728.4	728.2	728.1	727.6	727.2
135°	777.1	778.3	779.6	780.8	781.5	781.5	781.5	781.5	781.5	781.1	780.6
137.5°	829.8	830.4	831.0	831.5	832.0	832.3	832.7	833.0	833.3	832.8	832.3
140°	865.2	865.7	866.1	866.5	866.7	866.7	866.7	866.7	866.7	866.5	866.3
142.5°	897.8	898.2	898.6	899.1	899.2	899.0	898.9	898.7	898.5	898.5	898.5
145°	943.3	944.2	945.0	945.8	946.4	946.6	946.8	947.0	947.2	947.0	946.8
147.5°	988.2	989.2	990.2	991.2	991.6	991.5	991.3	991.2	991.0	990.8	990.7
150°	1015.3	1016.2	1017.0	1017.8	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2
152.5°	1040.7	1041.2	1041.7	1042.3	1042.6	1042.8	1042.9	1043.1	1043.3	1043.7	1044.2
155°	1079.8	1079.8	1079.8	1079.8	1079.7	1079.5	1079.3	1079.0	1078.9	1079.7	1080.6
157.5°	1112.8	1112.4	1112.1	1111.7	1111.4	1111.4	1111.3	1111.3	1111.3	1111.9	1112.6
160°	1132.7	1132.5	1132.2	1132.0	1131.8	1131.6	1131.4	1131.1	1131.0	1131.6	1132.2
162.5°	1150.5	1150.0	1149.4	1148.8	1148.5	1148.3	1148.1	1147.9	1147.6	1148.8	1149.9
165°	1174.8	1174.2	1173.6	1173.0	1172.4	1172.0	1171.6	1171.2	1170.8	1172.0	1173.3
167.5°	1193.4	1192.5	1191.6	1190.7	1190.3	1190.3	1190.3	1190.4	1190.4	1191.7	1192.9
170°	1203.8	1202.7	1201.7	1200.6	1200.2	1200.4	1200.6	1200.9	1201.1	1202.3	1203.6
172.5°	1211.5	1210.6	1209.7	1208.9	1208.4	1208.5	1208.6	1208.6	1208.7	1210.1	1211.5
175°	1221.8	1220.7	1219.7	1218.6	1218.0	1217.8	1217.6	1217.4	1217.2	1218.6	1220.1
177.5°	1225.4	1224.6	1223.8	1222.9	1222.5	1222.5	1222.5	1222.5	1222.5	1223.7	1224.8
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1128.9	1130.3	1131.4	1134.8	1135.1	1138.3	1135.1
5°	1222.3	1228.4	1238.0	1247.5	1248.4	1254.4	1243.6
7.5°	1327.1	1341.2	1349.9	1365.3	1371.4	1375.2	1369.0
10°	1399.2	1412.3	1435.3	1446.5	1457.8	1459.5	1454.3
12.5°	1469.0	1489.6	1507.7	1529.1	1528.5	1543.9	1538.2
15°	1561.9	1583.1	1608.3	1632.1	1640.8	1640.8	1647.7
17.5°	1628.1	1667.0	1693.1	1711.8	1732.3	1735.8	1733.4
20°	1672.8	1714.9	1742.7	1766.9	1780.9	1784.7	1784.7
22.5°	1706.2	1742.0	1769.0	1790.9	1802.3	1806.9	1805.6
25°	1729.2	1760.0	1776.5	1783.0	1786.0	1785.2	1776.9
27.5°	1697.6	1696.2	1685.9	1665.9	1650.9	1641.8	1631.4
30°	1637.3	1614.8	1588.8	1560.1	1523.2	1495.1	1486.4
32.5°	1547.4	1496.8	1452.8	1405.1	1365.5	1337.3	1325.4
35°	1373.7	1293.5	1228.0	1170.8	1129.1	1103.1	1094.5
37.5°	1167.4	1089.8	1008.8	953.2	918.8	892.4	882.6
40°	1036.3	951.8	881.1	829.1	793.5	767.9	767.5
42.5°	916.6	835.9	769.4	731.9	693.6	676.7	676.6
45°	750.6	686.0	629.6	600.1	577.2	563.3	559.4
47.5°	621.4	568.0	530.4	507.0	488.2	479.4	473.7
50°	548.9	502.1	472.2	451.8	441.4	430.2	429.3
52.5°	488.6	450.8	427.5	410.9	397.7	390.9	391.1
55°	410.6	380.7	364.2	351.6	341.3	336.1	333.9
57.5°	345.9	323.5	311.5	299.9	295.5	291.5	290.3
60°	305.7	290.5	279.2	270.1	263.7	262.4	261.9
62.5°	272.4	256.5	248.7	241.7	236.9	234.9	234.2
65°	224.6	212.9	205.9	200.3	198.6	195.6	195.1
67.5°	181.1	174.1	169.4	165.6	163.2	163.1	163.1
70°	154.3	150.4	146.6	144.4	143.1	142.2	142.2
72.5°	131.5	128.6	125.4	124.3	124.0	123.1	122.8
75°	100.2	97.1	97.6	95.4	93.7	91.5	90.2
77.5°	71.0	68.9	68.4	68.2	66.7	66.4	67.1
80°	55.0	52.9	52.5	52.9	52.5	51.2	51.2
82.5°	41.9	40.0	39.6	39.4	39.0	39.4	38.6
85°	22.6	21.7	21.7	21.7	22.6	22.1	21.7
87.5°	12.9	12.8	13.3	13.0	13.1	12.9	13.3
90°	24.6	25.9	26.7	27.1	27.6	28.0	28.5
92.5°	39.8	40.5	41.0	41.3	41.6	41.8	42.1
95°	73.9	74.5	74.8	74.8	74.8	74.8	74.8
97.5°	116.1	116.9	117.2	117.2	117.2	117.2	117.2
100°	146.2	146.6	146.8	146.8	146.8	146.8	146.8
102.5°	178.6	179.1	179.4	179.7	179.9	180.0	180.2
105°	227.3	228.0	228.6	229.3	229.8	230.5	231.1
107.5°	280.1	280.6	281.0	280.9	280.9	280.8	280.8
110°	314.1	313.7	313.8	314.5	315.1	315.8	316.3



TEST NUMBER: P332950-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	352.3	352.2	352.2	352.4	352.5	352.6	352.8
115°	410.4	410.3	410.0	409.9	409.6	409.4	409.2
117.5°	465.9	465.2	464.7	464.2	463.8	463.4	463.0
120°	503.6	502.6	502.2	502.6	503.0	503.5	503.9
122.5°	542.5	541.8	541.0	540.3	539.6	538.7	538.0
125°	599.2	598.8	598.4	598.0	597.6	597.1	596.7
127.5°	653.3	652.8	652.5	652.2	651.8	651.4	651.1
130°	691.1	690.7	690.1	689.3	688.4	687.5	686.7
132.5°	726.8	726.4	725.9	725.6	725.3	725.0	724.6
135°	780.2	779.8	779.3	778.6	778.0	777.3	776.7
137.5°	831.7	831.2	831.0	831.1	831.2	831.4	831.4
140°	866.1	865.8	865.7	865.4	865.2	865.0	864.8
142.5°	898.4	898.4	898.3	898.3	898.2	898.2	898.1
145°	946.6	946.4	945.9	945.3	944.7	944.0	943.5
147.5°	990.5	990.3	990.1	989.9	989.7	989.4	989.3
150°	1018.2	1018.2	1018.1	1017.9	1017.7	1017.5	1017.3
152.5°	1044.8	1045.3	1045.3	1044.7	1044.2	1043.6	1043.1
155°	1081.4	1082.2	1082.2	1081.4	1080.6	1079.7	1078.9
157.5°	1113.1	1113.8	1113.8	1113.0	1112.3	1111.6	1110.9
160°	1132.9	1133.5	1133.3	1132.2	1131.1	1130.2	1129.1
162.5°	1151.0	1152.2	1152.3	1151.2	1150.1	1149.1	1148.0
165°	1174.5	1175.8	1176.0	1175.2	1174.4	1173.5	1172.6
167.5°	1194.3	1195.5	1195.5	1194.2	1192.9	1191.6	1190.3
170°	1204.8	1206.2	1206.0	1204.5	1203.1	1201.6	1200.1
172.5°	1212.9	1214.4	1214.4	1212.8	1211.4	1209.9	1208.4
175°	1221.6	1223.0	1223.0	1221.6	1220.1	1218.6	1217.2
177.5°	1226.0	1227.2	1227.1	1225.7	1224.4	1223.0	1221.7
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7

(END OF REPORT)