

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332954-930

Luminaire Tested: **SA4XXRDIP-C795D1205U930-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332954-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6126.5 lumens
Efficiency: N/A
Efficacy: 107.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332954-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

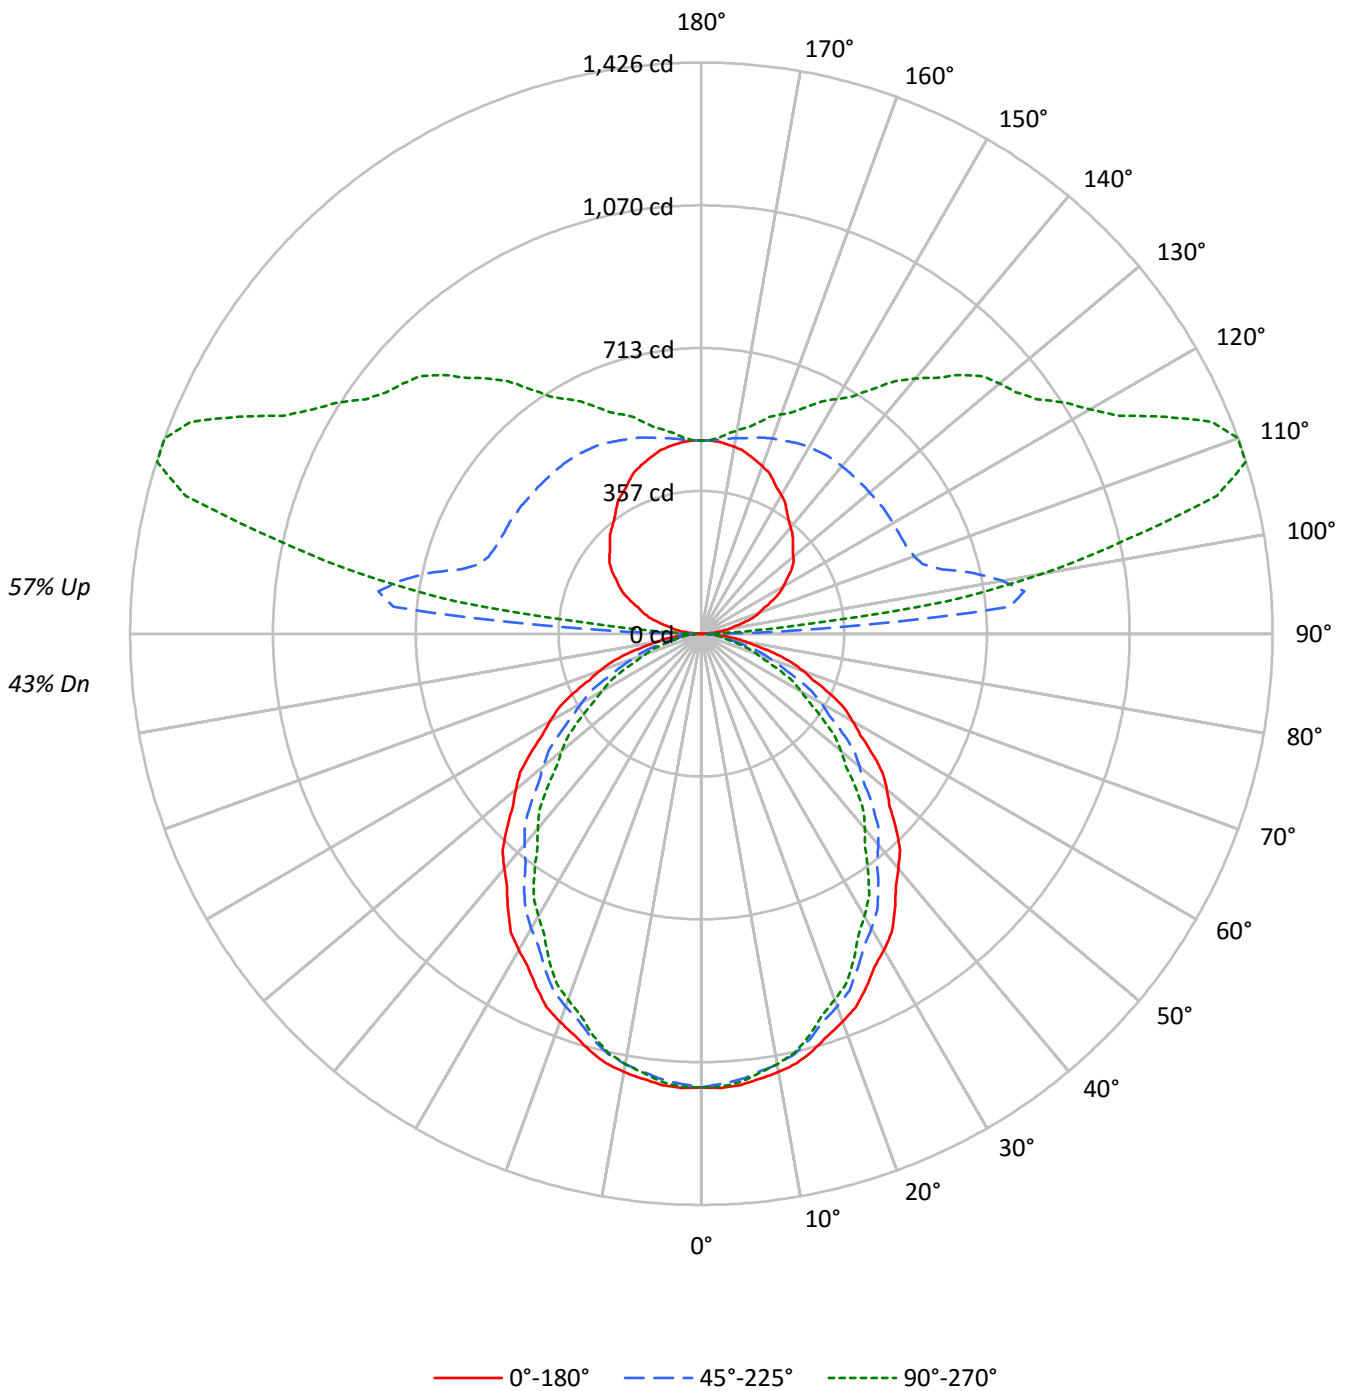



TEST NUMBER: P332954-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	43
1	96	92	88	85	88	84	81	78	70	68	66	56	55	54	44	43	42	36
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36	31
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	35	33	31	26
4	74	63	55	49	67	58	51	46	48	43	39	39	36	33	31	29	27	23
5	68	56	48	42	62	52	45	40	43	38	34	36	32	29	28	25	23	20
6	62	50	43	37	57	47	40	34	39	34	30	32	28	25	26	23	21	18
7	58	46	38	32	53	42	35	30	35	30	26	29	25	22	23	21	18	16
8	53	41	34	29	49	38	32	27	32	27	23	27	23	20	22	19	17	14
9	50	38	30	25	45	35	28	24	30	25	21	25	21	18	20	17	15	13
10	46	35	28	23	42	32	26	21	27	22	19	23	19	16	18	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9143	9143	9143
5°	9164	9052	9108
10°	9107	8943	8943
15°	9002	8756	8690
20°	8858	8508	8352
25°	8675	8219	8011
30°	8496	7914	7582
35°	8298	7597	7154
40°	8061	7238	6690
45°	7841	6882	6218
50°	7592	6469	5718
55°	7323	6042	5175
60°	7030	5572	4621
65°	6758	4988	4076
70°	6366	4338	3460
75°	5870	3599	2813
80°	5119	2738	2580
85°	4335	2492	2325



TEST NUMBER: P332954-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.4	1.7
10°-20°	296.7	4.8
20°-30°	428.4	7.0
30°-40°	485.6	7.9
40°-50°	468.9	7.7
50°-60°	389.9	6.4
60°-70°	269.3	4.4
70°-80°	136.5	2.2
80°-90°	37.7	0.6
90°-100°	348.3	5.7
100°-110°	724.9	11.8
110°-120°	649.3	10.6
120°-130°	546.2	8.9
130°-140°	455.4	7.4
140°-150°	347.9	5.7
150°-160°	244.5	4.0
160°-170°	143.8	2.3
170°-180°	46.8	0.8
0°-30°	831.5	13.6
0°-40°	1317.1	21.5
0°-60°	2176.0	35.5
0°-90°	2619.4	42.8
90°-120°	1722.5	28.1
90°-150°	3071.9	50.1
90°-180°	3507.0	57.2
0°-180°	6126.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1133	1133	1133	1133	1133	
5°	1131	1127	1117	1125	1124	107
15°	1077	1069	1048	1046	1040	303
25°	974	957	923	908	899	449
35°	842	813	771	742	726	526
45°	687	654	603	562	545	529
55°	520	484	429	386	368	465
65°	354	316	261	225	213	349
75°	188	156	115	96	90	199
85°	47	30	27	25	25	53
90°	1	8	17	19	20	4
95°	31	99	772	382	231	35
105°	111	161	622	1338	1333	118
115°	195	245	554	1065	1280	193
125°	272	323	551	906	1021	242
135°	323	385	547	804	913	250
145°	372	426	544	678	746	234
155°	424	457	529	599	624	195
165°	461	476	507	537	545	130
175°	481	482	486	493	491	46
180°	482	482	482	482	482	



TEST NUMBER: P332954-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6
2.5°	1135.4	1134.7	1134.1	1133.5	1132.9	1131.7	1130.0	1128.4	1126.7	1124.9	1126.7
5°	1130.8	1130.1	1129.3	1128.5	1127.7	1126.3	1123.9	1121.6	1119.2	1117.0	1118.9
7.5°	1120.6	1119.8	1119.0	1118.2	1117.4	1115.5	1112.5	1109.5	1106.4	1103.4	1104.6
10°	1110.9	1109.9	1109.0	1108.0	1107.0	1104.8	1101.4	1097.9	1094.5	1091.0	1091.7
12.5°	1098.4	1097.3	1096.2	1095.0	1094.0	1091.4	1087.3	1083.1	1079.0	1075.0	1075.5
15°	1077.1	1075.4	1073.6	1071.9	1070.2	1066.9	1062.0	1057.2	1052.4	1047.6	1047.2
17.5°	1051.2	1048.7	1046.2	1043.7	1041.2	1037.1	1031.3	1025.5	1019.7	1013.9	1012.8
20°	1031.1	1028.6	1026.1	1023.6	1021.1	1016.6	1010.0	1003.5	996.9	990.3	988.8
22.5°	1008.9	1006.1	1003.3	1000.5	997.7	992.7	985.7	978.7	971.7	964.7	962.4
25°	973.9	970.4	966.9	963.4	960.0	954.3	946.4	938.5	930.6	922.7	919.4
27.5°	937.1	932.8	928.4	924.1	919.7	913.3	904.8	896.4	887.9	879.5	875.5
30°	911.4	906.6	901.8	897.0	892.2	885.3	876.2	867.2	858.0	849.0	844.2
32.5°	884.4	879.0	873.5	868.0	862.7	855.2	845.9	836.5	827.1	817.7	812.2
35°	842.0	835.9	829.7	823.5	817.4	809.5	799.9	790.2	780.6	770.9	764.4
37.5°	796.8	790.4	784.1	777.7	771.4	762.9	752.2	741.5	730.8	720.2	712.8
40°	764.9	758.6	752.2	745.8	739.5	730.8	719.7	708.8	697.8	686.8	678.7
42.5°	734.3	727.7	721.1	714.4	707.7	698.6	687.2	675.7	664.3	652.8	644.6
45°	686.8	679.7	672.5	665.4	658.3	649.0	637.4	625.8	614.2	602.8	593.3
47.5°	637.7	630.4	623.1	615.6	608.3	598.6	586.6	574.5	562.6	550.5	540.7
50°	604.5	597.0	589.4	581.9	574.4	564.4	552.1	539.8	527.4	515.1	505.5
52.5°	570.5	563.1	555.7	548.4	541.0	531.0	518.4	505.7	493.1	480.5	470.7
55°	520.3	512.6	504.9	497.2	489.5	479.4	466.8	454.3	441.8	429.3	419.2
57.5°	470.8	462.7	454.7	446.7	438.6	428.4	416.1	403.8	391.5	379.1	369.0
60°	435.4	427.6	420.0	412.2	404.5	394.5	382.1	369.8	357.5	345.1	335.1
62.5°	403.4	395.4	387.4	379.4	371.4	361.0	348.4	335.7	323.1	310.5	301.2
65°	353.8	345.5	337.2	329.0	320.7	310.4	298.0	285.7	273.4	261.1	252.7
67.5°	302.3	294.4	286.4	278.5	270.5	260.9	249.4	238.0	226.5	215.1	207.9
70°	269.7	261.6	253.5	245.4	237.3	227.8	216.8	205.8	194.9	183.8	177.5
72.5°	235.1	227.7	220.4	213.0	205.7	196.9	186.5	176.1	165.8	155.4	149.9
75°	188.2	181.1	173.9	166.8	159.6	151.6	142.5	133.5	124.4	115.4	110.9
77.5°	140.6	134.6	128.6	122.5	116.4	109.7	102.5	95.1	87.8	80.5	77.9
80°	110.1	104.5	99.0	93.4	87.8	82.1	76.3	70.5	64.7	58.9	58.4
82.5°	83.8	78.7	73.5	68.4	63.3	59.0	55.8	52.4	49.1	45.8	45.3
85°	46.8	43.0	39.1	35.3	31.4	29.2	28.6	28.0	27.5	26.9	26.5
87.5°	16.1	15.3	14.6	13.6	12.6	11.8	12.8	12.6	12.9	13.1	12.8
90°	1.0	2.9	5.7	6.6	7.6	7.6	13.3	13.3	15.2	17.0	16.1
92.5°	10.8	15.7	24.6	36.2	50.1	69.7	117.9	191.4	263.0	300.5	250.3
95°	31.2	34.1	43.6	55.9	78.6	118.5	200.8	356.2	582.6	772.1	793.9
97.5°	56.1	56.1	64.2	75.6	95.1	128.5	191.9	320.2	545.3	813.3	997.4
100°	72.0	72.0	78.6	90.0	108.0	138.4	194.2	301.3	494.6	761.7	1004.2
102.5°	87.2	88.7	94.6	105.2	122.4	151.2	201.8	296.0	460.4	697.2	947.4
105°	110.9	113.7	118.5	129.8	146.8	174.3	219.8	298.4	431.0	621.5	844.1
107.5°	137.0	138.8	143.7	155.7	172.0	199.2	240.8	312.4	425.7	579.0	760.8
110°	154.4	156.3	161.0	172.4	189.5	215.1	256.7	323.0	427.3	564.7	719.1



TEST NUMBER: P332954-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	171.1	173.0	178.5	189.1	206.2	231.7	271.9	334.4	431.8	557.8	695.5
115°	195.2	198.0	204.6	214.1	232.1	257.7	295.5	352.5	440.5	554.2	673.6
117.5°	220.1	222.8	228.7	239.1	256.0	282.5	318.5	370.8	449.8	553.3	663.7
120°	236.8	238.7	245.4	255.8	271.9	298.4	334.4	383.7	456.6	553.3	658.4
122.5°	252.0	253.9	260.6	270.2	287.8	313.6	349.6	395.8	463.5	552.5	652.4
125°	271.9	275.7	281.4	291.8	309.8	336.3	370.4	414.0	473.7	551.4	642.3
127.5°	289.5	292.5	299.4	311.3	330.0	356.8	389.7	429.7	481.8	549.3	628.8
130°	299.4	303.1	310.7	325.0	342.9	370.4	402.7	439.6	487.9	548.5	620.5
132.5°	309.2	312.3	322.1	335.6	355.1	381.1	413.3	449.5	493.2	547.8	612.9
135°	323.0	326.9	336.3	352.5	372.3	397.0	428.2	462.4	501.2	546.7	601.6
137.5°	336.9	340.5	350.9	366.2	386.9	410.4	439.6	471.4	505.9	546.4	591.7
140°	346.7	349.6	360.0	376.1	396.0	418.7	447.2	477.4	509.7	545.7	586.4
142.5°	357.3	360.2	369.8	385.2	404.3	426.3	454.0	482.0	512.7	545.7	581.9
145°	372.3	375.2	384.7	397.9	415.9	436.8	461.4	487.0	514.5	543.8	574.1
147.5°	389.1	390.1	398.4	412.1	427.1	445.8	469.0	491.3	515.4	540.4	567.1
150°	399.8	400.7	408.3	419.7	433.9	451.9	472.7	493.6	515.4	538.1	561.8
152.5°	409.6	409.9	417.4	428.0	440.8	457.2	475.8	495.1	513.9	534.3	555.7
155°	423.5	424.4	430.1	439.6	450.0	464.2	480.3	496.4	511.6	528.6	546.7
157.5°	436.9	436.9	442.2	449.6	458.7	469.9	483.6	496.4	509.2	522.8	537.4
160°	445.2	445.2	449.1	455.7	463.3	473.7	485.0	496.4	506.9	518.2	530.5
162.5°	452.8	452.1	455.1	461.0	467.8	476.0	486.6	496.4	504.6	513.6	524.5
165°	461.4	461.4	463.3	468.0	472.7	478.4	487.0	494.6	500.2	506.9	514.5
167.5°	469.9	469.0	469.9	473.5	476.1	480.5	486.7	492.3	495.7	500.0	505.3
170°	473.7	472.7	473.7	476.5	478.4	481.3	486.0	490.7	492.6	495.5	499.3
172.5°	477.4	476.5	476.7	478.8	480.0	482.0	485.3	489.3	489.6	490.9	494.0
175°	481.3	480.3	480.3	481.3	482.2	482.2	484.1	487.0	486.0	486.0	487.9
177.5°	483.0	482.2	481.4	482.2	482.2	482.2	483.0	484.5	483.0	483.0	483.7
180°	482.2	482.2	482.2	482.2	482.2	482.2	482.2	482.2	482.2	482.2	482.2



TEST NUMBER: P332954-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6
2.5°	1128.4	1130.0	1131.7	1132.5	1132.4	1132.2	1132.0	1131.9
5°	1120.8	1122.7	1124.7	1125.4	1125.0	1124.7	1124.3	1123.9
7.5°	1105.9	1107.2	1108.4	1108.6	1108.1	1107.4	1106.9	1106.2
10°	1092.5	1093.2	1094.1	1094.1	1093.2	1092.5	1091.7	1091.0
12.5°	1076.0	1076.4	1076.8	1076.5	1075.5	1074.4	1073.3	1072.2
15°	1046.8	1046.4	1046.0	1045.2	1043.8	1042.4	1041.1	1039.8
17.5°	1011.8	1010.7	1009.6	1008.0	1006.0	1004.0	1001.9	999.9
20°	987.2	985.7	984.1	982.2	979.7	977.1	974.6	972.2
22.5°	960.1	957.7	955.4	953.2	951.2	949.2	947.1	945.1
25°	916.2	912.9	909.6	907.0	905.1	903.2	901.2	899.3
27.5°	871.4	867.4	863.3	859.9	857.1	854.4	851.6	848.8
30°	839.4	834.5	829.7	825.7	822.7	819.6	816.5	813.4
32.5°	806.6	801.0	795.4	791.2	788.2	785.3	782.4	779.4
35°	757.8	751.3	744.8	739.7	736.3	732.8	729.3	725.9
37.5°	705.5	698.1	690.8	685.4	682.0	678.5	675.1	671.6
40°	670.7	662.5	654.4	648.7	645.2	641.7	638.3	634.8
42.5°	636.3	628.1	619.9	613.9	610.3	606.7	603.1	599.4
45°	583.8	574.4	564.9	558.5	555.0	551.5	548.0	544.6
47.5°	530.9	521.1	511.4	504.5	500.8	496.9	493.1	489.3
50°	495.9	486.2	476.5	469.9	466.3	462.6	458.9	455.3
52.5°	460.9	451.1	441.2	434.5	430.6	426.8	423.1	419.2
55°	409.2	399.2	389.2	382.4	378.7	375.0	371.4	367.7
57.5°	358.8	348.6	338.4	332.0	329.2	326.4	323.7	320.9
60°	325.1	315.1	305.1	298.5	295.5	292.4	289.3	286.2
62.5°	292.0	282.7	273.5	267.6	265.1	262.7	260.2	257.7
65°	244.4	236.2	227.9	222.6	220.3	217.9	215.6	213.4
67.5°	200.8	193.7	186.5	181.7	179.2	176.6	174.1	171.5
70°	171.1	164.8	158.4	154.3	152.4	150.4	148.5	146.6
72.5°	144.6	139.1	133.6	130.0	128.3	126.5	124.7	122.9
75°	106.5	102.1	97.6	94.8	93.7	92.5	91.3	90.2
77.5°	75.3	72.7	70.1	68.6	68.3	68.0	67.7	67.3
80°	57.8	57.2	56.7	56.3	56.1	55.8	55.7	55.5
82.5°	44.9	44.5	44.1	43.8	43.6	43.4	43.2	43.0
85°	26.1	25.8	25.4	25.1	25.1	25.1	25.1	25.1
87.5°	12.8	12.9	12.9	12.9	13.2	13.5	13.5	13.7
90°	17.0	18.0	18.9	18.9	19.9	20.9	19.9	19.9
92.5°	186.1	140.0	111.5	92.5	81.3	76.1	73.0	73.0
95°	702.0	555.1	428.2	336.3	289.9	260.6	243.4	231.1
97.5°	1037.2	982.6	890.0	791.1	723.0	666.0	637.6	617.9
100°	1142.6	1161.5	1115.1	1045.0	962.5	904.7	876.4	868.8
102.5°	1137.3	1231.2	1244.6	1215.4	1164.9	1123.0	1093.1	1087.0
105°	1061.0	1225.0	1318.7	1357.6	1359.5	1351.9	1338.6	1332.9
107.5°	952.8	1127.4	1259.5	1343.9	1390.7	1412.3	1421.8	1424.3
110°	887.7	1051.6	1189.0	1293.1	1360.4	1400.2	1417.3	1425.8



TEST NUMBER: P332954-930

CATALOG NUMBER: SA4XXRDIP-C795D1205U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	839.9	984.9	1114.7	1218.9	1295.3	1343.4	1367.3	1381.1
115°	792.0	908.6	1019.4	1110.4	1185.2	1242.0	1272.4	1279.9
117.5°	768.5	865.0	952.1	1029.2	1093.1	1140.8	1171.5	1177.4
120°	757.9	846.0	921.8	989.0	1043.1	1084.8	1109.4	1119.8
122.5°	748.8	833.9	902.9	961.8	1007.5	1043.1	1063.9	1074.3
125°	733.3	814.7	880.1	932.2	970.1	997.6	1015.6	1021.2
127.5°	714.3	792.2	857.4	906.9	944.9	969.4	984.6	990.2
130°	699.2	774.0	838.5	888.7	927.5	951.1	966.3	972.0
132.5°	683.2	753.6	816.4	866.7	904.7	931.5	945.8	951.5
135°	661.3	722.8	780.6	828.0	865.9	892.4	907.6	913.3
137.5°	641.4	693.5	742.2	785.0	820.4	846.6	859.1	865.9
140°	630.0	674.5	717.1	756.9	790.1	811.0	824.2	831.8
142.5°	619.4	658.6	695.2	729.7	759.0	778.4	790.1	795.4
145°	604.5	636.7	665.0	691.6	715.3	731.4	740.9	745.6
147.5°	592.2	617.7	640.4	661.3	678.7	692.5	699.8	701.4
150°	584.6	606.3	625.3	642.3	657.5	669.8	675.5	676.5
152.5°	576.2	594.9	612.4	626.4	639.3	649.3	652.7	653.7
155°	563.7	578.9	593.0	604.5	613.9	621.5	624.4	624.4
157.5°	550.2	563.0	574.9	584.0	591.2	596.9	598.6	598.6
160°	541.9	552.3	562.7	570.3	576.0	581.7	582.6	582.6
162.5°	533.5	542.5	550.7	557.4	561.6	567.3	568.3	567.4
165°	522.0	527.7	534.3	539.1	542.8	546.7	545.7	544.8
167.5°	510.9	515.2	520.5	523.3	525.2	527.7	527.5	526.8
170°	504.0	506.9	510.6	513.5	515.4	516.3	515.4	515.4
172.5°	497.9	500.0	502.3	504.3	505.5	506.5	505.5	504.0
175°	489.8	490.7	492.6	492.6	492.6	494.6	492.6	490.7
177.5°	484.5	485.3	485.3	486.0	485.3	486.0	484.5	483.0
180°	482.2	482.2	482.2	482.2	482.2	482.2	482.2	482.2

(END OF REPORT)