

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332587

Luminaire Tested: **SA4XXDIP-C795D365U835-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332587  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C795D365U835-4F0-1E-UDD-F1  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4675.5 lumens  
Efficiency: N/A  
Efficacy: 133.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 35  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332587  
CATALOG NUMBER: SA4XXDIP-C795D365U835-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

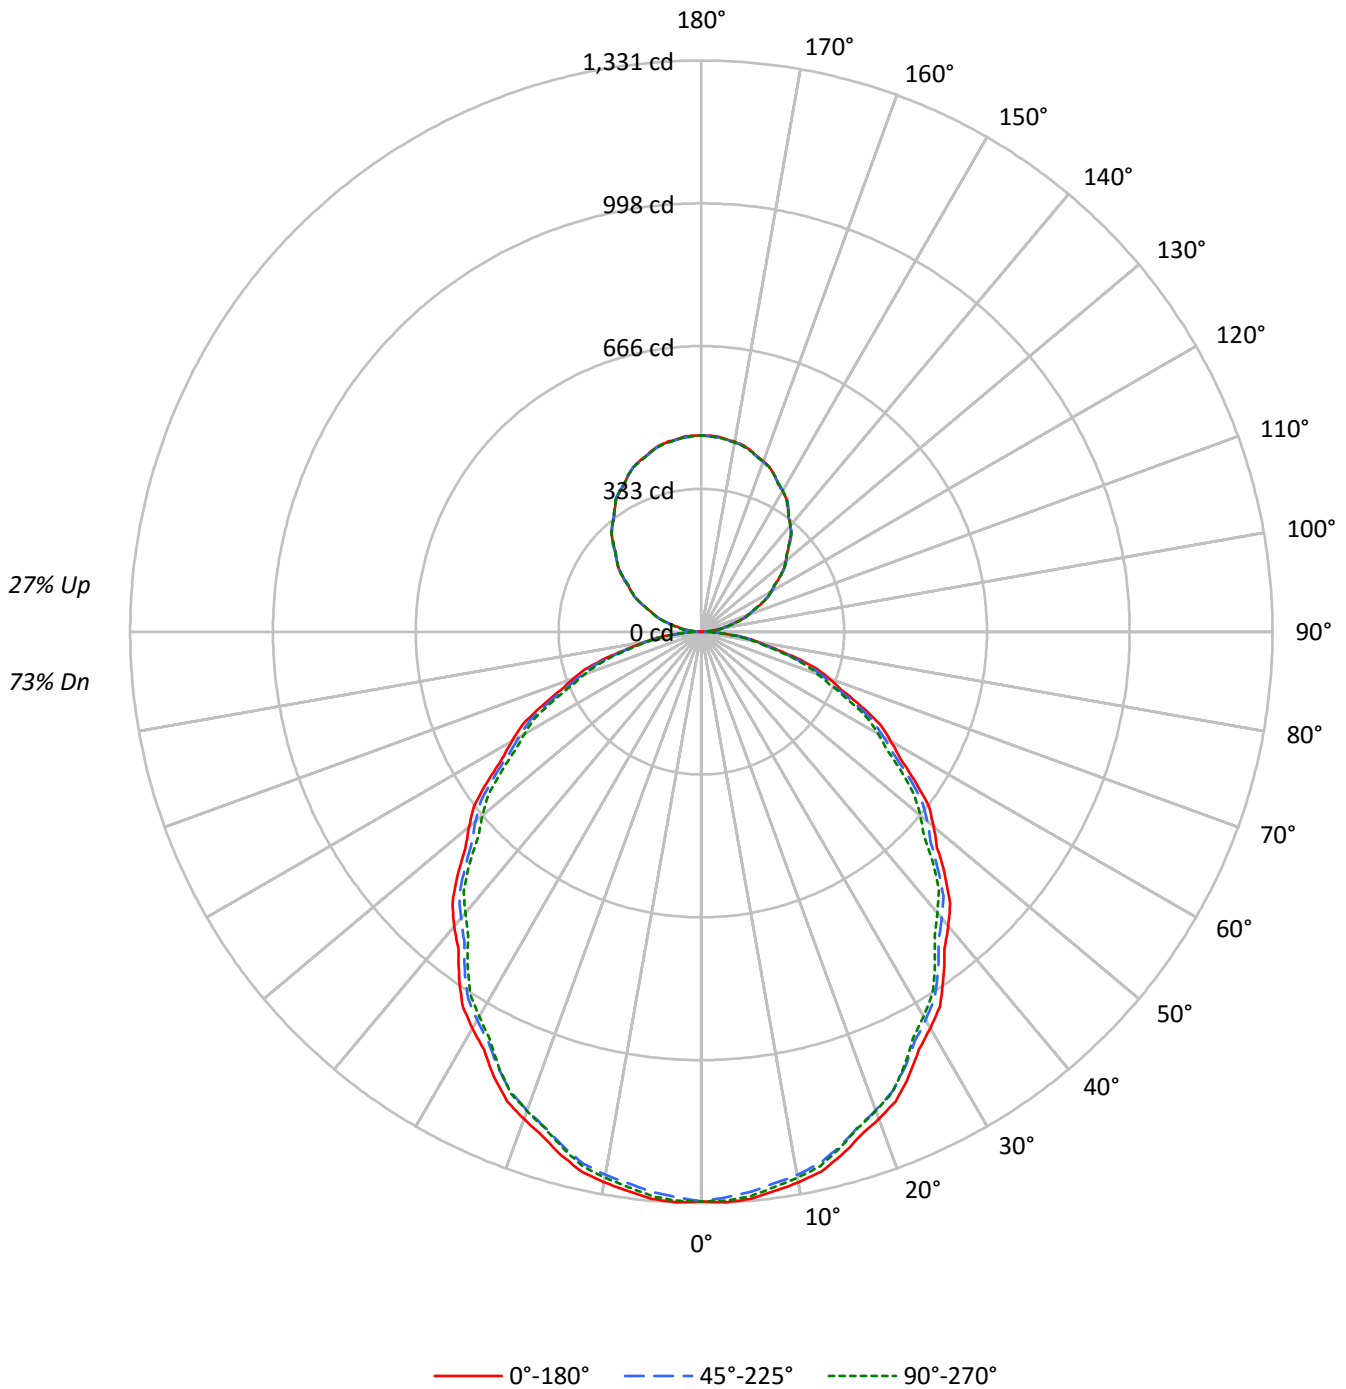



TEST NUMBER: P332587

CATALOG NUMBER: SA4XXDIP-C795D365U835-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	107	107	107	107	96	96	96	86	86	86	77	77	77	73
1	103	98	94	91	97	93	90	87	84	82	79	76	74	72	68	67	65	61
2	94	86	79	74	89	82	76	71	74	69	65	67	63	60	60	57	55	51
3	85	76	68	62	81	72	65	60	65	60	55	59	55	51	53	50	47	43
4	78	67	59	52	74	64	56	51	58	52	47	53	48	44	48	44	40	37
5	72	60	51	45	68	57	49	44	52	46	41	47	42	38	43	39	35	32
6	66	54	45	39	63	51	44	38	47	41	36	43	37	33	39	34	31	28
7	62	49	40	35	58	47	39	34	43	36	32	39	34	30	36	31	28	25
8	57	44	36	31	54	43	35	30	39	33	28	36	30	26	33	28	25	23
9	53	41	33	28	51	39	32	27	36	30	25	33	28	24	30	26	22	20
10	50	37	30	25	47	36	29	24	33	27	23	31	25	22	28	24	20	18

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10717	10717	10717
5°	10749	10619	10697
10°	10681	10533	10585
15°	10552	10384	10410
20°	10381	10198	10207
25°	10185	9986	9958
30°	9945	9737	9648
35°	9697	9477	9351
40°	9438	9180	9013
45°	9169	8889	8719
50°	8871	8629	8363
55°	8549	8294	8024
60°	8226	7918	7677
65°	7862	7559	7253
70°	7456	7081	6805
75°	6834	6503	6338
80°	6081	5835	5686
85°	5317	5122	5020



TEST NUMBER: P332587

CATALOG NUMBER: SA4XXDIP-C795D365U835-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	125.0	2.7
10°-20°	352.2	7.5
20°-30°	518.4	11.1
30°-40°	602.7	12.9
40°-50°	602.7	12.9
50°-60°	527.2	11.3
60°-70°	391.5	8.4
70°-80°	222.4	4.8
80°-90°	65.6	1.4
90°-100°	30.1	0.6
100°-110°	89.3	1.9
110°-120°	151.5	3.2
120°-130°	199.8	4.3
130°-140°	224.4	4.8
140°-150°	220.5	4.7
150°-160°	185.4	4.0
160°-170°	123.4	2.6
170°-180°	43.2	0.9
0°-30°	995.7	21.3
0°-40°	1598.4	34.2
0°-60°	2728.3	58.4
0°-90°	3407.8	72.9
90°-120°	270.9	5.8
90°-150°	915.6	19.6
90°-180°	1268.0	27.1
0°-180°	4675.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1328	1328	1328	1328	1328	
5°	1326	1322	1310	1321	1320	126
15°	1263	1258	1242	1248	1246	356
25°	1143	1136	1121	1122	1118	526
35°	984	976	962	954	949	615
45°	803	795	779	767	764	619
55°	607	604	589	577	570	544
65°	412	406	396	385	380	407
75°	219	214	208	204	203	233
85°	57	57	55	55	54	63
90°	1	5	8	10	11	4
95°	21	24	27	28	28	24
105°	82	83	84	85	86	87
115°	154	154	153	153	153	152
125°	224	224	224	223	223	200
135°	289	291	292	291	290	224
145°	352	353	353	353	352	220
155°	403	403	402	404	402	185
165°	438	438	437	439	438	124
175°	456	454	454	456	454	43
180°	457	457	457	457	457	



TEST NUMBER: P332587

CATALOG NUMBER: SA4XXDIP-C795D365U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1330.9	1330.3	1329.7	1329.2	1328.6	1327.3	1325.2	1323.1	1321.0	1319.0	1320.8
5°	1326.4	1325.5	1324.5	1323.6	1322.6	1320.8	1318.2	1315.6	1313.0	1310.4	1313.0
7.5°	1314.1	1313.1	1312.2	1311.2	1310.3	1308.4	1305.5	1302.6	1299.7	1296.8	1298.9
10°	1303.0	1302.1	1301.1	1300.2	1299.2	1297.2	1294.1	1291.1	1288.0	1284.9	1286.8
12.5°	1288.5	1287.6	1286.6	1285.7	1284.8	1282.6	1279.4	1276.1	1272.9	1269.6	1271.7
15°	1262.6	1261.6	1260.7	1259.7	1258.8	1256.6	1253.0	1249.5	1245.9	1242.4	1243.8
17.5°	1231.3	1230.1	1228.9	1227.8	1226.6	1224.3	1221.0	1217.6	1214.2	1210.9	1211.8
20°	1208.3	1207.1	1206.0	1204.8	1203.6	1201.2	1197.7	1194.1	1190.6	1187.1	1187.8
22.5°	1183.7	1182.1	1180.5	1179.0	1177.4	1174.9	1171.3	1167.8	1164.2	1160.7	1162.0
25°	1143.4	1141.8	1140.1	1138.5	1136.8	1134.3	1131.0	1127.7	1124.4	1121.1	1121.3
27.5°	1097.5	1095.8	1094.1	1092.4	1090.7	1088.3	1085.2	1082.2	1079.1	1076.0	1075.4
30°	1066.9	1065.0	1063.1	1061.2	1059.3	1056.8	1053.7	1050.7	1047.6	1044.5	1043.6
32.5°	1034.5	1032.8	1031.1	1029.4	1027.7	1025.2	1022.0	1018.7	1015.5	1012.2	1011.1
35°	983.9	982.2	980.6	978.9	977.3	974.8	971.5	968.2	964.9	961.6	959.9
37.5°	930.5	929.0	927.5	926.0	924.4	921.9	918.4	914.8	911.3	907.7	905.9
40°	895.6	893.7	891.8	889.9	888.0	885.3	881.8	878.2	874.7	871.1	868.8
42.5°	858.2	857.0	855.9	854.8	853.6	851.1	847.2	843.3	839.3	835.4	832.7
45°	803.1	801.4	799.8	798.1	796.5	793.7	790.0	786.2	782.4	778.6	776.0
47.5°	745.4	744.3	743.2	742.0	740.9	738.6	735.1	731.6	728.1	724.6	721.6
50°	706.3	705.3	704.4	703.4	702.5	700.4	697.1	693.8	690.4	687.1	683.8
52.5°	668.0	666.9	665.7	664.6	663.4	661.1	657.6	654.1	650.6	647.1	644.2
55°	607.4	606.6	605.9	605.2	604.5	602.5	599.2	595.9	592.6	589.3	586.4
57.5°	549.5	548.7	547.9	547.1	546.3	544.2	541.0	537.7	534.5	531.2	528.5
60°	509.5	508.3	507.1	506.0	504.8	502.6	499.6	496.5	493.4	490.4	488.2
62.5°	470.4	469.4	468.4	467.4	466.4	464.3	461.0	457.7	454.5	451.2	449.3
65°	411.6	410.5	409.3	408.1	406.9	405.1	402.8	400.4	398.0	395.7	393.3
67.5°	352.5	351.4	350.3	349.2	348.2	346.5	344.2	341.9	339.7	337.4	335.1
70°	315.9	314.3	312.6	310.9	309.3	307.5	305.6	303.7	301.8	300.0	298.1
72.5°	276.8	275.1	273.5	271.8	270.1	268.6	267.1	265.5	264.0	262.5	261.0
75°	219.1	217.9	216.8	215.6	214.4	213.2	212.0	210.8	209.7	208.5	207.5
77.5°	164.0	163.5	163.0	162.5	161.9	161.2	160.1	159.1	158.0	157.0	156.7
80°	130.8	130.1	129.4	128.7	128.0	127.4	126.9	126.5	126.0	125.5	125.0
82.5°	98.5	98.2	97.8	97.5	97.2	97.0	96.9	96.8	96.7	96.6	96.3
85°	57.4	57.4	57.4	57.4	57.4	57.2	56.7	56.3	55.8	55.3	55.3
87.5°	22.3	22.3	22.3	22.3	22.3	22.2	22.2	22.1	22.0	22.0	22.1
90°	1.1	1.9	2.8	3.7	4.5	5.3	5.9	6.5	7.1	7.8	8.2
92.5°	7.6	8.6	9.5	10.5	11.5	12.2	12.7	13.1	13.6	14.0	14.3
95°	21.2	21.9	22.6	23.3	24.0	24.7	25.2	25.8	26.3	26.9	27.1
97.5°	37.0	37.6	38.2	38.7	39.3	39.9	40.5	41.2	41.8	42.5	42.8
100°	49.5	49.8	50.1	50.4	50.7	51.2	51.9	52.7	53.4	54.1	54.2
102.5°	62.5	62.6	62.7	62.9	63.0	63.4	64.0	64.7	65.3	65.9	66.2
105°	82.3	82.4	82.5	82.6	82.6	82.8	83.2	83.5	83.8	84.1	84.3
107.5°	103.2	103.3	103.4	103.5	103.6	103.6	103.7	103.7	103.8	103.8	104.0
110°	117.3	117.5	117.6	117.8	117.9	118.0	117.9	117.8	117.7	117.7	117.5



TEST NUMBER: P332587

CATALOG NUMBER: SA4XXDIP-C795D365U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	132.0	132.0	132.1	132.1	132.1	132.1	131.9	131.8	131.7	131.5	131.5
115°	154.1	154.1	154.1	154.1	154.1	154.0	153.8	153.7	153.5	153.4	153.3
117.5°	174.8	174.9	175.0	175.0	175.1	175.1	175.0	174.9	174.7	174.6	174.4
120°	188.7	189.0	189.3	189.6	190.0	190.0	189.8	189.5	189.3	189.1	188.7
122.5°	203.1	203.2	203.4	203.5	203.6	203.6	203.5	203.4	203.3	203.2	202.9
125°	224.4	224.4	224.4	224.4	224.4	224.3	224.3	224.2	224.1	224.0	223.9
127.5°	243.7	243.9	244.2	244.4	244.6	244.7	244.6	244.4	244.3	244.2	244.0
130°	257.3	257.5	257.7	258.0	258.2	258.3	258.3	258.3	258.3	258.3	258.2
132.5°	271.1	271.3	271.4	271.6	271.8	271.8	271.8	271.7	271.7	271.6	271.4
135°	289.4	289.9	290.3	290.8	291.3	291.5	291.5	291.5	291.5	291.5	291.4
137.5°	309.3	309.6	309.8	310.0	310.2	310.4	310.5	310.6	310.8	310.9	310.7
140°	322.6	322.8	322.9	323.1	323.3	323.3	323.3	323.3	323.3	323.3	323.3
142.5°	334.8	334.9	335.1	335.2	335.4	335.5	335.4	335.3	335.3	335.2	335.2
145°	351.6	351.9	352.2	352.5	352.9	353.1	353.1	353.2	353.3	353.4	353.3
147.5°	368.3	368.7	369.0	369.4	369.8	369.9	369.9	369.8	369.8	369.7	369.6
150°	378.5	378.8	379.1	379.4	379.7	379.9	379.9	379.9	379.9	379.9	379.9
152.5°	388.1	388.3	388.4	388.6	388.8	388.9	389.0	389.1	389.1	389.2	389.4
155°	402.8	402.8	402.8	402.8	402.8	402.8	402.7	402.6	402.6	402.5	402.8
157.5°	415.3	415.1	415.0	414.9	414.7	414.6	414.6	414.6	414.6	414.6	414.8
160°	422.6	422.5	422.5	422.4	422.3	422.2	422.2	422.1	422.0	421.9	422.2
162.5°	429.4	429.2	429.0	428.8	428.6	428.5	428.4	428.3	428.2	428.1	428.6
165°	438.5	438.3	438.1	437.8	437.6	437.4	437.2	437.1	436.9	436.8	437.2
167.5°	445.5	445.2	444.9	444.5	444.2	444.0	444.1	444.1	444.1	444.1	444.6
170°	449.5	449.1	448.7	448.3	447.9	447.8	447.8	447.9	448.0	448.1	448.5
172.5°	452.3	452.0	451.6	451.3	451.0	450.8	450.8	450.9	450.9	450.9	451.4
175°	456.2	455.8	455.4	455.0	454.6	454.4	454.3	454.2	454.2	454.1	454.6
177.5°	457.5	457.2	456.8	456.5	456.2	456.1	456.1	456.1	456.1	456.1	456.5
180°	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9



TEST NUMBER: P332587

CATALOG NUMBER: SA4XXDIP-C795D365U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1322.7	1324.6	1326.5	1327.4	1327.2	1327.0	1326.8	1326.6
5°	1315.6	1318.2	1320.8	1321.9	1321.4	1321.0	1320.5	1320.0
7.5°	1301.0	1303.1	1305.1	1306.0	1305.8	1305.5	1305.2	1304.9
10°	1288.7	1290.6	1292.5	1293.2	1292.7	1292.2	1291.8	1291.3
12.5°	1273.8	1275.8	1277.9	1278.6	1278.0	1277.3	1276.6	1276.0
15°	1245.2	1246.6	1248.0	1248.4	1247.7	1247.0	1246.3	1245.6
17.5°	1212.7	1213.6	1214.5	1214.7	1214.2	1213.7	1213.3	1212.8
20°	1188.5	1189.2	1189.9	1190.0	1189.5	1189.1	1188.6	1188.1
22.5°	1163.2	1164.5	1165.8	1166.0	1165.1	1164.3	1163.4	1162.6
25°	1121.6	1121.8	1122.1	1121.7	1120.8	1119.8	1118.9	1117.9
27.5°	1074.9	1074.3	1073.7	1072.9	1071.7	1070.5	1069.3	1068.1
30°	1042.6	1041.7	1040.7	1039.7	1038.5	1037.3	1036.1	1035.0
32.5°	1009.9	1008.8	1007.7	1006.5	1005.3	1004.1	1002.9	1001.8
35°	958.3	956.6	954.9	953.5	952.3	951.2	950.0	948.8
37.5°	904.1	902.3	900.6	898.9	897.3	895.8	894.2	892.6
40°	866.4	864.1	861.7	859.9	858.7	857.6	856.4	855.2
42.5°	829.9	827.2	824.4	822.7	821.9	821.1	820.3	819.5
45°	773.4	770.8	768.2	766.6	765.8	765.1	764.4	763.7
47.5°	718.7	715.8	712.8	710.5	708.7	706.9	705.1	703.3
50°	680.5	677.2	673.9	671.5	670.1	668.7	667.3	665.9
52.5°	641.3	638.3	635.4	633.1	631.3	629.5	627.7	625.9
55°	583.6	580.8	577.9	575.8	574.4	573.0	571.5	570.1
57.5°	525.8	523.1	520.4	518.4	517.0	515.6	514.3	512.9
60°	486.1	484.0	481.8	480.2	479.0	477.8	476.6	475.5
62.5°	447.3	445.4	443.5	441.9	440.7	439.5	438.4	437.2
65°	391.0	388.6	386.2	384.5	383.3	382.1	380.9	379.7
67.5°	332.9	330.6	328.3	327.0	326.7	326.4	326.0	325.7
70°	296.2	294.3	292.4	291.1	290.4	289.7	289.0	288.3
72.5°	259.5	258.0	256.5	255.4	254.6	253.9	253.2	252.5
75°	206.6	205.6	204.7	204.1	203.9	203.6	203.4	203.2
77.5°	156.4	156.1	155.9	155.4	154.8	154.2	153.6	153.0
80°	124.6	124.1	123.6	123.3	123.0	122.8	122.6	122.3
82.5°	96.0	95.7	95.4	95.2	95.0	94.7	94.5	94.2
85°	55.3	55.3	55.3	55.2	55.0	54.7	54.5	54.2
87.5°	22.2	22.3	22.4	22.4	22.4	22.5	22.5	22.5
90°	8.7	9.2	9.7	10.0	10.1	10.3	10.4	10.6
92.5°	14.6	14.8	15.1	15.3	15.4	15.5	15.6	15.7
95°	27.3	27.6	27.8	27.9	27.9	27.9	27.9	27.9
97.5°	43.0	43.3	43.6	43.7	43.7	43.7	43.7	43.7
100°	54.4	54.5	54.7	54.8	54.8	54.8	54.8	54.8
102.5°	66.4	66.6	66.8	67.0	67.0	67.1	67.1	67.2
105°	84.6	84.8	85.0	85.3	85.5	85.8	86.0	86.2
107.5°	104.3	104.5	104.7	104.8	104.8	104.8	104.8	104.7
110°	117.4	117.2	117.0	117.1	117.3	117.6	117.8	118.0





TEST NUMBER: P332587

CATALOG NUMBER: SA4XXDIP-C795D365U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	131.5	131.4	131.4	131.4	131.5	131.5	131.5	131.6
115°	153.2	153.1	153.0	153.0	152.9	152.8	152.7	152.7
117.5°	174.1	173.8	173.6	173.4	173.2	173.0	172.9	172.7
120°	188.3	187.9	187.5	187.4	187.5	187.7	187.8	188.0
122.5°	202.7	202.4	202.1	201.8	201.6	201.3	201.0	200.7
125°	223.7	223.6	223.4	223.2	223.1	222.9	222.8	222.6
127.5°	243.9	243.7	243.5	243.4	243.3	243.2	243.0	242.9
130°	258.0	257.8	257.7	257.4	257.1	256.8	256.5	256.2
132.5°	271.3	271.1	271.0	270.8	270.7	270.6	270.5	270.3
135°	291.2	291.1	290.9	290.7	290.5	290.2	290.0	289.8
137.5°	310.5	310.3	310.1	310.0	310.0	310.1	310.1	310.2
140°	323.2	323.1	323.0	322.9	322.9	322.8	322.7	322.6
142.5°	335.2	335.2	335.1	335.1	335.1	335.1	335.1	335.1
145°	353.2	353.1	353.1	352.9	352.7	352.4	352.2	352.0
147.5°	369.6	369.5	369.4	369.4	369.3	369.2	369.1	369.1
150°	379.9	379.9	379.9	379.8	379.8	379.7	379.6	379.5
152.5°	389.6	389.8	390.0	389.9	389.7	389.5	389.3	389.1
155°	403.1	403.4	403.7	403.7	403.4	403.1	402.8	402.5
157.5°	415.0	415.3	415.5	415.5	415.2	415.0	414.7	414.4
160°	422.4	422.6	422.9	422.8	422.4	422.0	421.6	421.2
162.5°	429.0	429.4	429.8	429.8	429.5	429.1	428.7	428.3
165°	437.7	438.2	438.6	438.7	438.4	438.1	437.8	437.5
167.5°	445.1	445.5	446.0	446.0	445.5	445.0	444.5	444.0
170°	449.0	449.5	450.0	449.9	449.4	448.8	448.3	447.7
172.5°	452.0	452.5	453.0	453.0	452.5	451.9	451.4	450.8
175°	455.2	455.7	456.3	456.3	455.7	455.2	454.6	454.1
177.5°	456.9	457.4	457.8	457.8	457.3	456.8	456.3	455.8
180°	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9

(END OF REPORT)