

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332596

Luminaire Tested: **SA4XXDIP-C795D590U835-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332596
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C795D590U835-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 590 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5454.7 lumens
Efficiency: N/A
Efficacy: 135.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332596
CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

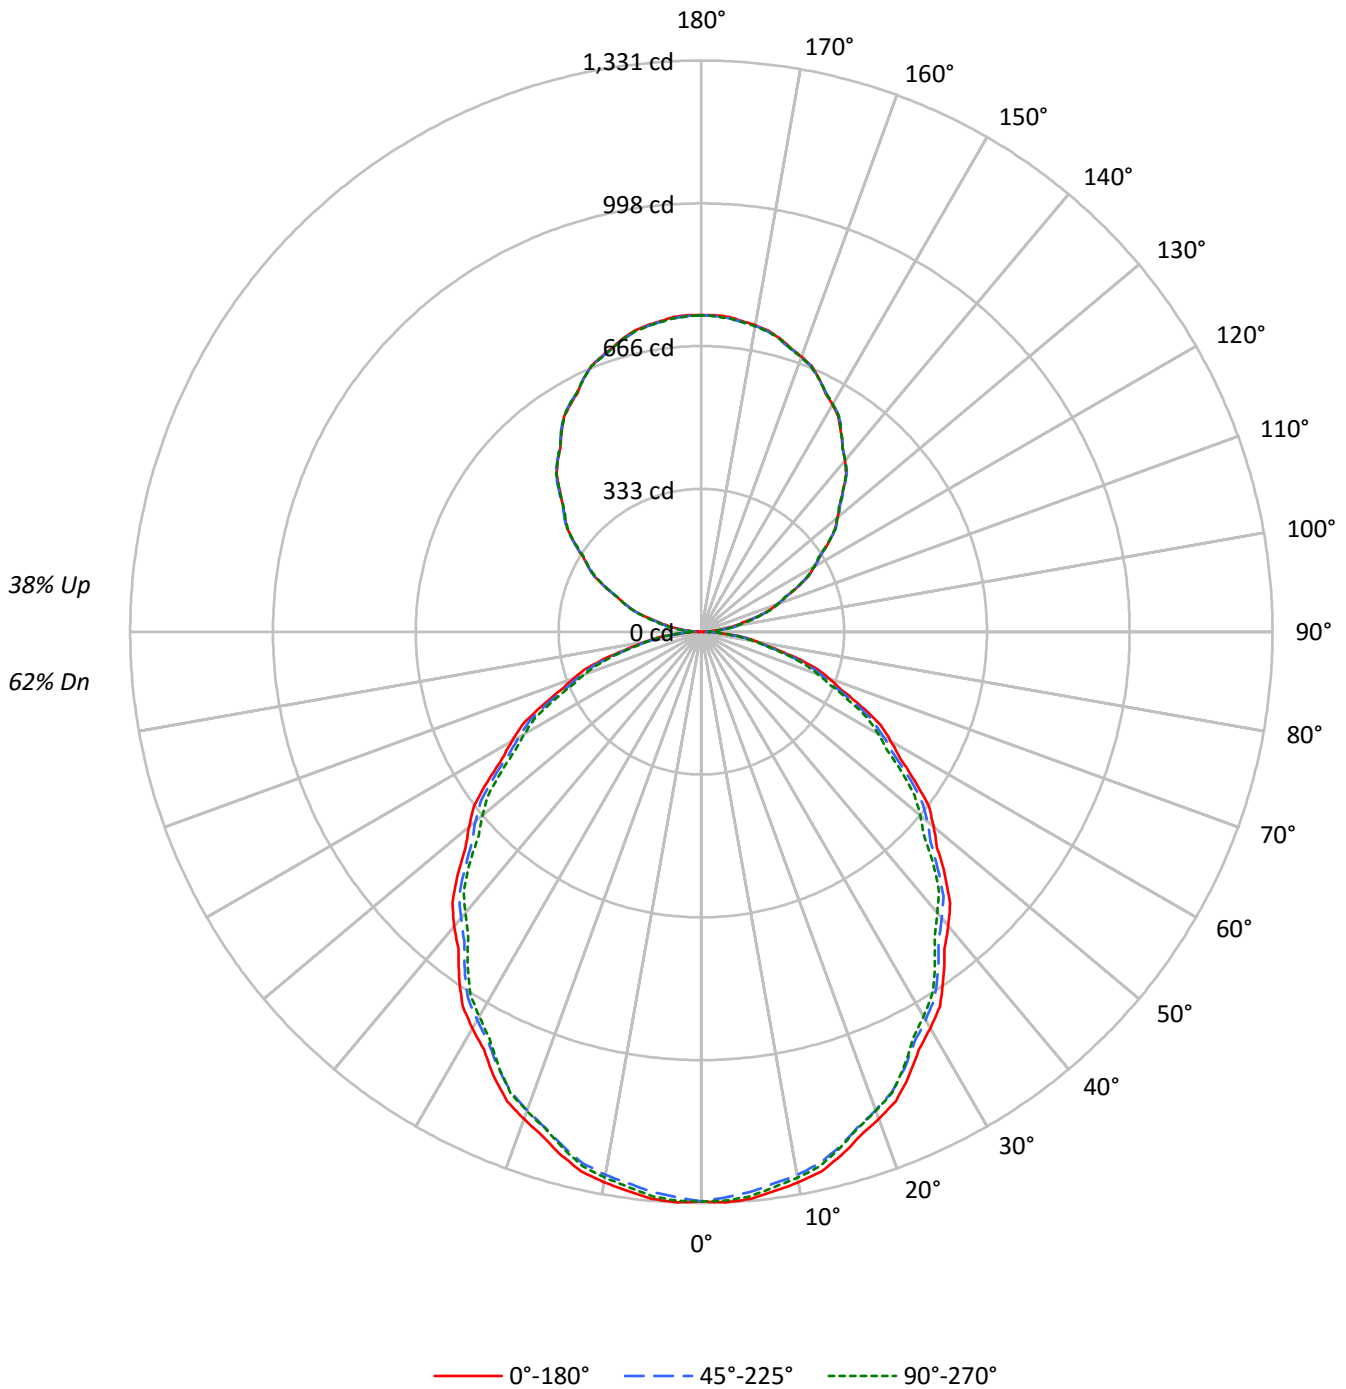



TEST NUMBER: P332596

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	68	68	68	62
1	101	96	92	89	94	90	87	84	79	77	74	69	67	65	60	58	57	53
2	92	84	78	72	86	79	73	69	69	65	61	61	57	55	53	50	48	44
3	84	74	66	60	78	69	63	57	61	56	52	54	50	46	47	43	41	37
4	76	65	57	51	71	62	54	49	54	49	44	48	43	40	42	38	35	32
5	70	58	50	44	66	55	48	42	49	43	38	43	38	34	37	34	31	28
6	65	52	44	38	60	49	42	37	44	38	33	39	34	30	34	30	27	24
7	60	47	39	34	56	45	37	32	40	34	29	35	30	27	31	27	24	22
8	56	43	35	30	52	41	34	29	36	30	26	32	27	24	29	25	22	19
9	52	39	32	27	49	37	30	26	34	28	24	30	25	22	26	22	20	17
10	49	36	29	24	46	34	28	23	31	25	21	28	23	20	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10717	10717	10717
5°	10749	10619	10697
10°	10681	10533	10585
15°	10552	10384	10410
20°	10381	10198	10207
25°	10185	9986	9958
30°	9945	9737	9648
35°	9697	9477	9351
40°	9438	9180	9013
45°	9169	8889	8719
50°	8871	8629	8363
55°	8549	8294	8024
60°	8226	7918	7677
65°	7862	7559	7253
70°	7456	7081	6805
75°	6834	6503	6338
80°	6081	5835	5686
85°	5317	5122	5020



TEST NUMBER: P332596

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.0	2.3
10°-20°	352.2	6.5
20°-30°	518.4	9.5
30°-40°	602.7	11.0
40°-50°	602.7	11.0
50°-60°	527.2	9.7
60°-70°	391.5	7.2
70°-80°	222.4	4.1
80°-90°	66.4	1.2
90°-100°	48.6	0.9
100°-110°	144.1	2.6
110°-120°	244.6	4.5
120°-130°	322.5	5.9
130°-140°	362.2	6.6
140°-150°	355.9	6.5
150°-160°	299.3	5.5
160°-170°	199.1	3.7
170°-180°	69.7	1.3
0°-30°	995.7	18.3
0°-40°	1598.4	29.3
0°-60°	2728.3	50.0
0°-90°	3408.7	62.5
90°-120°	437.3	8.0
90°-150°	1477.8	27.1
90°-180°	2046.0	37.5
0°-180°	5454.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1328	1328	1328	1328	1328	
5°	1326	1322	1310	1321	1320	126
15°	1263	1258	1242	1248	1246	356
25°	1143	1136	1121	1122	1118	526
35°	984	976	962	954	949	615
45°	803	795	779	767	764	619
55°	607	604	589	577	570	544
65°	412	406	396	385	380	407
75°	219	214	208	204	203	233
85°	57	57	55	55	54	63
90°	2	8	12	16	17	5
95°	34	39	43	45	45	38
105°	133	134	136	137	139	141
115°	249	249	248	247	246	245
125°	362	362	362	360	359	323
135°	467	470	470	469	468	361
145°	568	570	570	570	568	355
155°	650	650	650	652	650	299
165°	708	706	705	708	706	199
175°	736	734	733	736	733	70
180°	738	738	738	738	738	



TEST NUMBER: P332596

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1330.9	1330.3	1329.7	1329.2	1328.6	1327.3	1325.2	1323.1	1321.0	1319.0	1320.8
5°	1326.4	1325.5	1324.5	1323.6	1322.6	1320.8	1318.2	1315.6	1313.0	1310.4	1313.0
7.5°	1314.1	1313.1	1312.2	1311.2	1310.3	1308.4	1305.5	1302.6	1299.7	1296.8	1298.9
10°	1303.0	1302.1	1301.1	1300.2	1299.2	1297.2	1294.1	1291.1	1288.0	1284.9	1286.8
12.5°	1288.5	1287.6	1286.6	1285.7	1284.8	1282.6	1279.4	1276.1	1272.9	1269.6	1271.7
15°	1262.6	1261.6	1260.7	1259.7	1258.8	1256.6	1253.0	1249.5	1245.9	1242.4	1243.8
17.5°	1231.3	1230.1	1228.9	1227.8	1226.6	1224.3	1221.0	1217.6	1214.2	1210.9	1211.8
20°	1208.3	1207.1	1206.0	1204.8	1203.6	1201.2	1197.7	1194.1	1190.6	1187.1	1187.8
22.5°	1183.7	1182.1	1180.5	1179.0	1177.4	1174.9	1171.3	1167.8	1164.2	1160.7	1162.0
25°	1143.4	1141.8	1140.1	1138.5	1136.8	1134.3	1131.0	1127.7	1124.4	1121.1	1121.3
27.5°	1097.5	1095.8	1094.1	1092.4	1090.7	1088.3	1085.2	1082.2	1079.1	1076.0	1075.4
30°	1066.9	1065.0	1063.1	1061.2	1059.3	1056.8	1053.7	1050.7	1047.6	1044.5	1043.6
32.5°	1034.5	1032.8	1031.1	1029.4	1027.7	1025.2	1022.0	1018.7	1015.5	1012.2	1011.1
35°	983.9	982.2	980.6	978.9	977.3	974.8	971.5	968.2	964.9	961.6	959.9
37.5°	930.5	929.0	927.5	926.0	924.4	921.9	918.4	914.8	911.3	907.7	905.9
40°	895.6	893.7	891.8	889.9	888.0	885.3	881.8	878.2	874.7	871.1	868.8
42.5°	858.2	857.0	855.9	854.8	853.6	851.1	847.2	843.3	839.3	835.4	832.7
45°	803.1	801.4	799.8	798.1	796.5	793.7	790.0	786.2	782.4	778.6	776.0
47.5°	745.4	744.3	743.2	742.0	740.9	738.6	735.1	731.6	728.1	724.6	721.6
50°	706.3	705.3	704.4	703.4	702.5	700.4	697.1	693.8	690.4	687.1	683.8
52.5°	668.0	666.9	665.7	664.6	663.4	661.1	657.6	654.1	650.6	647.1	644.2
55°	607.4	606.6	605.9	605.2	604.5	602.5	599.2	595.9	592.6	589.3	586.4
57.5°	549.5	548.7	547.9	547.1	546.3	544.2	541.0	537.7	534.5	531.2	528.5
60°	509.5	508.3	507.1	506.0	504.8	502.6	499.6	496.5	493.4	490.4	488.2
62.5°	470.4	469.4	468.4	467.4	466.4	464.3	461.0	457.7	454.5	451.2	449.3
65°	411.6	410.5	409.3	408.1	406.9	405.1	402.8	400.4	398.0	395.7	393.3
67.5°	352.5	351.4	350.3	349.2	348.2	346.5	344.2	341.9	339.7	337.4	335.1
70°	315.9	314.3	312.6	310.9	309.3	307.5	305.6	303.7	301.8	300.0	298.1
72.5°	276.8	275.1	273.5	271.8	270.1	268.6	267.1	265.5	264.0	262.5	261.0
75°	219.1	217.9	216.8	215.6	214.4	213.2	212.0	210.8	209.7	208.5	207.5
77.5°	164.0	163.5	163.0	162.5	161.9	161.2	160.1	159.1	158.0	157.0	156.7
80°	130.8	130.1	129.4	128.7	128.0	127.4	126.9	126.5	126.0	125.5	125.0
82.5°	98.5	98.2	97.8	97.5	97.2	97.0	96.9	96.8	96.7	96.6	96.3
85°	57.4	57.4	57.4	57.4	57.4	57.2	56.7	56.3	55.8	55.3	55.3
87.5°	22.5	22.6	22.6	22.7	22.8	22.9	22.9	22.9	22.9	22.9	23.1
90°	1.7	3.1	4.5	5.9	7.3	8.5	9.5	10.5	11.5	12.5	13.3
92.5°	12.2	13.8	15.4	17.0	18.6	19.7	20.5	21.2	21.9	22.6	23.0
95°	34.2	35.4	36.5	37.6	38.8	39.8	40.7	41.6	42.5	43.3	43.7
97.5°	59.8	60.7	61.6	62.5	63.4	64.4	65.4	66.5	67.5	68.6	69.0
100°	79.8	80.4	80.9	81.4	81.9	82.7	83.8	85.0	86.1	87.3	87.5
102.5°	100.8	101.0	101.2	101.4	101.6	102.3	103.3	104.3	105.4	106.4	106.8
105°	132.9	133.0	133.1	133.3	133.4	133.7	134.2	134.7	135.2	135.7	136.1
107.5°	166.5	166.7	166.8	167.0	167.2	167.3	167.3	167.4	167.5	167.6	167.9
110°	189.4	189.6	189.9	190.1	190.4	190.4	190.3	190.2	190.1	189.9	189.7



TEST NUMBER: P332596

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	213.1	213.1	213.2	213.2	213.3	213.2	213.0	212.7	212.5	212.3	212.2
115°	248.7	248.7	248.7	248.7	248.7	248.5	248.3	248.0	247.8	247.5	247.4
117.5°	282.2	282.3	282.4	282.5	282.6	282.6	282.4	282.2	282.0	281.9	281.4
120°	304.6	305.1	305.6	306.1	306.6	306.7	306.3	305.9	305.5	305.1	304.5
122.5°	327.8	328.0	328.2	328.4	328.6	328.7	328.5	328.3	328.1	328.0	327.5
125°	362.2	362.2	362.2	362.2	362.2	362.1	362.0	361.9	361.7	361.6	361.3
127.5°	393.3	393.7	394.1	394.5	394.8	394.9	394.7	394.5	394.3	394.1	393.9
130°	415.2	415.6	416.0	416.4	416.7	416.9	416.9	416.9	416.9	416.9	416.7
132.5°	437.6	437.9	438.1	438.4	438.7	438.8	438.7	438.6	438.5	438.4	438.1
135°	467.1	467.9	468.6	469.4	470.2	470.5	470.5	470.5	470.5	470.5	470.3
137.5°	499.3	499.6	500.0	500.3	500.7	501.0	501.2	501.4	501.6	501.8	501.5
140°	520.7	521.0	521.2	521.5	521.7	521.9	521.9	521.9	521.9	521.9	521.7
142.5°	540.3	540.6	540.9	541.1	541.4	541.4	541.3	541.2	541.1	541.0	541.0
145°	567.5	568.0	568.5	569.0	569.5	569.8	570.0	570.1	570.2	570.3	570.2
147.5°	594.4	595.0	595.6	596.2	596.9	597.1	597.0	596.9	596.8	596.7	596.6
150°	610.8	611.4	611.9	612.4	612.9	613.1	613.1	613.1	613.1	613.1	613.1
152.5°	626.4	626.7	627.0	627.3	627.6	627.8	627.9	628.0	628.1	628.2	628.5
155°	650.2	650.2	650.2	650.2	650.2	650.1	650.0	649.9	649.8	649.6	650.1
157.5°	670.3	670.0	669.8	669.6	669.4	669.2	669.2	669.2	669.2	669.1	669.5
160°	682.1	682.0	681.9	681.8	681.6	681.5	681.4	681.3	681.1	681.0	681.4
162.5°	693.1	692.8	692.4	692.1	691.8	691.5	691.4	691.3	691.2	691.0	691.7
165°	707.8	707.4	707.0	706.7	706.3	706.0	705.7	705.5	705.2	705.0	705.7
167.5°	719.1	718.6	718.0	717.5	717.0	716.7	716.7	716.8	716.8	716.8	717.6
170°	725.5	724.9	724.2	723.6	722.9	722.7	722.8	722.9	723.1	723.2	724.0
172.5°	730.0	729.5	729.0	728.5	727.9	727.7	727.7	727.7	727.7	727.8	728.6
175°	736.3	735.7	735.1	734.4	733.8	733.4	733.3	733.2	733.0	732.9	733.8
177.5°	738.4	737.9	737.4	736.9	736.3	736.1	736.1	736.1	736.1	736.1	736.8
180°	737.5	737.5	737.5	737.5	737.5	737.5	737.5	737.5	737.5	737.5	737.5



TEST NUMBER: P332596

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1322.7	1324.6	1326.5	1327.4	1327.2	1327.0	1326.8	1326.6
5°	1315.6	1318.2	1320.8	1321.9	1321.4	1321.0	1320.5	1320.0
7.5°	1301.0	1303.1	1305.1	1306.0	1305.8	1305.5	1305.2	1304.9
10°	1288.7	1290.6	1292.5	1293.2	1292.7	1292.2	1291.8	1291.3
12.5°	1273.8	1275.8	1277.9	1278.6	1278.0	1277.3	1276.6	1276.0
15°	1245.2	1246.6	1248.0	1248.4	1247.7	1247.0	1246.3	1245.6
17.5°	1212.7	1213.6	1214.5	1214.7	1214.2	1213.7	1213.3	1212.8
20°	1188.5	1189.2	1189.9	1190.0	1189.5	1189.1	1188.6	1188.1
22.5°	1163.2	1164.5	1165.8	1166.0	1165.1	1164.3	1163.4	1162.6
25°	1121.6	1121.8	1122.1	1121.7	1120.8	1119.8	1118.9	1117.9
27.5°	1074.9	1074.3	1073.7	1072.9	1071.7	1070.5	1069.3	1068.1
30°	1042.6	1041.7	1040.7	1039.7	1038.5	1037.3	1036.1	1035.0
32.5°	1009.9	1008.8	1007.7	1006.5	1005.3	1004.1	1002.9	1001.8
35°	958.3	956.6	954.9	953.5	952.3	951.2	950.0	948.8
37.5°	904.1	902.3	900.6	898.9	897.3	895.8	894.2	892.6
40°	866.4	864.1	861.7	859.9	858.7	857.6	856.4	855.2
42.5°	829.9	827.2	824.4	822.7	821.9	821.1	820.3	819.5
45°	773.4	770.8	768.2	766.6	765.8	765.1	764.4	763.7
47.5°	718.7	715.8	712.8	710.5	708.7	706.9	705.1	703.3
50°	680.5	677.2	673.9	671.5	670.1	668.7	667.3	665.9
52.5°	641.3	638.3	635.4	633.1	631.3	629.5	627.7	625.9
55°	583.6	580.8	577.9	575.8	574.4	573.0	571.5	570.1
57.5°	525.8	523.1	520.4	518.4	517.0	515.6	514.3	512.9
60°	486.1	484.0	481.8	480.2	479.0	477.8	476.6	475.5
62.5°	447.3	445.4	443.5	441.9	440.7	439.5	438.4	437.2
65°	391.0	388.6	386.2	384.5	383.3	382.1	380.9	379.7
67.5°	332.9	330.6	328.3	327.0	326.7	326.4	326.0	325.7
70°	296.2	294.3	292.4	291.1	290.4	289.7	289.0	288.3
72.5°	259.5	258.0	256.5	255.4	254.6	253.9	253.2	252.5
75°	206.6	205.6	204.7	204.1	203.9	203.6	203.4	203.2
77.5°	156.4	156.1	155.9	155.4	154.8	154.2	153.6	153.0
80°	124.6	124.1	123.6	123.3	123.0	122.8	122.6	122.3
82.5°	96.0	95.7	95.4	95.2	95.0	94.7	94.5	94.2
85°	55.3	55.3	55.3	55.2	55.0	54.7	54.5	54.2
87.5°	23.2	23.4	23.5	23.6	23.7	23.7	23.8	23.8
90°	14.1	14.8	15.6	16.1	16.4	16.6	16.9	17.1
92.5°	23.5	24.0	24.4	24.7	24.9	25.0	25.2	25.3
95°	44.1	44.5	44.9	45.1	45.1	45.1	45.1	45.1
97.5°	69.5	69.9	70.4	70.6	70.6	70.6	70.6	70.6
100°	87.8	88.0	88.3	88.4	88.4	88.4	88.4	88.4
102.5°	107.1	107.5	107.8	108.1	108.2	108.3	108.4	108.5
105°	136.5	136.9	137.3	137.6	138.0	138.4	138.8	139.2
107.5°	168.3	168.6	169.0	169.2	169.1	169.1	169.1	169.1
110°	189.4	189.2	188.9	189.0	189.4	189.7	190.1	190.5



TEST NUMBER: P332596

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	212.2	212.1	212.1	212.1	212.2	212.2	212.3	212.4
115°	247.3	247.2	247.0	246.9	246.8	246.6	246.5	246.4
117.5°	281.0	280.6	280.1	279.8	279.5	279.3	279.0	278.8
120°	303.9	303.2	302.6	302.4	302.7	302.9	303.2	303.4
122.5°	327.1	326.7	326.2	325.8	325.3	324.9	324.4	324.0
125°	361.1	360.8	360.6	360.3	360.1	359.8	359.6	359.3
127.5°	393.6	393.4	393.1	392.9	392.7	392.5	392.3	392.1
130°	416.4	416.2	415.9	415.5	415.0	414.5	414.0	413.5
132.5°	437.9	437.6	437.4	437.1	436.9	436.7	436.5	436.3
135°	470.0	469.8	469.5	469.2	468.8	468.4	468.1	467.7
137.5°	501.1	500.8	500.5	500.3	500.4	500.5	500.6	500.7
140°	521.6	521.5	521.4	521.2	521.1	521.0	520.9	520.7
142.5°	541.0	541.0	540.9	540.9	540.9	540.9	540.8	540.8
145°	570.1	570.0	569.8	569.6	569.2	568.8	568.4	568.1
147.5°	596.5	596.4	596.3	596.2	596.1	595.9	595.8	595.7
150°	613.1	613.1	613.1	613.1	612.9	612.8	612.7	612.6
152.5°	628.8	629.1	629.4	629.4	629.1	628.7	628.4	628.1
155°	650.6	651.1	651.7	651.7	651.1	650.6	650.1	649.6
157.5°	669.9	670.3	670.7	670.6	670.2	669.8	669.3	668.9
160°	681.8	682.1	682.5	682.4	681.8	681.1	680.5	679.9
162.5°	692.4	693.1	693.8	693.8	693.2	692.5	691.9	691.3
165°	706.5	707.2	708.0	708.1	707.6	707.1	706.6	706.1
167.5°	718.3	719.1	719.9	719.8	719.1	718.3	717.5	716.7
170°	724.7	725.5	726.2	726.2	725.3	724.4	723.5	722.6
172.5°	729.5	730.4	731.2	731.2	730.3	729.4	728.5	727.7
175°	734.7	735.6	736.4	736.4	735.6	734.7	733.8	732.9
177.5°	737.5	738.2	738.9	738.9	738.1	737.3	736.4	735.6
180°	737.5	737.5	737.5	737.5	737.5	737.5	737.5	737.5

(END OF REPORT)