

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332597

Luminaire Tested: **SA4XXDIP-C795D590U835-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332597
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C795D590U835-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5519.8 lumens
Efficiency: N/A
Efficacy: 137.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332597
CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

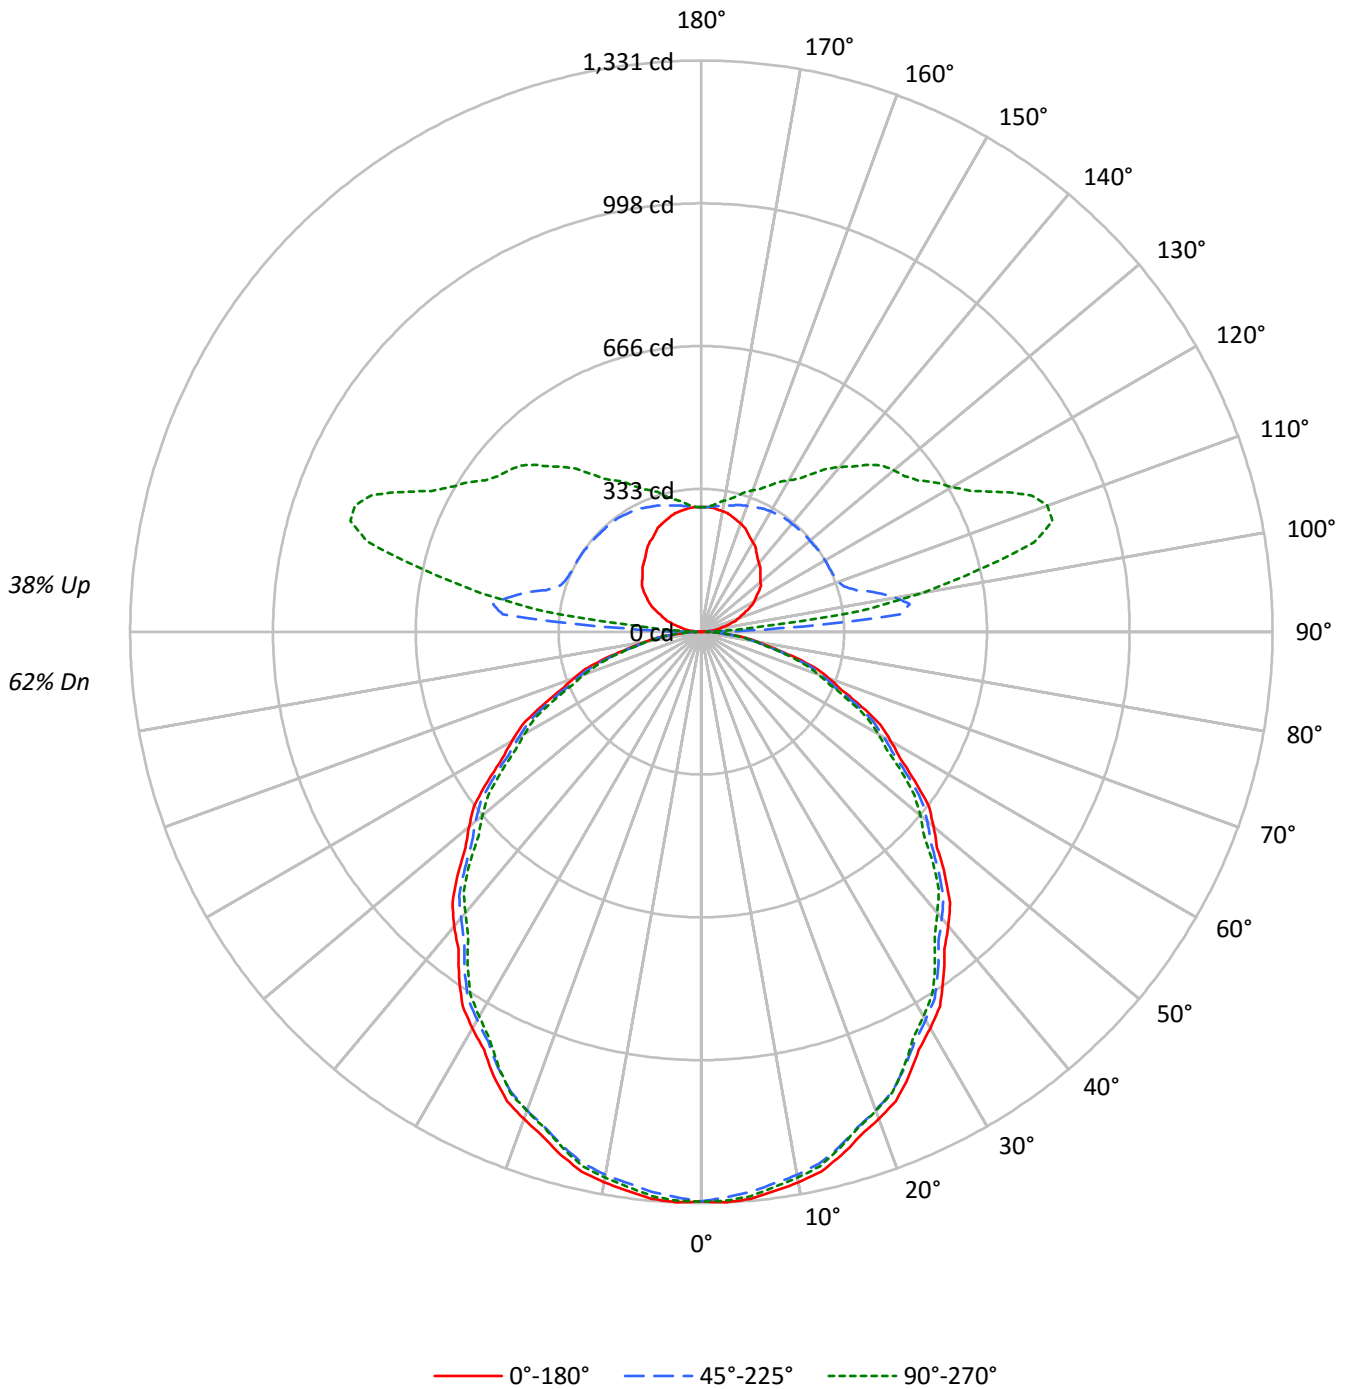



TEST NUMBER: P332597

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	62
1	100	96	92	88	94	90	86	83	79	76	74	69	67	65	59	58	56	52
2	91	84	77	72	85	79	73	68	69	65	61	60	57	54	52	50	48	43
3	83	74	66	60	78	69	63	57	61	56	51	53	49	46	46	43	40	37
4	76	65	57	51	71	61	54	49	54	48	44	47	43	39	41	38	35	32
5	70	58	50	44	65	55	47	42	49	43	38	43	38	34	37	33	30	27
6	65	52	44	38	60	49	42	36	44	38	33	39	34	30	34	30	27	24
7	60	47	39	33	56	45	37	32	40	34	29	35	30	27	31	27	24	21
8	56	43	35	30	52	41	33	28	36	30	26	32	27	24	28	24	21	19
9	52	39	32	27	48	37	30	25	33	27	23	30	25	21	26	22	19	17
10	48	36	29	24	45	34	28	23	31	25	21	27	23	19	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10717	10717	10717
5°	10749	10619	10697
10°	10681	10533	10585
15°	10552	10384	10410
20°	10381	10198	10207
25°	10185	9986	9958
30°	9945	9737	9648
35°	9697	9477	9351
40°	9438	9180	9013
45°	9169	8889	8719
50°	8871	8629	8363
55°	8549	8294	8024
60°	8226	7918	7677
65°	7862	7559	7253
70°	7456	7081	6805
75°	6834	6503	6338
80°	6081	5835	5686
85°	5317	5122	5020



TEST NUMBER: P332597

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.0	2.3
10°-20°	352.2	6.4
20°-30°	518.4	9.4
30°-40°	602.7	10.9
40°-50°	602.7	10.9
50°-60°	527.2	9.6
60°-70°	391.5	7.1
70°-80°	222.4	4.0
80°-90°	65.8	1.2
90°-100°	209.7	3.8
100°-110°	436.5	7.9
110°-120°	391.0	7.1
120°-130°	328.9	6.0
130°-140°	274.2	5.0
140°-150°	209.5	3.8
150°-160°	147.2	2.7
160°-170°	86.6	1.6
170°-180°	28.2	0.5
0°-30°	995.7	18.0
0°-40°	1598.4	29.0
0°-60°	2728.3	49.4
0°-90°	3408.1	61.7
90°-120°	1037.2	18.8
90°-150°	1849.7	33.5
90°-180°	2112.0	38.3
0°-180°	5519.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1328	1328	1328	1328	1328	
5°	1326	1322	1310	1321	1320	126
15°	1263	1258	1242	1248	1246	356
25°	1143	1136	1121	1122	1118	526
35°	984	976	962	954	949	615
45°	803	795	779	767	764	619
55°	607	604	589	577	570	544
65°	412	406	396	385	380	407
75°	219	214	208	204	203	233
85°	57	57	55	55	54	63
90°	1	5	10	11	12	4
95°	19	59	465	230	139	21
105°	67	97	374	806	803	71
115°	118	148	334	641	771	117
125°	164	194	332	546	615	146
135°	194	232	329	484	550	150
145°	224	257	327	408	449	141
155°	255	275	318	360	376	118
165°	278	286	305	323	328	78
175°	290	290	293	297	296	27
180°	290	290	290	290	290	



TEST NUMBER: P332597

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1330.9	1330.3	1329.7	1329.2	1328.6	1327.3	1325.2	1323.1	1321.0	1319.0	1320.8
5°	1326.4	1325.5	1324.5	1323.6	1322.6	1320.8	1318.2	1315.6	1313.0	1310.4	1313.0
7.5°	1314.1	1313.1	1312.2	1311.2	1310.3	1308.4	1305.5	1302.6	1299.7	1296.8	1298.9
10°	1303.0	1302.1	1301.1	1300.2	1299.2	1297.2	1294.1	1291.1	1288.0	1284.9	1286.8
12.5°	1288.5	1287.6	1286.6	1285.7	1284.8	1282.6	1279.4	1276.1	1272.9	1269.6	1271.7
15°	1262.6	1261.6	1260.7	1259.7	1258.8	1256.6	1253.0	1249.5	1245.9	1242.4	1243.8
17.5°	1231.3	1230.1	1228.9	1227.8	1226.6	1224.3	1221.0	1217.6	1214.2	1210.9	1211.8
20°	1208.3	1207.1	1206.0	1204.8	1203.6	1201.2	1197.7	1194.1	1190.6	1187.1	1187.8
22.5°	1183.7	1182.1	1180.5	1179.0	1177.4	1174.9	1171.3	1167.8	1164.2	1160.7	1162.0
25°	1143.4	1141.8	1140.1	1138.5	1136.8	1134.3	1131.0	1127.7	1124.4	1121.1	1121.3
27.5°	1097.5	1095.8	1094.1	1092.4	1090.7	1088.3	1085.2	1082.2	1079.1	1076.0	1075.4
30°	1066.9	1065.0	1063.1	1061.2	1059.3	1056.8	1053.7	1050.7	1047.6	1044.5	1043.6
32.5°	1034.5	1032.8	1031.1	1029.4	1027.7	1025.2	1022.0	1018.7	1015.5	1012.2	1011.1
35°	983.9	982.2	980.6	978.9	977.3	974.8	971.5	968.2	964.9	961.6	959.9
37.5°	930.5	929.0	927.5	926.0	924.4	921.9	918.4	914.8	911.3	907.7	905.9
40°	895.6	893.7	891.8	889.9	888.0	885.3	881.8	878.2	874.7	871.1	868.8
42.5°	858.2	857.0	855.9	854.8	853.6	851.1	847.2	843.3	839.3	835.4	832.7
45°	803.1	801.4	799.8	798.1	796.5	793.7	790.0	786.2	782.4	778.6	776.0
47.5°	745.4	744.3	743.2	742.0	740.9	738.6	735.1	731.6	728.1	724.6	721.6
50°	706.3	705.3	704.4	703.4	702.5	700.4	697.1	693.8	690.4	687.1	683.8
52.5°	668.0	666.9	665.7	664.6	663.4	661.1	657.6	654.1	650.6	647.1	644.2
55°	607.4	606.6	605.9	605.2	604.5	602.5	599.2	595.9	592.6	589.3	586.4
57.5°	549.5	548.7	547.9	547.1	546.3	544.2	541.0	537.7	534.5	531.2	528.5
60°	509.5	508.3	507.1	506.0	504.8	502.6	499.6	496.5	493.4	490.4	488.2
62.5°	470.4	469.4	468.4	467.4	466.4	464.3	461.0	457.7	454.5	451.2	449.3
65°	411.6	410.5	409.3	408.1	406.9	405.1	402.8	400.4	398.0	395.7	393.3
67.5°	352.5	351.4	350.3	349.2	348.2	346.5	344.2	341.9	339.7	337.4	335.1
70°	315.9	314.3	312.6	310.9	309.3	307.5	305.6	303.7	301.8	300.0	298.1
72.5°	276.8	275.1	273.5	271.8	270.1	268.6	267.1	265.5	264.0	262.5	261.0
75°	219.1	217.9	216.8	215.6	214.4	213.2	212.0	210.8	209.7	208.5	207.5
77.5°	164.0	163.5	163.0	162.5	161.9	161.2	160.1	159.1	158.0	157.0	156.7
80°	130.8	130.1	129.4	128.7	128.0	127.4	126.9	126.5	126.0	125.5	125.0
82.5°	98.5	98.2	97.8	97.5	97.2	97.0	96.9	96.8	96.7	96.6	96.3
85°	57.4	57.4	57.4	57.4	57.4	57.2	56.7	56.3	55.8	55.3	55.3
87.5°	22.2	22.3	22.4	22.4	22.3	22.1	22.6	22.4	22.4	22.5	22.4
90°	0.6	1.7	3.4	4.0	4.6	4.6	8.0	8.0	9.1	10.3	9.7
92.5°	6.5	9.5	14.8	21.8	30.1	42.0	71.0	115.2	158.4	180.9	150.7
95°	18.8	20.5	26.2	33.7	47.3	71.3	120.9	214.5	350.8	464.9	478.0
97.5°	33.8	33.8	38.7	45.5	57.3	77.4	115.6	192.8	328.4	489.7	600.6
100°	43.4	43.4	47.3	54.2	65.0	83.3	116.9	181.4	297.8	458.6	604.7
102.5°	52.5	53.4	56.9	63.3	73.7	91.0	121.5	178.2	277.2	419.9	570.4
105°	66.7	68.5	71.3	78.2	88.4	105.0	132.3	179.7	259.6	374.2	508.3
107.5°	82.5	83.6	86.5	93.8	103.6	119.9	145.0	188.1	256.4	348.7	458.1
110°	93.0	94.1	97.0	103.8	114.1	129.5	154.6	194.5	257.3	340.0	433.0



TEST NUMBER: P332597

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	103.0	104.2	107.5	113.9	124.1	139.5	163.7	201.4	260.0	335.9	418.8
115°	117.5	119.2	123.2	128.9	139.8	155.2	178.0	212.2	265.3	333.7	405.6
117.5°	132.6	134.2	137.7	144.0	154.1	170.1	191.8	223.3	270.8	333.1	399.7
120°	142.6	143.8	147.7	154.0	163.7	179.7	201.4	231.0	275.0	333.1	396.5
122.5°	151.7	152.9	156.9	162.7	173.3	188.8	210.5	238.3	279.1	332.7	392.8
125°	163.7	166.0	169.4	175.7	186.5	202.5	223.0	249.3	285.2	332.0	386.8
127.5°	174.3	176.2	180.3	187.4	198.7	214.8	234.7	258.8	290.1	330.7	378.7
130°	180.3	182.5	187.1	195.7	206.5	223.0	242.4	264.7	293.8	330.3	373.6
132.5°	186.2	188.0	194.0	202.1	213.8	229.4	248.8	270.6	297.0	329.8	369.1
135°	194.5	196.8	202.5	212.2	224.2	239.0	257.8	278.4	301.8	329.1	362.2
137.5°	202.9	205.0	211.3	220.5	233.0	247.1	264.7	283.9	304.6	329.0	356.3
140°	208.8	210.5	216.8	226.5	238.4	252.1	269.3	287.5	306.9	328.6	353.1
142.5°	215.2	216.9	222.7	231.9	243.5	256.7	273.4	290.2	308.7	328.6	350.4
145°	224.2	225.9	231.6	239.6	250.4	263.0	277.8	293.2	309.8	327.4	345.7
147.5°	234.3	234.9	239.9	248.1	257.2	268.5	282.4	295.8	310.3	325.4	341.5
150°	240.7	241.3	245.9	252.7	261.3	272.1	284.7	297.2	310.3	324.0	338.3
152.5°	246.7	246.8	251.3	257.7	265.4	275.3	286.5	298.1	309.4	321.7	334.6
155°	255.0	255.6	259.0	264.7	271.0	279.5	289.2	298.9	308.0	318.3	329.1
157.5°	263.1	263.1	266.3	270.7	276.2	282.9	291.2	298.9	306.6	314.8	323.6
160°	268.1	268.1	270.4	274.4	278.9	285.2	292.1	298.9	305.2	312.0	319.5
162.5°	272.7	272.2	274.0	277.6	281.7	286.6	293.0	298.9	303.8	309.3	315.8
165°	277.8	277.8	278.9	281.8	284.7	288.1	293.2	297.8	301.2	305.2	309.8
167.5°	282.9	282.4	282.9	285.1	286.7	289.3	293.1	296.4	298.5	301.1	304.3
170°	285.2	284.7	285.2	286.9	288.1	289.8	292.6	295.5	296.6	298.3	300.6
172.5°	287.5	286.9	287.0	288.3	289.0	290.2	292.2	294.6	294.8	295.6	297.4
175°	289.8	289.2	289.2	289.8	290.4	290.4	291.5	293.2	292.6	292.6	293.8
177.5°	290.8	290.4	289.9	290.4	290.4	290.4	290.8	291.7	290.8	290.8	291.3
180°	290.4	290.4	290.4	290.4	290.4	290.4	290.4	290.4	290.4	290.4	290.4



TEST NUMBER: P332597

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1322.7	1324.6	1326.5	1327.4	1327.2	1327.0	1326.8	1326.6
5°	1315.6	1318.2	1320.8	1321.9	1321.4	1321.0	1320.5	1320.0
7.5°	1301.0	1303.1	1305.1	1306.0	1305.8	1305.5	1305.2	1304.9
10°	1288.7	1290.6	1292.5	1293.2	1292.7	1292.2	1291.8	1291.3
12.5°	1273.8	1275.8	1277.9	1278.6	1278.0	1277.3	1276.6	1276.0
15°	1245.2	1246.6	1248.0	1248.4	1247.7	1247.0	1246.3	1245.6
17.5°	1212.7	1213.6	1214.5	1214.7	1214.2	1213.7	1213.3	1212.8
20°	1188.5	1189.2	1189.9	1190.0	1189.5	1189.1	1188.6	1188.1
22.5°	1163.2	1164.5	1165.8	1166.0	1165.1	1164.3	1163.4	1162.6
25°	1121.6	1121.8	1122.1	1121.7	1120.8	1119.8	1118.9	1117.9
27.5°	1074.9	1074.3	1073.7	1072.9	1071.7	1070.5	1069.3	1068.1
30°	1042.6	1041.7	1040.7	1039.7	1038.5	1037.3	1036.1	1035.0
32.5°	1009.9	1008.8	1007.7	1006.5	1005.3	1004.1	1002.9	1001.8
35°	958.3	956.6	954.9	953.5	952.3	951.2	950.0	948.8
37.5°	904.1	902.3	900.6	898.9	897.3	895.8	894.2	892.6
40°	866.4	864.1	861.7	859.9	858.7	857.6	856.4	855.2
42.5°	829.9	827.2	824.4	822.7	821.9	821.1	820.3	819.5
45°	773.4	770.8	768.2	766.6	765.8	765.1	764.4	763.7
47.5°	718.7	715.8	712.8	710.5	708.7	706.9	705.1	703.3
50°	680.5	677.2	673.9	671.5	670.1	668.7	667.3	665.9
52.5°	641.3	638.3	635.4	633.1	631.3	629.5	627.7	625.9
55°	583.6	580.8	577.9	575.8	574.4	573.0	571.5	570.1
57.5°	525.8	523.1	520.4	518.4	517.0	515.6	514.3	512.9
60°	486.1	484.0	481.8	480.2	479.0	477.8	476.6	475.5
62.5°	447.3	445.4	443.5	441.9	440.7	439.5	438.4	437.2
65°	391.0	388.6	386.2	384.5	383.3	382.1	380.9	379.7
67.5°	332.9	330.6	328.3	327.0	326.7	326.4	326.0	325.7
70°	296.2	294.3	292.4	291.1	290.4	289.7	289.0	288.3
72.5°	259.5	258.0	256.5	255.4	254.6	253.9	253.2	252.5
75°	206.6	205.6	204.7	204.1	203.9	203.6	203.4	203.2
77.5°	156.4	156.1	155.9	155.4	154.8	154.2	153.6	153.0
80°	124.6	124.1	123.6	123.3	123.0	122.8	122.6	122.3
82.5°	96.0	95.7	95.4	95.2	95.0	94.7	94.5	94.2
85°	55.3	55.3	55.3	55.2	55.0	54.7	54.5	54.2
87.5°	22.5	22.6	22.7	22.7	22.8	22.9	22.8	22.8
90°	10.3	10.8	11.4	11.4	12.0	12.5	12.0	12.0
92.5°	112.0	84.3	67.1	55.7	48.9	45.9	43.9	43.9
95°	422.7	334.3	257.8	202.5	174.6	156.9	146.6	139.2
97.5°	624.5	591.7	535.9	476.3	435.4	401.0	383.9	372.0
100°	688.0	699.4	671.4	629.2	579.6	544.8	527.7	523.1
102.5°	684.8	741.4	749.5	731.9	701.4	676.2	658.2	654.5
105°	638.9	737.6	794.1	817.5	818.6	814.0	806.0	802.6
107.5°	573.8	678.8	758.4	809.2	837.4	850.4	856.1	857.6
110°	534.5	633.2	715.9	778.7	819.2	843.1	853.4	858.5



TEST NUMBER: P332597

CATALOG NUMBER: SA4XXDIP-C795D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	505.8	593.0	671.2	733.9	779.9	808.9	823.3	831.6
115°	476.9	547.1	613.8	668.6	713.6	747.9	766.1	770.7
117.5°	462.7	520.8	573.3	619.7	658.2	686.9	705.4	709.0
120°	456.4	509.4	555.0	595.5	628.1	653.2	668.0	674.3
122.5°	450.9	502.1	543.6	579.1	606.6	628.1	640.6	646.9
125°	441.5	490.6	529.9	561.3	584.1	600.7	611.5	614.9
127.5°	430.1	477.0	516.3	546.0	569.0	583.7	592.8	596.2
130°	421.0	466.1	504.8	535.1	558.5	572.7	581.9	585.3
132.5°	411.4	453.7	491.6	521.8	544.8	560.9	569.5	573.0
135°	398.2	435.3	470.0	498.6	521.4	537.4	546.5	549.9
137.5°	386.2	417.6	446.9	472.7	494.0	509.8	517.3	521.4
140°	379.3	406.2	431.8	455.8	475.8	488.3	496.3	500.9
142.5°	373.0	396.6	418.6	439.4	457.0	468.7	475.8	478.9
145°	363.9	383.3	400.5	416.4	430.7	440.4	446.1	448.9
147.5°	356.5	371.9	385.6	398.2	408.7	417.0	421.3	422.4
150°	352.0	365.1	376.5	386.8	395.9	403.3	406.7	407.3
152.5°	346.9	358.2	368.7	377.2	384.9	391.0	393.0	393.6
155°	339.4	348.5	357.1	363.9	369.7	374.2	375.9	375.9
157.5°	331.3	339.0	346.1	351.6	356.0	359.4	360.4	360.4
160°	326.3	332.6	338.8	343.4	346.8	350.3	350.8	350.8
162.5°	321.3	326.6	331.5	335.7	338.2	341.6	342.2	341.7
165°	314.3	317.7	321.7	324.6	326.9	329.1	328.6	328.0
167.5°	307.6	310.2	313.4	315.1	316.3	317.7	317.6	317.2
170°	303.5	305.2	307.5	309.2	310.3	310.9	310.3	310.3
172.5°	299.8	301.1	302.5	303.7	304.4	305.0	304.4	303.5
175°	294.9	295.5	296.6	296.6	296.6	297.8	296.6	295.5
177.5°	291.7	292.2	292.2	292.6	292.2	292.6	291.7	290.8
180°	290.4	290.4	290.4	290.4	290.4	290.4	290.4	290.4

(END OF REPORT)