

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332956

Luminaire Tested: **SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332956  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1020 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5606.2 lumens  
Efficiency: N/A  
Efficacy: 128.9 lumens/watt  
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39  
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 43.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

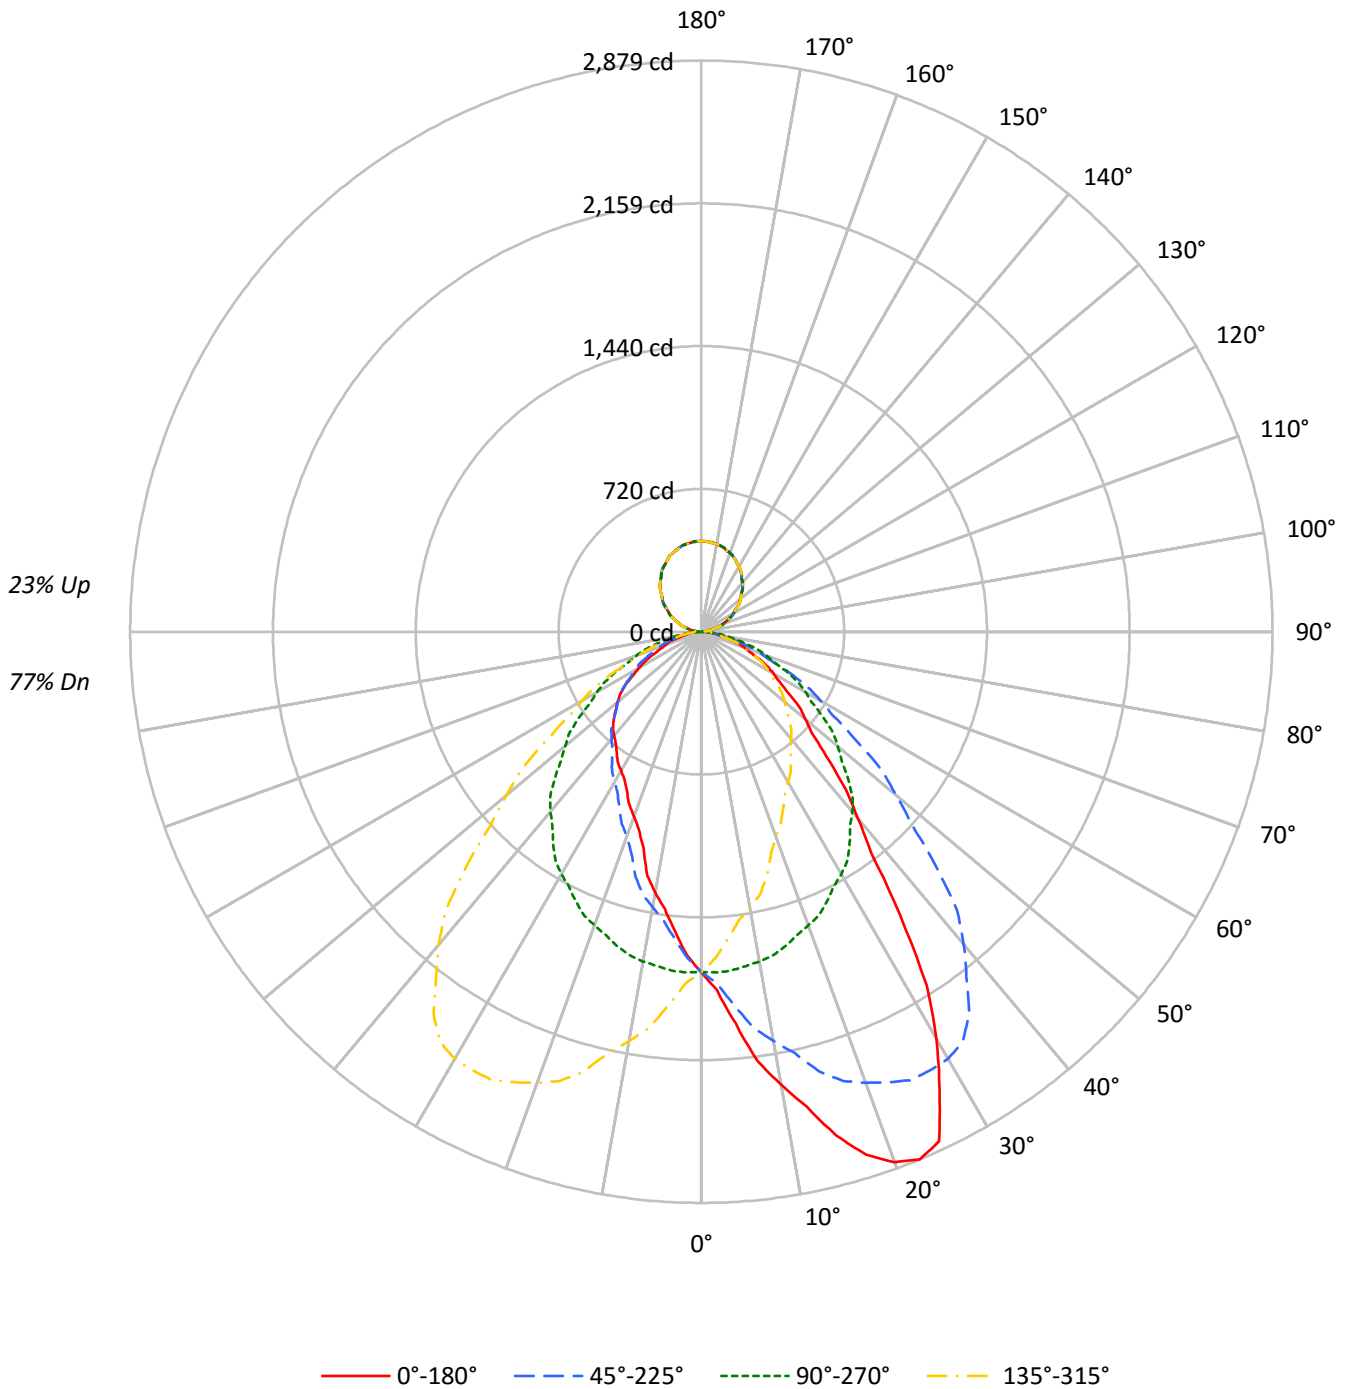



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	114	114	114	114	108	108	108	108	99	99	99	90	90	90	81	81	81	77
1	105	100	97	93	100	96	93	90	88	85	83	80	78	76	73	72	70	67
2	96	89	83	77	91	85	79	75	78	73	70	71	68	65	65	63	60	57
3	88	79	71	65	84	75	69	63	69	64	59	64	59	56	58	55	52	49
4	81	70	62	56	77	67	60	54	62	56	51	57	52	48	53	49	45	43
5	75	63	55	49	71	60	53	47	56	50	45	52	46	42	48	43	40	37
6	69	57	49	43	66	55	47	42	51	44	40	47	42	37	43	39	35	33
7	64	52	43	38	61	50	42	37	46	40	35	43	37	33	40	35	32	30
8	60	47	39	34	57	45	38	33	42	36	32	39	34	30	37	32	29	27
9	56	43	36	30	53	42	35	30	39	33	28	36	31	27	34	29	26	24
10	52	40	33	28	50	39	32	27	36	30	26	34	29	25	32	27	24	22

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	13852	13852	13852	13852
5°	16067	13893	12280	13893
10°	19007	13833	10960	13833
15°	21956	13705	9417	13705
20°	24445	13529	8516	13529
25°	25235	13356	7906	13356
30°	22091	13147	7539	13147
35°	17196	12835	7318	12835
40°	12895	12480	7198	12480
45°	10182	11910	7134	11910
50°	8596	11252	6929	11252
55°	7492	10528	6557	10528
60°	6741	9778	5804	9778
65°	5943	8967	4991	8967
70°	5351	8127	4504	8127
75°	4485	7202	3840	7202
80°	3794	6137	3598	6137
85°	3205	4798	3205	4798



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	166.3	3.0
10°-20°	501.5	8.9
20°-30°	784.4	14.0
30°-40°	872.0	15.6
40°-50°	773.6	13.8
50°-60°	602.8	10.8
60°-70°	394.7	7.0
70°-80°	194.1	3.5
80°-90°	49.3	0.9
90°-100°	30.1	0.5
100°-110°	89.3	1.6
110°-120°	151.5	2.7
120°-130°	199.8	3.6
130°-140°	224.4	4.0
140°-150°	220.5	3.9
150°-160°	185.4	3.3
160°-170°	123.4	2.2
170°-180°	43.2	0.8
0°-30°	1452.1	25.9
0°-40°	2324.1	41.5
0°-60°	3700.5	66.0
0°-90°	4338.5	77.4
90°-120°	270.9	4.8
90°-150°	915.6	16.3
90°-180°	1268.0	22.6
0°-180°	5606.2	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1716	1716	1716	1716	1716	
5°	1983	1714	1515	1714	1983	201
15°	2627	1640	1127	1640	2627	747
25°	2833	1499	888	1499	2833	1257
35°	1745	1302	742	1302	1745	1094
45°	892	1043	625	1043	892	706
55°	532	748	466	748	532	484
65°	311	469	261	469	311	313
75°	144	231	123	231	144	158
85°	35	52	35	52	35	39
90°	11	1	11	1	11	7
95°	28	21	28	21	28	29
105°	86	82	86	82	86	91
115°	153	154	153	154	153	151
125°	223	224	223	224	223	199
135°	290	289	290	289	290	224
145°	352	352	352	352	352	220
155°	402	403	402	403	402	185
165°	438	438	438	438	438	123
175°	454	456	454	456	454	43
180°	457	457	457	457	457	



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1809.8	1814.8	1809.8	1809.3	1803.8	1802.1	1799.9	1792.7	1779.4	1771.7	1773.3
5°	1982.7	1999.9	1990.3	1988.9	1973.7	1958.5	1948.8	1926.7	1903.2	1887.3	1874.1
7.5°	2182.6	2192.5	2186.5	2176.8	2152.2	2138.2	2115.8	2086.6	2044.5	2012.2	1982.8
10°	2318.6	2326.9	2324.2	2306.2	2288.2	2251.6	2230.8	2190.1	2136.8	2094.7	2055.2
12.5°	2452.5	2461.3	2437.0	2437.8	2403.8	2374.9	2342.0	2290.7	2229.2	2174.8	2125.5
15°	2627.0	2615.9	2615.9	2602.1	2564.0	2524.0	2490.1	2436.2	2358.7	2293.7	2225.3
17.5°	2763.6	2767.4	2761.8	2729.1	2699.3	2657.8	2595.7	2532.8	2460.9	2373.7	2303.7
20°	2845.4	2845.4	2839.2	2817.1	2778.4	2734.1	2667.1	2598.6	2507.4	2419.6	2340.8
22.5°	2878.6	2880.8	2873.5	2855.2	2820.4	2777.2	2720.1	2650.6	2556.6	2457.7	2360.1
25°	2833.0	2846.1	2847.5	2842.6	2832.3	2806.0	2756.9	2685.7	2601.4	2494.2	2389.1
27.5°	2601.0	2617.6	2632.1	2656.0	2687.8	2704.4	2706.6	2670.4	2596.8	2493.7	2387.9
30°	2369.8	2383.6	2428.6	2487.3	2532.9	2574.4	2610.4	2620.0	2578.6	2485.9	2374.6
32.5°	2113.2	2132.0	2176.9	2240.1	2316.1	2386.4	2467.1	2508.3	2507.2	2451.6	2348.6
35°	1744.9	1758.7	1800.2	1866.5	1957.8	2062.2	2190.1	2289.6	2357.3	2352.5	2289.6
37.5°	1407.2	1422.8	1464.7	1519.8	1608.3	1737.5	1861.3	1998.4	2123.7	2194.1	2173.0
40°	1223.6	1224.3	1265.1	1321.8	1404.7	1517.4	1652.2	1804.3	1943.9	2058.0	2080.1
42.5°	1078.7	1078.8	1105.8	1166.9	1226.7	1332.7	1461.4	1612.4	1775.8	1907.6	1966.2
45°	891.8	898.0	920.1	956.8	1003.8	1093.6	1196.6	1337.0	1520.2	1676.4	1773.9
47.5°	755.2	764.3	778.4	808.3	845.7	905.6	990.8	1116.9	1265.9	1437.8	1576.5
50°	684.4	685.8	703.7	720.3	752.8	800.5	875.2	980.3	1117.1	1282.4	1436.5
52.5°	623.6	623.3	634.1	655.1	681.5	718.7	779.0	874.6	996.0	1144.1	1303.2
55°	532.3	535.8	544.1	560.6	580.7	607.0	654.7	726.6	822.0	948.5	1093.0
57.5°	462.9	464.7	471.2	478.2	496.6	515.7	551.5	601.4	681.9	785.5	920.1
60°	417.5	418.2	420.3	430.7	445.2	463.2	487.4	529.5	597.3	692.0	798.5
62.5°	373.3	374.5	377.7	385.3	396.5	409.0	434.3	468.2	524.3	605.2	701.1
65°	311.1	311.8	316.6	319.4	328.4	339.4	358.1	380.9	419.6	487.4	560.0
67.5°	259.9	259.9	260.2	263.9	270.2	277.5	288.7	306.9	336.1	377.7	441.7
70°	226.7	226.7	228.1	230.2	233.7	239.9	246.1	259.9	281.4	315.2	364.3
72.5°	195.8	196.3	197.7	198.1	199.9	205.0	209.6	218.5	234.4	259.9	299.6
75°	143.8	145.9	149.3	152.1	155.5	154.9	159.7	165.2	170.1	185.3	208.1
77.5°	107.0	105.9	106.3	108.7	109.1	109.8	113.2	117.5	121.1	128.3	136.5
80°	81.6	81.6	83.6	84.3	83.6	84.3	87.8	89.9	91.3	94.0	101.6
82.5°	61.7	62.8	62.1	62.8	63.2	63.9	66.8	67.2	68.6	69.7	72.9
85°	34.6	35.3	35.9	34.6	34.6	34.6	35.9	36.6	38.0	37.3	38.7
87.5°	14.3	13.7	14.2	14.2	14.7	14.1	14.6	15.6	14.4	14.8	14.7
90°	10.6	10.4	10.3	10.1	10.0	9.7	9.2	8.7	8.2	7.8	7.1
92.5°	15.7	15.6	15.5	15.4	15.3	15.1	14.8	14.6	14.3	14.0	13.6
95°	27.9	27.9	27.9	27.9	27.9	27.8	27.6	27.3	27.1	26.9	26.3
97.5°	43.7	43.7	43.7	43.7	43.7	43.6	43.3	43.0	42.8	42.5	41.8
100°	54.8	54.8	54.8	54.8	54.8	54.7	54.5	54.4	54.2	54.1	53.4
102.5°	67.2	67.1	67.1	67.0	67.0	66.8	66.6	66.4	66.2	65.9	65.3
105°	86.2	86.0	85.8	85.5	85.3	85.0	84.8	84.6	84.3	84.1	83.8
107.5°	104.7	104.8	104.8	104.8	104.8	104.7	104.5	104.3	104.0	103.8	103.8
110°	118.0	117.8	117.6	117.3	117.1	117.0	117.2	117.4	117.5	117.7	117.7



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	131.6	131.5	131.5	131.5	131.4	131.4	131.4	131.5	131.5	131.5	131.7
115°	152.7	152.7	152.8	152.9	153.0	153.0	153.1	153.2	153.3	153.4	153.5
117.5°	172.7	172.9	173.0	173.2	173.4	173.6	173.8	174.1	174.4	174.6	174.7
120°	188.0	187.8	187.7	187.5	187.4	187.5	187.9	188.3	188.7	189.1	189.3
122.5°	200.7	201.0	201.3	201.6	201.8	202.1	202.4	202.7	202.9	203.2	203.3
125°	222.6	222.8	222.9	223.1	223.2	223.4	223.6	223.7	223.9	224.0	224.1
127.5°	242.9	243.0	243.2	243.3	243.4	243.5	243.7	243.9	244.0	244.2	244.3
130°	256.2	256.5	256.8	257.1	257.4	257.7	257.8	258.0	258.2	258.3	258.3
132.5°	270.3	270.5	270.6	270.7	270.8	271.0	271.1	271.3	271.4	271.6	271.7
135°	289.8	290.0	290.2	290.5	290.7	290.9	291.1	291.2	291.4	291.5	291.5
137.5°	310.2	310.1	310.1	310.0	310.0	310.1	310.3	310.5	310.7	310.9	310.8
140°	322.6	322.7	322.8	322.9	322.9	323.0	323.1	323.2	323.3	323.3	323.3
142.5°	335.1	335.1	335.1	335.1	335.1	335.1	335.2	335.2	335.2	335.2	335.3
145°	352.0	352.2	352.4	352.7	352.9	353.1	353.1	353.2	353.3	353.4	353.3
147.5°	369.1	369.1	369.2	369.3	369.4	369.4	369.5	369.6	369.6	369.7	369.8
150°	379.5	379.6	379.7	379.8	379.8	379.9	379.9	379.9	379.9	379.9	379.9
152.5°	389.1	389.3	389.5	389.7	389.9	390.0	389.8	389.6	389.4	389.2	389.1
155°	402.5	402.8	403.1	403.4	403.7	403.7	403.4	403.1	402.8	402.5	402.6
157.5°	414.4	414.7	415.0	415.2	415.5	415.5	415.3	415.0	414.8	414.6	414.6
160°	421.2	421.6	422.0	422.4	422.8	422.9	422.6	422.4	422.2	421.9	422.0
162.5°	428.3	428.7	429.1	429.5	429.8	429.8	429.4	429.0	428.6	428.1	428.2
165°	437.5	437.8	438.1	438.4	438.7	438.6	438.2	437.7	437.2	436.8	436.9
167.5°	444.0	444.5	445.0	445.5	446.0	446.0	445.5	445.1	444.6	444.1	444.1
170°	447.7	448.3	448.8	449.4	449.9	450.0	449.5	449.0	448.5	448.1	448.0
172.5°	450.8	451.4	451.9	452.5	453.0	453.0	452.5	452.0	451.4	450.9	450.9
175°	454.1	454.6	455.2	455.7	456.3	456.3	455.7	455.2	454.6	454.1	454.2
177.5°	455.8	456.3	456.8	457.3	457.8	457.8	457.4	456.9	456.5	456.1	456.1
180°	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1767.8	1760.1	1756.2	1747.3	1736.8	1731.3	1726.3	1719.1	1709.7	1699.8	1692.6
5°	1857.5	1840.9	1820.2	1795.3	1773.2	1751.8	1733.1	1714.4	1693.0	1670.9	1648.8
7.5°	1949.6	1917.0	1881.7	1840.9	1801.3	1765.2	1732.0	1700.2	1664.2	1632.0	1602.7
10°	2013.8	1969.5	1920.4	1868.6	1816.7	1771.8	1727.6	1687.5	1643.2	1603.8	1570.6
12.5°	2065.8	2013.8	1954.7	1890.2	1827.8	1773.5	1722.6	1670.3	1620.0	1577.3	1533.0
15°	2152.0	2080.8	2001.3	1923.9	1843.0	1769.0	1700.6	1639.8	1582.4	1522.3	1480.1
17.5°	2211.3	2126.9	2030.2	1937.2	1841.6	1754.4	1675.4	1603.0	1536.8	1475.4	1425.2
20°	2246.7	2153.4	2046.3	1940.5	1833.3	1740.0	1655.0	1574.8	1506.4	1440.0	1388.1
22.5°	2266.6	2163.4	2046.3	1935.5	1824.5	1723.4	1630.1	1546.6	1472.1	1405.7	1348.3
25°	2273.0	2162.4	2042.8	1915.6	1793.9	1686.8	1590.0	1499.4	1416.5	1350.1	1289.3
27.5°	2264.2	2133.9	2011.4	1880.9	1755.4	1642.4	1540.8	1445.7	1362.6	1291.4	1229.0
30°	2250.9	2111.2	1979.9	1844.4	1717.2	1608.7	1501.5	1410.3	1323.8	1249.9	1187.0
32.5°	2222.1	2083.6	1942.3	1803.5	1674.6	1562.8	1461.1	1369.3	1284.6	1209.0	1142.2
35°	2165.2	2024.8	1871.4	1729.0	1602.4	1486.3	1390.9	1302.4	1221.5	1140.7	1070.1
37.5°	2090.1	1946.7	1794.1	1638.1	1511.5	1401.8	1314.3	1231.2	1152.3	1078.4	1000.3
40°	2019.3	1888.6	1731.0	1576.2	1446.2	1340.4	1259.6	1184.2	1104.7	1031.4	953.3
42.5°	1933.6	1822.3	1663.0	1507.6	1379.3	1277.4	1202.0	1128.3	1056.0	985.0	903.5
45°	1790.5	1706.1	1556.8	1407.5	1278.2	1177.3	1108.2	1043.2	979.6	911.8	835.1
47.5°	1626.5	1569.4	1440.5	1287.6	1168.0	1077.2	1010.4	957.3	903.5	835.8	768.5
50°	1512.6	1475.9	1351.5	1211.9	1097.8	1014.1	945.7	895.9	851.0	786.0	725.9
52.5°	1390.9	1371.4	1266.3	1132.8	1022.6	940.6	882.1	837.3	791.8	737.9	681.6
55°	1205.6	1216.0	1126.8	1011.4	907.7	838.6	785.3	748.0	709.3	663.7	620.1
57.5°	1016.2	1054.1	994.2	892.9	795.7	731.8	691.7	660.3	627.8	590.0	552.8
60°	902.8	934.6	900.8	811.6	726.6	667.1	629.8	605.6	573.1	538.5	510.2
62.5°	792.2	826.2	806.2	734.2	655.2	604.1	571.2	548.6	524.4	494.3	464.8
65°	653.3	675.4	665.7	616.0	560.0	516.4	486.0	469.4	447.3	425.2	398.9
67.5°	500.4	543.1	537.4	511.0	462.6	428.6	408.7	394.0	373.9	357.4	339.6
70°	411.3	450.7	450.0	428.6	402.3	370.5	356.7	344.3	326.3	310.4	295.9
72.5°	336.7	372.8	378.1	361.7	343.7	319.7	306.4	297.8	280.4	269.5	257.7
75°	235.7	262.0	268.9	268.9	260.6	248.2	236.4	230.9	218.5	208.8	201.9
77.5°	154.6	171.2	182.0	184.4	185.7	181.5	171.9	168.0	158.4	155.0	148.4
80°	109.2	120.3	132.7	136.9	140.3	139.0	134.8	132.0	123.1	119.6	116.8
82.5°	75.5	81.6	91.8	100.9	100.0	103.6	100.0	97.8	91.0	89.7	87.0
85°	39.4	40.1	41.5	47.7	51.2	52.5	53.2	51.8	49.8	49.8	44.9
87.5°	14.6	13.9	14.9	14.7	15.1	17.1	18.6	19.0	17.5	16.0	14.6
90°	6.5	5.9	5.3	4.5	3.7	2.8	1.9	1.1	1.9	2.8	3.7
92.5°	13.1	12.7	12.2	11.5	10.5	9.5	8.6	7.6	8.6	9.5	10.5
95°	25.8	25.2	24.7	24.0	23.3	22.6	21.9	21.2	21.9	22.6	23.3
97.5°	41.2	40.5	39.9	39.3	38.7	38.2	37.6	37.0	37.6	38.2	38.7
100°	52.7	51.9	51.2	50.7	50.4	50.1	49.8	49.5	49.8	50.1	50.4
102.5°	64.7	64.0	63.4	63.0	62.9	62.7	62.6	62.5	62.6	62.7	62.9
105°	83.5	83.2	82.8	82.6	82.6	82.5	82.4	82.3	82.4	82.5	82.6
107.5°	103.7	103.7	103.6	103.6	103.5	103.4	103.3	103.2	103.3	103.4	103.5
110°	117.8	117.9	118.0	117.9	117.8	117.6	117.5	117.3	117.5	117.6	117.8





TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	131.8	131.9	132.1	132.1	132.1	132.1	132.0	132.0	132.0	132.1	132.1
115°	153.7	153.8	154.0	154.1	154.1	154.1	154.1	154.1	154.1	154.1	154.1
117.5°	174.9	175.0	175.1	175.1	175.0	175.0	174.9	174.8	174.9	175.0	175.0
120°	189.5	189.8	190.0	190.0	189.6	189.3	189.0	188.7	189.0	189.3	189.6
122.5°	203.4	203.5	203.6	203.6	203.5	203.4	203.2	203.1	203.2	203.4	203.5
125°	224.2	224.3	224.3	224.4	224.4	224.4	224.4	224.4	224.4	224.4	224.4
127.5°	244.4	244.6	244.7	244.6	244.4	244.2	243.9	243.7	243.9	244.2	244.4
130°	258.3	258.3	258.3	258.2	258.0	257.7	257.5	257.3	257.5	257.7	258.0
132.5°	271.7	271.8	271.8	271.8	271.6	271.4	271.3	271.1	271.3	271.4	271.6
135°	291.5	291.5	291.5	291.3	290.8	290.3	289.9	289.4	289.9	290.3	290.8
137.5°	310.6	310.5	310.4	310.2	310.0	309.8	309.6	309.3	309.6	309.8	310.0
140°	323.3	323.3	323.3	323.3	323.1	322.9	322.8	322.6	322.8	322.9	323.1
142.5°	335.3	335.4	335.5	335.4	335.2	335.1	334.9	334.8	334.9	335.1	335.2
145°	353.2	353.1	353.1	352.9	352.5	352.2	351.9	351.6	351.9	352.2	352.5
147.5°	369.8	369.9	369.9	369.8	369.4	369.0	368.7	368.3	368.7	369.0	369.4
150°	379.9	379.9	379.9	379.7	379.4	379.1	378.8	378.5	378.8	379.1	379.4
152.5°	389.1	389.0	388.9	388.8	388.6	388.4	388.3	388.1	388.3	388.4	388.6
155°	402.6	402.7	402.8	402.8	402.8	402.8	402.8	402.8	402.8	402.8	402.8
157.5°	414.6	414.6	414.6	414.7	414.9	415.0	415.1	415.3	415.1	415.0	414.9
160°	422.1	422.2	422.2	422.3	422.4	422.5	422.5	422.6	422.5	422.5	422.4
162.5°	428.3	428.4	428.5	428.6	428.8	429.0	429.2	429.4	429.2	429.0	428.8
165°	437.1	437.2	437.4	437.6	437.8	438.1	438.3	438.5	438.3	438.1	437.8
167.5°	444.1	444.1	444.0	444.2	444.5	444.9	445.2	445.5	445.2	444.9	444.5
170°	447.9	447.8	447.8	447.9	448.3	448.7	449.1	449.5	449.1	448.7	448.3
172.5°	450.9	450.8	450.8	451.0	451.3	451.6	452.0	452.3	452.0	451.6	451.3
175°	454.2	454.3	454.4	454.6	455.0	455.4	455.8	456.2	455.8	455.4	455.0
177.5°	456.1	456.1	456.1	456.2	456.5	456.8	457.2	457.5	457.2	456.8	456.5
180°	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1684.8	1679.3	1672.1	1663.8	1653.9	1645.0	1641.2	1644.5	1646.1	1641.7	1641.2
5°	1633.6	1616.3	1602.4	1581.7	1565.1	1551.3	1541.6	1537.5	1538.8	1527.8	1525.0
7.5°	1575.9	1555.4	1532.8	1508.1	1485.2	1464.9	1454.2	1448.4	1436.7	1431.7	1423.3
10°	1538.8	1511.2	1489.1	1460.0	1433.8	1409.6	1397.8	1388.1	1376.4	1370.9	1359.1
12.5°	1500.7	1468.6	1444.3	1414.1	1387.3	1358.1	1346.9	1329.0	1310.6	1299.0	1283.9
15°	1446.9	1408.2	1378.5	1342.5	1310.7	1277.5	1247.8	1214.6	1202.2	1175.9	1160.7
17.5°	1384.0	1344.7	1307.9	1259.7	1210.6	1169.4	1137.7	1105.9	1086.9	1070.1	1062.4
20°	1342.5	1306.6	1255.4	1199.4	1144.8	1099.2	1073.6	1052.9	1032.1	1020.4	1012.1
22.5°	1303.2	1257.3	1197.9	1137.5	1082.9	1047.2	1025.5	1004.2	987.3	976.1	965.1
25°	1237.4	1177.3	1114.4	1045.3	1007.9	976.8	953.3	936.0	925.7	911.1	905.6
27.5°	1169.8	1097.0	1027.6	981.1	942.2	913.8	893.3	880.3	867.2	857.9	850.7
30°	1117.8	1043.9	981.7	937.4	898.0	874.5	857.9	842.7	832.3	824.7	819.2
32.5°	1066.4	992.4	940.2	892.6	861.5	838.6	820.9	809.5	801.4	791.5	788.2
35°	992.0	926.3	880.7	837.9	806.1	785.3	771.5	759.7	752.8	750.1	748.0
37.5°	920.5	866.8	817.7	782.6	754.2	737.9	721.6	715.8	711.1	706.1	708.3
40°	875.2	824.7	781.2	743.8	721.0	703.1	693.4	686.5	682.3	682.3	682.3
42.5°	835.9	786.6	744.1	710.7	687.8	672.6	661.9	656.0	654.7	654.1	657.4
45°	775.0	729.3	686.5	658.8	639.5	624.2	618.0	613.2	613.2	616.0	616.6
47.5°	714.5	671.8	637.4	606.4	588.7	579.2	573.8	571.3	571.6	574.3	577.5
50°	677.5	635.3	601.4	573.8	557.2	548.2	543.4	542.0	543.4	543.4	548.2
52.5°	637.1	599.4	566.0	542.8	524.0	515.6	512.9	511.0	511.8	514.1	516.1
55°	577.9	544.1	512.3	490.1	476.3	470.8	464.6	465.2	463.9	465.2	465.2
57.5°	518.6	488.2	458.6	441.1	428.9	420.9	414.1	416.0	414.0	413.7	412.6
60°	480.5	447.3	423.8	407.9	394.0	387.1	380.9	382.3	380.2	378.8	376.1
62.5°	439.0	411.3	388.9	373.6	362.5	354.5	348.3	346.9	342.1	337.4	331.3
65°	378.8	356.0	336.0	321.5	311.1	304.9	300.0	295.9	285.5	274.4	268.9
67.5°	320.4	303.9	285.2	272.9	264.5	256.3	247.1	240.0	230.3	224.3	220.8
70°	282.7	266.8	250.9	239.2	230.2	222.6	212.2	207.4	200.5	197.7	194.3
72.5°	246.8	232.0	217.2	206.6	197.0	191.1	182.9	178.1	175.0	173.9	170.5
75°	192.2	180.4	169.4	159.7	152.1	147.9	144.5	141.0	139.6	133.4	130.0
77.5°	140.2	132.5	125.5	118.6	113.2	110.5	103.8	99.8	97.5	94.6	93.9
80°	109.2	103.7	96.8	92.6	85.0	82.3	79.5	78.8	78.1	77.4	76.7
82.5°	82.1	76.6	69.7	67.2	65.1	63.5	61.8	61.1	60.4	60.8	60.7
85°	41.5	38.7	38.7	38.0	37.3	36.6	35.9	35.9	35.3	35.9	35.3
87.5°	14.7	14.3	14.5	13.5	14.1	14.3	13.8	13.9	14.6	13.5	13.6
90°	4.5	5.3	5.9	6.5	7.1	7.8	8.2	8.7	9.2	9.7	10.0
92.5°	11.5	12.2	12.7	13.1	13.6	14.0	14.3	14.6	14.8	15.1	15.3
95°	24.0	24.7	25.2	25.8	26.3	26.9	27.1	27.3	27.6	27.8	27.9
97.5°	39.3	39.9	40.5	41.2	41.8	42.5	42.8	43.0	43.3	43.6	43.7
100°	50.7	51.2	51.9	52.7	53.4	54.1	54.2	54.4	54.5	54.7	54.8
102.5°	63.0	63.4	64.0	64.7	65.3	65.9	66.2	66.4	66.6	66.8	67.0
105°	82.6	82.8	83.2	83.5	83.8	84.1	84.3	84.6	84.8	85.0	85.3
107.5°	103.6	103.6	103.7	103.7	103.8	103.8	104.0	104.3	104.5	104.7	104.8
110°	117.9	118.0	117.9	117.8	117.7	117.7	117.5	117.4	117.2	117.0	117.1



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	132.1	132.1	131.9	131.8	131.7	131.5	131.5	131.5	131.4	131.4	131.4
115°	154.1	154.0	153.8	153.7	153.5	153.4	153.3	153.2	153.1	153.0	153.0
117.5°	175.1	175.1	175.0	174.9	174.7	174.6	174.4	174.1	173.8	173.6	173.4
120°	190.0	190.0	189.8	189.5	189.3	189.1	188.7	188.3	187.9	187.5	187.4
122.5°	203.6	203.6	203.5	203.4	203.3	203.2	202.9	202.7	202.4	202.1	201.8
125°	224.4	224.3	224.3	224.2	224.1	224.0	223.9	223.7	223.6	223.4	223.2
127.5°	244.6	244.7	244.6	244.4	244.3	244.2	244.0	243.9	243.7	243.5	243.4
130°	258.2	258.3	258.3	258.3	258.3	258.3	258.2	258.0	257.8	257.7	257.4
132.5°	271.8	271.8	271.8	271.7	271.7	271.6	271.4	271.3	271.1	271.0	270.8
135°	291.3	291.5	291.5	291.5	291.5	291.5	291.4	291.2	291.1	290.9	290.7
137.5°	310.2	310.4	310.5	310.6	310.8	310.9	310.7	310.5	310.3	310.1	310.0
140°	323.3	323.3	323.3	323.3	323.3	323.3	323.3	323.2	323.1	323.0	322.9
142.5°	335.4	335.5	335.4	335.3	335.3	335.2	335.2	335.2	335.2	335.1	335.1
145°	352.9	353.1	353.1	353.2	353.3	353.4	353.3	353.2	353.1	353.1	352.9
147.5°	369.8	369.9	369.9	369.8	369.8	369.7	369.6	369.6	369.5	369.4	369.4
150°	379.7	379.9	379.9	379.9	379.9	379.9	379.9	379.9	379.9	379.9	379.8
152.5°	388.8	388.9	389.0	389.1	389.1	389.2	389.4	389.6	389.8	390.0	389.9
155°	402.8	402.8	402.7	402.6	402.6	402.5	402.8	403.1	403.4	403.7	403.7
157.5°	414.7	414.6	414.6	414.6	414.6	414.6	414.8	415.0	415.3	415.5	415.5
160°	422.3	422.2	422.2	422.1	422.0	421.9	422.2	422.4	422.6	422.9	422.8
162.5°	428.6	428.5	428.4	428.3	428.2	428.1	428.6	429.0	429.4	429.8	429.8
165°	437.6	437.4	437.2	437.1	436.9	436.8	437.2	437.7	438.2	438.6	438.7
167.5°	444.2	444.0	444.1	444.1	444.1	444.1	444.6	445.1	445.5	446.0	446.0
170°	447.9	447.8	447.8	447.9	448.0	448.1	448.5	449.0	449.5	450.0	449.9
172.5°	451.0	450.8	450.8	450.9	450.9	450.9	451.4	452.0	452.5	453.0	453.0
175°	454.6	454.4	454.3	454.2	454.2	454.1	454.6	455.2	455.7	456.3	456.3
177.5°	456.2	456.1	456.1	456.1	456.1	456.1	456.5	456.9	457.4	457.8	457.8
180°	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1637.8	1638.9	1635.1	1634.0	1635.1	1638.9	1637.8	1641.2	1641.7	1646.1	1644.5
5°	1519.5	1518.1	1514.6	1515.3	1514.6	1518.1	1519.5	1525.0	1527.8	1538.8	1537.5
7.5°	1418.3	1412.9	1414.4	1408.9	1414.4	1412.9	1418.3	1423.3	1431.7	1436.7	1448.4
10°	1356.3	1348.7	1342.5	1337.0	1342.5	1348.7	1356.3	1359.1	1370.9	1376.4	1388.1
12.5°	1271.7	1265.2	1256.8	1258.5	1256.8	1265.2	1271.7	1283.9	1299.0	1310.6	1329.0
15°	1151.7	1141.3	1124.8	1126.8	1124.8	1141.3	1151.7	1160.7	1175.9	1202.2	1214.6
17.5°	1050.1	1050.2	1042.6	1044.4	1042.6	1050.2	1050.1	1062.4	1070.1	1086.9	1105.9
20°	997.6	992.7	993.4	991.3	993.4	992.7	997.6	1012.1	1020.4	1032.1	1052.9
22.5°	961.1	955.1	950.3	946.0	950.3	955.1	961.1	965.1	976.1	987.3	1004.2
25°	899.4	895.2	889.0	887.6	889.0	895.2	899.4	905.6	911.1	925.7	936.0
27.5°	845.2	844.4	841.9	838.7	841.9	844.4	845.2	850.7	857.9	867.2	880.3
30°	813.7	812.3	810.9	808.8	810.9	812.3	813.7	819.2	824.7	832.3	842.7
32.5°	785.5	784.6	783.2	783.4	783.2	784.6	785.5	788.2	791.5	801.4	809.5
35°	745.2	744.5	743.2	742.5	743.2	744.5	745.2	748.0	750.1	752.8	759.7
37.5°	707.6	709.4	708.6	708.4	708.6	709.4	707.6	708.3	706.1	711.1	715.8
40°	681.6	682.3	683.7	683.0	683.7	682.3	681.6	682.3	682.3	682.3	686.5
42.5°	660.1	660.2	662.1	659.8	662.1	660.2	660.1	657.4	654.1	654.7	656.0
45°	621.5	625.6	624.9	624.9	624.9	625.6	621.5	616.6	616.0	613.2	613.2
47.5°	579.3	582.9	583.9	583.7	583.9	582.9	579.3	577.5	574.3	571.6	571.3
50°	551.7	550.3	552.4	551.7	552.4	550.3	551.7	548.2	543.4	543.4	542.0
52.5°	517.9	518.2	518.1	517.4	518.1	518.2	517.9	516.1	514.1	511.8	511.0
55°	465.9	466.6	465.2	465.9	465.2	466.6	465.9	465.2	465.2	463.9	465.2
57.5°	409.5	406.2	407.6	405.9	407.6	406.2	409.5	412.6	413.7	414.0	416.0
60°	369.2	363.6	362.2	359.5	362.2	363.6	369.2	376.1	378.8	380.2	382.3
62.5°	323.8	319.9	315.2	317.4	315.2	319.9	323.8	331.3	337.4	342.1	346.9
65°	263.4	260.6	258.5	261.3	258.5	260.6	263.4	268.9	274.4	285.5	295.9
67.5°	218.0	216.5	216.5	215.1	216.5	216.5	218.0	220.8	224.3	230.3	240.0
70°	194.3	192.2	192.2	190.8	192.2	192.2	194.3	194.3	197.7	200.5	207.4
72.5°	169.9	167.8	168.4	167.6	168.4	167.8	169.9	170.5	173.9	175.0	178.1
75°	125.8	122.4	122.4	123.1	122.4	122.4	125.8	130.0	133.4	139.6	141.0
77.5°	93.9	93.2	94.2	92.9	94.2	93.2	93.9	93.9	94.6	97.5	99.8
80°	76.7	76.0	75.4	77.4	75.4	76.0	76.7	76.7	77.4	78.1	78.8
82.5°	59.6	59.5	59.3	61.9	59.3	59.5	59.6	60.7	60.8	60.4	61.1
85°	35.9	34.6	35.9	34.6	35.9	34.6	35.9	35.3	35.9	35.3	35.9
87.5°	14.7	14.2	13.7	14.3	13.7	14.2	14.7	13.6	13.5	14.6	13.9
90°	10.1	10.3	10.4	10.6	10.4	10.3	10.1	10.0	9.7	9.2	8.7
92.5°	15.4	15.5	15.6	15.7	15.6	15.5	15.4	15.3	15.1	14.8	14.6
95°	27.9	27.9	27.9	27.9	27.9	27.9	27.9	27.9	27.8	27.6	27.3
97.5°	43.7	43.7	43.7	43.7	43.7	43.7	43.7	43.7	43.6	43.3	43.0
100°	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.7	54.5	54.4
102.5°	67.0	67.1	67.1	67.2	67.1	67.1	67.0	67.0	66.8	66.6	66.4
105°	85.5	85.8	86.0	86.2	86.0	85.8	85.5	85.3	85.0	84.8	84.6
107.5°	104.8	104.8	104.8	104.7	104.8	104.8	104.8	104.8	104.7	104.5	104.3
110°	117.3	117.6	117.8	118.0	117.8	117.6	117.3	117.1	117.0	117.2	117.4



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	131.5	131.5	131.5	131.6	131.5	131.5	131.5	131.4	131.4	131.4	131.5
115°	152.9	152.8	152.7	152.7	152.7	152.8	152.9	153.0	153.0	153.1	153.2
117.5°	173.2	173.0	172.9	172.7	172.9	173.0	173.2	173.4	173.6	173.8	174.1
120°	187.5	187.7	187.8	188.0	187.8	187.7	187.5	187.4	187.5	187.9	188.3
122.5°	201.6	201.3	201.0	200.7	201.0	201.3	201.6	201.8	202.1	202.4	202.7
125°	223.1	222.9	222.8	222.6	222.8	222.9	223.1	223.2	223.4	223.6	223.7
127.5°	243.3	243.2	243.0	242.9	243.0	243.2	243.3	243.4	243.5	243.7	243.9
130°	257.1	256.8	256.5	256.2	256.5	256.8	257.1	257.4	257.7	257.8	258.0
132.5°	270.7	270.6	270.5	270.3	270.5	270.6	270.7	270.8	271.0	271.1	271.3
135°	290.5	290.2	290.0	289.8	290.0	290.2	290.5	290.7	290.9	291.1	291.2
137.5°	310.0	310.1	310.1	310.2	310.1	310.1	310.0	310.0	310.1	310.3	310.5
140°	322.9	322.8	322.7	322.6	322.7	322.8	322.9	322.9	323.0	323.1	323.2
142.5°	335.1	335.1	335.1	335.1	335.1	335.1	335.1	335.1	335.1	335.2	335.2
145°	352.7	352.4	352.2	352.0	352.2	352.4	352.7	352.9	353.1	353.1	353.2
147.5°	369.3	369.2	369.1	369.1	369.1	369.2	369.3	369.4	369.4	369.5	369.6
150°	379.8	379.7	379.6	379.5	379.6	379.7	379.8	379.8	379.9	379.9	379.9
152.5°	389.7	389.5	389.3	389.1	389.3	389.5	389.7	389.9	390.0	389.8	389.6
155°	403.4	403.1	402.8	402.5	402.8	403.1	403.4	403.7	403.7	403.4	403.1
157.5°	415.2	415.0	414.7	414.4	414.7	415.0	415.2	415.5	415.5	415.3	415.0
160°	422.4	422.0	421.6	421.2	421.6	422.0	422.4	422.8	422.9	422.6	422.4
162.5°	429.5	429.1	428.7	428.3	428.7	429.1	429.5	429.8	429.8	429.4	429.0
165°	438.4	438.1	437.8	437.5	437.8	438.1	438.4	438.7	438.6	438.2	437.7
167.5°	445.5	445.0	444.5	444.0	444.5	445.0	445.5	446.0	446.0	445.5	445.1
170°	449.4	448.8	448.3	447.7	448.3	448.8	449.4	449.9	450.0	449.5	449.0
172.5°	452.5	451.9	451.4	450.8	451.4	451.9	452.5	453.0	453.0	452.5	452.0
175°	455.7	455.2	454.6	454.1	454.6	455.2	455.7	456.3	456.3	455.7	455.2
177.5°	457.3	456.8	456.3	455.8	456.3	456.8	457.3	457.8	457.8	457.4	456.9
180°	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1641.2	1645.0	1653.9	1663.8	1672.1	1679.3	1684.8	1692.6	1699.8	1709.7	1719.1
5°	1541.6	1551.3	1565.1	1581.7	1602.4	1616.3	1633.6	1648.8	1670.9	1693.0	1714.4
7.5°	1454.2	1464.9	1485.2	1508.1	1532.8	1555.4	1575.9	1602.7	1632.0	1664.2	1700.2
10°	1397.8	1409.6	1433.8	1460.0	1489.1	1511.2	1538.8	1570.6	1603.8	1643.2	1687.5
12.5°	1346.9	1358.1	1387.3	1414.1	1444.3	1468.6	1500.7	1533.0	1577.3	1620.0	1670.3
15°	1247.8	1277.5	1310.7	1342.5	1378.5	1408.2	1446.9	1480.1	1522.3	1582.4	1639.8
17.5°	1137.7	1169.4	1210.6	1259.7	1307.9	1344.7	1384.0	1425.2	1475.4	1536.8	1603.0
20°	1073.6	1099.2	1144.8	1199.4	1255.4	1306.6	1342.5	1388.1	1440.0	1506.4	1574.8
22.5°	1025.5	1047.2	1082.9	1137.5	1197.9	1257.3	1303.2	1348.3	1405.7	1472.1	1546.6
25°	953.3	976.8	1007.9	1045.3	1114.4	1177.3	1237.4	1289.3	1350.1	1416.5	1499.4
27.5°	893.3	913.8	942.2	981.1	1027.6	1097.0	1169.8	1229.0	1291.4	1362.6	1445.7
30°	857.9	874.5	898.0	937.4	981.7	1043.9	1117.8	1187.0	1249.9	1323.8	1410.3
32.5°	820.9	838.6	861.5	892.6	940.2	992.4	1066.4	1142.2	1209.0	1284.6	1369.3
35°	771.5	785.3	806.1	837.9	880.7	926.3	992.0	1070.1	1140.7	1221.5	1302.4
37.5°	721.6	737.9	754.2	782.6	817.7	866.8	920.5	1000.3	1078.4	1152.3	1231.2
40°	693.4	703.1	721.0	743.8	781.2	824.7	875.2	953.3	1031.4	1104.7	1184.2
42.5°	661.9	672.6	687.8	710.7	744.1	786.6	835.9	903.5	985.0	1056.0	1128.3
45°	618.0	624.2	639.5	658.8	686.5	729.3	775.0	835.1	911.8	979.6	1043.2
47.5°	573.8	579.2	588.7	606.4	637.4	671.8	714.5	768.5	835.8	903.5	957.3
50°	543.4	548.2	557.2	573.8	601.4	635.3	677.5	725.9	786.0	851.0	895.9
52.5°	512.9	515.6	524.0	542.8	566.0	599.4	637.1	681.6	737.9	791.8	837.3
55°	464.6	470.8	476.3	490.1	512.3	544.1	577.9	620.1	663.7	709.3	748.0
57.5°	414.1	420.9	428.9	441.1	458.6	488.2	518.6	552.8	590.0	627.8	660.3
60°	380.9	387.1	394.0	407.9	423.8	447.3	480.5	510.2	538.5	573.1	605.6
62.5°	348.3	354.5	362.5	373.6	388.9	411.3	439.0	464.8	494.3	524.4	548.6
65°	300.0	304.9	311.1	321.5	336.0	356.0	378.8	398.9	425.2	447.3	469.4
67.5°	247.1	256.3	264.5	272.9	285.2	303.9	320.4	339.6	357.4	373.9	394.0
70°	212.2	222.6	230.2	239.2	250.9	266.8	282.7	295.9	310.4	326.3	344.3
72.5°	182.9	191.1	197.0	206.6	217.2	232.0	246.8	257.7	269.5	280.4	297.8
75°	144.5	147.9	152.1	159.7	169.4	180.4	192.2	201.9	208.8	218.5	230.9
77.5°	103.8	110.5	113.2	118.6	125.5	132.5	140.2	148.4	155.0	158.4	168.0
80°	79.5	82.3	85.0	92.6	96.8	103.7	109.2	116.8	119.6	123.1	132.0
82.5°	61.8	63.5	65.1	67.2	69.7	76.6	82.1	87.0	89.7	91.0	97.8
85°	35.9	36.6	37.3	38.0	38.7	38.7	41.5	44.9	49.8	49.8	51.8
87.5°	13.8	14.3	14.1	13.5	14.5	14.3	14.7	14.6	16.0	17.5	19.0
90°	8.2	7.8	7.1	6.5	5.9	5.3	4.5	3.7	2.8	1.9	1.1
92.5°	14.3	14.0	13.6	13.1	12.7	12.2	11.5	10.5	9.5	8.6	7.6
95°	27.1	26.9	26.3	25.8	25.2	24.7	24.0	23.3	22.6	21.9	21.2
97.5°	42.8	42.5	41.8	41.2	40.5	39.9	39.3	38.7	38.2	37.6	37.0
100°	54.2	54.1	53.4	52.7	51.9	51.2	50.7	50.4	50.1	49.8	49.5
102.5°	66.2	65.9	65.3	64.7	64.0	63.4	63.0	62.9	62.7	62.6	62.5
105°	84.3	84.1	83.8	83.5	83.2	82.8	82.6	82.6	82.5	82.4	82.3
107.5°	104.0	103.8	103.8	103.7	103.7	103.6	103.6	103.5	103.4	103.3	103.2
110°	117.5	117.7	117.7	117.8	117.9	118.0	117.9	117.8	117.6	117.5	117.3



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	131.5	131.5	131.7	131.8	131.9	132.1	132.1	132.1	132.1	132.0	132.0
115°	153.3	153.4	153.5	153.7	153.8	154.0	154.1	154.1	154.1	154.1	154.1
117.5°	174.4	174.6	174.7	174.9	175.0	175.1	175.1	175.0	175.0	174.9	174.8
120°	188.7	189.1	189.3	189.5	189.8	190.0	190.0	189.6	189.3	189.0	188.7
122.5°	202.9	203.2	203.3	203.4	203.5	203.6	203.6	203.5	203.4	203.2	203.1
125°	223.9	224.0	224.1	224.2	224.3	224.3	224.4	224.4	224.4	224.4	224.4
127.5°	244.0	244.2	244.3	244.4	244.6	244.7	244.6	244.4	244.2	243.9	243.7
130°	258.2	258.3	258.3	258.3	258.3	258.3	258.2	258.0	257.7	257.5	257.3
132.5°	271.4	271.6	271.7	271.7	271.8	271.8	271.8	271.6	271.4	271.3	271.1
135°	291.4	291.5	291.5	291.5	291.5	291.5	291.3	290.8	290.3	289.9	289.4
137.5°	310.7	310.9	310.8	310.6	310.5	310.4	310.2	310.0	309.8	309.6	309.3
140°	323.3	323.3	323.3	323.3	323.3	323.3	323.3	323.1	322.9	322.8	322.6
142.5°	335.2	335.2	335.3	335.3	335.4	335.5	335.4	335.2	335.1	334.9	334.8
145°	353.3	353.4	353.3	353.2	353.1	353.1	352.9	352.5	352.2	351.9	351.6
147.5°	369.6	369.7	369.8	369.8	369.9	369.9	369.8	369.4	369.0	368.7	368.3
150°	379.9	379.9	379.9	379.9	379.9	379.9	379.7	379.4	379.1	378.8	378.5
152.5°	389.4	389.2	389.1	389.1	389.0	388.9	388.8	388.6	388.4	388.3	388.1
155°	402.8	402.5	402.6	402.6	402.7	402.8	402.8	402.8	402.8	402.8	402.8
157.5°	414.8	414.6	414.6	414.6	414.6	414.6	414.7	414.9	415.0	415.1	415.3
160°	422.2	421.9	422.0	422.1	422.2	422.2	422.3	422.4	422.5	422.5	422.6
162.5°	428.6	428.1	428.2	428.3	428.4	428.5	428.6	428.8	429.0	429.2	429.4
165°	437.2	436.8	436.9	437.1	437.2	437.4	437.6	437.8	438.1	438.3	438.5
167.5°	444.6	444.1	444.1	444.1	444.1	444.0	444.2	444.5	444.9	445.2	445.5
170°	448.5	448.1	448.0	447.9	447.8	447.8	447.9	448.3	448.7	449.1	449.5
172.5°	451.4	450.9	450.9	450.9	450.8	450.8	451.0	451.3	451.6	452.0	452.3
175°	454.6	454.1	454.2	454.2	454.3	454.4	454.6	455.0	455.4	455.8	456.2
177.5°	456.5	456.1	456.1	456.1	456.1	456.1	456.2	456.5	456.8	457.2	457.5
180°	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1726.3	1731.3	1736.8	1747.3	1756.2	1760.1	1767.8	1773.3	1771.7	1779.4	1792.7
5°	1733.1	1751.8	1773.2	1795.3	1820.2	1840.9	1857.5	1874.1	1887.3	1903.2	1926.7
7.5°	1732.0	1765.2	1801.3	1840.9	1881.7	1917.0	1949.6	1982.8	2012.2	2044.5	2086.6
10°	1727.6	1771.8	1816.7	1868.6	1920.4	1969.5	2013.8	2055.2	2094.7	2136.8	2190.1
12.5°	1722.6	1773.5	1827.8	1890.2	1954.7	2013.8	2065.8	2125.5	2174.8	2229.2	2290.7
15°	1700.6	1769.0	1843.0	1923.9	2001.3	2080.8	2152.0	2225.3	2293.7	2358.7	2436.2
17.5°	1675.4	1754.4	1841.6	1937.2	2030.2	2126.9	2211.3	2303.7	2373.7	2460.9	2532.8
20°	1655.0	1740.0	1833.3	1940.5	2046.3	2153.4	2246.7	2340.8	2419.6	2507.4	2598.6
22.5°	1630.1	1723.4	1824.5	1935.5	2046.3	2163.4	2266.6	2360.1	2457.7	2556.6	2650.6
25°	1590.0	1686.8	1793.9	1915.6	2042.8	2162.4	2273.0	2389.1	2494.2	2601.4	2685.7
27.5°	1540.8	1642.4	1755.4	1880.9	2011.4	2133.9	2264.2	2387.9	2493.7	2596.8	2670.4
30°	1501.5	1608.7	1717.2	1844.4	1979.9	2111.2	2250.9	2374.6	2485.9	2578.6	2620.0
32.5°	1461.1	1562.8	1674.6	1803.5	1942.3	2083.6	2222.1	2348.6	2451.6	2507.2	2508.3
35°	1390.9	1486.3	1602.4	1729.0	1871.4	2024.8	2165.2	2289.6	2352.5	2357.3	2289.6
37.5°	1314.3	1401.8	1511.5	1638.1	1794.1	1946.7	2090.1	2173.0	2194.1	2123.7	1998.4
40°	1259.6	1340.4	1446.2	1576.2	1731.0	1888.6	2019.3	2080.1	2058.0	1943.9	1804.3
42.5°	1202.0	1277.4	1379.3	1507.6	1663.0	1822.3	1933.6	1966.2	1907.6	1775.8	1612.4
45°	1108.2	1177.3	1278.2	1407.5	1556.8	1706.1	1790.5	1773.9	1676.4	1520.2	1337.0
47.5°	1010.4	1077.2	1168.0	1287.6	1440.5	1569.4	1626.5	1576.5	1437.8	1265.9	1116.9
50°	945.7	1014.1	1097.8	1211.9	1351.5	1475.9	1512.6	1436.5	1282.4	1117.1	980.3
52.5°	882.1	940.6	1022.6	1132.8	1266.3	1371.4	1390.9	1303.2	1144.1	996.0	874.6
55°	785.3	838.6	907.7	1011.4	1126.8	1216.0	1205.6	1093.0	948.5	822.0	726.6
57.5°	691.7	731.8	795.7	892.9	994.2	1054.1	1016.2	920.1	785.5	681.9	601.4
60°	629.8	667.1	726.6	811.6	900.8	934.6	902.8	798.5	692.0	597.3	529.5
62.5°	571.2	604.1	655.2	734.2	806.2	826.2	792.2	701.1	605.2	524.3	468.2
65°	486.0	516.4	560.0	616.0	665.7	675.4	653.3	560.0	487.4	419.6	380.9
67.5°	408.7	428.6	462.6	511.0	537.4	543.1	500.4	441.7	377.7	336.1	306.9
70°	356.7	370.5	402.3	428.6	450.0	450.7	411.3	364.3	315.2	281.4	259.9
72.5°	306.4	319.7	343.7	361.7	378.1	372.8	336.7	299.6	259.9	234.4	218.5
75°	236.4	248.2	260.6	268.9	268.9	262.0	235.7	208.1	185.3	170.1	165.2
77.5°	171.9	181.5	185.7	184.4	182.0	171.2	154.6	136.5	128.3	121.1	117.5
80°	134.8	139.0	140.3	136.9	132.7	120.3	109.2	101.6	94.0	91.3	89.9
82.5°	100.0	103.6	100.0	100.9	91.8	81.6	75.5	72.9	69.7	68.6	67.2
85°	53.2	52.5	51.2	47.7	41.5	40.1	39.4	38.7	37.3	38.0	36.6
87.5°	18.6	17.1	15.1	14.7	14.9	13.9	14.6	14.7	14.8	14.4	15.6
90°	1.9	2.8	3.7	4.5	5.3	5.9	6.5	7.1	7.8	8.2	8.7
92.5°	8.6	9.5	10.5	11.5	12.2	12.7	13.1	13.6	14.0	14.3	14.6
95°	21.9	22.6	23.3	24.0	24.7	25.2	25.8	26.3	26.9	27.1	27.3
97.5°	37.6	38.2	38.7	39.3	39.9	40.5	41.2	41.8	42.5	42.8	43.0
100°	49.8	50.1	50.4	50.7	51.2	51.9	52.7	53.4	54.1	54.2	54.4
102.5°	62.6	62.7	62.9	63.0	63.4	64.0	64.7	65.3	65.9	66.2	66.4
105°	82.4	82.5	82.6	82.6	82.8	83.2	83.5	83.8	84.1	84.3	84.6
107.5°	103.3	103.4	103.5	103.6	103.6	103.7	103.7	103.8	103.8	104.0	104.3
110°	117.5	117.6	117.8	117.9	118.0	117.9	117.8	117.7	117.7	117.5	117.4





TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	132.0	132.1	132.1	132.1	132.1	131.9	131.8	131.7	131.5	131.5	131.5
115°	154.1	154.1	154.1	154.1	154.0	153.8	153.7	153.5	153.4	153.3	153.2
117.5°	174.9	175.0	175.0	175.1	175.1	175.0	174.9	174.7	174.6	174.4	174.1
120°	189.0	189.3	189.6	190.0	190.0	189.8	189.5	189.3	189.1	188.7	188.3
122.5°	203.2	203.4	203.5	203.6	203.6	203.5	203.4	203.3	203.2	202.9	202.7
125°	224.4	224.4	224.4	224.4	224.3	224.3	224.2	224.1	224.0	223.9	223.7
127.5°	243.9	244.2	244.4	244.6	244.7	244.6	244.4	244.3	244.2	244.0	243.9
130°	257.5	257.7	258.0	258.2	258.3	258.3	258.3	258.3	258.3	258.2	258.0
132.5°	271.3	271.4	271.6	271.8	271.8	271.8	271.7	271.7	271.6	271.4	271.3
135°	289.9	290.3	290.8	291.3	291.5	291.5	291.5	291.5	291.5	291.4	291.2
137.5°	309.6	309.8	310.0	310.2	310.4	310.5	310.6	310.8	310.9	310.7	310.5
140°	322.8	322.9	323.1	323.3	323.3	323.3	323.3	323.3	323.3	323.3	323.2
142.5°	334.9	335.1	335.2	335.4	335.5	335.4	335.3	335.3	335.2	335.2	335.2
145°	351.9	352.2	352.5	352.9	353.1	353.1	353.2	353.3	353.4	353.3	353.2
147.5°	368.7	369.0	369.4	369.8	369.9	369.9	369.8	369.8	369.7	369.6	369.6
150°	378.8	379.1	379.4	379.7	379.9	379.9	379.9	379.9	379.9	379.9	379.9
152.5°	388.3	388.4	388.6	388.8	388.9	389.0	389.1	389.1	389.2	389.4	389.6
155°	402.8	402.8	402.8	402.8	402.8	402.7	402.6	402.6	402.5	402.8	403.1
157.5°	415.1	415.0	414.9	414.7	414.6	414.6	414.6	414.6	414.6	414.8	415.0
160°	422.5	422.5	422.4	422.3	422.2	422.2	422.1	422.0	421.9	422.2	422.4
162.5°	429.2	429.0	428.8	428.6	428.5	428.4	428.3	428.2	428.1	428.6	429.0
165°	438.3	438.1	437.8	437.6	437.4	437.2	437.1	436.9	436.8	437.2	437.7
167.5°	445.2	444.9	444.5	444.2	444.0	444.1	444.1	444.1	444.1	444.6	445.1
170°	449.1	448.7	448.3	447.9	447.8	447.8	447.9	448.0	448.1	448.5	449.0
172.5°	452.0	451.6	451.3	451.0	450.8	450.8	450.9	450.9	450.9	451.4	452.0
175°	455.8	455.4	455.0	454.6	454.4	454.3	454.2	454.2	454.1	454.6	455.2
177.5°	457.2	456.8	456.5	456.2	456.1	456.1	456.1	456.1	456.1	456.5	456.9
180°	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9	456.9



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1799.9	1802.1	1803.8	1809.3	1809.8	1814.8	1809.8
5°	1948.8	1958.5	1973.7	1988.9	1990.3	1999.9	1982.7
7.5°	2115.8	2138.2	2152.2	2176.8	2186.5	2192.5	2182.6
10°	2230.8	2251.6	2288.2	2306.2	2324.2	2326.9	2318.6
12.5°	2342.0	2374.9	2403.8	2437.8	2437.0	2461.3	2452.5
15°	2490.1	2524.0	2564.0	2602.1	2615.9	2615.9	2627.0
17.5°	2595.7	2657.8	2699.3	2729.1	2761.8	2767.4	2763.6
20°	2667.1	2734.1	2778.4	2817.1	2839.2	2845.4	2845.4
22.5°	2720.1	2777.2	2820.4	2855.2	2873.5	2880.8	2878.6
25°	2756.9	2806.0	2832.3	2842.6	2847.5	2846.1	2833.0
27.5°	2706.6	2704.4	2687.8	2656.0	2632.1	2617.6	2601.0
30°	2610.4	2574.4	2532.9	2487.3	2428.6	2383.6	2369.8
32.5°	2467.1	2386.4	2316.1	2240.1	2176.9	2132.0	2113.2
35°	2190.1	2062.2	1957.8	1866.5	1800.2	1758.7	1744.9
37.5°	1861.3	1737.5	1608.3	1519.8	1464.7	1422.8	1407.2
40°	1652.2	1517.4	1404.7	1321.8	1265.1	1224.3	1223.6
42.5°	1461.4	1332.7	1226.7	1166.9	1105.8	1078.8	1078.7
45°	1196.6	1093.6	1003.8	956.8	920.1	898.0	891.8
47.5°	990.8	905.6	845.7	808.3	778.4	764.3	755.2
50°	875.2	800.5	752.8	720.3	703.7	685.8	684.4
52.5°	779.0	718.7	681.5	655.1	634.1	623.3	623.6
55°	654.7	607.0	580.7	560.6	544.1	535.8	532.3
57.5°	551.5	515.7	496.6	478.2	471.2	464.7	462.9
60°	487.4	463.2	445.2	430.7	420.3	418.2	417.5
62.5°	434.3	409.0	396.5	385.3	377.7	374.5	373.3
65°	358.1	339.4	328.4	319.4	316.6	311.8	311.1
67.5°	288.7	277.5	270.2	263.9	260.2	259.9	259.9
70°	246.1	239.9	233.7	230.2	228.1	226.7	226.7
72.5°	209.6	205.0	199.9	198.1	197.7	196.3	195.8
75°	159.7	154.9	155.5	152.1	149.3	145.9	143.8
77.5°	113.2	109.8	109.1	108.7	106.3	105.9	107.0
80°	87.8	84.3	83.6	84.3	83.6	81.6	81.6
82.5°	66.8	63.9	63.2	62.8	62.1	62.8	61.7
85°	35.9	34.6	34.6	34.6	35.9	35.3	34.6
87.5°	14.6	14.1	14.7	14.2	14.2	13.7	14.3
90°	9.2	9.7	10.0	10.1	10.3	10.4	10.6
92.5°	14.8	15.1	15.3	15.4	15.5	15.6	15.7
95°	27.6	27.8	27.9	27.9	27.9	27.9	27.9
97.5°	43.3	43.6	43.7	43.7	43.7	43.7	43.7
100°	54.5	54.7	54.8	54.8	54.8	54.8	54.8
102.5°	66.6	66.8	67.0	67.0	67.1	67.1	67.2
105°	84.8	85.0	85.3	85.5	85.8	86.0	86.2
107.5°	104.5	104.7	104.8	104.8	104.8	104.8	104.7
110°	117.2	117.0	117.1	117.3	117.6	117.8	118.0



TEST NUMBER: P332956

CATALOG NUMBER: SA4XXRDIP-C1020D365U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	131.4	131.4	131.4	131.5	131.5	131.5	131.6
115°	153.1	153.0	153.0	152.9	152.8	152.7	152.7
117.5°	173.8	173.6	173.4	173.2	173.0	172.9	172.7
120°	187.9	187.5	187.4	187.5	187.7	187.8	188.0
122.5°	202.4	202.1	201.8	201.6	201.3	201.0	200.7
125°	223.6	223.4	223.2	223.1	222.9	222.8	222.6
127.5°	243.7	243.5	243.4	243.3	243.2	243.0	242.9
130°	257.8	257.7	257.4	257.1	256.8	256.5	256.2
132.5°	271.1	271.0	270.8	270.7	270.6	270.5	270.3
135°	291.1	290.9	290.7	290.5	290.2	290.0	289.8
137.5°	310.3	310.1	310.0	310.0	310.1	310.1	310.2
140°	323.1	323.0	322.9	322.9	322.8	322.7	322.6
142.5°	335.2	335.1	335.1	335.1	335.1	335.1	335.1
145°	353.1	353.1	352.9	352.7	352.4	352.2	352.0
147.5°	369.5	369.4	369.4	369.3	369.2	369.1	369.1
150°	379.9	379.9	379.8	379.8	379.7	379.6	379.5
152.5°	389.8	390.0	389.9	389.7	389.5	389.3	389.1
155°	403.4	403.7	403.7	403.4	403.1	402.8	402.5
157.5°	415.3	415.5	415.5	415.2	415.0	414.7	414.4
160°	422.6	422.9	422.8	422.4	422.0	421.6	421.2
162.5°	429.4	429.8	429.8	429.5	429.1	428.7	428.3
165°	438.2	438.6	438.7	438.4	438.1	437.8	437.5
167.5°	445.5	446.0	446.0	445.5	445.0	444.5	444.0
170°	449.5	450.0	449.9	449.4	448.8	448.3	447.7
172.5°	452.5	453.0	453.0	452.5	451.9	451.4	450.8
175°	455.7	456.3	456.3	455.7	455.2	454.6	454.1
177.5°	457.4	457.8	457.8	457.3	456.8	456.3	455.8
180°	456.9	456.9	456.9	456.9	456.9	456.9	456.9

(END OF REPORT)