

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332948

Luminaire Tested: **SA4XXRDIP-C795D1035U835-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332948
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C795D1035U835-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1035 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6908.0 lumens
Efficiency: N/A
Efficacy: 132.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 52
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332948
CATALOG NUMBER: SA4XXRDIP-C795D1035U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

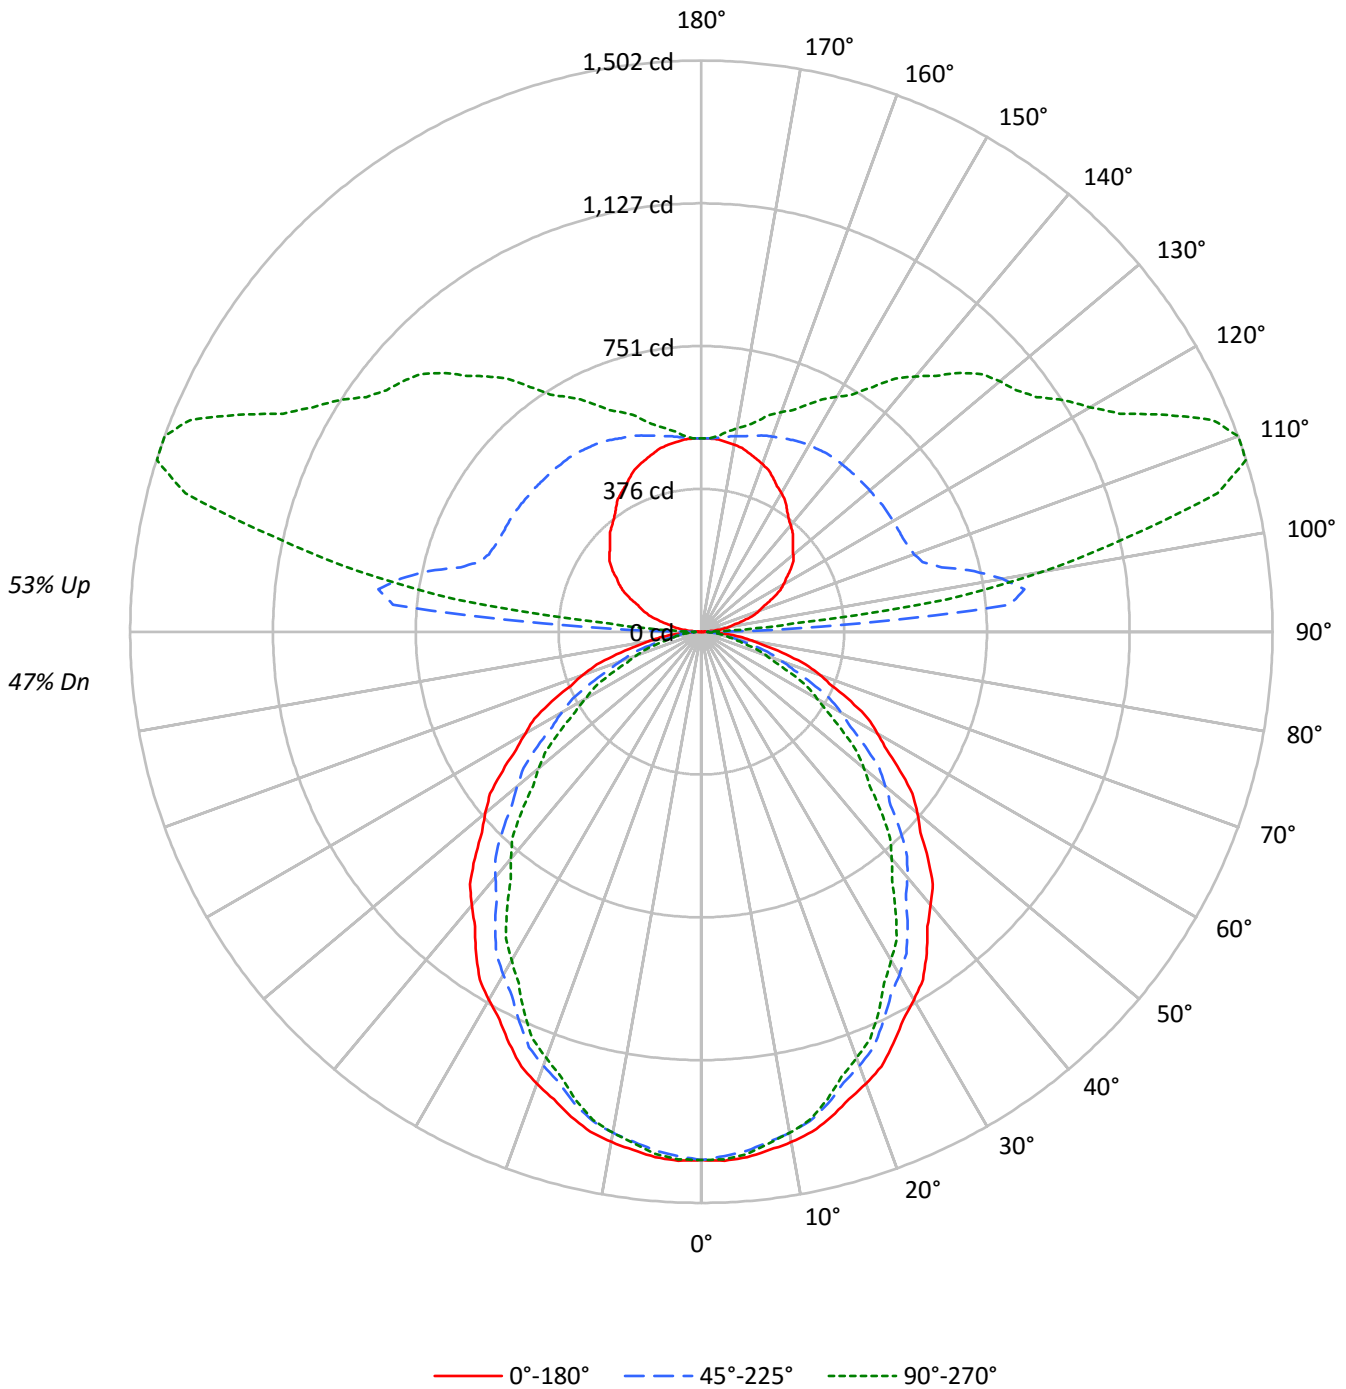



TEST NUMBER: P332948

CATALOG NUMBER: SA4XXRDIP-C795D1035U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	98	98	98	98	81	81	81	67	67	67	53	53	53	47				47
1	97	93	89	86	89	86	82	79	72	69	67	59	57	56	47	46	45				40	
2	89	82	76	71	81	75	70	66	63	59	56	52	49	47	42	40	38				34	
3	81	72	65	59	74	66	60	55	56	51	47	46	43	40	37	35	33				29	
4	74	64	56	50	68	59	52	47	50	45	41	41	38	34	33	31	29				25	
5	68	57	49	43	62	53	46	40	45	39	35	37	33	30	30	27	25				22	
6	63	51	43	37	58	47	40	35	40	35	31	34	30	26	27	24	22				19	
7	58	46	38	33	53	43	36	31	37	31	27	31	26	23	25	22	20				17	
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	23	20	18				15	
9	50	38	31	26	46	36	29	24	31	25	22	26	22	19	21	18	16				14	
10	47	35	28	23	43	33	26	22	28	23	20	24	20	17	20	17	15				13	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11215	11215	11215
5°	11240	11102	11171
10°	11170	10969	10969
15°	11041	10739	10659
20°	10865	10436	10244
25°	10640	10081	9825
30°	10421	9707	9300
35°	10178	9319	8774
40°	9887	8878	8205
45°	9618	8440	7626
50°	9311	7935	7013
55°	8983	7410	6348
60°	8622	6835	5667
65°	8290	6117	4999
70°	7808	5323	4244
75°	7199	4414	3450
80°	6281	3361	3166
85°	5317	3057	2853



TEST NUMBER: P332948

CATALOG NUMBER: SA4XXRDIP-C795D1035U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	130.5	1.9
10°-20°	363.9	5.3
20°-30°	525.5	7.6
30°-40°	595.6	8.6
40°-50°	575.2	8.3
50°-60°	478.3	6.9
60°-70°	330.3	4.8
70°-80°	167.4	2.4
80°-90°	45.7	0.7
90°-100°	367.0	5.3
100°-110°	763.9	11.1
110°-120°	684.2	9.9
120°-130°	575.5	8.3
130°-140°	479.9	6.9
140°-150°	366.6	5.3
150°-160°	257.7	3.7
160°-170°	151.6	2.2
170°-180°	49.3	0.7
0°-30°	1019.8	14.8
0°-40°	1615.5	23.4
0°-60°	2668.9	38.6
0°-90°	3212.3	46.5
90°-120°	1815.1	26.3
90°-150°	3237.1	46.9
90°-180°	3696.0	53.5
0°-180°	6908.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1389	1389	1389	1389	1389	
5°	1387	1382	1370	1380	1378	132
15°	1321	1311	1285	1282	1275	372
25°	1194	1174	1132	1114	1103	550
35°	1033	998	946	910	890	645
45°	842	802	739	689	668	649
55°	638	594	526	473	451	571
65°	434	387	320	276	262	428
75°	231	191	142	118	111	244
85°	57	37	33	31	31	65
90°	1	8	18	20	21	5
95°	33	104	814	403	244	37
105°	117	169	655	1410	1405	125
115°	206	258	584	1122	1349	204
125°	286	340	581	955	1076	255
135°	340	405	576	848	962	263
145°	392	449	573	715	786	246
155°	446	482	557	631	658	206
165°	486	501	534	566	574	137
175°	507	508	512	519	517	48
180°	508	508	508	508	508	



TEST NUMBER: P332948

CATALOG NUMBER: SA4XXRDIP-C795D1035U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2
2.5°	1392.6	1391.8	1391.0	1390.3	1389.5	1388.1	1386.0	1384.0	1381.9	1379.8	1381.9
5°	1387.0	1386.1	1385.1	1384.2	1383.2	1381.4	1378.5	1375.7	1372.8	1370.0	1372.4
7.5°	1374.5	1373.5	1372.5	1371.5	1370.5	1368.2	1364.5	1360.8	1357.1	1353.4	1354.9
10°	1362.6	1361.4	1360.2	1359.0	1357.8	1355.1	1350.9	1346.6	1342.4	1338.1	1339.0
12.5°	1347.2	1345.9	1344.5	1343.1	1341.8	1338.6	1333.6	1328.5	1323.5	1318.5	1319.1
15°	1321.1	1319.0	1316.8	1314.7	1312.6	1308.6	1302.6	1296.7	1290.8	1284.9	1284.4
17.5°	1289.4	1286.3	1283.2	1280.2	1277.1	1272.0	1264.9	1257.8	1250.7	1243.6	1242.3
20°	1264.7	1261.6	1258.6	1255.5	1252.4	1246.9	1238.8	1230.8	1222.7	1214.7	1212.8
22.5°	1237.5	1234.0	1230.6	1227.1	1223.7	1217.6	1209.0	1200.4	1191.8	1183.2	1180.4
25°	1194.5	1190.2	1186.0	1181.7	1177.5	1170.5	1160.8	1151.1	1141.4	1131.7	1127.7
27.5°	1149.4	1144.1	1138.7	1133.4	1128.0	1120.2	1109.8	1099.5	1089.1	1078.8	1073.8
30°	1117.9	1112.0	1106.1	1100.2	1094.3	1085.8	1074.7	1063.6	1052.4	1041.3	1035.4
32.5°	1084.7	1078.1	1071.4	1064.7	1058.1	1049.0	1037.5	1026.0	1014.5	1003.0	996.2
35°	1032.8	1025.3	1017.7	1010.1	1002.6	992.9	981.1	969.2	957.4	945.6	937.6
37.5°	977.3	969.5	961.7	953.9	946.1	935.7	922.6	909.5	896.4	883.3	874.3
40°	938.2	930.4	922.6	914.8	907.0	896.3	882.8	869.4	855.9	842.4	832.5
42.5°	900.7	892.5	884.4	876.2	868.0	856.9	842.9	828.8	814.8	800.7	790.6
45°	842.4	833.7	824.9	816.2	807.4	796.0	781.8	767.6	753.4	739.3	727.7
47.5°	782.2	773.2	764.2	755.1	746.1	734.2	719.5	704.7	690.0	675.2	663.2
50°	741.4	732.2	722.9	713.7	704.5	692.3	677.2	662.1	646.9	631.8	620.0
52.5°	699.7	690.7	681.6	672.6	663.6	651.3	635.8	620.3	604.8	589.3	577.3
55°	638.2	628.7	619.3	609.8	600.4	588.0	572.6	557.2	541.9	526.5	514.2
57.5°	577.4	567.5	557.7	547.9	538.0	525.5	510.4	495.3	480.2	465.0	452.6
60°	534.0	524.5	515.1	505.6	496.1	483.9	468.7	453.6	438.5	423.3	411.0
62.5°	494.8	485.0	475.2	465.3	455.5	442.8	427.3	411.8	396.3	380.8	369.4
65°	434.0	423.8	413.6	403.5	393.3	380.7	365.5	350.4	335.3	320.2	310.0
67.5°	370.8	361.1	351.3	341.6	331.8	320.0	305.9	291.9	277.8	263.8	255.0
70°	330.8	320.9	310.9	301.0	291.1	279.4	265.9	252.4	239.0	225.5	217.7
72.5°	288.3	279.3	270.3	261.3	252.3	241.5	228.8	216.0	203.3	190.6	183.9
75°	230.8	222.1	213.3	204.6	195.8	185.9	174.8	163.7	152.6	141.5	136.0
77.5°	172.5	165.1	157.7	150.3	142.8	134.6	125.7	116.7	107.7	98.7	95.5
80°	135.1	128.2	121.4	114.5	107.7	100.7	93.6	86.5	79.4	72.3	71.6
82.5°	102.8	96.5	90.2	83.9	77.6	72.4	68.4	64.3	60.2	56.2	55.6
85°	57.4	52.7	48.0	43.3	38.5	35.8	35.1	34.4	33.7	33.0	32.5
87.5°	19.8	18.7	17.7	16.4	15.1	14.3	15.3	15.1	15.3	15.5	15.1
90°	1.0	3.0	6.0	7.0	8.0	8.0	14.0	14.0	16.0	18.0	17.0
92.5°	11.4	16.6	26.0	38.1	52.7	73.5	124.2	201.7	277.1	316.7	263.8
95°	32.9	35.9	45.9	58.9	82.9	124.8	211.6	375.4	614.0	813.6	836.6
97.5°	59.1	59.1	67.7	79.7	100.2	135.4	202.3	337.4	574.6	856.9	1051.0
100°	75.9	75.9	82.9	94.8	113.8	145.8	204.7	317.5	521.1	802.6	1058.2
102.5°	91.8	93.4	99.6	110.8	129.0	159.3	212.6	311.9	485.2	734.8	998.3
105°	116.8	119.8	124.8	136.8	154.7	183.7	231.6	314.5	454.2	654.9	889.5
107.5°	144.4	146.4	151.3	164.1	181.3	209.8	253.8	329.2	448.6	610.2	801.6
110°	162.7	164.7	169.7	181.7	199.7	226.6	270.5	340.4	450.2	595.0	757.7



TEST NUMBER: P332948

CATALOG NUMBER: SA4XXRDIP-C795D1035U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	180.3	182.3	188.1	199.3	217.2	244.2	286.5	352.4	455.0	587.8	733.0
115°	205.7	208.6	215.6	225.6	244.6	271.5	311.5	371.4	464.2	584.0	709.8
117.5°	232.0	234.8	241.0	252.0	269.7	297.7	335.6	390.7	474.0	583.0	699.4
120°	249.6	251.6	258.6	269.5	286.5	314.5	352.4	404.3	481.2	583.0	693.8
122.5°	265.6	267.5	274.5	284.7	303.3	330.4	368.4	417.1	488.4	582.2	687.4
125°	286.5	290.5	296.5	307.5	326.4	354.4	390.3	436.3	499.2	581.0	676.9
127.5°	305.1	308.3	315.5	328.0	347.8	376.0	410.7	452.8	507.7	578.8	662.7
130°	315.5	319.5	327.4	342.4	361.4	390.3	424.3	463.2	514.1	578.0	653.9
132.5°	325.8	329.0	339.4	353.6	374.2	401.5	435.5	473.6	519.7	577.2	645.9
135°	340.4	344.4	354.4	371.4	392.3	418.3	451.2	487.2	528.1	576.0	633.9
137.5°	355.0	358.8	369.8	385.9	407.7	432.5	463.2	496.8	533.1	575.8	623.5
140°	365.4	368.4	379.4	396.3	417.3	441.3	471.2	503.1	537.1	575.0	618.0
142.5°	376.6	379.6	389.7	405.9	426.1	449.2	478.4	507.9	540.3	575.0	613.2
145°	392.3	395.3	405.3	419.3	438.3	460.2	486.2	513.1	542.1	573.0	605.0
147.5°	410.1	411.1	419.9	434.3	450.0	469.8	494.2	517.7	543.1	569.4	597.6
150°	421.3	422.3	430.3	442.3	457.2	476.2	498.2	520.1	543.1	567.0	592.0
152.5°	431.7	431.9	439.9	451.0	464.4	481.8	501.4	521.7	541.5	563.0	585.6
155°	446.2	447.2	453.2	463.2	474.2	489.2	506.1	523.1	539.1	557.1	576.0
157.5°	460.4	460.4	466.0	473.8	483.4	495.2	509.5	523.1	536.5	550.9	566.2
160°	469.2	469.2	473.2	480.2	488.2	499.2	511.1	523.1	534.1	546.1	559.1
162.5°	477.2	476.4	479.6	485.8	493.0	501.6	512.7	523.1	531.7	541.3	552.7
165°	486.2	486.2	488.2	493.2	498.2	504.1	513.1	521.1	527.1	534.1	542.1
167.5°	495.2	494.2	495.2	499.0	501.8	506.3	512.9	518.7	522.3	526.9	532.5
170°	499.2	498.2	499.2	502.2	504.1	507.1	512.1	517.1	519.1	522.1	526.1
172.5°	503.1	502.2	502.3	504.5	505.7	507.9	511.3	515.5	515.9	517.3	520.5
175°	507.1	506.1	506.1	507.1	508.1	508.1	510.1	513.1	512.1	512.1	514.1
177.5°	508.9	508.1	507.3	508.1	508.1	508.1	508.9	510.5	508.9	508.9	509.7
180°	508.1	508.1	508.1	508.1	508.1	508.1	508.1	508.1	508.1	508.1	508.1



TEST NUMBER: P332948

CATALOG NUMBER: SA4XXRDIP-C795D1035U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2
2.5°	1384.0	1386.0	1388.1	1389.1	1388.9	1388.7	1388.5	1388.3
5°	1374.7	1377.1	1379.5	1380.4	1379.9	1379.5	1379.0	1378.5
7.5°	1356.4	1358.0	1359.5	1359.8	1359.1	1358.3	1357.6	1356.8
10°	1340.0	1340.9	1341.9	1341.9	1340.9	1340.0	1339.0	1338.1
12.5°	1319.7	1320.2	1320.8	1320.4	1319.1	1317.8	1316.4	1315.1
15°	1284.0	1283.5	1283.0	1282.0	1280.3	1278.6	1277.0	1275.3
17.5°	1241.0	1239.7	1238.3	1236.4	1233.9	1231.4	1228.9	1226.4
20°	1210.9	1209.0	1207.1	1204.7	1201.6	1198.5	1195.4	1192.4
22.5°	1177.6	1174.7	1171.9	1169.2	1166.7	1164.2	1161.7	1159.2
25°	1123.7	1119.7	1115.7	1112.5	1110.1	1107.8	1105.4	1103.0
27.5°	1068.8	1063.9	1058.9	1054.7	1051.3	1047.9	1044.5	1041.1
30°	1029.5	1023.6	1017.7	1012.8	1009.1	1005.3	1001.5	997.7
32.5°	989.3	982.5	975.6	970.4	966.8	963.2	959.6	956.0
35°	929.5	921.5	913.5	907.3	903.1	898.8	894.5	890.3
37.5°	865.3	856.3	847.3	840.7	836.5	832.2	828.0	823.7
40°	822.6	812.6	802.7	795.6	791.4	787.1	782.9	778.6
42.5°	780.5	770.4	760.3	753.0	748.5	744.1	739.7	735.2
45°	716.1	704.5	692.9	685.0	680.7	676.5	672.2	668.0
47.5°	651.2	639.2	627.2	618.8	614.2	609.5	604.8	600.1
50°	608.2	596.4	584.5	576.4	571.9	567.4	562.9	558.4
52.5°	565.3	553.3	541.2	532.9	528.2	523.5	518.9	514.2
55°	501.9	489.6	477.4	469.0	464.5	460.0	455.5	451.0
57.5°	440.1	427.6	415.1	407.2	403.8	400.4	397.0	393.6
60°	398.8	386.5	374.2	366.1	362.4	358.6	354.8	351.0
62.5°	358.1	346.8	335.4	328.2	325.2	322.2	319.1	316.1
65°	299.8	289.7	279.5	273.0	270.2	267.3	264.5	261.7
67.5°	246.3	237.6	228.8	222.9	219.8	216.6	213.5	210.4
70°	209.9	202.1	194.3	189.2	186.9	184.5	182.1	179.8
72.5°	177.3	170.6	163.9	159.5	157.4	155.2	153.0	150.8
75°	130.6	125.2	119.7	116.3	114.9	113.5	112.0	110.6
77.5°	92.4	89.2	86.0	84.2	83.8	83.4	83.0	82.5
80°	70.9	70.2	69.5	69.0	68.8	68.5	68.3	68.1
82.5°	55.1	54.6	54.1	53.7	53.5	53.2	53.0	52.8
85°	32.0	31.6	31.1	30.8	30.8	30.8	30.8	30.8
87.5°	15.1	15.1	15.1	15.1	15.5	15.9	15.9	16.1
90°	18.0	19.0	20.0	20.0	21.0	22.0	21.0	21.0
92.5°	196.1	147.6	117.4	97.4	85.7	80.3	76.9	76.9
95°	739.7	585.0	451.2	354.4	305.5	274.5	256.6	243.6
97.5°	1093.0	1035.4	937.8	833.6	761.9	701.8	671.9	651.1
100°	1204.0	1223.9	1175.0	1101.1	1014.3	953.4	923.4	915.5
102.5°	1198.4	1297.4	1311.6	1280.8	1227.5	1183.4	1151.9	1145.5
105°	1118.1	1290.8	1389.6	1430.6	1432.6	1424.6	1410.6	1404.6
107.5°	1004.1	1188.0	1327.2	1416.2	1465.5	1488.3	1498.3	1500.9
110°	935.4	1108.1	1252.9	1362.7	1433.6	1475.5	1493.5	1502.5



TEST NUMBER: P332948

CATALOG NUMBER: SA4XXRDIP-C795D1035U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	885.1	1037.8	1174.6	1284.4	1364.9	1415.6	1440.8	1455.3
115°	834.6	957.4	1074.2	1170.0	1248.9	1308.8	1340.7	1348.7
117.5°	809.8	911.5	1003.3	1084.6	1151.9	1202.2	1234.5	1240.7
120°	798.6	891.5	971.4	1042.2	1099.1	1143.1	1169.0	1180.0
122.5°	789.1	878.7	951.4	1013.5	1061.6	1099.1	1121.1	1132.1
125°	772.7	858.5	927.4	982.3	1022.3	1051.2	1070.2	1076.2
127.5°	752.7	834.8	903.5	955.6	995.7	1021.5	1037.4	1043.4
130°	736.8	815.6	883.5	936.4	977.3	1002.3	1018.3	1024.3
132.5°	720.0	794.1	860.3	913.3	953.4	981.5	996.7	1002.7
135°	696.8	761.7	822.6	872.5	912.5	940.4	956.4	962.4
137.5°	675.9	730.8	782.1	827.2	864.5	892.1	905.3	912.5
140°	663.9	710.8	755.7	797.6	832.6	854.6	868.5	876.5
142.5°	652.7	694.0	732.6	768.9	799.8	820.2	832.6	838.2
145°	636.9	670.9	700.8	728.8	753.7	770.7	780.7	785.7
147.5°	623.9	650.9	674.9	696.8	715.2	729.8	737.4	739.1
150°	616.0	638.9	658.9	676.9	692.8	705.8	711.8	712.8
152.5°	607.2	626.9	645.3	660.1	673.7	684.2	687.8	688.8
155°	594.0	610.0	624.9	636.9	646.9	654.9	657.9	657.9
157.5°	579.8	593.2	605.8	615.4	622.9	628.9	630.7	630.7
160°	571.0	582.0	593.0	601.0	607.0	613.0	614.0	614.0
162.5°	562.2	571.6	580.2	587.4	591.8	597.8	598.8	598.0
165°	550.1	556.1	563.0	568.0	572.0	576.0	575.0	574.0
167.5°	538.3	542.9	548.5	551.5	553.5	556.1	555.9	555.1
170°	531.1	534.1	538.1	541.1	543.1	544.1	543.1	543.1
172.5°	524.7	526.9	529.3	531.5	532.7	533.7	532.7	531.1
175°	516.1	517.1	519.1	519.1	519.1	521.1	519.1	517.1
177.5°	510.5	511.3	511.3	512.1	511.3	512.1	510.5	508.9
180°	508.1	508.1	508.1	508.1	508.1	508.1	508.1	508.1

(END OF REPORT)