

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332925

Luminaire Tested: **SA4XXRDIP-C795D365U835-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332925
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 365 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4799.7 lumens
Efficiency: N/A
Efficacy: 137.1 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 35
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332925
CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

Luminous Intensity Polar Plot

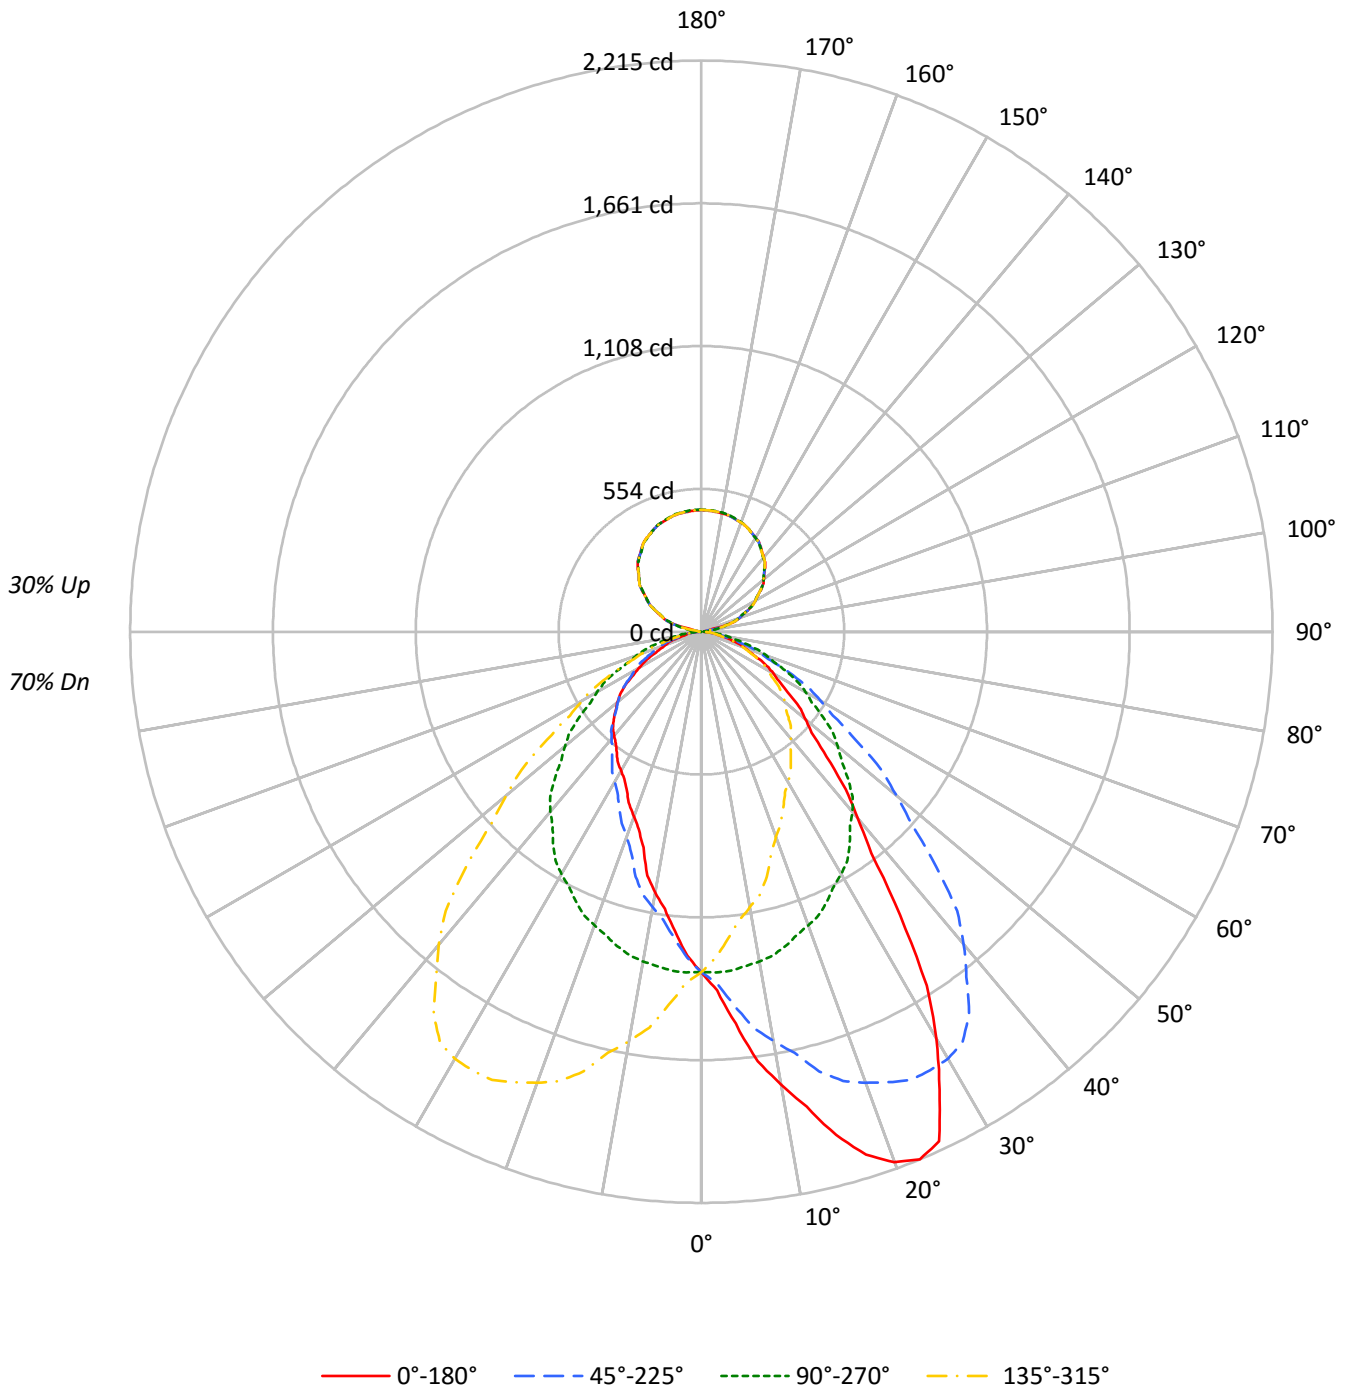



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20													
RC	80					70					50					30					10					0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0				
RCR	0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	74	74	74	74	74	74	74	74	74	74	74	74	74	74	70				
	1	103	99	95	91	97	93	90	87	84	81	79	75	73	71	67	65	64	64	64	64	64	64	64	64	64	64	64	64	60				
	2	94	87	81	76	89	82	77	73	74	70	66	66	63	60	59	57	55	55	55	55	55	55	55	55	55	55	55	55	51				
	3	86	77	70	64	81	73	67	61	66	61	57	59	55	52	53	50	47	47	47	47	47	47	47	47	47	47	47	47	44				
	4	79	69	61	55	75	65	58	53	59	53	49	53	49	45	48	44	41	41	41	41	41	41	41	41	41	41	41	41	38				
	5	73	61	53	47	69	59	51	46	53	47	43	48	43	39	43	39	36	36	36	36	36	36	36	36	36	36	36	36	34				
	6	68	55	47	42	64	53	46	40	48	42	37	44	39	35	40	35	32	32	32	32	32	32	32	32	32	32	32	32	30				
	7	63	50	42	37	59	48	41	36	44	38	33	40	35	31	36	32	29	29	29	29	29	29	29	29	29	29	29	29	27				
	8	58	46	38	33	55	44	37	32	40	34	30	37	32	28	33	29	26	26	26	26	26	26	26	26	26	26	26	26	24				
	9	54	42	35	29	52	40	33	29	37	31	27	34	29	25	31	27	24	24	24	24	24	24	24	24	24	24	24	24	22				
	10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	29	25	22	22	22	22	22	22	22	22	22	22	22	22	20				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10656	10656	10656	10656
5°	12361	10689	9447	10689
10°	14623	10642	8432	10642
15°	16891	10543	7245	10543
20°	18806	10408	6552	10408
25°	19414	10276	6083	10276
30°	16995	10113	5800	10113
35°	13230	9875	5629	9875
40°	9921	9601	5538	9601
45°	7833	9162	5489	9162
50°	6612	8657	5330	8657
55°	5764	8099	5046	8099
60°	5186	7522	4466	7522
65°	4571	6898	3840	6898
70°	4116	6253	3465	6253
75°	3450	5540	2954	5540
80°	2920	4723	2771	4723
85°	2464	3696	2464	3696



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.9	2.7
10°-20°	385.8	8.0
20°-30°	603.4	12.6
30°-40°	670.8	14.0
40°-50°	595.2	12.4
50°-60°	463.8	9.7
60°-70°	303.6	6.3
70°-80°	149.3	3.1
80°-90°	38.2	0.8
90°-100°	16.2	0.3
100°-110°	103.0	2.1
110°-120°	197.1	4.1
120°-130°	250.2	5.2
130°-140°	267.7	5.6
140°-150°	250.4	5.2
150°-160°	201.9	4.2
160°-170°	130.2	2.7
170°-180°	44.9	0.9
0°-30°	1117.1	23.3
0°-40°	1787.9	37.3
0°-60°	2846.9	59.3
0°-90°	3338.1	69.5
90°-120°	316.3	6.6
90°-150°	1084.6	22.6
90°-180°	1462.0	30.5
0°-180°	4799.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1320	1320	1320	1320	1320	
5°	1525	1319	1166	1319	1525	154
15°	2021	1262	867	1262	2021	575
25°	2180	1154	683	1154	2180	967
35°	1342	1002	571	1002	1342	841
45°	686	802	481	802	686	543
55°	410	575	358	575	410	372
65°	239	361	201	361	239	241
75°	111	178	95	178	111	122
85°	27	40	27	40	27	30
90°	11	1	11	1	11	6
95°	10	19	10	19	10	8
105°	101	106	101	106	101	88
115°	200	199	200	199	200	198
125°	281	279	281	279	281	251
135°	349	346	349	346	349	268
145°	402	399	402	399	402	251
155°	438	438	438	438	438	202
165°	460	462	460	462	460	130
175°	470	472	470	472	470	45
180°	472	472	472	472	472	



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0
2.5°	1392.3	1396.2	1392.3	1391.9	1387.7	1386.4	1384.7	1379.2	1368.9	1363.0	1364.3
5°	1525.3	1538.6	1531.2	1530.1	1518.4	1506.7	1499.2	1482.2	1464.1	1451.9	1441.8
7.5°	1679.1	1686.8	1682.1	1674.6	1655.7	1645.0	1627.7	1605.3	1572.9	1548.1	1525.4
10°	1783.8	1790.2	1788.0	1774.2	1760.4	1732.2	1716.2	1684.9	1643.9	1611.5	1581.2
12.5°	1886.7	1893.6	1874.8	1875.5	1849.3	1827.1	1801.8	1762.3	1715.0	1673.2	1635.2
15°	2021.0	2012.5	2012.5	2001.8	1972.6	1941.7	1915.7	1874.2	1814.6	1764.6	1712.0
17.5°	2126.1	2129.0	2124.7	2099.6	2076.6	2044.7	1996.9	1948.5	1893.2	1826.1	1772.3
20°	2189.0	2189.0	2184.3	2167.2	2137.5	2103.4	2051.8	1999.2	1929.0	1861.4	1800.8
22.5°	2214.6	2216.3	2210.6	2196.6	2169.8	2136.6	2092.7	2039.2	1966.8	1890.8	1815.7
25°	2179.5	2189.6	2190.6	2186.9	2178.9	2158.7	2121.0	2066.2	2001.3	1918.9	1838.0
27.5°	2001.0	2013.7	2024.9	2043.3	2067.8	2080.5	2082.2	2054.4	1997.8	1918.4	1837.1
30°	1823.1	1833.8	1868.3	1913.5	1948.7	1980.6	2008.2	2015.7	1983.8	1912.5	1826.9
32.5°	1625.7	1640.2	1674.8	1723.4	1781.9	1835.9	1898.0	1929.7	1928.9	1886.1	1806.9
35°	1342.4	1353.0	1384.9	1436.0	1506.2	1586.5	1684.9	1761.4	1813.6	1809.8	1761.4
37.5°	1082.6	1094.6	1126.9	1169.2	1237.3	1336.7	1431.9	1537.4	1633.8	1687.9	1671.8
40°	941.4	941.9	973.3	1016.9	1080.7	1167.4	1271.1	1388.1	1495.5	1583.3	1600.3
42.5°	829.9	830.0	850.7	897.7	943.7	1025.3	1124.3	1240.5	1366.2	1467.6	1512.7
45°	686.1	690.9	707.9	736.1	772.2	841.4	920.6	1028.6	1169.5	1289.7	1364.7
47.5°	581.0	588.0	598.8	621.8	650.6	696.7	762.2	859.2	973.9	1106.1	1212.8
50°	526.5	527.6	541.4	554.2	579.2	615.9	673.3	754.1	859.4	986.6	1105.2
52.5°	479.7	479.5	487.8	504.0	524.3	552.9	599.3	672.9	766.3	880.2	1002.6
55°	409.5	412.2	418.6	431.3	446.7	467.0	503.6	559.0	632.4	729.7	840.8
57.5°	356.1	357.5	362.5	367.9	382.1	396.8	424.3	462.7	524.6	604.3	707.9
60°	321.2	321.8	323.4	331.3	342.5	356.3	374.9	407.4	459.5	532.4	614.3
62.5°	287.2	288.1	290.6	296.4	305.1	314.6	334.1	360.2	403.3	465.6	539.4
65°	239.3	239.9	243.6	245.7	252.6	261.1	275.5	293.0	322.8	374.9	430.8
67.5°	200.0	200.0	200.2	203.1	207.8	213.5	222.1	236.1	258.6	290.6	339.8
70°	174.4	174.4	175.5	177.1	179.8	184.5	189.3	200.0	216.5	242.5	280.3
72.5°	150.6	151.0	152.1	152.4	153.8	157.7	161.3	168.1	180.3	200.0	230.5
75°	110.6	112.2	114.9	117.0	119.7	119.1	122.9	127.1	130.8	142.5	160.1
77.5°	82.3	81.5	81.8	83.6	83.9	84.5	87.1	90.4	93.2	98.7	105.0
80°	62.8	62.8	64.4	64.9	64.4	64.9	67.5	69.1	70.2	72.3	78.2
82.5°	47.4	48.3	47.8	48.3	48.6	49.1	51.4	51.7	52.8	53.6	56.1
85°	26.6	27.1	27.7	26.6	26.6	26.6	27.7	28.2	29.3	28.7	29.8
87.5°	11.5	11.0	11.4	11.4	11.8	11.3	11.6	12.4	11.4	11.8	11.6
90°	10.6	10.4	10.3	10.1	10.0	9.7	9.2	8.7	8.2	7.8	7.1
92.5°	9.8	9.7	9.7	9.7	9.6	9.4	8.9	8.4	8.0	7.5	6.9
95°	10.2	10.2	10.1	10.0	9.9	9.7	9.2	8.7	8.2	7.8	7.7
97.5°	9.9	9.8	9.7	9.7	9.6	9.5	9.5	9.4	9.4	9.3	18.1
100°	9.9	9.8	9.7	9.7	9.6	10.2	11.5	12.9	14.2	15.6	26.4
102.5°	10.2	10.2	10.1	10.1	10.1	17.3	31.7	46.1	60.5	74.9	76.3
105°	100.7	103.5	106.4	109.2	112.0	113.1	112.4	111.7	111.0	110.3	109.9
107.5°	140.4	140.1	139.8	139.5	139.2	138.9	138.5	138.2	137.8	137.5	136.9
110°	157.6	157.4	157.2	156.9	156.7	156.5	156.3	156.2	156.0	155.9	155.4



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	174.9	174.6	174.3	174.0	173.7	173.5	173.6	173.6	173.6	173.7	173.4
115°	200.0	200.0	200.0	200.0	200.0	200.0	199.8	199.6	199.5	199.3	199.4
117.5°	225.6	225.7	225.7	225.7	225.7	225.8	225.8	225.8	225.9	225.9	225.7
120°	241.7	241.9	242.0	242.2	242.4	242.4	242.2	242.0	241.9	241.7	241.8
122.5°	257.6	257.7	257.9	258.0	258.2	258.2	258.1	258.0	257.9	257.9	257.7
125°	281.3	281.2	281.2	281.1	281.0	280.8	280.6	280.4	280.1	279.9	280.1
127.5°	302.2	302.2	302.3	302.4	302.4	302.5	302.5	302.6	302.6	302.7	302.3
130°	316.3	316.3	316.3	316.3	316.3	316.3	316.2	316.1	316.0	316.0	315.7
132.5°	329.3	329.4	329.4	329.5	329.6	329.6	329.5	329.4	329.3	329.2	328.9
135°	348.8	348.7	348.5	348.3	348.2	348.0	347.9	347.7	347.6	347.4	347.1
137.5°	365.5	365.5	365.6	365.6	365.7	365.6	365.5	365.3	365.1	364.9	364.6
140°	377.1	377.0	376.9	376.9	376.8	376.6	376.4	376.1	375.9	375.7	375.5
142.5°	386.7	386.7	386.7	386.7	386.6	386.5	386.4	386.2	386.0	385.9	385.8
145°	401.5	401.3	401.2	401.0	400.8	400.7	400.7	400.6	400.5	400.4	400.4
147.5°	413.7	413.6	413.5	413.5	413.4	413.3	413.3	413.2	413.1	413.1	413.1
150°	421.6	421.5	421.5	421.4	421.3	421.3	421.3	421.3	421.3	421.3	421.3
152.5°	428.4	428.5	428.5	428.5	428.6	428.6	428.4	428.3	428.2	428.1	428.2
155°	437.5	437.8	438.0	438.2	438.5	438.4	438.1	437.8	437.5	437.2	437.4
157.5°	445.2	445.6	446.0	446.4	446.8	446.8	446.4	446.0	445.6	445.2	445.4
160°	450.2	450.7	451.2	451.7	452.1	452.1	451.7	451.2	450.7	450.2	450.3
162.5°	454.2	454.7	455.3	455.8	456.3	456.4	455.9	455.4	455.0	454.5	454.6
165°	459.8	460.5	461.2	461.9	462.6	462.7	462.0	461.4	460.8	460.1	460.1
167.5°	464.0	464.7	465.5	466.3	467.1	467.1	466.5	465.8	465.1	464.4	464.4
170°	466.5	467.3	468.1	468.9	469.6	469.7	469.1	468.5	467.8	467.2	467.1
172.5°	467.9	468.8	469.6	470.5	471.3	471.4	470.8	470.2	469.5	468.9	468.8
175°	469.7	470.6	471.6	472.5	473.5	473.6	472.9	472.2	471.5	470.7	470.7
177.5°	470.8	471.6	472.3	473.1	473.8	474.0	473.5	473.0	472.5	471.9	471.8
180°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0
2.5°	1360.0	1354.1	1351.1	1344.3	1336.2	1331.9	1328.1	1322.6	1315.3	1307.7	1302.1
5°	1429.0	1416.3	1400.3	1381.2	1364.2	1347.7	1333.3	1319.0	1302.5	1285.4	1268.4
7.5°	1499.9	1474.8	1447.7	1416.3	1385.8	1358.0	1332.5	1308.0	1280.3	1255.6	1233.0
10°	1549.2	1515.2	1477.4	1437.6	1397.7	1363.1	1329.1	1298.2	1264.2	1233.9	1208.3
12.5°	1589.2	1549.2	1503.8	1454.1	1406.2	1364.4	1325.2	1285.0	1246.3	1213.4	1179.4
15°	1655.6	1600.8	1539.7	1480.1	1417.9	1361.0	1308.3	1261.5	1217.4	1171.1	1138.7
17.5°	1701.2	1636.2	1561.9	1490.3	1416.8	1349.7	1289.0	1233.2	1182.3	1135.0	1096.4
20°	1728.5	1656.7	1574.2	1492.9	1410.4	1338.6	1273.2	1211.5	1158.9	1107.8	1067.9
22.5°	1743.8	1664.3	1574.2	1489.0	1403.6	1325.9	1254.1	1189.8	1132.5	1081.4	1037.3
25°	1748.7	1663.6	1571.6	1473.7	1380.1	1297.7	1223.2	1153.6	1089.7	1038.7	991.9
27.5°	1741.9	1641.7	1547.4	1447.0	1350.4	1263.5	1185.4	1112.2	1048.3	993.5	945.5
30°	1731.7	1624.2	1523.2	1418.9	1321.1	1237.6	1155.1	1084.9	1018.5	961.6	913.2
32.5°	1709.5	1603.0	1494.2	1387.5	1288.3	1202.3	1124.1	1053.5	988.3	930.1	878.7
35°	1665.7	1557.8	1439.7	1330.1	1232.8	1143.4	1070.1	1002.0	939.8	877.5	823.3
37.5°	1608.0	1497.7	1380.2	1260.2	1162.8	1078.5	1011.1	947.2	886.5	829.7	769.6
40°	1553.5	1453.0	1331.7	1212.6	1112.6	1031.2	969.0	911.0	849.9	793.5	733.4
42.5°	1487.5	1401.9	1279.4	1159.8	1061.1	982.7	924.8	868.1	812.4	757.8	695.1
45°	1377.5	1312.6	1197.7	1082.8	983.4	905.7	852.5	802.5	753.6	701.5	642.5
47.5°	1251.3	1207.4	1108.2	990.6	898.6	828.7	777.3	736.5	695.1	643.0	591.2
50°	1163.7	1135.5	1039.7	932.3	844.6	780.2	727.6	689.3	654.7	604.7	558.4
52.5°	1070.1	1055.1	974.2	871.5	786.7	723.6	678.6	644.2	609.2	567.7	524.4
55°	927.5	935.5	866.9	778.1	698.3	645.1	604.2	575.4	545.7	510.6	477.1
57.5°	781.8	810.9	764.9	686.9	612.1	563.0	532.2	508.0	483.0	453.9	425.3
60°	694.6	719.0	693.0	624.4	559.0	513.2	484.5	465.9	440.9	414.3	392.5
62.5°	609.5	635.7	620.2	564.8	504.1	464.7	439.4	422.1	403.5	380.3	357.6
65°	502.6	519.6	512.2	473.9	430.8	397.3	373.9	361.1	344.1	327.1	306.9
67.5°	384.9	417.8	413.5	393.1	355.9	329.7	314.4	303.1	287.6	275.0	261.2
70°	316.4	346.8	346.2	329.7	309.5	285.1	274.4	264.9	251.0	238.8	227.6
72.5°	259.0	286.8	290.9	278.3	264.4	245.9	235.7	229.1	215.7	207.3	198.3
75°	181.4	201.6	206.9	206.9	200.5	190.9	181.9	177.6	168.1	160.6	155.3
77.5°	118.9	131.7	140.0	141.9	142.9	139.7	132.2	129.2	121.9	119.2	114.1
80°	84.0	92.5	102.1	105.3	108.0	106.9	103.7	101.6	94.7	92.0	89.9
82.5°	58.1	62.8	70.6	77.6	76.9	79.7	76.9	75.2	70.0	69.0	66.9
85°	30.3	30.8	31.9	36.7	39.4	40.4	41.0	39.9	38.3	38.3	34.6
87.5°	11.5	11.0	11.7	11.5	11.8	13.3	14.4	14.7	13.6	12.5	11.4
90°	6.5	5.9	5.3	4.5	3.7	2.8	1.9	1.1	1.9	2.8	3.7
92.5°	6.2	5.6	5.0	4.6	4.6	4.5	4.5	4.5	4.5	4.5	4.6
95°	7.6	7.5	7.5	8.8	11.4	14.1	16.8	19.4	16.8	14.1	11.4
97.5°	26.9	35.6	44.4	47.9	46.3	44.6	42.9	41.3	42.9	44.6	46.3
100°	37.2	48.1	58.9	63.6	62.2	60.8	59.4	58.0	59.4	60.8	62.2
102.5°	77.8	79.2	80.6	80.8	79.7	78.7	77.7	76.6	77.7	78.7	79.7
105°	109.5	109.1	108.7	108.3	107.8	107.3	106.8	106.4	106.8	107.3	107.8
107.5°	136.4	135.9	135.3	135.0	134.7	134.5	134.2	134.0	134.2	134.5	134.7
110°	154.9	154.4	154.0	153.6	153.4	153.1	152.9	152.7	152.9	153.1	153.4



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	173.2	173.0	172.8	172.5	172.0	171.6	171.2	170.8	171.2	171.6	172.0
115°	199.5	199.6	199.6	199.6	199.3	199.1	198.9	198.6	198.9	199.1	199.3
117.5°	225.6	225.4	225.2	225.0	224.7	224.3	224.0	223.7	224.0	224.3	224.7
120°	241.9	242.0	242.0	241.9	241.6	241.3	241.0	240.7	241.0	241.3	241.6
122.5°	257.6	257.5	257.4	257.3	257.1	256.9	256.7	256.5	256.7	256.9	257.1
125°	280.2	280.4	280.5	280.5	280.1	279.8	279.5	279.2	279.5	279.8	280.1
127.5°	301.9	301.6	301.2	301.0	300.9	300.8	300.8	300.7	300.8	300.8	300.9
130°	315.5	315.2	315.0	314.9	314.8	314.7	314.6	314.5	314.6	314.7	314.8
132.5°	328.6	328.3	328.0	327.8	327.7	327.5	327.4	327.3	327.4	327.5	327.7
135°	346.8	346.5	346.1	346.0	346.1	346.2	346.3	346.3	346.3	346.2	346.1
137.5°	364.2	363.9	363.6	363.4	363.3	363.3	363.3	363.2	363.3	363.3	363.3
140°	375.4	375.2	375.0	374.9	374.7	374.6	374.4	374.3	374.4	374.6	374.7
142.5°	385.7	385.6	385.5	385.3	385.0	384.7	384.4	384.2	384.4	384.7	385.0
145°	400.4	400.4	400.4	400.3	400.1	399.8	399.6	399.4	399.6	399.8	400.1
147.5°	413.2	413.3	413.4	413.2	412.8	412.3	411.9	411.4	411.9	412.3	412.8
150°	421.4	421.5	421.6	421.5	421.2	420.8	420.5	420.2	420.5	420.8	421.2
152.5°	428.3	428.5	428.6	428.6	428.3	428.1	427.8	427.6	427.8	428.1	428.3
155°	437.6	437.9	438.1	438.2	438.1	438.0	438.0	437.9	438.0	438.0	438.1
157.5°	445.7	446.0	446.2	446.4	446.4	446.5	446.5	446.6	446.5	446.5	446.4
160°	450.4	450.5	450.6	450.7	451.0	451.2	451.4	451.7	451.4	451.2	451.0
162.5°	454.6	454.7	454.8	455.0	455.3	455.6	455.9	456.2	455.9	455.6	455.3
165°	460.1	460.1	460.1	460.3	460.7	461.1	461.5	461.9	461.5	461.1	460.7
167.5°	464.5	464.5	464.6	464.8	465.2	465.6	466.0	466.4	466.0	465.6	465.2
170°	467.1	467.0	466.9	467.1	467.6	468.0	468.5	469.0	468.5	468.0	467.6
172.5°	468.8	468.7	468.6	468.8	469.3	469.7	470.2	470.7	470.2	469.7	469.3
175°	470.6	470.5	470.4	470.6	471.1	471.6	472.0	472.5	472.0	471.6	471.1
177.5°	471.7	471.6	471.4	471.6	472.0	472.5	472.9	473.4	472.9	472.5	472.0
180°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0
2.5°	1296.2	1291.9	1286.4	1280.0	1272.4	1265.6	1262.6	1265.1	1266.4	1263.0	1262.6
5°	1256.7	1243.4	1232.8	1216.8	1204.1	1193.4	1186.0	1182.8	1183.9	1175.4	1173.2
7.5°	1212.4	1196.6	1179.2	1160.3	1142.6	1127.0	1118.8	1114.3	1105.3	1101.4	1094.9
10°	1183.9	1162.6	1145.6	1123.2	1103.0	1084.4	1075.4	1067.9	1058.9	1054.6	1045.6
12.5°	1154.5	1129.8	1111.1	1087.9	1067.3	1044.8	1036.2	1022.4	1008.3	999.3	987.7
15°	1113.1	1083.4	1060.5	1032.8	1008.4	982.8	960.0	934.4	924.9	904.7	893.0
17.5°	1064.7	1034.5	1006.2	969.1	931.4	899.7	875.3	850.8	836.2	823.3	817.3
20°	1032.8	1005.2	965.8	922.7	880.7	845.6	825.9	810.0	794.0	785.0	778.6
22.5°	1002.6	967.3	921.6	875.1	833.1	805.6	788.9	772.5	759.6	751.0	742.4
25°	952.0	905.7	857.3	804.1	775.4	751.5	733.4	720.1	712.1	701.0	696.7
27.5°	900.0	843.9	790.5	754.8	724.9	703.0	687.2	677.2	667.1	660.0	654.5
30°	860.0	803.1	755.2	721.2	690.9	672.8	660.0	648.3	640.3	634.5	630.2
32.5°	820.4	763.5	723.3	686.7	662.8	645.1	631.5	622.8	616.5	609.0	606.4
35°	763.2	712.7	677.6	644.6	620.1	604.2	593.5	584.5	579.2	577.0	575.4
37.5°	708.2	666.8	629.1	602.0	580.2	567.7	555.1	550.7	547.0	543.2	544.9
40°	673.3	634.5	601.0	572.3	554.7	540.9	533.4	528.1	524.9	524.9	524.9
42.5°	643.1	605.1	572.5	546.7	529.2	517.5	509.2	504.7	503.6	503.2	505.8
45°	596.2	561.1	528.1	506.8	491.9	480.2	475.5	471.7	471.7	473.9	474.4
47.5°	549.7	516.8	490.4	466.5	452.9	445.6	441.4	439.5	439.7	441.9	444.3
50°	521.2	488.8	462.7	441.4	428.7	421.7	418.0	417.0	418.0	418.0	421.7
52.5°	490.1	461.1	435.5	417.6	403.1	396.6	394.6	393.1	393.8	395.5	397.1
55°	444.6	418.6	394.1	377.1	366.4	362.2	357.4	357.9	356.9	357.9	357.9
57.5°	399.0	375.6	352.8	339.3	330.0	323.8	318.6	320.1	318.5	318.3	317.4
60°	369.6	344.1	326.0	313.8	303.1	297.8	293.0	294.1	292.5	291.4	289.3
62.5°	337.7	316.4	299.2	287.4	278.9	272.7	267.9	266.9	263.2	259.5	254.9
65°	291.4	273.9	258.5	247.3	239.3	234.5	230.8	227.6	219.6	211.1	206.9
67.5°	246.5	233.8	219.4	210.0	203.5	197.2	190.1	184.7	177.2	172.5	169.9
70°	217.5	205.3	193.1	184.0	177.1	171.3	163.3	159.6	154.2	152.1	149.4
72.5°	189.9	178.5	167.1	158.9	151.6	147.0	140.7	137.0	134.7	133.8	131.2
75°	147.9	138.8	130.3	122.9	117.0	113.8	111.2	108.5	107.4	102.6	100.0
77.5°	107.9	101.9	96.6	91.3	87.1	85.0	79.9	76.8	75.0	72.8	72.2
80°	84.0	79.8	74.5	71.3	65.4	63.3	61.2	60.6	60.1	59.6	59.0
82.5°	63.2	58.9	53.6	51.7	50.1	48.8	47.5	47.0	46.5	46.8	46.7
85°	31.9	29.8	29.8	29.3	28.7	28.2	27.7	27.7	27.1	27.7	27.1
87.5°	11.5	11.3	11.4	10.7	11.2	11.3	11.0	11.1	11.6	10.9	10.9
90°	4.5	5.3	5.9	6.5	7.1	7.8	8.2	8.7	9.2	9.7	10.0
92.5°	4.6	5.0	5.6	6.2	6.9	7.5	8.0	8.4	8.9	9.4	9.6
95°	8.8	7.5	7.5	7.6	7.7	7.8	8.2	8.7	9.2	9.7	9.9
97.5°	47.9	44.4	35.6	26.9	18.1	9.3	9.4	9.4	9.5	9.5	9.6
100°	63.6	58.9	48.1	37.2	26.4	15.6	14.2	12.9	11.5	10.2	9.6
102.5°	80.8	80.6	79.2	77.8	76.3	74.9	60.5	46.1	31.7	17.3	10.1
105°	108.3	108.7	109.1	109.5	109.9	110.3	111.0	111.7	112.4	113.1	112.0
107.5°	135.0	135.3	135.9	136.4	136.9	137.5	137.8	138.2	138.5	138.9	139.2
110°	153.6	154.0	154.4	154.9	155.4	155.9	156.0	156.2	156.3	156.5	156.7



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	172.5	172.8	173.0	173.2	173.4	173.7	173.6	173.6	173.6	173.5	173.7
115°	199.6	199.6	199.6	199.5	199.4	199.3	199.5	199.6	199.8	200.0	200.0
117.5°	225.0	225.2	225.4	225.6	225.7	225.9	225.9	225.8	225.8	225.8	225.7
120°	241.9	242.0	242.0	241.9	241.8	241.7	241.9	242.0	242.2	242.4	242.4
122.5°	257.3	257.4	257.5	257.6	257.7	257.9	257.9	258.0	258.1	258.2	258.2
125°	280.5	280.5	280.4	280.2	280.1	279.9	280.1	280.4	280.6	280.8	281.0
127.5°	301.0	301.2	301.6	301.9	302.3	302.7	302.6	302.6	302.5	302.5	302.4
130°	314.9	315.0	315.2	315.5	315.7	316.0	316.0	316.1	316.2	316.3	316.3
132.5°	327.8	328.0	328.3	328.6	328.9	329.2	329.3	329.4	329.5	329.6	329.6
135°	346.0	346.1	346.5	346.8	347.1	347.4	347.6	347.7	347.9	348.0	348.2
137.5°	363.4	363.6	363.9	364.2	364.6	364.9	365.1	365.3	365.5	365.6	365.7
140°	374.9	375.0	375.2	375.4	375.5	375.7	375.9	376.1	376.4	376.6	376.8
142.5°	385.3	385.5	385.6	385.7	385.8	385.9	386.0	386.2	386.4	386.5	386.6
145°	400.3	400.4	400.4	400.4	400.4	400.4	400.5	400.6	400.7	400.7	400.8
147.5°	413.2	413.4	413.3	413.2	413.1	413.1	413.1	413.2	413.3	413.3	413.4
150°	421.5	421.6	421.5	421.4	421.3	421.3	421.3	421.3	421.3	421.3	421.3
152.5°	428.6	428.6	428.5	428.3	428.2	428.1	428.2	428.3	428.4	428.6	428.6
155°	438.2	438.1	437.9	437.6	437.4	437.2	437.5	437.8	438.1	438.4	438.5
157.5°	446.4	446.2	446.0	445.7	445.4	445.2	445.6	446.0	446.4	446.8	446.8
160°	450.7	450.6	450.5	450.4	450.3	450.2	450.7	451.2	451.7	452.1	452.1
162.5°	455.0	454.8	454.7	454.6	454.6	454.5	455.0	455.4	455.9	456.4	456.3
165°	460.3	460.1	460.1	460.1	460.1	460.1	460.8	461.4	462.0	462.7	462.6
167.5°	464.8	464.6	464.5	464.5	464.4	464.4	465.1	465.8	466.5	467.1	467.1
170°	467.1	466.9	467.0	467.1	467.1	467.2	467.8	468.5	469.1	469.7	469.6
172.5°	468.8	468.6	468.7	468.8	468.8	468.9	469.5	470.2	470.8	471.4	471.3
175°	470.6	470.4	470.5	470.6	470.7	470.7	471.5	472.2	472.9	473.6	473.5
177.5°	471.6	471.4	471.6	471.7	471.8	471.9	472.5	473.0	473.5	474.0	473.8
180°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0
2.5°	1260.0	1260.9	1257.9	1257.0	1257.9	1260.9	1260.0	1262.6	1263.0	1266.4	1265.1
5°	1169.0	1167.9	1165.3	1165.8	1165.3	1167.9	1169.0	1173.2	1175.4	1183.9	1182.8
7.5°	1091.1	1087.0	1088.1	1083.9	1088.1	1087.0	1091.1	1094.9	1101.4	1105.3	1114.3
10°	1043.5	1037.6	1032.8	1028.6	1032.8	1037.6	1043.5	1045.6	1054.6	1058.9	1067.9
12.5°	978.4	973.4	966.9	968.2	966.9	973.4	978.4	987.7	999.3	1008.3	1022.4
15°	886.0	878.1	865.3	866.9	865.3	878.1	886.0	893.0	904.7	924.9	934.4
17.5°	807.9	808.0	802.1	803.5	802.1	808.0	807.9	817.3	823.3	836.2	850.8
20°	767.4	763.7	764.2	762.7	764.2	763.7	767.4	778.6	785.0	794.0	810.0
22.5°	739.4	734.8	731.1	727.8	731.1	734.8	739.4	742.4	751.0	759.6	772.5
25°	691.9	688.7	683.9	682.9	683.9	688.7	691.9	696.7	701.0	712.1	720.1
27.5°	650.2	649.6	647.7	645.2	647.7	649.6	650.2	654.5	660.0	667.1	677.2
30°	626.0	624.9	623.8	622.2	623.8	624.9	626.0	630.2	634.5	640.3	648.3
32.5°	604.3	603.6	602.6	602.7	602.6	603.6	604.3	606.4	609.0	616.5	622.8
35°	573.3	572.8	571.7	571.2	571.7	572.8	573.3	575.4	577.0	579.2	584.5
37.5°	544.4	545.8	545.1	545.0	545.1	545.8	544.4	544.9	543.2	547.0	550.7
40°	524.4	524.9	526.0	525.5	526.0	524.9	524.4	524.9	524.9	524.9	528.1
42.5°	507.8	507.9	509.4	507.6	509.4	507.9	507.8	505.8	503.2	503.6	504.7
45°	478.1	481.3	480.8	480.8	480.8	481.3	478.1	474.4	473.9	471.7	471.7
47.5°	445.7	448.4	449.2	449.1	449.2	448.4	445.7	444.3	441.9	439.7	439.5
50°	424.4	423.3	424.9	424.4	424.9	423.3	424.4	421.7	418.0	418.0	417.0
52.5°	398.5	398.7	398.6	398.0	398.6	398.7	398.5	397.1	395.5	393.8	393.1
55°	358.5	359.0	357.9	358.5	357.9	359.0	358.5	357.9	357.9	356.9	357.9
57.5°	315.1	312.5	313.6	312.3	313.6	312.5	315.1	317.4	318.3	318.5	320.1
60°	284.0	279.7	278.7	276.6	278.7	279.7	284.0	289.3	291.4	292.5	294.1
62.5°	249.1	246.1	242.5	244.2	242.5	246.1	249.1	254.9	259.5	263.2	266.9
65°	202.6	200.5	198.9	201.0	198.9	200.5	202.6	206.9	211.1	219.6	227.6
67.5°	167.7	166.6	166.6	165.5	166.6	166.6	167.7	169.9	172.5	177.2	184.7
70°	149.4	147.9	147.9	146.8	147.9	147.9	149.4	149.4	152.1	154.2	159.6
72.5°	130.7	129.1	129.6	128.9	129.6	129.1	130.7	131.2	133.8	134.7	137.0
75°	96.8	94.1	94.1	94.7	94.1	94.1	96.8	100.0	102.6	107.4	108.5
77.5°	72.2	71.7	72.4	71.5	72.4	71.7	72.2	72.2	72.8	75.0	76.8
80°	59.0	58.5	58.0	59.6	58.0	58.5	59.0	59.0	59.6	60.1	60.6
82.5°	45.8	45.7	45.6	47.7	45.6	45.7	45.8	46.7	46.8	46.5	47.0
85°	27.7	26.6	27.7	26.6	27.7	26.6	27.7	27.1	27.7	27.1	27.7
87.5°	11.8	11.4	11.0	11.5	11.0	11.4	11.8	10.9	10.9	11.6	11.1
90°	10.1	10.3	10.4	10.6	10.4	10.3	10.1	10.0	9.7	9.2	8.7
92.5°	9.7	9.7	9.7	9.8	9.7	9.7	9.7	9.6	9.4	8.9	8.4
95°	10.0	10.1	10.2	10.2	10.2	10.1	10.0	9.9	9.7	9.2	8.7
97.5°	9.7	9.7	9.8	9.9	9.8	9.7	9.7	9.6	9.5	9.5	9.4
100°	9.7	9.7	9.8	9.9	9.8	9.7	9.7	9.6	10.2	11.5	12.9
102.5°	10.1	10.1	10.2	10.2	10.2	10.1	10.1	10.1	17.3	31.7	46.1
105°	109.2	106.4	103.5	100.7	103.5	106.4	109.2	112.0	113.1	112.4	111.7
107.5°	139.5	139.8	140.1	140.4	140.1	139.8	139.5	139.2	138.9	138.5	138.2
110°	156.9	157.2	157.4	157.6	157.4	157.2	156.9	156.7	156.5	156.3	156.2



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	174.0	174.3	174.6	174.9	174.6	174.3	174.0	173.7	173.5	173.6	173.6
115°	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	199.8	199.6
117.5°	225.7	225.7	225.7	225.6	225.7	225.7	225.7	225.7	225.8	225.8	225.8
120°	242.2	242.0	241.9	241.7	241.9	242.0	242.2	242.4	242.4	242.2	242.0
122.5°	258.0	257.9	257.7	257.6	257.7	257.9	258.0	258.2	258.2	258.1	258.0
125°	281.1	281.2	281.2	281.3	281.2	281.2	281.1	281.0	280.8	280.6	280.4
127.5°	302.4	302.3	302.2	302.2	302.2	302.3	302.4	302.4	302.5	302.5	302.6
130°	316.3	316.3	316.3	316.3	316.3	316.3	316.3	316.3	316.3	316.2	316.1
132.5°	329.5	329.4	329.4	329.3	329.4	329.4	329.5	329.6	329.6	329.5	329.4
135°	348.3	348.5	348.7	348.8	348.7	348.5	348.3	348.2	348.0	347.9	347.7
137.5°	365.6	365.6	365.5	365.5	365.5	365.6	365.6	365.7	365.6	365.5	365.3
140°	376.9	376.9	377.0	377.1	377.0	376.9	376.9	376.8	376.6	376.4	376.1
142.5°	386.7	386.7	386.7	386.7	386.7	386.7	386.7	386.6	386.5	386.4	386.2
145°	401.0	401.2	401.3	401.5	401.3	401.2	401.0	400.8	400.7	400.7	400.6
147.5°	413.5	413.5	413.6	413.7	413.6	413.5	413.5	413.4	413.3	413.3	413.2
150°	421.4	421.5	421.5	421.6	421.5	421.5	421.4	421.3	421.3	421.3	421.3
152.5°	428.5	428.5	428.5	428.4	428.5	428.5	428.5	428.6	428.6	428.4	428.3
155°	438.2	438.0	437.8	437.5	437.8	438.0	438.2	438.5	438.4	438.1	437.8
157.5°	446.4	446.0	445.6	445.2	445.6	446.0	446.4	446.8	446.8	446.4	446.0
160°	451.7	451.2	450.7	450.2	450.7	451.2	451.7	452.1	452.1	451.7	451.2
162.5°	455.8	455.3	454.7	454.2	454.7	455.3	455.8	456.3	456.4	455.9	455.4
165°	461.9	461.2	460.5	459.8	460.5	461.2	461.9	462.6	462.7	462.0	461.4
167.5°	466.3	465.5	464.7	464.0	464.7	465.5	466.3	467.1	467.1	466.5	465.8
170°	468.9	468.1	467.3	466.5	467.3	468.1	468.9	469.6	469.7	469.1	468.5
172.5°	470.5	469.6	468.8	467.9	468.8	469.6	470.5	471.3	471.4	470.8	470.2
175°	472.5	471.6	470.6	469.7	470.6	471.6	472.5	473.5	473.6	472.9	472.2
177.5°	473.1	472.3	471.6	470.8	471.6	472.3	473.1	473.8	474.0	473.5	473.0
180°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0
2.5°	1262.6	1265.6	1272.4	1280.0	1286.4	1291.9	1296.2	1302.1	1307.7	1315.3	1322.6
5°	1186.0	1193.4	1204.1	1216.8	1232.8	1243.4	1256.7	1268.4	1285.4	1302.5	1319.0
7.5°	1118.8	1127.0	1142.6	1160.3	1179.2	1196.6	1212.4	1233.0	1255.6	1280.3	1308.0
10°	1075.4	1084.4	1103.0	1123.2	1145.6	1162.6	1183.9	1208.3	1233.9	1264.2	1298.2
12.5°	1036.2	1044.8	1067.3	1087.9	1111.1	1129.8	1154.5	1179.4	1213.4	1246.3	1285.0
15°	960.0	982.8	1008.4	1032.8	1060.5	1083.4	1113.1	1138.7	1171.1	1217.4	1261.5
17.5°	875.3	899.7	931.4	969.1	1006.2	1034.5	1064.7	1096.4	1135.0	1182.3	1233.2
20°	825.9	845.6	880.7	922.7	965.8	1005.2	1032.8	1067.9	1107.8	1158.9	1211.5
22.5°	788.9	805.6	833.1	875.1	921.6	967.3	1002.6	1037.3	1081.4	1132.5	1189.8
25°	733.4	751.5	775.4	804.1	857.3	905.7	952.0	991.9	1038.7	1089.7	1153.6
27.5°	687.2	703.0	724.9	754.8	790.5	843.9	900.0	945.5	993.5	1048.3	1112.2
30°	660.0	672.8	690.9	721.2	755.2	803.1	860.0	913.2	961.6	1018.5	1084.9
32.5°	631.5	645.1	662.8	686.7	723.3	763.5	820.4	878.7	930.1	988.3	1053.5
35°	593.5	604.2	620.1	644.6	677.6	712.7	763.2	823.3	877.5	939.8	1002.0
37.5°	555.1	567.7	580.2	602.0	629.1	666.8	708.2	769.6	829.7	886.5	947.2
40°	533.4	540.9	554.7	572.3	601.0	634.5	673.3	733.4	793.5	849.9	911.0
42.5°	509.2	517.5	529.2	546.7	572.5	605.1	643.1	695.1	757.8	812.4	868.1
45°	475.5	480.2	491.9	506.8	528.1	561.1	596.2	642.5	701.5	753.6	802.5
47.5°	441.4	445.6	452.9	466.5	490.4	516.8	549.7	591.2	643.0	695.1	736.5
50°	418.0	421.7	428.7	441.4	462.7	488.8	521.2	558.4	604.7	654.7	689.3
52.5°	394.6	396.6	403.1	417.6	435.5	461.1	490.1	524.4	567.7	609.2	644.2
55°	357.4	362.2	366.4	377.1	394.1	418.6	444.6	477.1	510.6	545.7	575.4
57.5°	318.6	323.8	330.0	339.3	352.8	375.6	399.0	425.3	453.9	483.0	508.0
60°	293.0	297.8	303.1	313.8	326.0	344.1	369.6	392.5	414.3	440.9	465.9
62.5°	267.9	272.7	278.9	287.4	299.2	316.4	337.7	357.6	380.3	403.5	422.1
65°	230.8	234.5	239.3	247.3	258.5	273.9	291.4	306.9	327.1	344.1	361.1
67.5°	190.1	197.2	203.5	210.0	219.4	233.8	246.5	261.2	275.0	287.6	303.1
70°	163.3	171.3	177.1	184.0	193.1	205.3	217.5	227.6	238.8	251.0	264.9
72.5°	140.7	147.0	151.6	158.9	167.1	178.5	189.9	198.3	207.3	215.7	229.1
75°	111.2	113.8	117.0	122.9	130.3	138.8	147.9	155.3	160.6	168.1	177.6
77.5°	79.9	85.0	87.1	91.3	96.6	101.9	107.9	114.1	119.2	121.9	129.2
80°	61.2	63.3	65.4	71.3	74.5	79.8	84.0	89.9	92.0	94.7	101.6
82.5°	47.5	48.8	50.1	51.7	53.6	58.9	63.2	66.9	69.0	70.0	75.2
85°	27.7	28.2	28.7	29.3	29.8	29.8	31.9	34.6	38.3	38.3	39.9
87.5°	11.0	11.3	11.2	10.7	11.4	11.3	11.5	11.4	12.5	13.6	14.7
90°	8.2	7.8	7.1	6.5	5.9	5.3	4.5	3.7	2.8	1.9	1.1
92.5°	8.0	7.5	6.9	6.2	5.6	5.0	4.6	4.6	4.5	4.5	4.5
95°	8.2	7.8	7.7	7.6	7.5	7.5	8.8	11.4	14.1	16.8	19.4
97.5°	9.4	9.3	18.1	26.9	35.6	44.4	47.9	46.3	44.6	42.9	41.3
100°	14.2	15.6	26.4	37.2	48.1	58.9	63.6	62.2	60.8	59.4	58.0
102.5°	60.5	74.9	76.3	77.8	79.2	80.6	80.8	79.7	78.7	77.7	76.6
105°	111.0	110.3	109.9	109.5	109.1	108.7	108.3	107.8	107.3	106.8	106.4
107.5°	137.8	137.5	136.9	136.4	135.9	135.3	135.0	134.7	134.5	134.2	134.0
110°	156.0	155.9	155.4	154.9	154.4	154.0	153.6	153.4	153.1	152.9	152.7



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	173.6	173.7	173.4	173.2	173.0	172.8	172.5	172.0	171.6	171.2	170.8
115°	199.5	199.3	199.4	199.5	199.6	199.6	199.6	199.3	199.1	198.9	198.6
117.5°	225.9	225.9	225.7	225.6	225.4	225.2	225.0	224.7	224.3	224.0	223.7
120°	241.9	241.7	241.8	241.9	242.0	242.0	241.9	241.6	241.3	241.0	240.7
122.5°	257.9	257.9	257.7	257.6	257.5	257.4	257.3	257.1	256.9	256.7	256.5
125°	280.1	279.9	280.1	280.2	280.4	280.5	280.5	280.1	279.8	279.5	279.2
127.5°	302.6	302.7	302.3	301.9	301.6	301.2	301.0	300.9	300.8	300.8	300.7
130°	316.0	316.0	315.7	315.5	315.2	315.0	314.9	314.8	314.7	314.6	314.5
132.5°	329.3	329.2	328.9	328.6	328.3	328.0	327.8	327.7	327.5	327.4	327.3
135°	347.6	347.4	347.1	346.8	346.5	346.1	346.0	346.1	346.2	346.3	346.3
137.5°	365.1	364.9	364.6	364.2	363.9	363.6	363.4	363.3	363.3	363.3	363.2
140°	375.9	375.7	375.5	375.4	375.2	375.0	374.9	374.7	374.6	374.4	374.3
142.5°	386.0	385.9	385.8	385.7	385.6	385.5	385.3	385.0	384.7	384.4	384.2
145°	400.5	400.4	400.4	400.4	400.4	400.4	400.3	400.1	399.8	399.6	399.4
147.5°	413.1	413.1	413.1	413.2	413.3	413.4	413.2	412.8	412.3	411.9	411.4
150°	421.3	421.3	421.3	421.4	421.5	421.6	421.5	421.2	420.8	420.5	420.2
152.5°	428.2	428.1	428.2	428.3	428.5	428.6	428.6	428.3	428.1	427.8	427.6
155°	437.5	437.2	437.4	437.6	437.9	438.1	438.2	438.1	438.0	438.0	437.9
157.5°	445.6	445.2	445.4	445.7	446.0	446.2	446.4	446.4	446.5	446.5	446.6
160°	450.7	450.2	450.3	450.4	450.5	450.6	450.7	451.0	451.2	451.4	451.7
162.5°	455.0	454.5	454.6	454.6	454.7	454.8	455.0	455.3	455.6	455.9	456.2
165°	460.8	460.1	460.1	460.1	460.1	460.1	460.3	460.7	461.1	461.5	461.9
167.5°	465.1	464.4	464.4	464.5	464.5	464.6	464.8	465.2	465.6	466.0	466.4
170°	467.8	467.2	467.1	467.1	467.0	466.9	467.1	467.6	468.0	468.5	469.0
172.5°	469.5	468.9	468.8	468.8	468.7	468.6	468.8	469.3	469.7	470.2	470.7
175°	471.5	470.7	470.7	470.6	470.5	470.4	470.6	471.1	471.6	472.0	472.5
177.5°	472.5	471.9	471.8	471.7	471.6	471.4	471.6	472.0	472.5	472.9	473.4
180°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0
2.5°	1328.1	1331.9	1336.2	1344.3	1351.1	1354.1	1360.0	1364.3	1363.0	1368.9	1379.2
5°	1333.3	1347.7	1364.2	1381.2	1400.3	1416.3	1429.0	1441.8	1451.9	1464.1	1482.2
7.5°	1332.5	1358.0	1385.8	1416.3	1447.7	1474.8	1499.9	1525.4	1548.1	1572.9	1605.3
10°	1329.1	1363.1	1397.7	1437.6	1477.4	1515.2	1549.2	1581.2	1611.5	1643.9	1684.9
12.5°	1325.2	1364.4	1406.2	1454.1	1503.8	1549.2	1589.2	1635.2	1673.2	1715.0	1762.3
15°	1308.3	1361.0	1417.9	1480.1	1539.7	1600.8	1655.6	1712.0	1764.6	1814.6	1874.2
17.5°	1289.0	1349.7	1416.8	1490.3	1561.9	1636.2	1701.2	1772.3	1826.1	1893.2	1948.5
20°	1273.2	1338.6	1410.4	1492.9	1574.2	1656.7	1728.5	1800.8	1861.4	1929.0	1999.2
22.5°	1254.1	1325.9	1403.6	1489.0	1574.2	1664.3	1743.8	1815.7	1890.8	1966.8	2039.2
25°	1223.2	1297.7	1380.1	1473.7	1571.6	1663.6	1748.7	1838.0	1918.9	2001.3	2066.2
27.5°	1185.4	1263.5	1350.4	1447.0	1547.4	1641.7	1741.9	1837.1	1918.4	1997.8	2054.4
30°	1155.1	1237.6	1321.1	1418.9	1523.2	1624.2	1731.7	1826.9	1912.5	1983.8	2015.7
32.5°	1124.1	1202.3	1288.3	1387.5	1494.2	1603.0	1709.5	1806.9	1886.1	1928.9	1929.7
35°	1070.1	1143.4	1232.8	1330.1	1439.7	1557.8	1665.7	1761.4	1809.8	1813.6	1761.4
37.5°	1011.1	1078.5	1162.8	1260.2	1380.2	1497.7	1608.0	1671.8	1687.9	1633.8	1537.4
40°	969.0	1031.2	1112.6	1212.6	1331.7	1453.0	1553.5	1600.3	1583.3	1495.5	1388.1
42.5°	924.8	982.7	1061.1	1159.8	1279.4	1401.9	1487.5	1512.7	1467.6	1366.2	1240.5
45°	852.5	905.7	983.4	1082.8	1197.7	1312.6	1377.5	1364.7	1289.7	1169.5	1028.6
47.5°	777.3	828.7	898.6	990.6	1108.2	1207.4	1251.3	1212.8	1106.1	973.9	859.2
50°	727.6	780.2	844.6	932.3	1039.7	1135.5	1163.7	1105.2	986.6	859.4	754.1
52.5°	678.6	723.6	786.7	871.5	974.2	1055.1	1070.1	1002.6	880.2	766.3	672.9
55°	604.2	645.1	698.3	778.1	866.9	935.5	927.5	840.8	729.7	632.4	559.0
57.5°	532.2	563.0	612.1	686.9	764.9	810.9	781.8	707.9	604.3	524.6	462.7
60°	484.5	513.2	559.0	624.4	693.0	719.0	694.6	614.3	532.4	459.5	407.4
62.5°	439.4	464.7	504.1	564.8	620.2	635.7	609.5	539.4	465.6	403.3	360.2
65°	373.9	397.3	430.8	473.9	512.2	519.6	502.6	430.8	374.9	322.8	293.0
67.5°	314.4	329.7	355.9	393.1	413.5	417.8	384.9	339.8	290.6	258.6	236.1
70°	274.4	285.1	309.5	329.7	346.2	346.8	316.4	280.3	242.5	216.5	200.0
72.5°	235.7	245.9	264.4	278.3	290.9	286.8	259.0	230.5	200.0	180.3	168.1
75°	181.9	190.9	200.5	206.9	206.9	201.6	181.4	160.1	142.5	130.8	127.1
77.5°	132.2	139.7	142.9	141.9	140.0	131.7	118.9	105.0	98.7	93.2	90.4
80°	103.7	106.9	108.0	105.3	102.1	92.5	84.0	78.2	72.3	70.2	69.1
82.5°	76.9	79.7	76.9	77.6	70.6	62.8	58.1	56.1	53.6	52.8	51.7
85°	41.0	40.4	39.4	36.7	31.9	30.8	30.3	29.8	28.7	29.3	28.2
87.5°	14.4	13.3	11.8	11.5	11.7	11.0	11.5	11.6	11.8	11.4	12.4
90°	1.9	2.8	3.7	4.5	5.3	5.9	6.5	7.1	7.8	8.2	8.7
92.5°	4.5	4.5	4.6	4.6	5.0	5.6	6.2	6.9	7.5	8.0	8.4
95°	16.8	14.1	11.4	8.8	7.5	7.5	7.6	7.7	7.8	8.2	8.7
97.5°	42.9	44.6	46.3	47.9	44.4	35.6	26.9	18.1	9.3	9.4	9.4
100°	59.4	60.8	62.2	63.6	58.9	48.1	37.2	26.4	15.6	14.2	12.9
102.5°	77.7	78.7	79.7	80.8	80.6	79.2	77.8	76.3	74.9	60.5	46.1
105°	106.8	107.3	107.8	108.3	108.7	109.1	109.5	109.9	110.3	111.0	111.7
107.5°	134.2	134.5	134.7	135.0	135.3	135.9	136.4	136.9	137.5	137.8	138.2
110°	152.9	153.1	153.4	153.6	154.0	154.4	154.9	155.4	155.9	156.0	156.2



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	171.2	171.6	172.0	172.5	172.8	173.0	173.2	173.4	173.7	173.6	173.6
115°	198.9	199.1	199.3	199.6	199.6	199.6	199.5	199.4	199.3	199.5	199.6
117.5°	224.0	224.3	224.7	225.0	225.2	225.4	225.6	225.7	225.9	225.9	225.8
120°	241.0	241.3	241.6	241.9	242.0	242.0	241.9	241.8	241.7	241.9	242.0
122.5°	256.7	256.9	257.1	257.3	257.4	257.5	257.6	257.7	257.9	257.9	258.0
125°	279.5	279.8	280.1	280.5	280.5	280.4	280.2	280.1	279.9	280.1	280.4
127.5°	300.8	300.8	300.9	301.0	301.2	301.6	301.9	302.3	302.7	302.6	302.6
130°	314.6	314.7	314.8	314.9	315.0	315.2	315.5	315.7	316.0	316.0	316.1
132.5°	327.4	327.5	327.7	327.8	328.0	328.3	328.6	328.9	329.2	329.3	329.4
135°	346.3	346.2	346.1	346.0	346.1	346.5	346.8	347.1	347.4	347.6	347.7
137.5°	363.3	363.3	363.3	363.4	363.6	363.9	364.2	364.6	364.9	365.1	365.3
140°	374.4	374.6	374.7	374.9	375.0	375.2	375.4	375.5	375.7	375.9	376.1
142.5°	384.4	384.7	385.0	385.3	385.5	385.6	385.7	385.8	385.9	386.0	386.2
145°	399.6	399.8	400.1	400.3	400.4	400.4	400.4	400.4	400.4	400.5	400.6
147.5°	411.9	412.3	412.8	413.2	413.4	413.3	413.2	413.1	413.1	413.1	413.2
150°	420.5	420.8	421.2	421.5	421.6	421.5	421.4	421.3	421.3	421.3	421.3
152.5°	427.8	428.1	428.3	428.6	428.6	428.5	428.3	428.2	428.1	428.2	428.3
155°	438.0	438.0	438.1	438.2	438.1	437.9	437.6	437.4	437.2	437.5	437.8
157.5°	446.5	446.5	446.4	446.4	446.2	446.0	445.7	445.4	445.2	445.6	446.0
160°	451.4	451.2	451.0	450.7	450.6	450.5	450.4	450.3	450.2	450.7	451.2
162.5°	455.9	455.6	455.3	455.0	454.8	454.7	454.6	454.6	454.5	455.0	455.4
165°	461.5	461.1	460.7	460.3	460.1	460.1	460.1	460.1	460.1	460.8	461.4
167.5°	466.0	465.6	465.2	464.8	464.6	464.5	464.5	464.4	464.4	465.1	465.8
170°	468.5	468.0	467.6	467.1	466.9	467.0	467.1	467.1	467.2	467.8	468.5
172.5°	470.2	469.7	469.3	468.8	468.6	468.7	468.8	468.8	468.9	469.5	470.2
175°	472.0	471.6	471.1	470.6	470.4	470.5	470.6	470.7	470.7	471.5	472.2
177.5°	472.9	472.5	472.0	471.6	471.4	471.6	471.7	471.8	471.9	472.5	473.0
180°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5	472.5



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0	1320.0
2.5°	1384.7	1386.4	1387.7	1391.9	1392.3	1396.2	1392.3
5°	1499.2	1506.7	1518.4	1530.1	1531.2	1538.6	1525.3
7.5°	1627.7	1645.0	1655.7	1674.6	1682.1	1686.8	1679.1
10°	1716.2	1732.2	1760.4	1774.2	1788.0	1790.2	1783.8
12.5°	1801.8	1827.1	1849.3	1875.5	1874.8	1893.6	1886.7
15°	1915.7	1941.7	1972.6	2001.8	2012.5	2012.5	2021.0
17.5°	1996.9	2044.7	2076.6	2099.6	2124.7	2129.0	2126.1
20°	2051.8	2103.4	2137.5	2167.2	2184.3	2189.0	2189.0
22.5°	2092.7	2136.6	2169.8	2196.6	2210.6	2216.3	2214.6
25°	2121.0	2158.7	2178.9	2186.9	2190.6	2189.6	2179.5
27.5°	2082.2	2080.5	2067.8	2043.3	2024.9	2013.7	2001.0
30°	2008.2	1980.6	1948.7	1913.5	1868.3	1833.8	1823.1
32.5°	1898.0	1835.9	1781.9	1723.4	1674.8	1640.2	1625.7
35°	1684.9	1586.5	1506.2	1436.0	1384.9	1353.0	1342.4
37.5°	1431.9	1336.7	1237.3	1169.2	1126.9	1094.6	1082.6
40°	1271.1	1167.4	1080.7	1016.9	973.3	941.9	941.4
42.5°	1124.3	1025.3	943.7	897.7	850.7	830.0	829.9
45°	920.6	841.4	772.2	736.1	707.9	690.9	686.1
47.5°	762.2	696.7	650.6	621.8	598.8	588.0	581.0
50°	673.3	615.9	579.2	554.2	541.4	527.6	526.5
52.5°	599.3	552.9	524.3	504.0	487.8	479.5	479.7
55°	503.6	467.0	446.7	431.3	418.6	412.2	409.5
57.5°	424.3	396.8	382.1	367.9	362.5	357.5	356.1
60°	374.9	356.3	342.5	331.3	323.4	321.8	321.2
62.5°	334.1	314.6	305.1	296.4	290.6	288.1	287.2
65°	275.5	261.1	252.6	245.7	243.6	239.9	239.3
67.5°	222.1	213.5	207.8	203.1	200.2	200.0	200.0
70°	189.3	184.5	179.8	177.1	175.5	174.4	174.4
72.5°	161.3	157.7	153.8	152.4	152.1	151.0	150.6
75°	122.9	119.1	119.7	117.0	114.9	112.2	110.6
77.5°	87.1	84.5	83.9	83.6	81.8	81.5	82.3
80°	67.5	64.9	64.4	64.9	64.4	62.8	62.8
82.5°	51.4	49.1	48.6	48.3	47.8	48.3	47.4
85°	27.7	26.6	26.6	26.6	27.7	27.1	26.6
87.5°	11.6	11.3	11.8	11.4	11.4	11.0	11.5
90°	9.2	9.7	10.0	10.1	10.3	10.4	10.6
92.5°	8.9	9.4	9.6	9.7	9.7	9.7	9.8
95°	9.2	9.7	9.9	10.0	10.1	10.2	10.2
97.5°	9.5	9.5	9.6	9.7	9.7	9.8	9.9
100°	11.5	10.2	9.6	9.7	9.7	9.8	9.9
102.5°	31.7	17.3	10.1	10.1	10.1	10.2	10.2
105°	112.4	113.1	112.0	109.2	106.4	103.5	100.7
107.5°	138.5	138.9	139.2	139.5	139.8	140.1	140.4
110°	156.3	156.5	156.7	156.9	157.2	157.4	157.6



TEST NUMBER: P332925

CATALOG NUMBER: SA4XXRDIP-C795D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	173.6	173.5	173.7	174.0	174.3	174.6	174.9
115°	199.8	200.0	200.0	200.0	200.0	200.0	200.0
117.5°	225.8	225.8	225.7	225.7	225.7	225.7	225.6
120°	242.2	242.4	242.4	242.2	242.0	241.9	241.7
122.5°	258.1	258.2	258.2	258.0	257.9	257.7	257.6
125°	280.6	280.8	281.0	281.1	281.2	281.2	281.3
127.5°	302.5	302.5	302.4	302.4	302.3	302.2	302.2
130°	316.2	316.3	316.3	316.3	316.3	316.3	316.3
132.5°	329.5	329.6	329.6	329.5	329.4	329.4	329.3
135°	347.9	348.0	348.2	348.3	348.5	348.7	348.8
137.5°	365.5	365.6	365.7	365.6	365.6	365.5	365.5
140°	376.4	376.6	376.8	376.9	376.9	377.0	377.1
142.5°	386.4	386.5	386.6	386.7	386.7	386.7	386.7
145°	400.7	400.7	400.8	401.0	401.2	401.3	401.5
147.5°	413.3	413.3	413.4	413.5	413.5	413.6	413.7
150°	421.3	421.3	421.3	421.4	421.5	421.5	421.6
152.5°	428.4	428.6	428.6	428.5	428.5	428.5	428.4
155°	438.1	438.4	438.5	438.2	438.0	437.8	437.5
157.5°	446.4	446.8	446.8	446.4	446.0	445.6	445.2
160°	451.7	452.1	452.1	451.7	451.2	450.7	450.2
162.5°	455.9	456.4	456.3	455.8	455.3	454.7	454.2
165°	462.0	462.7	462.6	461.9	461.2	460.5	459.8
167.5°	466.5	467.1	467.1	466.3	465.5	464.7	464.0
170°	469.1	469.7	469.6	468.9	468.1	467.3	466.5
172.5°	470.8	471.4	471.3	470.5	469.6	468.8	467.9
175°	472.9	473.6	473.5	472.5	471.6	470.6	469.7
177.5°	473.5	474.0	473.8	473.1	472.3	471.6	470.8
180°	472.5	472.5	472.5	472.5	472.5	472.5	472.5

(END OF REPORT)