

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332659-935

Luminaire Tested: **SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332659-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1035 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6898.7 lumens
Efficiency: N/A
Efficacy: 114.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332659-935
CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

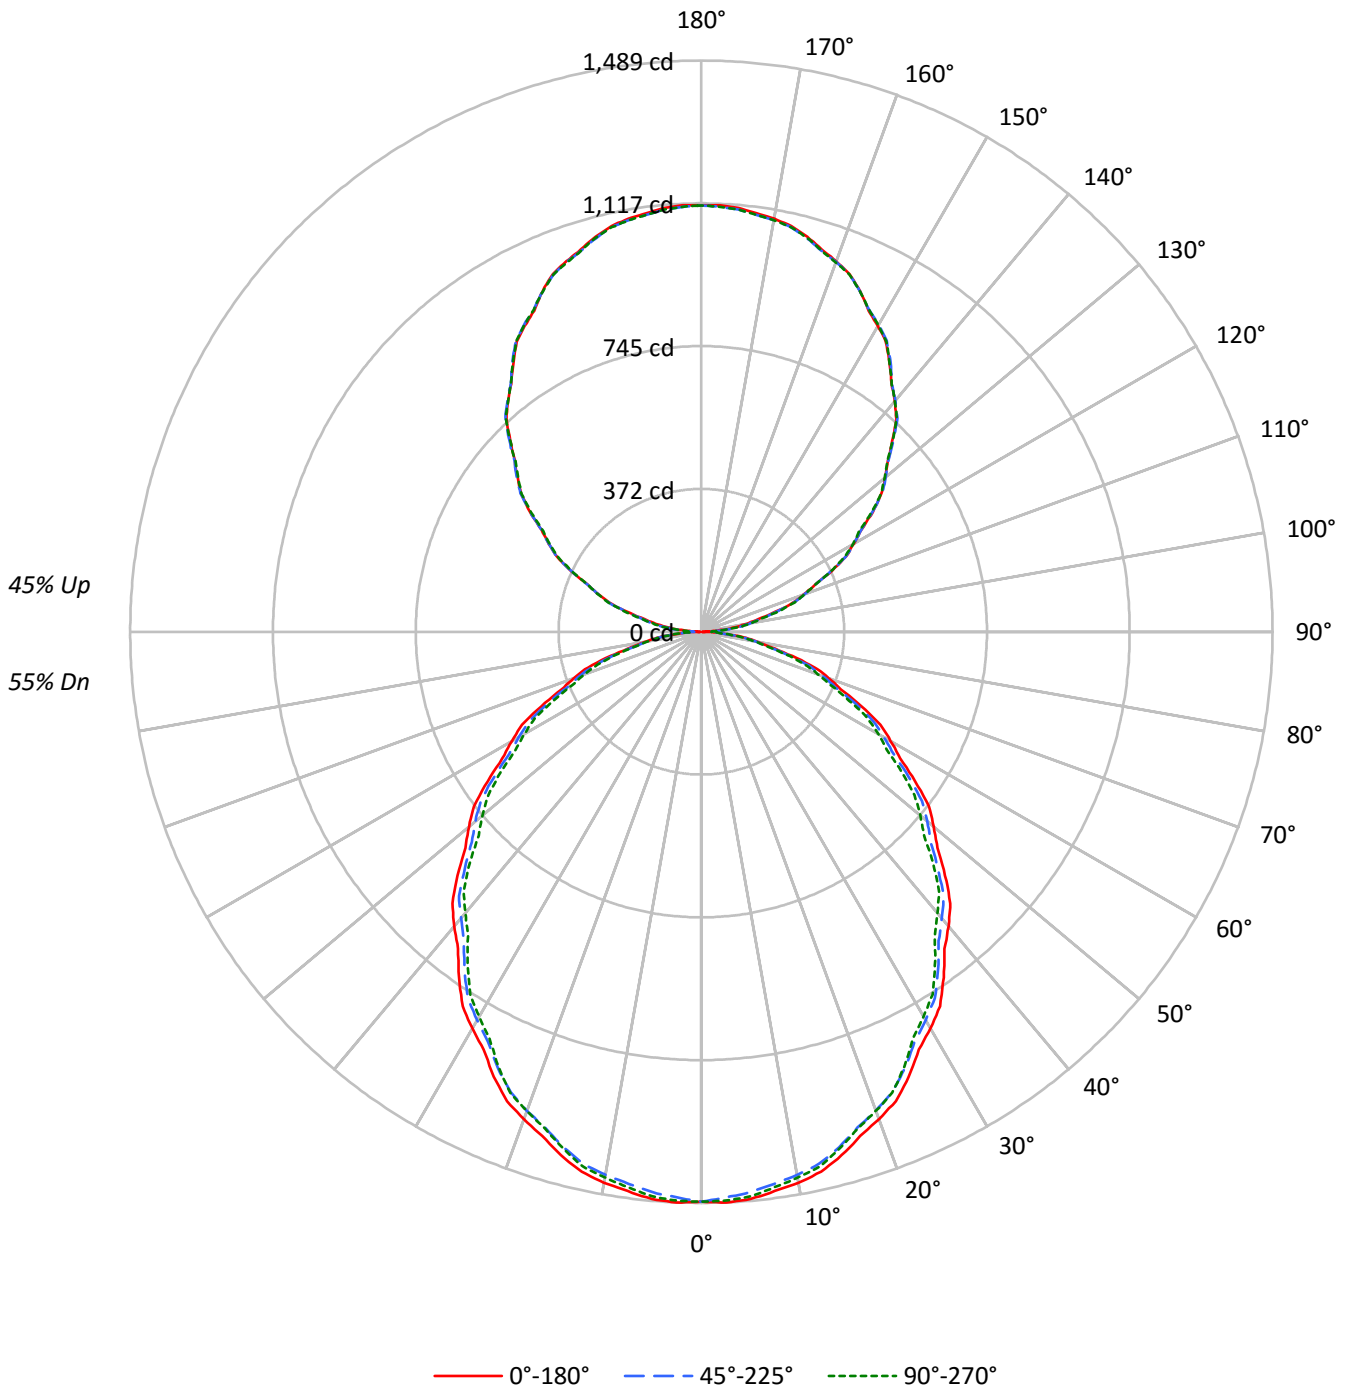



TEST NUMBER: P332659-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	91	87	92	88	85	81	76	73	71	64	62	61	54	53	51	46
2	90	83	76	71	83	77	71	67	66	62	59	56	53	51	47	45	43	39
3	82	73	65	59	76	68	61	56	58	53	49	50	46	43	42	39	37	33
4	75	64	56	50	70	60	53	47	52	46	42	44	40	37	38	34	32	28
5	69	57	49	43	64	54	46	41	47	41	36	40	35	32	34	30	28	25
6	64	51	43	37	59	48	41	35	42	36	32	36	32	28	31	27	24	22
7	59	46	38	33	55	44	36	31	38	32	28	33	28	25	28	24	22	19
8	55	42	34	29	51	40	33	28	35	29	25	30	25	22	26	22	19	17
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18	15
10	48	35	28	23	44	33	27	22	29	24	20	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11994	11994	11994
5°	12030	11885	11972
10°	11954	11788	11847
15°	11810	11621	11651
20°	11618	11413	11424
25°	11399	11176	11144
30°	11130	10897	10797
35°	10852	10606	10465
40°	10564	10275	10086
45°	10261	9949	9758
50°	9928	9658	9359
55°	9568	9282	8981
60°	9206	8861	8591
65°	8800	8458	8118
70°	8344	7924	7615
75°	7648	7277	7093
80°	6811	6527	6365
85°	5956	5734	5622



TEST NUMBER: P332659-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	139.9	2.0
10°-20°	394.2	5.7
20°-30°	580.2	8.4
30°-40°	674.5	9.8
40°-50°	674.5	9.8
50°-60°	590.0	8.6
60°-70°	438.2	6.4
70°-80°	248.9	3.6
80°-90°	75.2	1.1
90°-100°	73.3	1.1
100°-110°	217.1	3.1
110°-120°	368.5	5.3
120°-130°	485.9	7.0
130°-140°	545.7	7.9
140°-150°	536.2	7.8
150°-160°	451.0	6.5
160°-170°	300.1	4.3
170°-180°	105.1	1.5
0°-30°	1114.3	16.2
0°-40°	1788.8	25.9
0°-60°	3053.4	44.3
0°-90°	3815.7	55.3
90°-120°	658.9	9.6
90°-150°	2226.8	32.3
90°-180°	3083.0	44.7
0°-180°	6898.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1486	1486	1486	1486	1486	
5°	1484	1479	1467	1479	1477	141
15°	1413	1408	1390	1397	1394	398
25°	1280	1271	1255	1256	1251	588
35°	1101	1092	1076	1068	1062	688
45°	899	890	871	859	855	693
55°	680	675	660	646	638	609
65°	461	454	443	431	425	456
75°	245	239	233	229	227	261
85°	64	64	62	62	61	71
90°	3	12	19	24	26	7
95°	52	59	65	68	68	57
105°	200	201	205	207	210	213
115°	375	375	373	372	371	369
125°	546	546	545	543	541	486
135°	704	709	709	707	705	544
145°	855	858	859	858	856	535
155°	980	980	979	982	979	451
165°	1066	1064	1062	1067	1064	301
175°	1110	1105	1104	1110	1104	105
180°	1111	1111	1111	1111	1111	



TEST NUMBER: P332659-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7
2.5°	1489.4	1488.8	1488.2	1487.5	1486.9	1485.4	1483.1	1480.7	1478.4	1476.1	1478.3
5°	1484.5	1483.4	1482.4	1481.3	1480.2	1478.3	1475.3	1472.4	1469.6	1466.6	1469.6
7.5°	1470.7	1469.6	1468.5	1467.5	1466.5	1464.3	1461.0	1457.8	1454.6	1451.4	1453.7
10°	1458.3	1457.2	1456.1	1455.1	1454.1	1451.8	1448.4	1444.9	1441.5	1438.0	1440.1
12.5°	1442.1	1441.1	1439.9	1438.9	1437.9	1435.5	1431.8	1428.2	1424.5	1420.9	1423.2
15°	1413.1	1412.0	1410.9	1409.9	1408.8	1406.3	1402.3	1398.4	1394.4	1390.4	1392.0
17.5°	1378.0	1376.7	1375.4	1374.1	1372.8	1370.2	1366.4	1362.7	1358.9	1355.2	1356.2
20°	1352.3	1351.0	1349.7	1348.3	1347.0	1344.4	1340.4	1336.4	1332.5	1328.5	1329.3
22.5°	1324.7	1322.9	1321.2	1319.5	1317.8	1314.8	1310.9	1306.9	1303.0	1299.0	1300.5
25°	1279.7	1277.9	1276.0	1274.1	1272.3	1269.5	1265.8	1262.1	1258.4	1254.7	1255.0
27.5°	1228.3	1226.4	1224.4	1222.5	1220.6	1218.0	1214.5	1211.1	1207.6	1204.2	1203.6
30°	1194.0	1191.9	1189.7	1187.7	1185.5	1182.8	1179.3	1175.9	1172.4	1169.0	1167.9
32.5°	1157.8	1155.9	1154.0	1152.1	1150.2	1147.4	1143.8	1140.1	1136.4	1132.8	1131.5
35°	1101.1	1099.3	1097.4	1095.6	1093.7	1091.0	1087.3	1083.6	1079.9	1076.2	1074.3
37.5°	1041.4	1039.7	1038.0	1036.3	1034.6	1031.8	1027.8	1023.8	1019.9	1015.9	1013.9
40°	1002.4	1000.2	998.1	996.0	993.9	990.8	986.9	982.9	979.0	975.0	972.3
42.5°	960.4	959.2	957.9	956.7	955.4	952.5	948.1	943.7	939.4	935.0	931.9
45°	898.8	896.9	895.1	893.2	891.4	888.3	884.1	879.9	875.6	871.4	868.5
47.5°	834.2	833.0	831.7	830.4	829.1	826.6	822.7	818.7	814.9	810.9	807.6
50°	790.5	789.4	788.3	787.3	786.2	783.9	780.2	776.4	772.7	769.0	765.3
52.5°	747.6	746.3	745.0	743.8	742.5	739.9	736.0	732.1	728.1	724.3	721.0
55°	679.8	678.9	678.1	677.3	676.6	674.3	670.6	666.9	663.2	659.5	656.3
57.5°	615.0	614.1	613.2	612.3	611.4	609.1	605.5	601.8	598.1	594.5	591.5
60°	570.2	568.9	567.6	566.3	564.9	562.6	559.1	555.7	552.2	548.8	546.4
62.5°	526.4	525.3	524.2	523.1	521.9	519.6	515.9	512.3	508.6	505.0	502.8
65°	460.7	459.3	458.1	456.8	455.4	453.4	450.7	448.2	445.5	442.8	440.2
67.5°	394.5	393.3	392.1	390.9	389.6	387.8	385.2	382.7	380.1	377.6	375.1
70°	353.5	351.7	349.8	348.0	346.1	344.1	342.1	339.9	337.9	335.7	333.6
72.5°	309.8	307.9	306.1	304.2	302.4	300.6	298.9	297.2	295.5	293.8	292.1
75°	245.2	243.9	242.5	241.3	240.0	238.6	237.3	236.0	234.6	233.3	232.3
77.5°	183.6	183.0	182.4	181.8	181.2	180.4	179.2	178.1	176.8	175.7	175.4
80°	146.5	145.6	144.8	144.0	143.3	142.6	142.1	141.5	141.0	140.4	139.9
82.5°	110.2	109.9	109.5	109.1	108.7	108.5	108.4	108.3	108.2	108.1	107.8
85°	64.3	64.3	64.3	64.3	64.3	64.1	63.5	62.9	62.4	61.9	61.9
87.5°	25.3	25.5	25.7	25.9	26.1	26.3	26.3	26.4	26.5	26.6	26.9
90°	2.6	4.6	6.8	8.9	11.0	12.8	14.3	15.8	17.4	18.9	20.1
92.5°	18.4	20.8	23.2	25.6	28.0	29.8	30.8	31.9	33.0	34.0	34.7
95°	51.6	53.3	55.0	56.7	58.5	59.9	61.3	62.7	64.0	65.3	65.9
97.5°	90.1	91.4	92.8	94.2	95.6	97.0	98.6	100.1	101.8	103.3	104.0
100°	120.3	121.1	121.8	122.6	123.4	124.6	126.3	128.0	129.8	131.5	131.9
102.5°	152.0	152.2	152.6	152.8	153.2	154.1	155.7	157.2	158.8	160.4	160.9
105°	200.3	200.4	200.6	200.8	201.0	201.5	202.2	203.0	203.8	204.6	205.1
107.5°	251.0	251.2	251.4	251.7	251.8	252.0	252.2	252.3	252.4	252.5	253.0
110°	285.3	285.7	286.1	286.5	286.9	287.0	286.7	286.5	286.4	286.2	285.8



TEST NUMBER: P332659-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	321.1	321.2	321.2	321.3	321.4	321.2	320.9	320.6	320.2	319.9	319.8
115°	374.7	374.7	374.7	374.7	374.7	374.5	374.1	373.8	373.3	373.0	372.8
117.5°	425.2	425.4	425.5	425.7	425.9	425.8	425.5	425.2	425.0	424.7	424.0
120°	458.9	459.7	460.5	461.2	462.0	462.1	461.5	460.9	460.4	459.8	458.8
122.5°	494.0	494.3	494.6	494.9	495.2	495.2	495.0	494.6	494.4	494.1	493.5
125°	545.7	545.7	545.7	545.7	545.7	545.6	545.4	545.3	545.0	544.8	544.5
127.5°	592.6	593.2	593.7	594.3	595.0	595.0	594.8	594.4	594.2	593.8	593.5
130°	625.6	626.2	626.8	627.3	627.9	628.2	628.2	628.2	628.2	628.2	627.8
132.5°	659.4	659.8	660.1	660.6	661.0	661.2	661.0	660.8	660.6	660.6	660.1
135°	703.9	705.0	706.1	707.3	708.4	709.0	709.0	709.0	709.0	709.0	708.6
137.5°	752.3	752.9	753.4	753.9	754.5	754.8	755.2	755.5	755.8	756.1	755.6
140°	784.6	785.0	785.4	785.7	786.2	786.4	786.4	786.4	786.4	786.4	786.2
142.5°	814.2	814.6	814.9	815.4	815.7	815.8	815.7	815.5	815.4	815.2	815.2
145°	855.1	855.8	856.6	857.4	858.2	858.6	858.8	859.0	859.2	859.4	859.2
147.5°	895.7	896.6	897.5	898.5	899.3	899.7	899.6	899.4	899.2	899.1	899.0
150°	920.4	921.2	922.0	922.7	923.5	923.9	923.9	923.9	923.9	923.9	923.9
152.5°	943.8	944.3	944.7	945.2	945.6	945.9	946.1	946.2	946.4	946.5	947.0
155°	979.7	979.7	979.7	979.7	979.7	979.6	979.4	979.2	979.0	978.9	979.6
157.5°	1010.0	1009.6	1009.3	1008.9	1008.6	1008.4	1008.3	1008.3	1008.3	1008.2	1008.8
160°	1027.9	1027.6	1027.4	1027.3	1027.1	1026.9	1026.7	1026.5	1026.3	1026.1	1026.7
162.5°	1044.3	1043.9	1043.4	1042.8	1042.3	1042.0	1041.8	1041.6	1041.5	1041.2	1042.2
165°	1066.5	1065.9	1065.4	1064.8	1064.2	1063.8	1063.3	1063.0	1062.6	1062.2	1063.3
167.5°	1083.6	1082.7	1081.9	1081.2	1080.3	1080.0	1080.0	1080.0	1080.0	1080.1	1081.2
170°	1093.1	1092.2	1091.2	1090.3	1089.3	1088.9	1089.2	1089.3	1089.5	1089.7	1090.9
172.5°	1100.0	1099.2	1098.5	1097.6	1096.8	1096.4	1096.5	1096.5	1096.6	1096.6	1097.9
175°	1109.5	1108.5	1107.6	1106.6	1105.7	1105.1	1104.9	1104.7	1104.5	1104.3	1105.7
177.5°	1112.6	1111.8	1111.0	1110.3	1109.5	1109.1	1109.1	1109.1	1109.1	1109.1	1110.2
180°	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2



TEST NUMBER: P332659-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7
2.5°	1480.3	1482.5	1484.6	1485.6	1485.3	1485.1	1484.9	1484.7
5°	1472.4	1475.3	1478.3	1479.5	1478.9	1478.3	1477.8	1477.3
7.5°	1456.0	1458.4	1460.7	1461.7	1461.4	1461.0	1460.7	1460.4
10°	1442.3	1444.4	1446.5	1447.3	1446.7	1446.2	1445.7	1445.2
12.5°	1425.6	1427.9	1430.2	1431.0	1430.3	1429.5	1428.7	1428.1
15°	1393.6	1395.2	1396.8	1397.1	1396.4	1395.6	1394.8	1394.0
17.5°	1357.2	1358.2	1359.2	1359.4	1358.9	1358.4	1357.9	1357.3
20°	1330.1	1330.9	1331.7	1331.8	1331.3	1330.8	1330.2	1329.7
22.5°	1301.8	1303.3	1304.7	1304.9	1304.0	1303.0	1302.1	1301.1
25°	1255.3	1255.5	1255.8	1255.3	1254.3	1253.3	1252.2	1251.1
27.5°	1203.0	1202.3	1201.7	1200.8	1199.4	1198.1	1196.7	1195.4
30°	1166.9	1165.8	1164.8	1163.6	1162.3	1160.9	1159.6	1158.3
32.5°	1130.2	1129.0	1127.7	1126.4	1125.1	1123.8	1122.5	1121.1
35°	1072.5	1070.6	1068.8	1067.1	1065.8	1064.5	1063.2	1061.9
37.5°	1011.8	1009.9	1007.9	1006.0	1004.3	1002.5	1000.7	999.0
40°	969.7	967.0	964.4	962.4	961.0	959.8	958.5	957.1
42.5°	928.8	925.7	922.6	920.7	919.8	918.9	918.0	917.1
45°	865.6	862.6	859.7	857.9	857.1	856.4	855.5	854.7
47.5°	804.3	801.1	797.8	795.1	793.2	791.1	789.1	787.1
50°	761.6	757.9	754.2	751.6	749.9	748.4	746.8	745.2
52.5°	717.7	714.4	711.1	708.5	706.5	704.5	702.5	700.4
55°	653.2	650.0	646.8	644.5	642.8	641.3	639.6	638.1
57.5°	588.5	585.5	582.5	580.1	578.6	577.1	575.6	574.0
60°	544.1	541.7	539.2	537.4	536.1	534.8	533.5	532.1
62.5°	500.7	498.4	496.3	494.6	493.3	491.9	490.6	489.3
65°	437.6	434.9	432.2	430.2	429.0	427.7	426.3	425.0
67.5°	372.6	370.0	367.5	366.0	365.6	365.2	364.9	364.5
70°	331.5	329.3	327.3	325.8	325.0	324.2	323.4	322.6
72.5°	290.4	288.7	287.1	285.8	285.0	284.2	283.4	282.6
75°	231.2	230.1	229.1	228.4	228.2	227.9	227.6	227.4
77.5°	175.0	174.8	174.4	173.9	173.2	172.5	171.9	171.2
80°	139.4	138.9	138.4	137.9	137.7	137.4	137.2	136.9
82.5°	107.5	107.1	106.9	106.5	106.2	106.0	105.7	105.5
85°	61.9	61.9	61.9	61.7	61.5	61.2	61.0	60.7
87.5°	27.1	27.3	27.6	27.7	27.8	27.9	27.9	28.0
90°	21.2	22.4	23.5	24.3	24.6	25.1	25.4	25.7
92.5°	35.4	36.1	36.8	37.3	37.5	37.7	38.0	38.1
95°	66.5	67.1	67.6	67.9	67.9	67.9	67.9	67.9
97.5°	104.7	105.4	106.1	106.4	106.4	106.4	106.4	106.4
100°	132.2	132.6	133.0	133.2	133.2	133.2	133.2	133.2
102.5°	161.4	162.0	162.5	162.8	163.0	163.2	163.3	163.4
105°	205.7	206.3	206.8	207.4	207.9	208.5	209.1	209.7
107.5°	253.6	254.1	254.6	254.9	254.9	254.8	254.8	254.7
110°	285.4	285.0	284.6	284.7	285.3	285.9	286.5	287.1



TEST NUMBER: P332659-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	319.7	319.6	319.6	319.6	319.7	319.8	319.9	320.0
115°	372.6	372.4	372.2	372.0	371.9	371.6	371.4	371.3
117.5°	423.4	422.8	422.1	421.6	421.2	420.9	420.4	420.1
120°	457.9	456.9	456.0	455.6	456.1	456.4	456.8	457.2
122.5°	492.8	492.2	491.5	490.9	490.2	489.5	488.8	488.1
125°	544.1	543.7	543.3	542.9	542.6	542.2	541.8	541.4
127.5°	593.1	592.7	592.3	591.9	591.7	591.3	591.1	590.7
130°	627.5	627.1	626.7	626.1	625.3	624.6	623.8	623.0
132.5°	659.8	659.4	659.0	658.7	658.3	658.1	657.7	657.5
135°	708.3	707.8	707.5	707.0	706.5	705.8	705.2	704.7
137.5°	755.1	754.6	754.1	753.9	754.1	754.1	754.2	754.4
140°	786.0	785.7	785.6	785.4	785.2	785.0	784.8	784.6
142.5°	815.1	815.1	815.1	815.0	815.0	814.9	814.9	814.9
145°	859.0	858.8	858.6	858.2	857.6	857.1	856.5	855.9
147.5°	898.8	898.6	898.5	898.3	898.1	897.9	897.8	897.6
150°	923.9	923.9	923.9	923.8	923.6	923.3	923.2	923.0
152.5°	947.4	947.9	948.4	948.4	947.9	947.4	946.8	946.3
155°	980.4	981.1	981.9	981.9	981.1	980.4	979.6	978.9
157.5°	1009.4	1010.0	1010.6	1010.5	1009.9	1009.2	1008.6	1007.9
160°	1027.3	1027.9	1028.4	1028.2	1027.3	1026.3	1025.4	1024.4
162.5°	1043.3	1044.3	1045.3	1045.4	1044.5	1043.5	1042.6	1041.6
165°	1064.5	1065.7	1066.8	1067.0	1066.3	1065.5	1064.7	1063.9
167.5°	1082.4	1083.6	1084.7	1084.7	1083.5	1082.3	1081.1	1080.0
170°	1092.0	1093.1	1094.3	1094.2	1092.9	1091.5	1090.2	1088.8
172.5°	1099.2	1100.4	1101.8	1101.7	1100.4	1099.1	1097.8	1096.4
175°	1107.0	1108.4	1109.7	1109.7	1108.4	1107.0	1105.7	1104.3
177.5°	1111.3	1112.3	1113.4	1113.4	1112.2	1110.9	1109.7	1108.5
180°	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2

(END OF REPORT)