

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332660-935

Luminaire Tested: **SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332660-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1035 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6996.8 lumens
Efficiency: N/A
Efficacy: 115.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332660-935
CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

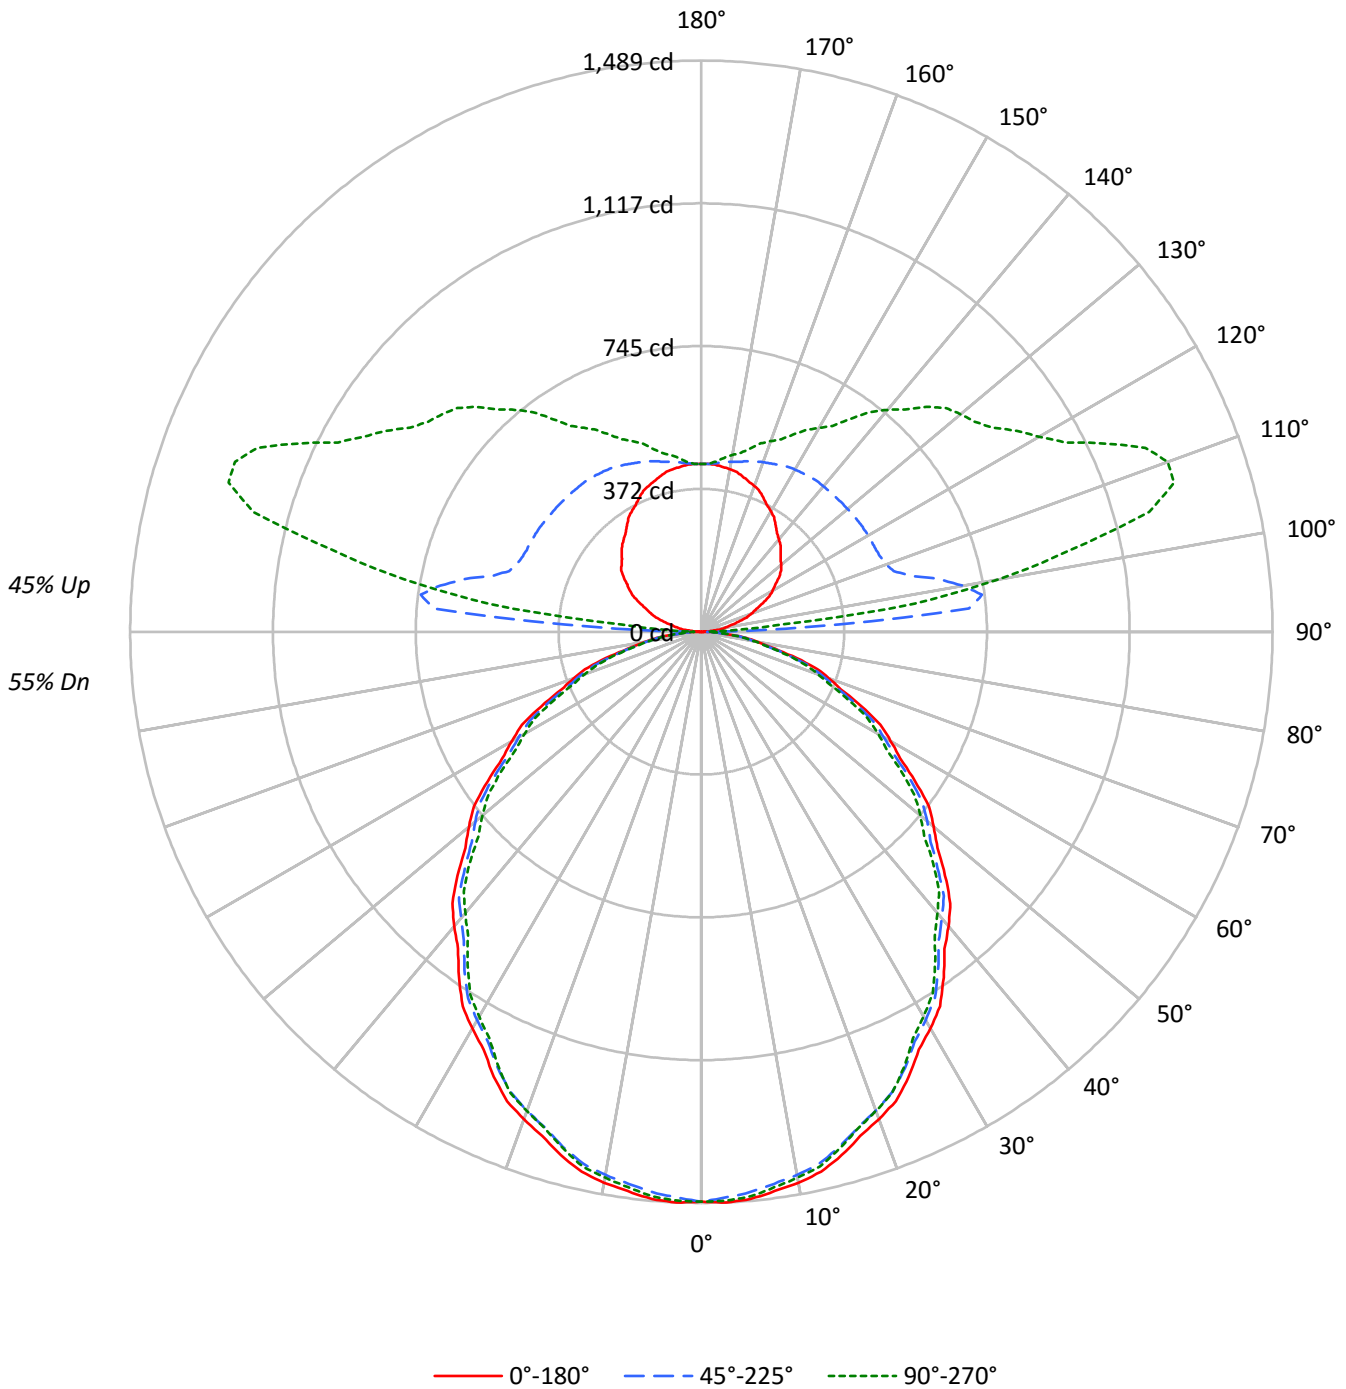



TEST NUMBER: P332660-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	55
1	99	94	90	87	91	88	84	81	75	73	70	64	62	60	53	52	51	46
2	90	82	76	71	83	77	71	67	66	62	58	56	53	50	47	45	43	38
3	82	72	65	59	76	67	61	56	58	53	49	50	46	43	41	39	36	32
4	75	64	56	50	69	60	53	47	52	46	42	44	40	37	37	34	31	28
5	69	57	49	43	64	53	46	41	46	40	36	40	35	32	33	30	27	24
6	64	51	43	37	59	48	41	35	42	36	31	36	31	28	30	27	24	21
7	59	46	38	33	54	43	36	31	38	32	28	33	28	25	28	24	21	19
8	55	42	34	29	51	39	32	28	35	29	25	30	25	22	25	22	19	17
9	51	38	31	26	47	36	29	25	32	26	22	27	23	20	24	20	17	15
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	22	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11994	11994	11994
5°	12030	11885	11972
10°	11954	11788	11847
15°	11810	11621	11651
20°	11618	11413	11424
25°	11399	11176	11144
30°	11130	10897	10797
35°	10852	10606	10465
40°	10564	10275	10086
45°	10261	9949	9758
50°	9928	9658	9359
55°	9568	9282	8981
60°	9206	8861	8591
65°	8800	8458	8118
70°	8344	7924	7615
75°	7648	7277	7093
80°	6811	6527	6365
85°	5956	5734	5622



TEST NUMBER: P332660-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	139.9	2.0
10°-20°	394.2	5.6
20°-30°	580.2	8.3
30°-40°	674.5	9.6
40°-50°	674.5	9.6
50°-60°	590.0	8.4
60°-70°	438.2	6.3
70°-80°	248.9	3.6
80°-90°	74.3	1.1
90°-100°	316.0	4.5
100°-110°	657.7	9.4
110°-120°	589.1	8.4
120°-130°	495.5	7.1
130°-140°	413.2	5.9
140°-150°	315.7	4.5
150°-160°	221.9	3.2
160°-170°	130.5	1.9
170°-180°	42.5	0.6
0°-30°	1114.3	15.9
0°-40°	1788.8	25.6
0°-60°	3053.4	43.6
0°-90°	3814.8	54.5
90°-120°	1562.8	22.3
90°-150°	2787.1	39.8
90°-180°	3182.0	45.5
0°-180°	6996.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1486	1486	1486	1486	1486	
5°	1484	1479	1467	1479	1477	141
15°	1413	1408	1390	1397	1394	398
25°	1280	1271	1255	1256	1251	588
35°	1101	1092	1076	1068	1062	688
45°	899	890	871	859	855	693
55°	680	675	660	646	638	609
65°	461	454	443	431	425	456
75°	245	239	233	229	227	261
85°	64	64	62	62	61	71
90°	1	7	16	17	18	5
95°	28	89	700	347	210	32
105°	101	146	564	1214	1209	107
115°	177	222	503	966	1161	176
125°	247	293	500	822	927	220
135°	293	349	496	730	829	227
145°	338	387	493	615	676	212
155°	384	415	480	543	566	177
165°	419	432	460	487	494	118
175°	437	438	441	447	445	41
180°	438	438	438	438	438	



TEST NUMBER: P332660-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7
2.5°	1489.4	1488.8	1488.2	1487.5	1486.9	1485.4	1483.1	1480.7	1478.4	1476.1	1478.3
5°	1484.5	1483.4	1482.4	1481.3	1480.2	1478.3	1475.3	1472.4	1469.6	1466.6	1469.6
7.5°	1470.7	1469.6	1468.5	1467.5	1466.5	1464.3	1461.0	1457.8	1454.6	1451.4	1453.7
10°	1458.3	1457.2	1456.1	1455.1	1454.1	1451.8	1448.4	1444.9	1441.5	1438.0	1440.1
12.5°	1442.1	1441.1	1439.9	1438.9	1437.9	1435.5	1431.8	1428.2	1424.5	1420.9	1423.2
15°	1413.1	1412.0	1410.9	1409.9	1408.8	1406.3	1402.3	1398.4	1394.4	1390.4	1392.0
17.5°	1378.0	1376.7	1375.4	1374.1	1372.8	1370.2	1366.4	1362.7	1358.9	1355.2	1356.2
20°	1352.3	1351.0	1349.7	1348.3	1347.0	1344.4	1340.4	1336.4	1332.5	1328.5	1329.3
22.5°	1324.7	1322.9	1321.2	1319.5	1317.8	1314.8	1310.9	1306.9	1303.0	1299.0	1300.5
25°	1279.7	1277.9	1276.0	1274.1	1272.3	1269.5	1265.8	1262.1	1258.4	1254.7	1255.0
27.5°	1228.3	1226.4	1224.4	1222.5	1220.6	1218.0	1214.5	1211.1	1207.6	1204.2	1203.6
30°	1194.0	1191.9	1189.7	1187.7	1185.5	1182.8	1179.3	1175.9	1172.4	1169.0	1167.9
32.5°	1157.8	1155.9	1154.0	1152.1	1150.2	1147.4	1143.8	1140.1	1136.4	1132.8	1131.5
35°	1101.1	1099.3	1097.4	1095.6	1093.7	1091.0	1087.3	1083.6	1079.9	1076.2	1074.3
37.5°	1041.4	1039.7	1038.0	1036.3	1034.6	1031.8	1027.8	1023.8	1019.9	1015.9	1013.9
40°	1002.4	1000.2	998.1	996.0	993.9	990.8	986.9	982.9	979.0	975.0	972.3
42.5°	960.4	959.2	957.9	956.7	955.4	952.5	948.1	943.7	939.4	935.0	931.9
45°	898.8	896.9	895.1	893.2	891.4	888.3	884.1	879.9	875.6	871.4	868.5
47.5°	834.2	833.0	831.7	830.4	829.1	826.6	822.7	818.7	814.9	810.9	807.6
50°	790.5	789.4	788.3	787.3	786.2	783.9	780.2	776.4	772.7	769.0	765.3
52.5°	747.6	746.3	745.0	743.8	742.5	739.9	736.0	732.1	728.1	724.3	721.0
55°	679.8	678.9	678.1	677.3	676.6	674.3	670.6	666.9	663.2	659.5	656.3
57.5°	615.0	614.1	613.2	612.3	611.4	609.1	605.5	601.8	598.1	594.5	591.5
60°	570.2	568.9	567.6	566.3	564.9	562.6	559.1	555.7	552.2	548.8	546.4
62.5°	526.4	525.3	524.2	523.1	521.9	519.6	515.9	512.3	508.6	505.0	502.8
65°	460.7	459.3	458.1	456.8	455.4	453.4	450.7	448.2	445.5	442.8	440.2
67.5°	394.5	393.3	392.1	390.9	389.6	387.8	385.2	382.7	380.1	377.6	375.1
70°	353.5	351.7	349.8	348.0	346.1	344.1	342.1	339.9	337.9	335.7	333.6
72.5°	309.8	307.9	306.1	304.2	302.4	300.6	298.9	297.2	295.5	293.8	292.1
75°	245.2	243.9	242.5	241.3	240.0	238.6	237.3	236.0	234.6	233.3	232.3
77.5°	183.6	183.0	182.4	181.8	181.2	180.4	179.2	178.1	176.8	175.7	175.4
80°	146.5	145.6	144.8	144.0	143.3	142.6	142.1	141.5	141.0	140.4	139.9
82.5°	110.2	109.9	109.5	109.1	108.7	108.5	108.4	108.3	108.2	108.1	107.8
85°	64.3	64.3	64.3	64.3	64.3	64.1	63.5	62.9	62.4	61.9	61.9
87.5°	25.0	25.1	25.4	25.3	25.3	25.1	25.9	25.7	25.8	25.9	25.7
90°	0.9	2.6	5.2	6.0	6.9	6.9	12.1	12.1	13.8	15.5	14.6
92.5°	9.8	14.3	22.4	32.8	45.4	63.3	106.9	173.7	238.6	272.7	227.1
95°	28.3	30.9	39.5	50.7	71.4	107.5	182.2	323.2	528.7	700.5	720.3
97.5°	50.9	50.9	58.3	68.6	86.3	116.6	174.2	290.5	494.7	737.8	904.9
100°	65.3	65.3	71.4	81.6	98.0	125.5	176.2	273.4	448.7	691.0	911.1
102.5°	79.0	80.4	85.8	95.4	111.1	137.2	183.0	268.5	417.8	632.7	859.5
105°	100.6	103.1	107.5	117.8	133.2	158.2	199.4	270.8	391.1	563.9	765.9
107.5°	124.3	126.1	130.3	141.3	156.1	180.6	218.5	283.4	386.2	525.4	690.2
110°	140.1	141.8	146.1	156.4	171.9	195.1	232.9	293.1	387.6	512.3	652.4



TEST NUMBER: P332660-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	155.2	157.0	162.0	171.6	187.0	210.3	246.7	303.4	391.8	506.1	631.1
115°	177.1	179.6	185.6	194.2	210.6	233.8	268.2	319.8	399.7	502.8	611.1
117.5°	199.8	202.2	207.5	217.0	232.2	256.3	289.0	336.4	408.1	502.0	602.2
120°	214.9	216.6	222.7	232.0	246.7	270.8	303.4	348.1	414.3	502.0	597.4
122.5°	228.7	230.3	236.3	245.1	261.1	284.5	317.2	359.1	420.5	501.3	591.9
125°	246.7	250.1	255.3	264.8	281.0	305.1	336.0	375.7	429.8	500.2	582.8
127.5°	262.7	265.4	271.6	282.4	299.5	323.7	353.6	389.9	437.1	498.3	570.6
130°	271.6	275.1	281.9	294.8	311.2	336.0	365.3	398.8	442.6	497.7	563.0
132.5°	280.5	283.3	292.2	304.4	322.2	345.7	375.0	407.8	447.5	497.0	556.1
135°	293.1	296.5	305.1	319.8	337.8	360.2	388.5	419.5	454.7	495.9	545.8
137.5°	305.7	308.9	318.4	332.3	351.0	372.4	398.8	427.7	459.0	495.8	536.8
140°	314.6	317.2	326.7	341.2	359.3	380.0	405.7	433.2	462.4	495.1	532.1
142.5°	324.3	326.8	335.5	349.5	366.9	386.8	411.9	437.3	465.2	495.1	528.0
145°	337.8	340.4	349.0	361.0	377.4	396.2	418.6	441.8	466.7	493.4	520.9
147.5°	353.1	354.0	361.5	373.9	387.4	404.5	425.5	445.7	467.6	490.3	514.5
150°	362.7	363.6	370.5	380.8	393.6	410.0	429.0	447.8	467.6	488.2	509.7
152.5°	371.7	371.9	378.8	388.3	399.8	414.8	431.7	449.2	466.2	484.7	504.2
155°	384.2	385.0	390.2	398.8	408.3	421.2	435.8	450.4	464.2	479.7	495.9
157.5°	396.4	396.4	401.2	407.9	416.2	426.4	438.7	450.4	461.9	474.3	487.5
160°	404.0	404.0	407.4	413.5	420.3	429.8	440.1	450.4	459.9	470.2	481.4
162.5°	410.9	410.2	412.9	418.3	424.5	431.9	441.4	450.4	457.8	466.1	475.9
165°	418.6	418.6	420.3	424.6	429.0	434.0	441.8	448.7	453.8	459.9	466.7
167.5°	426.4	425.5	426.4	429.6	432.0	435.9	441.6	446.6	449.7	453.7	458.5
170°	429.8	429.0	429.8	432.4	434.0	436.6	440.9	445.2	446.9	449.5	453.0
172.5°	433.2	432.4	432.5	434.4	435.4	437.3	440.2	443.8	444.2	445.4	448.2
175°	436.6	435.8	435.8	436.6	437.5	437.5	439.2	441.8	440.9	440.9	442.6
177.5°	438.2	437.5	436.8	437.5	437.5	437.5	438.2	439.5	438.2	438.2	438.9
180°	437.5	437.5	437.5	437.5	437.5	437.5	437.5	437.5	437.5	437.5	437.5



TEST NUMBER: P332660-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7	1485.7
2.5°	1480.3	1482.5	1484.6	1485.6	1485.3	1485.1	1484.9	1484.7
5°	1472.4	1475.3	1478.3	1479.5	1478.9	1478.3	1477.8	1477.3
7.5°	1456.0	1458.4	1460.7	1461.7	1461.4	1461.0	1460.7	1460.4
10°	1442.3	1444.4	1446.5	1447.3	1446.7	1446.2	1445.7	1445.2
12.5°	1425.6	1427.9	1430.2	1431.0	1430.3	1429.5	1428.7	1428.1
15°	1393.6	1395.2	1396.8	1397.1	1396.4	1395.6	1394.8	1394.0
17.5°	1357.2	1358.2	1359.2	1359.4	1358.9	1358.4	1357.9	1357.3
20°	1330.1	1330.9	1331.7	1331.8	1331.3	1330.8	1330.2	1329.7
22.5°	1301.8	1303.3	1304.7	1304.9	1304.0	1303.0	1302.1	1301.1
25°	1255.3	1255.5	1255.8	1255.3	1254.3	1253.3	1252.2	1251.1
27.5°	1203.0	1202.3	1201.7	1200.8	1199.4	1198.1	1196.7	1195.4
30°	1166.9	1165.8	1164.8	1163.6	1162.3	1160.9	1159.6	1158.3
32.5°	1130.2	1129.0	1127.7	1126.4	1125.1	1123.8	1122.5	1121.1
35°	1072.5	1070.6	1068.8	1067.1	1065.8	1064.5	1063.2	1061.9
37.5°	1011.8	1009.9	1007.9	1006.0	1004.3	1002.5	1000.7	999.0
40°	969.7	967.0	964.4	962.4	961.0	959.8	958.5	957.1
42.5°	928.8	925.7	922.6	920.7	919.8	918.9	918.0	917.1
45°	865.6	862.6	859.7	857.9	857.1	856.4	855.5	854.7
47.5°	804.3	801.1	797.8	795.1	793.2	791.1	789.1	787.1
50°	761.6	757.9	754.2	751.6	749.9	748.4	746.8	745.2
52.5°	717.7	714.4	711.1	708.5	706.5	704.5	702.5	700.4
55°	653.2	650.0	646.8	644.5	642.8	641.3	639.6	638.1
57.5°	588.5	585.5	582.5	580.1	578.6	577.1	575.6	574.0
60°	544.1	541.7	539.2	537.4	536.1	534.8	533.5	532.1
62.5°	500.7	498.4	496.3	494.6	493.3	491.9	490.6	489.3
65°	437.6	434.9	432.2	430.2	429.0	427.7	426.3	425.0
67.5°	372.6	370.0	367.5	366.0	365.6	365.2	364.9	364.5
70°	331.5	329.3	327.3	325.8	325.0	324.2	323.4	322.6
72.5°	290.4	288.7	287.1	285.8	285.0	284.2	283.4	282.6
75°	231.2	230.1	229.1	228.4	228.2	227.9	227.6	227.4
77.5°	175.0	174.8	174.4	173.9	173.2	172.5	171.9	171.2
80°	139.4	138.9	138.4	137.9	137.7	137.4	137.2	136.9
82.5°	107.5	107.1	106.9	106.5	106.2	106.0	105.7	105.5
85°	61.9	61.9	61.9	61.7	61.5	61.2	61.0	60.7
87.5°	25.9	26.1	26.3	26.3	26.4	26.6	26.4	26.4
90°	15.5	16.4	17.2	17.2	18.1	18.9	18.1	18.1
92.5°	168.8	127.1	101.1	83.9	73.8	69.1	66.2	66.2
95°	636.9	503.7	388.5	305.1	263.0	236.3	220.9	209.7
97.5°	941.1	891.5	807.4	717.7	656.0	604.2	578.5	560.6
100°	1036.6	1053.8	1011.7	948.0	873.3	820.9	795.0	788.2
102.5°	1031.8	1117.1	1129.3	1102.8	1056.9	1018.9	991.8	986.3
105°	962.7	1111.4	1196.4	1231.7	1233.5	1226.6	1214.5	1209.4
107.5°	864.5	1022.9	1142.7	1219.3	1261.8	1281.4	1290.0	1292.3
110°	805.4	954.1	1078.7	1173.3	1234.3	1270.4	1285.9	1293.7



TEST NUMBER: P332660-935

CATALOG NUMBER: SA4XXDIP-C1020D1035U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	762.1	893.5	1011.3	1105.9	1175.2	1218.8	1240.5	1253.0
115°	718.6	824.3	924.9	1007.4	1075.3	1126.9	1154.3	1161.2
117.5°	697.2	784.8	863.8	933.8	991.8	1035.1	1062.9	1068.2
120°	687.6	767.6	836.4	897.3	946.3	984.2	1006.5	1016.0
122.5°	679.4	756.6	819.2	872.6	914.0	946.3	965.3	974.7
125°	665.3	739.2	798.5	845.8	880.2	905.1	921.4	926.6
127.5°	648.1	718.8	777.9	822.8	857.3	879.5	893.2	898.4
130°	634.4	702.2	760.7	806.2	841.5	863.0	876.8	881.9
132.5°	619.9	683.7	740.7	786.4	820.9	845.1	858.2	863.3
135°	599.9	655.8	708.3	751.2	785.7	809.7	823.5	828.6
137.5°	581.9	629.2	673.4	712.2	744.3	768.1	779.5	785.7
140°	571.6	612.0	650.7	686.7	716.9	735.8	747.8	754.7
142.5°	562.0	597.5	630.8	662.0	688.6	706.2	716.9	721.7
145°	548.4	577.6	603.4	627.5	648.9	663.6	672.2	676.5
147.5°	537.2	560.4	581.1	599.9	615.8	628.4	634.9	636.4
150°	530.4	550.1	567.3	582.8	596.5	607.7	612.9	613.7
152.5°	522.8	539.8	555.6	568.3	580.1	589.1	592.2	593.1
155°	511.4	525.2	538.0	548.4	557.0	563.9	566.5	566.5
157.5°	499.2	510.7	521.6	529.9	536.3	541.5	543.0	543.0
160°	491.6	501.1	510.6	517.5	522.6	527.8	528.7	528.7
162.5°	484.1	492.1	499.6	505.8	509.5	514.7	515.6	514.9
165°	473.6	478.8	484.7	489.0	492.5	495.9	495.1	494.2
167.5°	463.5	467.4	472.3	474.8	476.6	478.8	478.6	477.9
170°	457.3	459.9	463.3	465.9	467.6	468.5	467.6	467.6
172.5°	451.8	453.7	455.7	457.6	458.7	459.5	458.7	457.3
175°	444.4	445.2	446.9	446.9	446.9	448.7	446.9	445.2
177.5°	439.5	440.2	440.2	440.9	440.2	440.9	439.5	438.2
180°	437.5	437.5	437.5	437.5	437.5	437.5	437.5	437.5

(END OF REPORT)