

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332695-935

Luminaire Tested: **SA4XXDIP-C1195D810U935-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332695-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C1195D810U935-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6820.4 lumens
Efficiency: N/A
Efficacy: 112.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332695-935
CATALOG NUMBER: SA4XXDIP-C1195D810U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

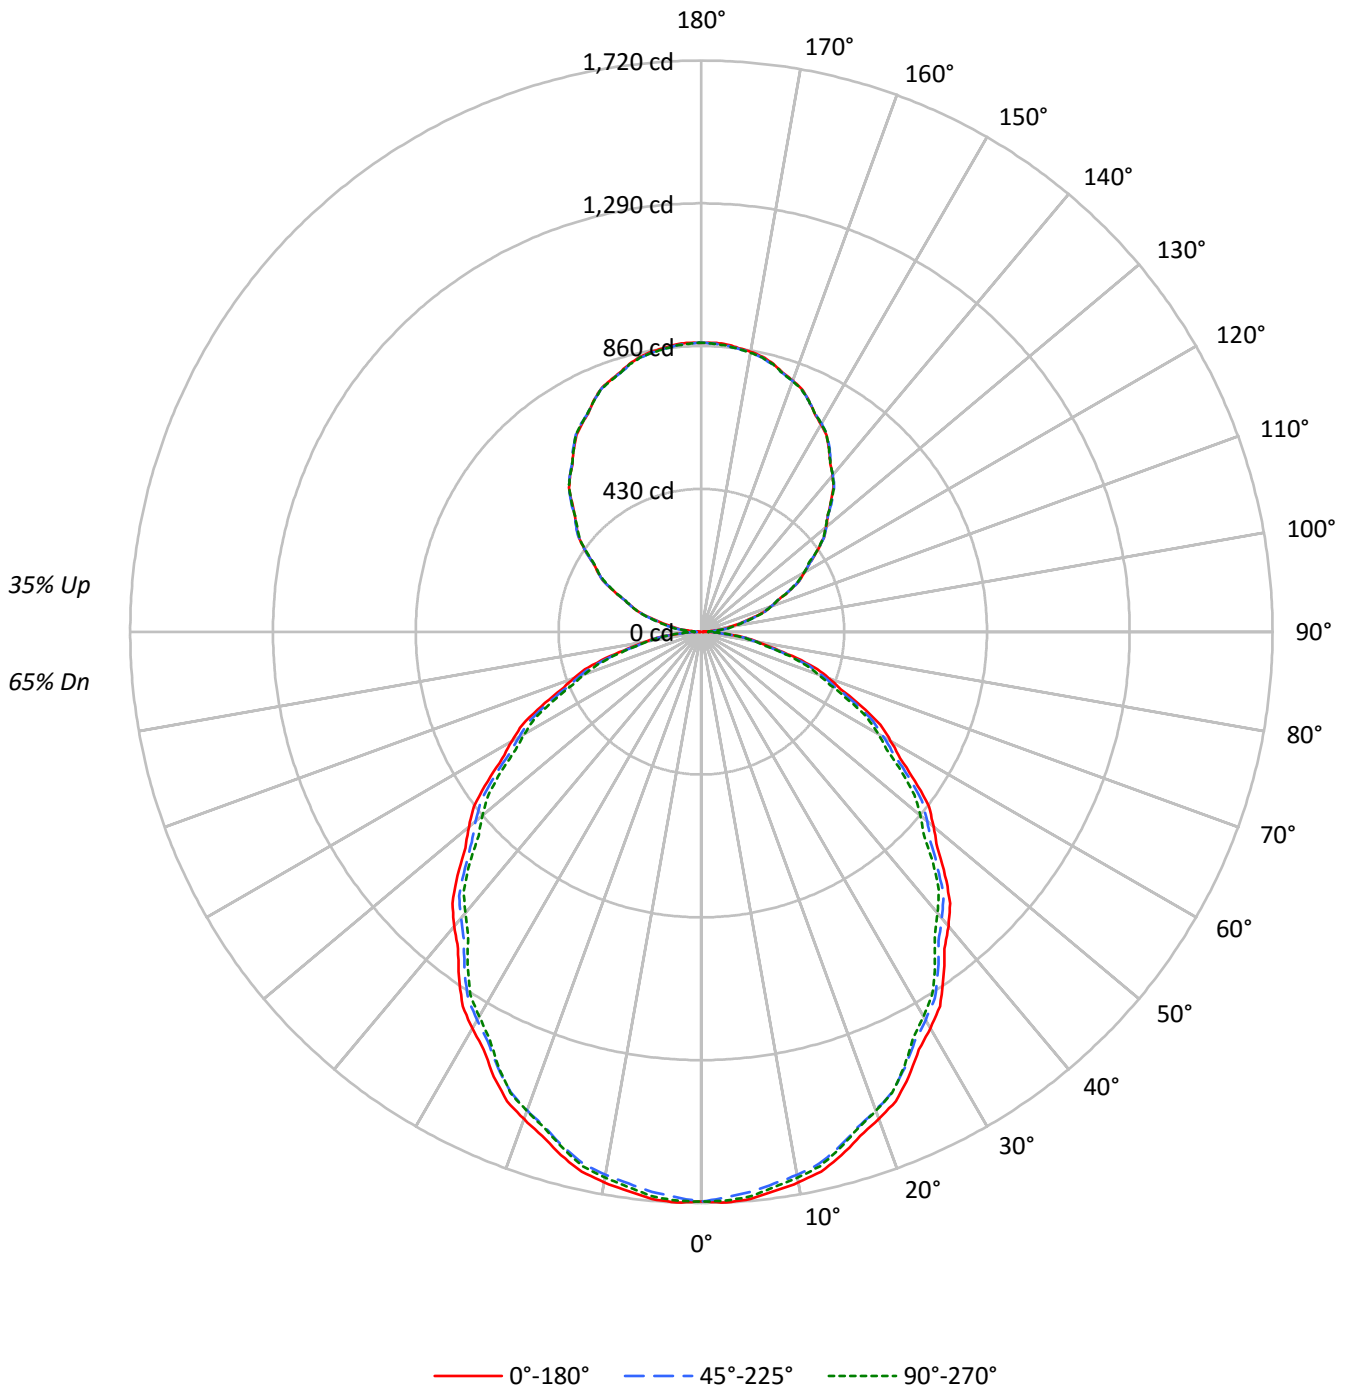



TEST NUMBER: P332695-935

CATALOG NUMBER: SA4XXDIP-C1195D810U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	70	70	70	65
1	101	97	93	89	95	91	87	84	80	78	75	70	68	67	61	60	59	54
2	92	84	78	73	86	79	74	69	70	66	62	62	59	56	54	52	49	45
3	84	74	67	61	79	70	63	58	62	57	52	55	51	47	48	45	42	38
4	77	66	58	51	72	62	55	49	55	49	45	49	44	40	43	39	36	33
5	71	59	50	44	66	55	48	42	49	43	39	44	39	35	39	35	32	29
6	65	53	44	38	61	50	42	37	45	38	34	40	35	31	35	31	28	25
7	60	48	39	34	56	45	38	32	41	34	30	36	31	27	32	28	25	22
8	56	43	35	30	53	41	34	29	37	31	27	33	28	24	29	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	30	26	22	27	23	20	18
10	49	36	29	24	46	35	28	23	31	26	22	28	23	20	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13852	13852	13852
5°	13893	13726	13827
10°	13806	13615	13682
15°	13639	13422	13456
20°	13418	13181	13193
25°	13165	12908	12871
30°	12855	12585	12470
35°	12534	12249	12086
40°	12199	11866	11649
45°	11851	11490	11270
50°	11465	11154	10810
55°	11050	10719	10372
60°	10634	10233	9923
65°	10164	9769	9377
70°	9640	9151	8795
75°	8833	8406	8191
80°	7861	7541	7350
85°	6873	6623	6493



TEST NUMBER: P332695-935

CATALOG NUMBER: SA4XXDIP-C1195D810U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.6	2.4
10°-20°	455.3	6.7
20°-30°	670.1	9.8
30°-40°	779.0	11.4
40°-50°	779.1	11.4
50°-60°	681.5	10.0
60°-70°	506.1	7.4
70°-80°	287.5	4.2
80°-90°	85.6	1.3
90°-100°	57.4	0.8
100°-110°	170.1	2.5
110°-120°	288.6	4.2
120°-130°	380.6	5.6
130°-140°	427.4	6.3
140°-150°	420.0	6.2
150°-160°	353.3	5.2
160°-170°	235.0	3.4
170°-180°	82.3	1.2
0°-30°	1287.0	18.9
0°-40°	2066.0	30.3
0°-60°	3526.5	51.7
0°-90°	4405.7	64.6
90°-120°	516.1	7.6
90°-150°	1744.1	25.6
90°-180°	2415.0	35.4
0°-180°	6820.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1716	1716	1716	1716	1716	
5°	1714	1708	1694	1708	1706	163
15°	1632	1626	1606	1613	1610	460
25°	1478	1468	1449	1450	1445	680
35°	1272	1262	1243	1233	1226	795
45°	1038	1028	1006	992	987	800
55°	785	780	762	746	737	703
65°	532	525	511	498	491	527
75°	283	276	270	264	263	301
85°	74	74	72	71	70	82
90°	2	9	15	19	20	6
95°	40	46	51	53	53	45
105°	157	158	160	162	164	166
115°	294	293	292	291	291	289
125°	427	427	427	425	424	381
135°	551	555	555	554	552	426
145°	670	672	673	672	670	419
155°	767	767	767	769	767	353
165°	835	833	832	836	833	235
175°	869	866	865	869	865	82
180°	870	870	870	870	870	



TEST NUMBER: P332695-935

CATALOG NUMBER: SA4XXDIP-C1195D810U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1720.2	1719.5	1718.7	1718.0	1717.3	1715.5	1712.9	1710.2	1707.5	1704.9	1707.3
5°	1714.4	1713.2	1712.0	1710.8	1709.6	1707.3	1703.9	1700.6	1697.2	1693.8	1697.2
7.5°	1698.5	1697.3	1696.1	1694.8	1693.6	1691.2	1687.4	1683.7	1680.0	1676.2	1679.0
10°	1684.2	1683.0	1681.8	1680.5	1679.3	1676.7	1672.8	1668.8	1664.8	1660.9	1663.3
12.5°	1665.5	1664.3	1663.0	1661.8	1660.6	1657.9	1653.7	1649.5	1645.3	1641.1	1643.7
15°	1631.9	1630.7	1629.5	1628.3	1627.0	1624.2	1619.5	1615.0	1610.4	1605.9	1607.7
17.5°	1591.6	1590.0	1588.5	1587.0	1585.4	1582.5	1578.1	1573.8	1569.5	1565.1	1566.3
20°	1561.9	1560.3	1558.8	1557.3	1555.7	1552.6	1548.1	1543.5	1539.0	1534.3	1535.2
22.5°	1529.9	1527.9	1526.0	1523.9	1521.9	1518.5	1514.0	1509.4	1504.9	1500.2	1501.9
25°	1478.0	1475.8	1473.7	1471.5	1469.4	1466.2	1461.9	1457.7	1453.4	1449.1	1449.4
27.5°	1418.6	1416.3	1414.2	1412.0	1409.8	1406.7	1402.7	1398.8	1394.8	1390.8	1390.1
30°	1379.0	1376.6	1374.1	1371.7	1369.2	1366.0	1362.0	1358.1	1354.1	1350.1	1348.9
32.5°	1337.2	1335.0	1332.8	1330.6	1328.4	1325.2	1320.9	1316.7	1312.5	1308.3	1306.8
35°	1271.8	1269.6	1267.5	1265.3	1263.2	1260.0	1255.7	1251.5	1247.2	1242.9	1240.7
37.5°	1202.7	1200.8	1198.9	1196.9	1194.9	1191.6	1187.1	1182.5	1177.8	1173.3	1171.0
40°	1157.6	1155.2	1152.7	1150.3	1147.9	1144.4	1139.8	1135.1	1130.6	1126.0	1122.9
42.5°	1109.2	1107.8	1106.3	1104.8	1103.4	1100.1	1095.0	1089.9	1084.9	1079.8	1076.2
45°	1038.0	1035.9	1033.7	1031.6	1029.5	1026.0	1021.1	1016.2	1011.2	1006.4	1003.1
47.5°	963.5	962.0	960.5	959.1	957.6	954.7	950.1	945.6	941.1	936.6	932.8
50°	912.9	911.7	910.4	909.2	908.0	905.3	901.0	896.7	892.4	888.1	883.9
52.5°	863.4	861.9	860.5	859.0	857.6	854.5	850.1	845.5	841.0	836.5	832.7
55°	785.1	784.1	783.3	782.3	781.4	778.8	774.5	770.3	765.9	761.6	758.0
57.5°	710.2	709.2	708.2	707.1	706.1	703.4	699.2	695.0	690.8	686.6	683.1
60°	658.6	657.0	655.5	654.0	652.5	649.7	645.8	641.8	637.7	633.8	631.0
62.5°	608.0	606.7	605.4	604.1	602.9	600.1	595.9	591.7	587.5	583.2	580.7
65°	532.1	530.5	529.0	527.4	526.0	523.7	520.6	517.5	514.5	511.4	508.4
67.5°	455.6	454.3	452.8	451.4	450.0	447.8	444.9	442.0	439.0	436.1	433.2
70°	408.4	406.2	404.1	401.9	399.8	397.5	395.0	392.6	390.1	387.7	385.3
72.5°	357.7	355.6	353.4	351.3	349.2	347.2	345.2	343.2	341.3	339.3	337.3
75°	283.2	281.7	280.2	278.6	277.1	275.6	274.1	272.5	271.0	269.5	268.3
77.5°	212.0	211.3	210.7	210.0	209.3	208.3	207.0	205.6	204.3	202.9	202.6
80°	169.1	168.2	167.3	166.3	165.5	164.7	164.1	163.4	162.8	162.2	161.6
82.5°	127.3	126.9	126.5	126.1	125.6	125.4	125.2	125.1	124.9	124.8	124.5
85°	74.2	74.2	74.2	74.2	74.2	74.0	73.4	72.8	72.1	71.5	71.5
87.5°	29.0	29.1	29.2	29.3	29.4	29.4	29.4	29.4	29.4	29.4	29.5
90°	2.0	3.7	5.3	7.0	8.6	10.0	11.2	12.4	13.6	14.8	15.7
92.5°	14.4	16.3	18.2	20.1	22.0	23.3	24.1	25.0	25.8	26.7	27.2
95°	40.4	41.8	43.0	44.4	45.8	47.0	48.0	49.1	50.1	51.1	51.6
97.5°	70.5	71.6	72.7	73.8	74.8	76.0	77.2	78.4	79.6	80.9	81.5
100°	94.3	94.8	95.4	96.0	96.6	97.6	98.9	100.3	101.6	103.0	103.3
102.5°	119.0	119.2	119.5	119.8	119.9	120.7	121.9	123.1	124.4	125.6	126.1
105°	156.9	157.0	157.1	157.3	157.5	157.8	158.4	159.0	159.6	160.2	160.7
107.5°	196.6	196.7	196.9	197.1	197.3	197.4	197.5	197.6	197.7	197.8	198.2
110°	223.5	223.8	224.0	224.4	224.6	224.7	224.6	224.5	224.3	224.1	223.9



TEST NUMBER: P332695-935

CATALOG NUMBER: SA4XXDIP-C1195D810U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	251.5	251.5	251.6	251.7	251.8	251.6	251.3	251.1	250.8	250.6	250.5
115°	293.5	293.5	293.5	293.5	293.5	293.3	293.0	292.7	292.4	292.1	292.0
117.5°	333.0	333.2	333.3	333.4	333.6	333.5	333.3	333.0	332.9	332.7	332.2
120°	359.5	360.1	360.7	361.3	361.9	361.9	361.4	361.0	360.6	360.2	359.4
122.5°	386.9	387.1	387.4	387.6	387.9	387.9	387.7	387.4	387.3	387.0	386.5
125°	427.4	427.4	427.4	427.4	427.4	427.3	427.2	427.1	426.9	426.8	426.5
127.5°	464.2	464.6	465.1	465.5	466.0	466.1	465.8	465.6	465.4	465.1	464.9
130°	490.0	490.5	490.9	491.4	491.8	492.1	492.1	492.1	492.1	492.1	491.7
132.5°	516.4	516.8	517.1	517.4	517.7	517.8	517.7	517.6	517.5	517.4	517.0
135°	551.3	552.2	553.1	554.0	554.9	555.3	555.3	555.3	555.3	555.3	555.0
137.5°	589.3	589.7	590.0	590.5	590.9	591.2	591.5	591.8	591.9	592.2	591.9
140°	614.6	614.8	615.2	615.4	615.8	615.9	615.9	615.9	615.9	615.9	615.8
142.5°	637.7	638.0	638.3	638.6	638.9	639.0	638.9	638.8	638.6	638.5	638.5
145°	669.8	670.4	671.0	671.6	672.2	672.5	672.7	672.8	673.0	673.1	673.0
147.5°	701.5	702.2	702.9	703.7	704.4	704.7	704.6	704.5	704.3	704.2	704.1
150°	720.9	721.5	722.1	722.7	723.3	723.6	723.6	723.6	723.6	723.6	723.6
152.5°	739.3	739.6	739.9	740.3	740.6	740.9	741.0	741.1	741.2	741.4	741.8
155°	767.3	767.3	767.3	767.3	767.3	767.2	767.2	767.0	766.8	766.7	767.2
157.5°	791.1	790.7	790.5	790.2	790.0	789.8	789.8	789.8	789.7	789.7	790.1
160°	805.0	804.9	804.8	804.6	804.4	804.3	804.2	804.0	803.8	803.7	804.2
162.5°	817.9	817.6	817.2	816.8	816.4	816.1	816.0	815.9	815.7	815.5	816.4
165°	835.3	834.9	834.5	834.0	833.5	833.2	832.8	832.6	832.2	832.0	832.8
167.5°	848.7	848.0	847.4	846.8	846.2	845.8	845.8	845.9	845.9	845.9	846.9
170°	856.2	855.5	854.7	853.9	853.3	852.9	853.1	853.3	853.3	853.5	854.4
172.5°	861.6	861.0	860.3	859.7	859.1	858.8	858.8	858.8	858.8	858.9	859.9
175°	869.0	868.2	867.5	866.8	866.0	865.6	865.4	865.2	865.1	865.0	866.0
177.5°	871.4	870.8	870.2	869.6	869.0	868.7	868.7	868.7	868.7	868.7	869.5
180°	870.3	870.3	870.3	870.3	870.3	870.3	870.3	870.3	870.3	870.3	870.3



TEST NUMBER: P332695-935

CATALOG NUMBER: SA4XXDIP-C1195D810U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1709.7	1712.2	1714.6	1715.7	1715.5	1715.2	1714.9	1714.7
5°	1700.6	1703.9	1707.3	1708.7	1708.1	1707.4	1706.8	1706.2
7.5°	1681.6	1684.3	1687.0	1688.2	1687.8	1687.4	1687.0	1686.7
10°	1665.7	1668.2	1670.6	1671.5	1670.9	1670.3	1669.7	1669.0
12.5°	1646.4	1649.1	1651.8	1652.7	1651.8	1651.0	1650.1	1649.2
15°	1609.5	1611.4	1613.2	1613.6	1612.7	1611.8	1610.8	1610.0
17.5°	1567.5	1568.7	1569.8	1570.0	1569.4	1568.8	1568.2	1567.6
20°	1536.2	1537.1	1538.0	1538.2	1537.6	1537.0	1536.4	1535.7
22.5°	1503.6	1505.2	1506.8	1507.1	1506.1	1504.9	1503.8	1502.7
25°	1449.8	1450.0	1450.4	1449.8	1448.6	1447.4	1446.2	1445.0
27.5°	1389.3	1388.6	1387.8	1386.7	1385.2	1383.7	1382.2	1380.6
30°	1347.6	1346.4	1345.2	1343.8	1342.3	1340.8	1339.3	1337.7
32.5°	1305.4	1303.9	1302.4	1301.0	1299.4	1297.9	1296.4	1294.9
35°	1238.6	1236.5	1234.3	1232.5	1231.0	1229.4	1227.9	1226.4
37.5°	1168.6	1166.3	1164.0	1161.8	1159.9	1157.8	1155.8	1153.7
40°	1119.9	1116.8	1113.8	1111.5	1110.0	1108.5	1106.9	1105.4
42.5°	1072.7	1069.2	1065.7	1063.3	1062.3	1061.3	1060.2	1059.2
45°	999.7	996.3	993.0	990.8	989.9	988.9	988.1	987.1
47.5°	929.0	925.2	921.4	918.3	916.0	913.7	911.4	909.0
50°	879.6	875.3	871.1	868.0	866.2	864.4	862.5	860.7
52.5°	828.9	825.1	821.3	818.3	816.0	813.6	811.3	809.0
55°	754.3	750.7	747.0	744.2	742.4	740.6	738.7	736.9
57.5°	679.7	676.1	672.7	670.0	668.3	666.5	664.7	663.0
60°	628.3	625.6	622.8	620.7	619.1	617.6	616.1	614.6
62.5°	578.2	575.7	573.2	571.2	569.6	568.1	566.6	565.1
65°	505.3	502.3	499.2	497.0	495.4	493.9	492.3	490.9
67.5°	430.2	427.3	424.4	422.7	422.2	421.8	421.4	420.9
70°	382.8	380.4	377.9	376.3	375.3	374.4	373.5	372.6
72.5°	335.4	333.5	331.5	330.0	329.2	328.2	327.3	326.4
75°	267.0	265.8	264.6	263.8	263.6	263.2	262.9	262.6
77.5°	202.2	201.8	201.5	200.9	200.1	199.3	198.5	197.7
80°	161.0	160.4	159.8	159.4	159.0	158.7	158.4	158.1
82.5°	124.1	123.7	123.4	123.0	122.7	122.4	122.1	121.8
85°	71.5	71.5	71.5	71.4	71.0	70.7	70.4	70.1
87.5°	29.7	29.9	30.0	30.2	30.2	30.3	30.4	30.4
90°	16.6	17.5	18.4	19.0	19.3	19.6	19.9	20.2
92.5°	27.7	28.2	28.8	29.2	29.4	29.5	29.7	29.9
95°	52.1	52.5	53.0	53.2	53.2	53.2	53.2	53.2
97.5°	82.0	82.5	83.1	83.3	83.3	83.3	83.3	83.3
100°	103.6	103.9	104.2	104.4	104.4	104.4	104.4	104.4
102.5°	126.5	126.8	127.3	127.5	127.7	127.8	127.9	128.0
105°	161.1	161.5	162.0	162.5	162.9	163.3	163.8	164.3
107.5°	198.6	199.0	199.4	199.7	199.6	199.6	199.6	199.5
110°	223.5	223.3	222.9	223.0	223.5	223.9	224.4	224.8



TEST NUMBER: P332695-935

CATALOG NUMBER: SA4XXDIP-C1195D810U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	250.4	250.4	250.3	250.3	250.4	250.5	250.6	250.6
115°	291.8	291.7	291.5	291.4	291.3	291.1	290.9	290.8
117.5°	331.7	331.1	330.6	330.2	329.9	329.6	329.3	329.0
120°	358.6	357.8	357.1	356.9	357.2	357.5	357.8	358.1
122.5°	386.0	385.6	385.0	384.5	383.9	383.4	382.9	382.4
125°	426.2	425.9	425.6	425.2	425.0	424.6	424.4	424.0
127.5°	464.5	464.3	463.9	463.6	463.4	463.2	463.0	462.7
130°	491.5	491.1	490.9	490.4	489.8	489.2	488.6	488.0
132.5°	516.8	516.4	516.2	515.9	515.7	515.4	515.1	515.0
135°	554.7	554.4	554.1	553.7	553.3	552.8	552.4	552.0
137.5°	591.4	591.1	590.6	590.5	590.6	590.6	590.7	590.9
140°	615.6	615.4	615.3	615.2	615.0	614.8	614.7	614.6
142.5°	638.4	638.4	638.4	638.3	638.3	638.3	638.3	638.3
145°	672.8	672.7	672.5	672.2	671.8	671.3	670.9	670.5
147.5°	704.0	703.9	703.7	703.6	703.4	703.3	703.2	703.0
150°	723.6	723.6	723.6	723.5	723.4	723.2	723.1	722.9
152.5°	742.1	742.4	742.8	742.8	742.4	742.0	741.7	741.2
155°	767.8	768.4	769.0	769.0	768.4	767.8	767.2	766.7
157.5°	790.6	791.1	791.5	791.4	791.0	790.5	790.0	789.5
160°	804.6	805.0	805.5	805.4	804.6	803.8	803.1	802.4
162.5°	817.2	817.9	818.8	818.8	818.0	817.3	816.6	815.8
165°	833.8	834.7	835.6	835.7	835.1	834.5	833.9	833.4
167.5°	847.7	848.7	849.5	849.5	848.6	847.7	846.8	845.8
170°	855.3	856.2	857.1	857.0	856.0	855.0	853.9	852.8
172.5°	860.9	861.9	863.0	863.0	861.9	860.8	859.8	858.8
175°	867.0	868.1	869.2	869.2	868.1	867.0	866.0	865.0
177.5°	870.4	871.2	872.1	872.0	871.1	870.1	869.2	868.1
180°	870.3	870.3	870.3	870.3	870.3	870.3	870.3	870.3

(END OF REPORT)