

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332972-935

Luminaire Tested: **SA4XXRDIP-C1020D810U935-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332972-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXRDIP-C1020D810U935-4F0-1E-UDD-F4  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 810 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6086.1 lumens  
Efficiency: N/A  
Efficacy: 111.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 54.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332972-935  
CATALOG NUMBER: SA4XXRDIP-C1020D810U935-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

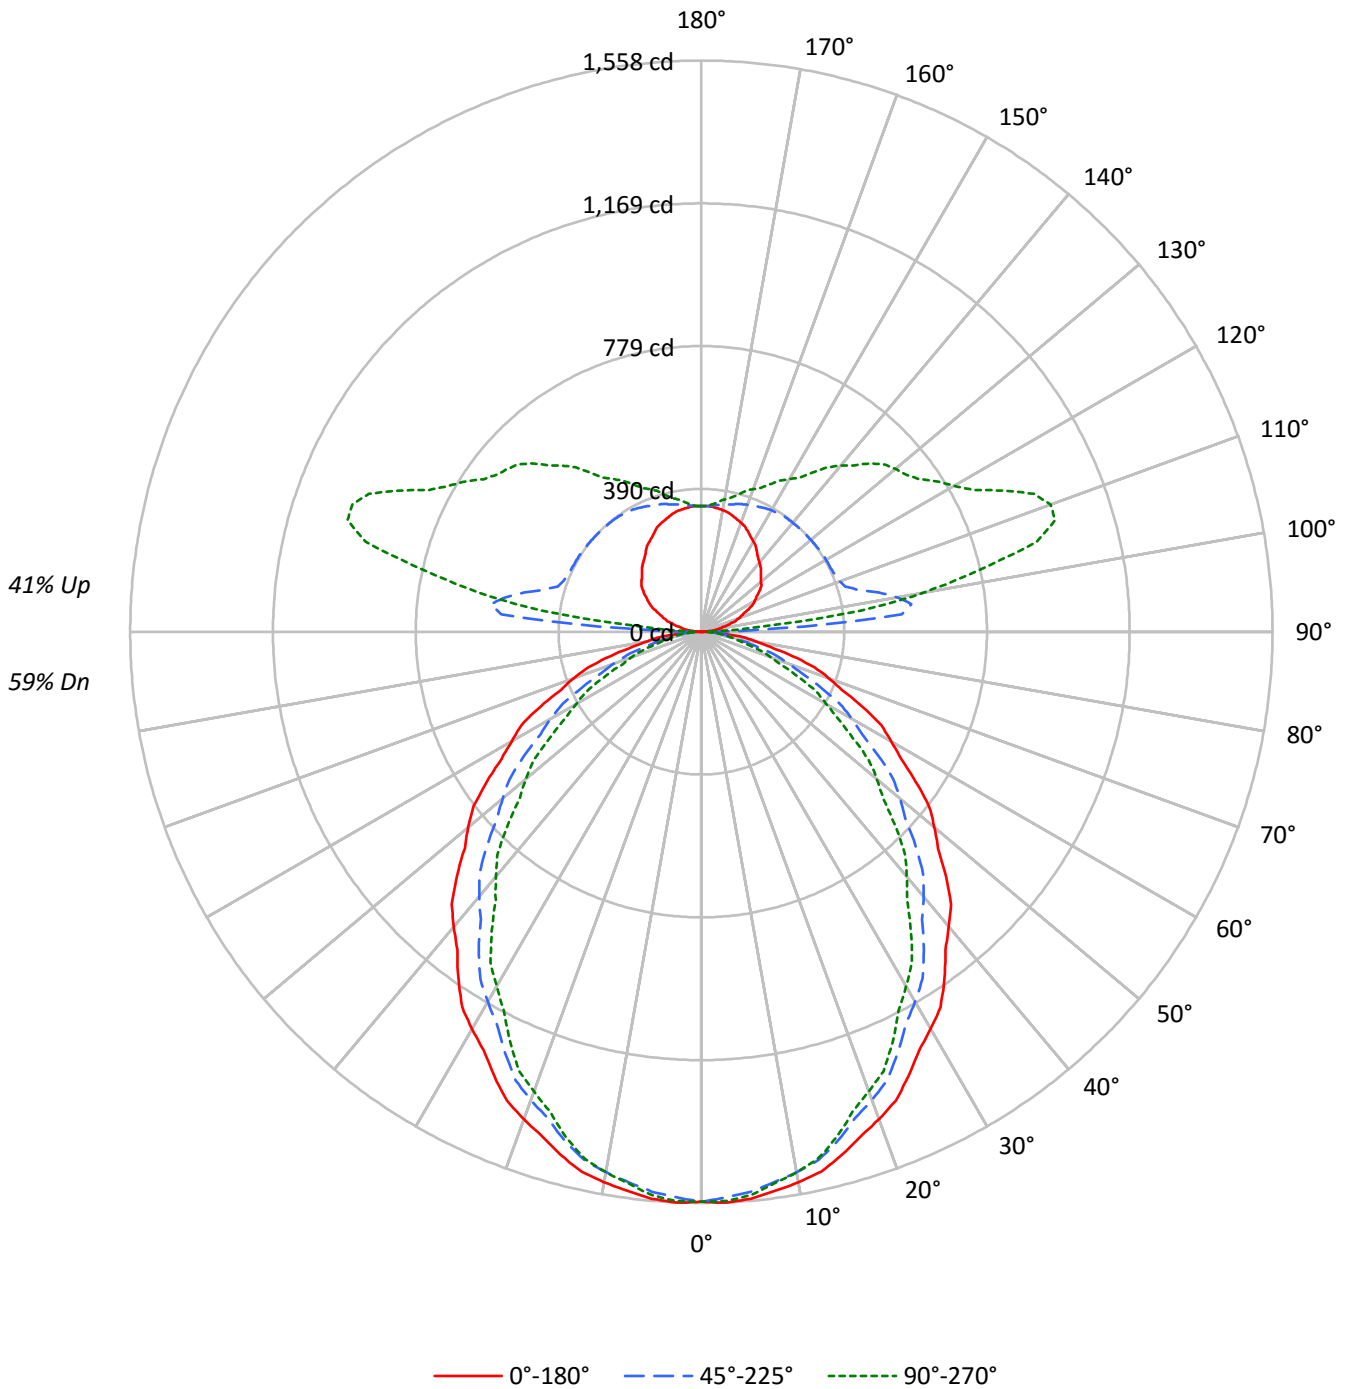



TEST NUMBER: P332972-935

CATALOG NUMBER: SA4XXRDIP-C1020D810U935-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59
1	100	96	92	89	93	90	86	83	78	76	73	67	66	64	57	56	55	50
2	91	84	78	73	85	79	73	69	69	65	61	60	57	54	51	49	47	43
3	84	74	67	61	78	70	63	58	61	56	52	53	49	46	45	43	40	37
4	77	66	58	52	71	62	55	49	54	49	44	47	43	40	41	38	35	32
5	71	59	51	45	66	55	48	43	49	43	39	43	38	35	37	33	31	28
6	65	53	45	39	61	50	43	37	44	38	34	39	34	30	34	30	27	24
7	60	48	40	34	56	45	38	33	40	34	30	35	31	27	31	27	24	22
8	56	44	36	31	52	41	34	29	37	31	27	32	28	24	28	25	22	19
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	26	22	20	18
10	49	37	30	25	46	35	28	24	31	26	22	28	23	20	24	21	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	12551	12551	12551
5°	12580	12426	12503
10°	12500	12276	12276
15°	12357	12018	11929
20°	12160	11679	11465
25°	11908	11282	10996
30°	11663	10864	10409
35°	11392	10430	9819
40°	11065	9936	9183
45°	10764	9445	8535
50°	10420	8881	7850
55°	10054	8294	7104
60°	9649	7650	6344
65°	9278	6844	5593
70°	8738	5958	4749
75°	8057	4938	3862
80°	7029	3761	3543
85°	5956	3418	3196



TEST NUMBER: P332972-935

CATALOG NUMBER: SA4XXRDIP-C1020D810U935-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	146.0	2.4
10°-20°	407.3	6.7
20°-30°	588.1	9.7
30°-40°	666.6	11.0
40°-50°	643.7	10.6
50°-60°	535.3	8.8
60°-70°	369.6	6.1
70°-80°	187.4	3.1
80°-90°	49.9	0.8
90°-100°	247.5	4.1
100°-110°	515.1	8.5
110°-120°	461.4	7.6
120°-130°	388.1	6.4
130°-140°	323.6	5.3
140°-150°	247.2	4.1
150°-160°	173.8	2.9
160°-170°	102.2	1.7
170°-180°	33.3	0.5
0°-30°	1141.4	18.8
0°-40°	1808.0	29.7
0°-60°	2987.0	49.1
0°-90°	3593.9	59.1
90°-120°	1224.0	20.1
90°-150°	2183.0	35.9
90°-180°	2492.0	40.9
0°-180°	6086.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1555	1555	1555	1555	1555	
5°	1552	1547	1533	1544	1543	147
15°	1478	1467	1438	1435	1427	416
25°	1337	1314	1267	1247	1234	616
35°	1156	1117	1058	1019	996	722
45°	943	897	827	771	748	727
55°	714	665	589	530	505	639
65°	486	433	358	309	293	479
75°	258	214	158	132	124	273
85°	64	42	37	35	34	72
90°	1	5	12	13	14	4
95°	22	70	549	272	164	25
105°	79	114	442	951	947	84
115°	139	174	394	757	910	138
125°	193	230	392	644	726	172
135°	230	273	388	572	649	177
145°	265	303	386	482	530	166
155°	301	325	376	426	444	139
165°	328	338	360	381	387	93
175°	342	343	345	350	349	32
180°	343	343	343	343	343	



TEST NUMBER: P332972-935

CATALOG NUMBER: SA4XXRDIP-C1020D810U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7
2.5°	1558.5	1557.6	1556.8	1556.0	1555.1	1553.5	1551.2	1548.9	1546.5	1544.2	1546.5
5°	1552.3	1551.3	1550.2	1549.1	1548.1	1545.9	1542.8	1539.6	1536.5	1533.3	1535.9
7.5°	1538.3	1537.1	1536.0	1534.9	1533.8	1531.2	1527.1	1522.9	1518.8	1514.7	1516.4
10°	1524.9	1523.6	1522.2	1521.0	1519.7	1516.6	1511.8	1507.1	1502.3	1497.5	1498.6
12.5°	1507.8	1506.2	1504.7	1503.2	1501.7	1498.1	1492.5	1486.9	1481.3	1475.7	1476.3
15°	1478.5	1476.1	1473.8	1471.4	1469.0	1464.5	1457.8	1451.2	1444.7	1438.0	1437.5
17.5°	1443.0	1439.6	1436.1	1432.7	1429.3	1423.6	1415.7	1407.7	1399.8	1391.8	1390.3
20°	1415.4	1412.0	1408.5	1405.1	1401.6	1395.4	1386.5	1377.4	1368.5	1359.4	1357.4
22.5°	1384.9	1381.0	1377.2	1373.4	1369.5	1362.7	1353.1	1343.5	1333.9	1324.2	1321.0
25°	1336.9	1332.1	1327.3	1322.6	1317.8	1310.0	1299.2	1288.3	1277.5	1266.6	1262.1
27.5°	1286.3	1280.4	1274.5	1268.4	1262.5	1253.7	1242.1	1230.5	1218.9	1207.3	1201.8
30°	1251.1	1244.5	1237.9	1231.3	1224.7	1215.1	1202.7	1190.2	1177.8	1165.4	1158.8
32.5°	1214.0	1206.5	1199.0	1191.6	1184.1	1174.0	1161.1	1148.3	1135.4	1122.6	1114.9
35°	1155.9	1147.5	1138.9	1130.5	1122.1	1111.2	1097.9	1084.8	1071.5	1058.3	1049.3
37.5°	1093.7	1085.0	1076.3	1067.6	1058.9	1047.1	1032.5	1017.9	1003.2	988.5	978.4
40°	1050.0	1041.2	1032.5	1023.7	1015.0	1003.2	988.1	972.9	957.9	942.8	931.7
42.5°	1008.1	998.9	989.7	980.6	971.5	959.0	943.3	927.6	911.9	896.1	884.8
45°	942.8	933.1	923.3	913.4	903.6	890.8	874.9	859.1	843.2	827.3	814.4
47.5°	875.5	865.3	855.2	845.2	835.0	821.7	805.2	788.7	772.1	755.7	742.3
50°	829.7	819.4	809.1	798.7	788.4	774.8	757.9	741.0	724.0	707.1	693.9
52.5°	783.1	772.9	762.8	752.8	742.6	728.9	711.5	694.2	676.8	659.5	646.1
55°	714.3	703.7	693.1	682.5	671.9	658.1	640.8	623.6	606.5	589.3	575.5
57.5°	646.2	635.2	624.1	613.1	602.2	588.1	571.3	554.3	537.4	520.5	506.5
60°	597.6	587.0	576.4	565.8	555.3	541.5	524.6	507.6	490.7	473.8	460.0
62.5°	553.8	542.8	531.8	520.7	509.8	495.6	478.2	460.9	443.5	426.2	413.5
65°	485.7	474.3	463.0	451.6	440.2	426.0	409.1	392.2	375.2	358.3	347.0
67.5°	415.0	404.1	393.2	382.3	371.3	358.1	342.3	326.7	310.9	295.2	285.4
70°	370.2	359.1	348.0	336.9	325.8	312.7	297.6	282.5	267.4	252.4	243.7
72.5°	322.6	312.5	302.5	292.5	282.4	270.3	256.1	241.8	227.6	213.4	205.9
75°	258.3	248.6	238.8	228.9	219.2	208.0	195.6	183.2	170.7	158.3	152.2
77.5°	193.1	184.8	176.5	168.2	159.9	150.7	140.6	130.6	120.5	110.5	106.9
80°	151.2	143.5	135.9	128.2	120.5	112.7	104.8	96.9	88.9	80.9	80.2
82.5°	115.0	108.0	100.9	93.8	86.9	81.0	76.5	72.0	67.4	62.9	62.3
85°	64.3	59.0	53.7	48.4	43.1	40.0	39.3	38.5	37.7	36.9	36.3
87.5°	22.0	20.6	19.3	17.7	16.2	15.2	15.8	15.7	15.7	15.8	15.4
90°	0.7	2.0	4.0	4.7	5.4	5.4	9.4	9.4	10.8	12.1	11.5
92.5°	7.7	11.2	17.5	25.7	35.6	49.5	83.8	136.0	186.9	213.5	177.9
95°	22.2	24.2	31.0	39.7	55.9	84.1	142.8	253.1	414.1	548.7	564.2
97.5°	39.9	39.9	45.6	53.7	67.6	91.3	136.4	227.6	387.5	577.9	708.8
100°	51.1	51.1	55.9	64.0	76.7	98.3	138.0	214.1	351.5	541.3	713.6
102.5°	61.9	63.0	67.2	74.7	87.0	107.5	143.4	210.3	327.2	495.5	673.2
105°	78.8	80.8	84.1	92.2	104.4	123.9	156.2	212.1	306.3	441.6	599.9
107.5°	97.4	98.7	102.0	110.6	122.3	141.5	171.2	222.1	302.6	411.5	540.6
110°	109.8	111.1	114.4	122.5	134.7	152.8	182.4	229.5	303.6	401.2	511.0



TEST NUMBER: P332972-935

CATALOG NUMBER: SA4XXRDIP-C1020D810U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	121.6	123.0	126.8	134.4	146.5	164.7	193.2	237.6	306.9	396.4	494.3
115°	138.7	140.7	145.4	152.1	165.0	183.1	210.1	250.5	313.1	393.8	478.6
117.5°	156.4	158.3	162.6	170.0	181.9	200.8	226.4	263.5	319.7	393.1	471.7
120°	168.3	169.6	174.4	181.8	193.2	212.1	237.6	272.7	324.5	393.1	467.9
122.5°	179.1	180.5	185.1	192.0	204.5	222.8	248.4	281.3	329.3	392.6	463.6
125°	193.2	195.9	199.9	207.3	220.2	239.0	263.2	294.2	336.7	391.8	456.4
127.5°	205.8	207.9	212.8	221.2	234.5	253.6	277.0	305.4	342.4	390.4	446.9
130°	212.8	215.4	220.8	230.9	243.7	263.2	286.1	312.4	346.7	389.8	441.0
132.5°	219.7	221.9	228.9	238.5	252.4	270.8	293.7	319.3	350.5	389.3	435.6
135°	229.5	232.3	239.0	250.5	264.6	282.1	304.3	328.6	356.1	388.5	427.5
137.5°	239.4	241.9	249.3	260.3	274.9	291.6	312.4	335.0	359.5	388.3	420.5
140°	246.4	248.4	255.8	267.3	281.4	297.6	317.8	339.3	362.2	387.8	416.7
142.5°	253.9	256.0	262.9	273.7	287.3	303.0	322.6	342.5	364.4	387.8	413.5
145°	264.6	266.6	273.4	282.8	295.6	310.4	327.9	346.0	365.6	386.4	407.9
147.5°	276.6	277.2	283.2	292.8	303.5	316.8	333.3	349.1	366.3	384.0	403.0
150°	284.1	284.8	290.2	298.3	308.3	321.2	336.0	350.8	366.3	382.4	399.2
152.5°	291.1	291.3	296.6	304.2	313.2	324.9	338.1	351.8	365.2	379.7	394.9
155°	300.9	301.6	305.7	312.4	319.8	329.8	341.3	352.8	363.5	375.7	388.5
157.5°	310.5	310.5	314.3	319.5	326.0	333.9	343.6	352.8	361.8	371.5	381.9
160°	316.4	316.4	319.1	323.8	329.2	336.7	344.7	352.8	360.2	368.2	377.0
162.5°	321.8	321.2	323.4	327.6	332.4	338.2	345.8	352.8	358.6	365.1	372.7
165°	327.9	327.9	329.2	332.6	336.0	340.0	346.0	351.5	355.5	360.2	365.6
167.5°	333.9	333.3	333.9	336.5	338.4	341.5	345.9	349.8	352.2	355.3	359.1
170°	336.7	336.0	336.7	338.6	340.0	342.0	345.3	348.7	350.1	352.1	354.8
172.5°	339.3	338.6	338.8	340.3	341.0	342.5	344.8	347.7	347.9	348.9	351.0
175°	342.0	341.3	341.3	342.0	342.7	342.7	344.1	346.0	345.3	345.3	346.7
177.5°	343.2	342.7	342.2	342.7	342.7	342.7	343.2	344.3	343.2	343.2	343.7
180°	342.7	342.7	342.7	342.7	342.7	342.7	342.7	342.7	342.7	342.7	342.7



TEST NUMBER: P332972-935

CATALOG NUMBER: SA4XXRDIP-C1020D810U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7
2.5°	1548.9	1551.2	1553.5	1554.6	1554.4	1554.2	1553.9	1553.8
5°	1538.5	1541.2	1543.9	1544.9	1544.4	1543.9	1543.3	1542.8
7.5°	1518.1	1519.8	1521.5	1521.9	1521.0	1520.2	1519.3	1518.5
10°	1499.7	1500.7	1501.8	1501.8	1500.7	1499.7	1498.6	1497.5
12.5°	1476.9	1477.6	1478.2	1477.7	1476.3	1474.8	1473.3	1471.9
15°	1437.0	1436.4	1435.9	1434.7	1432.9	1431.0	1429.2	1427.3
17.5°	1388.9	1387.4	1386.0	1383.8	1381.0	1378.2	1375.4	1372.5
20°	1355.2	1353.1	1351.0	1348.2	1344.8	1341.4	1337.9	1334.5
22.5°	1317.8	1314.7	1311.6	1308.5	1305.7	1303.0	1300.1	1297.4
25°	1257.6	1253.1	1248.6	1245.0	1242.4	1239.8	1237.1	1234.5
27.5°	1196.2	1190.7	1185.1	1180.4	1176.6	1172.8	1169.0	1165.2
30°	1152.2	1145.6	1138.9	1133.5	1129.3	1125.1	1120.8	1116.6
32.5°	1107.2	1099.6	1091.9	1086.1	1082.0	1078.0	1074.0	1070.0
35°	1040.3	1031.3	1022.3	1015.5	1010.6	1005.9	1001.2	996.3
37.5°	968.5	958.4	948.3	940.9	936.2	931.3	926.6	921.9
40°	920.6	909.5	898.4	890.4	885.7	880.9	876.2	871.4
42.5°	873.5	862.2	850.8	842.7	837.8	832.8	827.8	822.9
45°	801.4	788.4	775.5	766.6	761.9	757.1	752.3	747.6
47.5°	728.8	715.4	701.9	692.6	687.3	682.1	676.8	671.7
50°	680.6	667.4	654.2	645.1	640.1	635.0	630.0	625.0
52.5°	632.6	619.1	605.7	596.4	591.2	585.9	580.7	575.5
55°	561.7	548.0	534.3	524.9	519.8	514.8	509.8	504.7
57.5°	492.5	478.5	464.6	455.7	451.9	448.1	444.3	440.5
60°	446.3	432.5	418.8	409.7	405.5	401.3	397.1	392.9
62.5°	400.8	388.1	375.4	367.3	363.9	360.6	357.1	353.8
65°	335.5	324.2	312.8	305.6	302.4	299.2	296.0	292.8
67.5°	275.6	265.9	256.1	249.4	245.9	242.5	238.9	235.5
70°	234.9	226.2	217.5	211.7	209.1	206.5	203.8	201.2
72.5°	198.4	191.0	183.5	178.6	176.1	173.7	171.3	168.8
75°	146.2	140.1	134.0	130.2	128.5	127.0	125.4	123.8
77.5°	103.4	99.9	96.3	94.3	93.8	93.3	92.8	92.4
80°	79.4	78.6	77.7	77.2	77.0	76.7	76.5	76.2
82.5°	61.6	61.1	60.5	60.1	59.8	59.6	59.3	59.1
85°	35.8	35.3	34.8	34.5	34.5	34.5	34.5	34.5
87.5°	15.3	15.2	15.2	15.2	15.5	15.8	15.9	16.2
90°	12.1	12.8	13.4	13.4	14.1	14.8	14.1	14.1
92.5°	132.2	99.5	79.2	65.7	57.8	54.2	51.8	51.8
95°	498.9	394.5	304.3	239.0	206.0	185.1	173.1	164.3
97.5°	737.0	698.3	632.4	562.1	513.8	473.3	453.1	439.1
100°	811.9	825.4	792.4	742.6	684.0	642.9	622.8	617.3
102.5°	808.1	874.9	884.5	863.8	827.9	798.1	776.8	772.5
105°	754.1	870.5	937.1	964.8	966.1	960.7	951.3	947.3
107.5°	677.2	801.2	895.0	955.0	988.3	1003.7	1010.4	1012.1
110°	630.9	747.3	844.9	918.9	966.7	995.1	1007.2	1013.2





TEST NUMBER: P332972-935

CATALOG NUMBER: SA4XXRDIP-C1020D810U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	596.9	699.9	792.1	866.2	920.4	954.7	971.6	981.5
115°	562.8	645.7	724.4	789.0	842.2	882.6	904.1	909.6
117.5°	546.1	614.7	676.6	731.4	776.8	810.7	832.5	836.7
120°	538.6	601.2	655.0	702.8	741.2	770.9	788.3	795.7
122.5°	532.1	592.5	641.6	683.5	715.9	741.2	756.0	763.4
125°	521.1	579.0	625.4	662.5	689.4	708.9	721.7	725.7
127.5°	507.6	562.9	609.2	644.5	671.5	688.9	699.6	703.7
130°	496.9	550.0	595.8	631.5	659.1	676.0	686.7	690.8
132.5°	485.5	535.5	580.2	615.9	642.9	661.9	672.2	676.2
135°	469.9	513.7	554.7	588.4	615.4	634.2	645.0	649.0
137.5°	455.8	492.8	527.4	557.8	583.0	601.6	610.4	615.4
140°	447.7	479.3	509.6	538.0	561.5	576.3	585.7	591.1
142.5°	440.1	468.0	494.0	518.5	539.4	553.1	561.5	565.2
145°	429.6	452.5	472.6	491.5	508.3	519.7	526.5	529.9
147.5°	420.8	438.9	455.1	469.9	482.3	492.1	497.2	498.4
150°	415.3	430.8	444.4	456.4	467.3	476.0	480.0	480.7
152.5°	409.5	422.8	435.1	445.1	454.3	461.4	463.8	464.5
155°	400.5	411.4	421.5	429.6	436.3	441.6	443.7	443.7
157.5°	391.0	400.0	408.5	415.0	420.1	424.1	425.3	425.3
160°	385.1	392.5	399.9	405.3	409.3	413.4	414.1	414.1
162.5°	379.2	385.5	391.3	396.1	399.1	403.1	403.8	403.3
165°	370.9	375.0	379.7	383.1	385.7	388.5	387.8	387.1
167.5°	363.0	366.1	369.9	371.9	373.2	375.0	374.9	374.3
170°	358.2	360.2	362.9	364.9	366.3	366.9	366.3	366.3
172.5°	353.9	355.3	357.0	358.4	359.2	359.9	359.2	358.2
175°	348.1	348.7	350.1	350.1	350.1	351.5	350.1	348.7
177.5°	344.3	344.8	344.8	345.3	344.8	345.3	344.3	343.2
180°	342.7	342.7	342.7	342.7	342.7	342.7	342.7	342.7

(END OF REPORT)