

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333008-935

Luminaire Tested: **SA4XXRDIP-C1195D1035U935-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P333008-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C1195D1035U935-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1035 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7332.9 lumens
Efficiency: N/A
Efficacy: 109.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 66.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333008-935
CATALOG NUMBER: SA4XXRDIP-C1195D1035U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

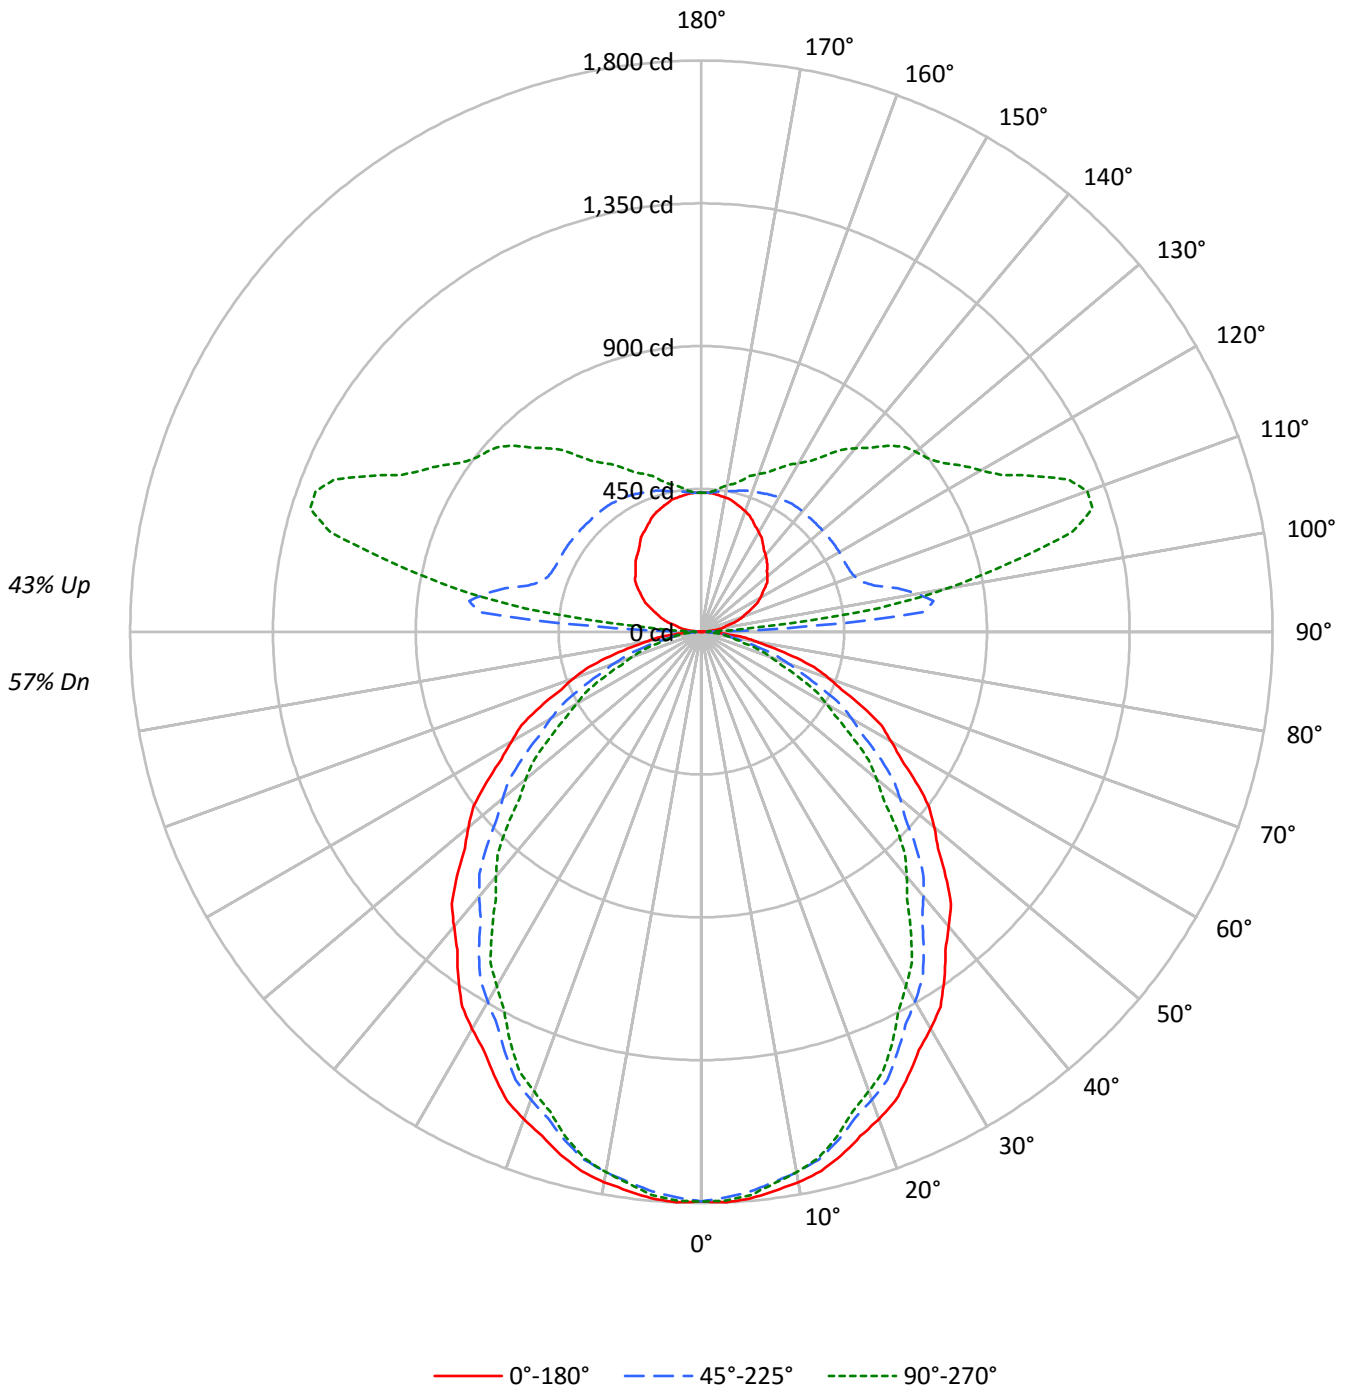



TEST NUMBER: P333008-935

CATALOG NUMBER: SA4XXRDIP-C1195D1035U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	57
1	100	95	92	88	93	89	86	83	77	74	72	66	64	62	55	54	53	48
2	91	84	78	72	84	78	73	68	68	64	60	58	55	53	49	47	45	41
3	83	74	66	61	77	69	63	57	60	55	51	52	48	45	44	41	39	35
4	76	65	58	52	71	61	54	49	53	48	44	46	42	39	39	36	34	30
5	70	58	50	44	65	55	48	42	48	42	38	42	37	34	36	32	30	26
6	65	53	45	39	60	49	42	37	43	38	33	38	33	30	32	29	26	23
7	60	48	40	34	56	45	38	33	39	34	29	34	30	26	30	26	23	21
8	56	43	36	30	52	41	34	29	36	30	26	32	27	24	27	24	21	19
9	52	40	32	27	48	37	31	26	33	27	24	29	25	21	25	22	19	17
10	49	36	29	24	45	34	28	23	31	25	21	27	22	19	23	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14495	14495	14495
5°	14528	14350	14439
10°	14437	14178	14178
15°	14271	13881	13778
20°	14044	13489	13241
25°	13752	13030	12699
30°	13470	12547	12021
35°	13157	12046	11340
40°	12779	11475	10606
45°	12432	10909	9857
50°	12036	10257	9065
55°	11610	9578	8204
60°	11144	8835	7325
65°	10714	7904	6460
70°	10093	6878	5486
75°	9304	5705	4460
80°	8117	4347	4091
85°	6873	3946	3696



TEST NUMBER: P333008-935

CATALOG NUMBER: SA4XXRDIP-C1195D1035U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	168.7	2.3
10°-20°	470.4	6.4
20°-30°	679.2	9.3
30°-40°	769.9	10.5
40°-50°	743.4	10.1
50°-60°	618.2	8.4
60°-70°	426.9	5.8
70°-80°	216.4	3.0
80°-90°	57.9	0.8
90°-100°	316.0	4.3
100°-110°	657.7	9.0
110°-120°	589.1	8.0
120°-130°	495.5	6.8
130°-140°	413.2	5.6
140°-150°	315.7	4.3
150°-160°	221.9	3.0
160°-170°	130.5	1.8
170°-180°	42.5	0.6
0°-30°	1318.2	18.0
0°-40°	2088.1	28.5
0°-60°	3449.7	47.0
0°-90°	4150.9	56.6
90°-120°	1562.8	21.3
90°-150°	2787.1	38.0
90°-180°	3182.0	43.4
0°-180°	7332.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1796	1796	1796	1796	1796	
5°	1793	1787	1771	1784	1782	170
15°	1708	1694	1661	1658	1648	481
25°	1544	1517	1463	1440	1426	711
35°	1335	1290	1222	1177	1151	834
45°	1089	1036	956	890	863	839
55°	825	768	680	612	583	738
65°	561	500	414	357	338	554
75°	298	247	183	152	143	315
85°	74	48	43	40	40	84
90°	1	7	16	17	18	5
95°	28	89	700	347	210	32
105°	101	146	564	1214	1209	107
115°	177	222	503	966	1161	176
125°	247	293	500	822	927	220
135°	293	349	496	730	829	227
145°	338	387	493	615	676	212
155°	384	415	480	543	566	177
165°	419	432	460	487	494	118
175°	437	438	441	447	445	41
180°	438	438	438	438	438	



TEST NUMBER: P333008-935

CATALOG NUMBER: SA4XXRDIP-C1195D1035U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5
2.5°	1799.9	1799.0	1798.0	1797.0	1796.0	1794.2	1791.6	1788.8	1786.1	1783.5	1786.1
5°	1792.8	1791.6	1790.4	1789.2	1788.0	1785.5	1781.8	1778.1	1774.5	1770.8	1773.8
7.5°	1776.6	1775.3	1774.0	1772.7	1771.4	1768.4	1763.7	1758.9	1754.1	1749.4	1751.4
10°	1761.2	1759.6	1758.2	1756.6	1755.1	1751.5	1746.1	1740.6	1735.1	1729.6	1730.8
12.5°	1741.4	1739.7	1737.8	1736.0	1734.3	1730.2	1723.7	1717.3	1710.7	1704.3	1705.0
15°	1707.5	1704.8	1702.1	1699.4	1696.6	1691.3	1683.8	1676.1	1668.4	1660.8	1660.2
17.5°	1666.6	1662.6	1658.6	1654.7	1650.7	1644.2	1635.0	1625.8	1616.6	1607.5	1605.8
20°	1634.7	1630.7	1626.8	1622.8	1618.9	1611.6	1601.3	1590.9	1580.5	1570.1	1567.6
22.5°	1599.5	1595.1	1590.6	1586.1	1581.7	1573.9	1562.7	1551.6	1540.5	1529.4	1525.7
25°	1543.9	1538.4	1532.9	1527.5	1522.0	1512.9	1500.5	1487.9	1475.4	1462.8	1457.7
27.5°	1485.7	1478.8	1471.9	1465.0	1458.0	1447.9	1434.5	1421.2	1407.7	1394.4	1387.9
30°	1445.0	1437.4	1429.7	1422.0	1414.5	1403.4	1389.1	1374.7	1360.4	1346.0	1338.3
32.5°	1402.1	1393.4	1384.8	1376.2	1367.6	1355.9	1341.0	1326.2	1311.3	1296.5	1287.6
35°	1335.0	1325.2	1315.4	1305.6	1295.9	1283.3	1268.1	1252.8	1237.5	1222.3	1211.9
37.5°	1263.3	1253.1	1243.0	1233.0	1222.9	1209.4	1192.5	1175.5	1158.6	1141.7	1130.1
40°	1212.6	1202.6	1192.5	1182.4	1172.3	1158.6	1141.2	1123.7	1106.3	1088.9	1076.1
42.5°	1164.2	1153.7	1143.1	1132.5	1122.0	1107.6	1089.4	1071.3	1053.2	1035.0	1021.9
45°	1088.9	1077.5	1066.3	1055.0	1043.7	1028.8	1010.6	992.2	973.9	955.5	940.6
47.5°	1011.1	999.4	987.7	976.0	964.4	949.0	930.0	910.9	891.8	872.8	857.2
50°	958.3	946.3	934.4	922.6	910.6	894.8	875.3	855.7	836.2	816.7	801.4
52.5°	904.4	892.7	881.1	869.4	857.7	841.8	821.8	801.8	781.7	761.6	746.1
55°	824.9	812.7	800.5	788.2	776.0	760.0	740.1	720.3	700.4	680.5	664.7
57.5°	746.2	733.6	720.8	708.2	695.4	679.3	659.8	640.2	620.6	601.1	585.0
60°	690.2	678.0	665.7	653.5	641.3	625.4	605.9	586.3	566.7	547.2	531.3
62.5°	639.6	626.9	614.2	601.5	588.8	572.4	552.3	532.3	512.2	492.2	477.5
65°	560.9	547.8	534.7	521.5	508.4	492.1	472.5	453.0	433.4	413.8	400.7
67.5°	479.2	466.7	454.1	441.5	429.0	413.5	395.4	377.3	359.1	341.0	329.7
70°	427.6	414.7	401.9	389.1	376.3	361.1	343.7	326.3	308.9	291.4	281.4
72.5°	372.6	361.0	349.4	337.8	326.1	312.1	295.7	279.2	262.8	246.3	237.7
75°	298.3	287.1	275.7	264.4	253.1	240.3	225.9	211.5	197.3	182.9	175.8
77.5°	223.0	213.4	203.8	194.2	184.6	174.0	162.4	150.8	139.2	127.6	123.5
80°	174.6	165.7	156.9	148.0	139.1	130.2	121.0	111.8	102.6	93.5	92.6
82.5°	132.9	124.7	116.6	108.4	100.3	93.6	88.3	83.1	77.8	72.6	71.9
85°	74.2	68.1	62.0	55.9	49.8	46.3	45.4	44.4	43.6	42.6	42.0
87.5°	25.5	23.8	22.4	20.7	18.9	17.7	18.5	18.3	18.4	18.5	18.1
90°	0.9	2.6	5.2	6.0	6.9	6.9	12.1	12.1	13.8	15.5	14.6
92.5°	9.8	14.3	22.4	32.8	45.4	63.3	106.9	173.7	238.6	272.7	227.1
95°	28.3	30.9	39.5	50.7	71.4	107.5	182.2	323.2	528.7	700.5	720.3
97.5°	50.9	50.9	58.3	68.6	86.3	116.6	174.2	290.5	494.7	737.8	904.9
100°	65.3	65.3	71.4	81.6	98.0	125.5	176.2	273.4	448.7	691.0	911.1
102.5°	79.0	80.4	85.8	95.4	111.1	137.2	183.0	268.5	417.8	632.7	859.5
105°	100.6	103.1	107.5	117.8	133.2	158.2	199.4	270.8	391.1	563.9	765.9
107.5°	124.3	126.1	130.3	141.3	156.1	180.6	218.5	283.4	386.2	525.4	690.2
110°	140.1	141.8	146.1	156.4	171.9	195.1	232.9	293.1	387.6	512.3	652.4



TEST NUMBER: P333008-935

CATALOG NUMBER: SA4XXRDIP-C1195D1035U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	155.2	157.0	162.0	171.6	187.0	210.3	246.7	303.4	391.8	506.1	631.1
115°	177.1	179.6	185.6	194.2	210.6	233.8	268.2	319.8	399.7	502.8	611.1
117.5°	199.8	202.2	207.5	217.0	232.2	256.3	289.0	336.4	408.1	502.0	602.2
120°	214.9	216.6	222.7	232.0	246.7	270.8	303.4	348.1	414.3	502.0	597.4
122.5°	228.7	230.3	236.3	245.1	261.1	284.5	317.2	359.1	420.5	501.3	591.9
125°	246.7	250.1	255.3	264.8	281.0	305.1	336.0	375.7	429.8	500.2	582.8
127.5°	262.7	265.4	271.6	282.4	299.5	323.7	353.6	389.9	437.1	498.3	570.6
130°	271.6	275.1	281.9	294.8	311.2	336.0	365.3	398.8	442.6	497.7	563.0
132.5°	280.5	283.3	292.2	304.4	322.2	345.7	375.0	407.8	447.5	497.0	556.1
135°	293.1	296.5	305.1	319.8	337.8	360.2	388.5	419.5	454.7	495.9	545.8
137.5°	305.7	308.9	318.4	332.3	351.0	372.4	398.8	427.7	459.0	495.8	536.8
140°	314.6	317.2	326.7	341.2	359.3	380.0	405.7	433.2	462.4	495.1	532.1
142.5°	324.3	326.8	335.5	349.5	366.9	386.8	411.9	437.3	465.2	495.1	528.0
145°	337.8	340.4	349.0	361.0	377.4	396.2	418.6	441.8	466.7	493.4	520.9
147.5°	353.1	354.0	361.5	373.9	387.4	404.5	425.5	445.7	467.6	490.3	514.5
150°	362.7	363.6	370.5	380.8	393.6	410.0	429.0	447.8	467.6	488.2	509.7
152.5°	371.7	371.9	378.8	388.3	399.8	414.8	431.7	449.2	466.2	484.7	504.2
155°	384.2	385.0	390.2	398.8	408.3	421.2	435.8	450.4	464.2	479.7	495.9
157.5°	396.4	396.4	401.2	407.9	416.2	426.4	438.7	450.4	461.9	474.3	487.5
160°	404.0	404.0	407.4	413.5	420.3	429.8	440.1	450.4	459.9	470.2	481.4
162.5°	410.9	410.2	412.9	418.3	424.5	431.9	441.4	450.4	457.8	466.1	475.9
165°	418.6	418.6	420.3	424.6	429.0	434.0	441.8	448.7	453.8	459.9	466.7
167.5°	426.4	425.5	426.4	429.6	432.0	435.9	441.6	446.6	449.7	453.7	458.5
170°	429.8	429.0	429.8	432.4	434.0	436.6	440.9	445.2	446.9	449.5	453.0
172.5°	433.2	432.4	432.5	434.4	435.4	437.3	440.2	443.8	444.2	445.4	448.2
175°	436.6	435.8	435.8	436.6	437.5	437.5	439.2	441.8	440.9	440.9	442.6
177.5°	438.2	437.5	436.8	437.5	437.5	437.5	438.2	439.5	438.2	438.2	438.9
180°	437.5	437.5	437.5	437.5	437.5	437.5	437.5	437.5	437.5	437.5	437.5



TEST NUMBER: P333008-935

CATALOG NUMBER: SA4XXRDIP-C1195D1035U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5
2.5°	1788.8	1791.6	1794.2	1795.4	1795.2	1794.9	1794.7	1794.5
5°	1776.9	1779.9	1783.0	1784.3	1783.6	1783.0	1782.4	1781.8
7.5°	1753.3	1755.2	1757.2	1757.6	1756.7	1755.8	1754.7	1753.8
10°	1732.0	1733.2	1734.5	1734.5	1733.2	1732.0	1730.8	1729.6
12.5°	1705.7	1706.5	1707.2	1706.7	1705.0	1703.3	1701.6	1699.9
15°	1659.6	1659.0	1658.4	1657.0	1654.8	1652.7	1650.6	1648.5
17.5°	1604.0	1602.3	1600.6	1598.2	1594.9	1591.6	1588.5	1585.2
20°	1565.2	1562.7	1560.3	1557.1	1553.2	1549.2	1545.2	1541.2
22.5°	1522.1	1518.4	1514.8	1511.3	1508.0	1504.8	1501.6	1498.3
25°	1452.4	1447.3	1442.1	1438.0	1434.9	1431.8	1428.7	1425.7
27.5°	1381.6	1375.1	1368.7	1363.3	1358.9	1354.5	1350.1	1345.7
30°	1330.7	1323.1	1315.4	1309.2	1304.2	1299.4	1294.5	1289.6
32.5°	1278.8	1269.9	1261.0	1254.3	1249.7	1245.0	1240.4	1235.7
35°	1201.4	1191.1	1180.7	1172.8	1167.3	1161.7	1156.2	1150.7
37.5°	1118.4	1106.8	1095.3	1086.7	1081.2	1075.6	1070.2	1064.7
40°	1063.2	1050.4	1037.6	1028.4	1022.9	1017.4	1011.9	1006.4
42.5°	1008.8	995.7	982.7	973.3	967.5	961.8	956.1	950.3
45°	925.6	910.6	895.6	885.4	879.9	874.4	868.9	863.4
47.5°	841.7	826.2	810.7	799.9	793.8	787.8	781.7	775.7
50°	786.1	770.9	755.5	745.0	739.3	733.4	727.6	721.8
52.5°	730.6	715.1	699.6	688.8	682.8	676.7	670.6	664.6
55°	648.8	632.9	617.0	606.1	600.4	594.5	588.8	582.9
57.5°	568.9	552.7	536.6	526.3	521.9	517.5	513.1	508.7
60°	515.4	499.6	483.6	473.3	468.4	463.5	458.6	453.7
62.5°	462.9	448.2	433.5	424.2	420.3	416.5	412.5	408.6
65°	387.5	374.4	361.3	352.8	349.2	345.5	341.9	338.2
67.5°	318.4	307.0	295.8	288.1	284.0	280.0	276.0	271.9
70°	271.3	261.2	251.2	244.6	241.5	238.5	235.4	232.4
72.5°	229.1	220.5	211.9	206.2	203.4	200.6	197.8	194.9
75°	168.8	161.8	154.7	150.3	148.5	146.6	144.8	143.0
77.5°	119.4	115.3	111.2	108.9	108.3	107.8	107.3	106.7
80°	91.7	90.7	89.8	89.2	88.9	88.6	88.3	88.0
82.5°	71.3	70.6	69.9	69.4	69.1	68.8	68.5	68.2
85°	41.4	40.8	40.2	39.9	39.9	39.9	39.9	39.9
87.5°	18.0	17.9	17.8	17.8	18.3	18.7	18.8	19.0
90°	15.5	16.4	17.2	17.2	18.1	18.9	18.1	18.1
92.5°	168.8	127.1	101.1	83.9	73.8	69.1	66.2	66.2
95°	636.9	503.7	388.5	305.1	263.0	236.3	220.9	209.7
97.5°	941.1	891.5	807.4	717.7	656.0	604.2	578.5	560.6
100°	1036.6	1053.8	1011.7	948.0	873.3	820.9	795.0	788.2
102.5°	1031.8	1117.1	1129.3	1102.8	1056.9	1018.9	991.8	986.3
105°	962.7	1111.4	1196.4	1231.7	1233.5	1226.6	1214.5	1209.4
107.5°	864.5	1022.9	1142.7	1219.3	1261.8	1281.4	1290.0	1292.3
110°	805.4	954.1	1078.7	1173.3	1234.3	1270.4	1285.9	1293.7



TEST NUMBER: P333008-935

CATALOG NUMBER: SA4XXRDIP-C1195D1035U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	762.1	893.5	1011.3	1105.9	1175.2	1218.8	1240.5	1253.0
115°	718.6	824.3	924.9	1007.4	1075.3	1126.9	1154.3	1161.2
117.5°	697.2	784.8	863.8	933.8	991.8	1035.1	1062.9	1068.2
120°	687.6	767.6	836.4	897.3	946.3	984.2	1006.5	1016.0
122.5°	679.4	756.6	819.2	872.6	914.0	946.3	965.3	974.7
125°	665.3	739.2	798.5	845.8	880.2	905.1	921.4	926.6
127.5°	648.1	718.8	777.9	822.8	857.3	879.5	893.2	898.4
130°	634.4	702.2	760.7	806.2	841.5	863.0	876.8	881.9
132.5°	619.9	683.7	740.7	786.4	820.9	845.1	858.2	863.3
135°	599.9	655.8	708.3	751.2	785.7	809.7	823.5	828.6
137.5°	581.9	629.2	673.4	712.2	744.3	768.1	779.5	785.7
140°	571.6	612.0	650.7	686.7	716.9	735.8	747.8	754.7
142.5°	562.0	597.5	630.8	662.0	688.6	706.2	716.9	721.7
145°	548.4	577.6	603.4	627.5	648.9	663.6	672.2	676.5
147.5°	537.2	560.4	581.1	599.9	615.8	628.4	634.9	636.4
150°	530.4	550.1	567.3	582.8	596.5	607.7	612.9	613.7
152.5°	522.8	539.8	555.6	568.3	580.1	589.1	592.2	593.1
155°	511.4	525.2	538.0	548.4	557.0	563.9	566.5	566.5
157.5°	499.2	510.7	521.6	529.9	536.3	541.5	543.0	543.0
160°	491.6	501.1	510.6	517.5	522.6	527.8	528.7	528.7
162.5°	484.1	492.1	499.6	505.8	509.5	514.7	515.6	514.9
165°	473.6	478.8	484.7	489.0	492.5	495.9	495.1	494.2
167.5°	463.5	467.4	472.3	474.8	476.6	478.8	478.6	477.9
170°	457.3	459.9	463.3	465.9	467.6	468.5	467.6	467.6
172.5°	451.8	453.7	455.7	457.6	458.7	459.5	458.7	457.3
175°	444.4	445.2	446.9	446.9	446.9	448.7	446.9	445.2
177.5°	439.5	440.2	440.2	440.9	440.2	440.9	439.5	438.2
180°	437.5	437.5	437.5	437.5	437.5	437.5	437.5	437.5

(END OF REPORT)