

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332887-935

Luminaire Tested: **SA4XXRDIP-C350D1035U935-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332887-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C350D1035U935-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1035 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4316.0 lumens
Efficiency: N/A
Efficacy: 115.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332887-935

CATALOG NUMBER: SA4XXRDIP-C350D1035U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

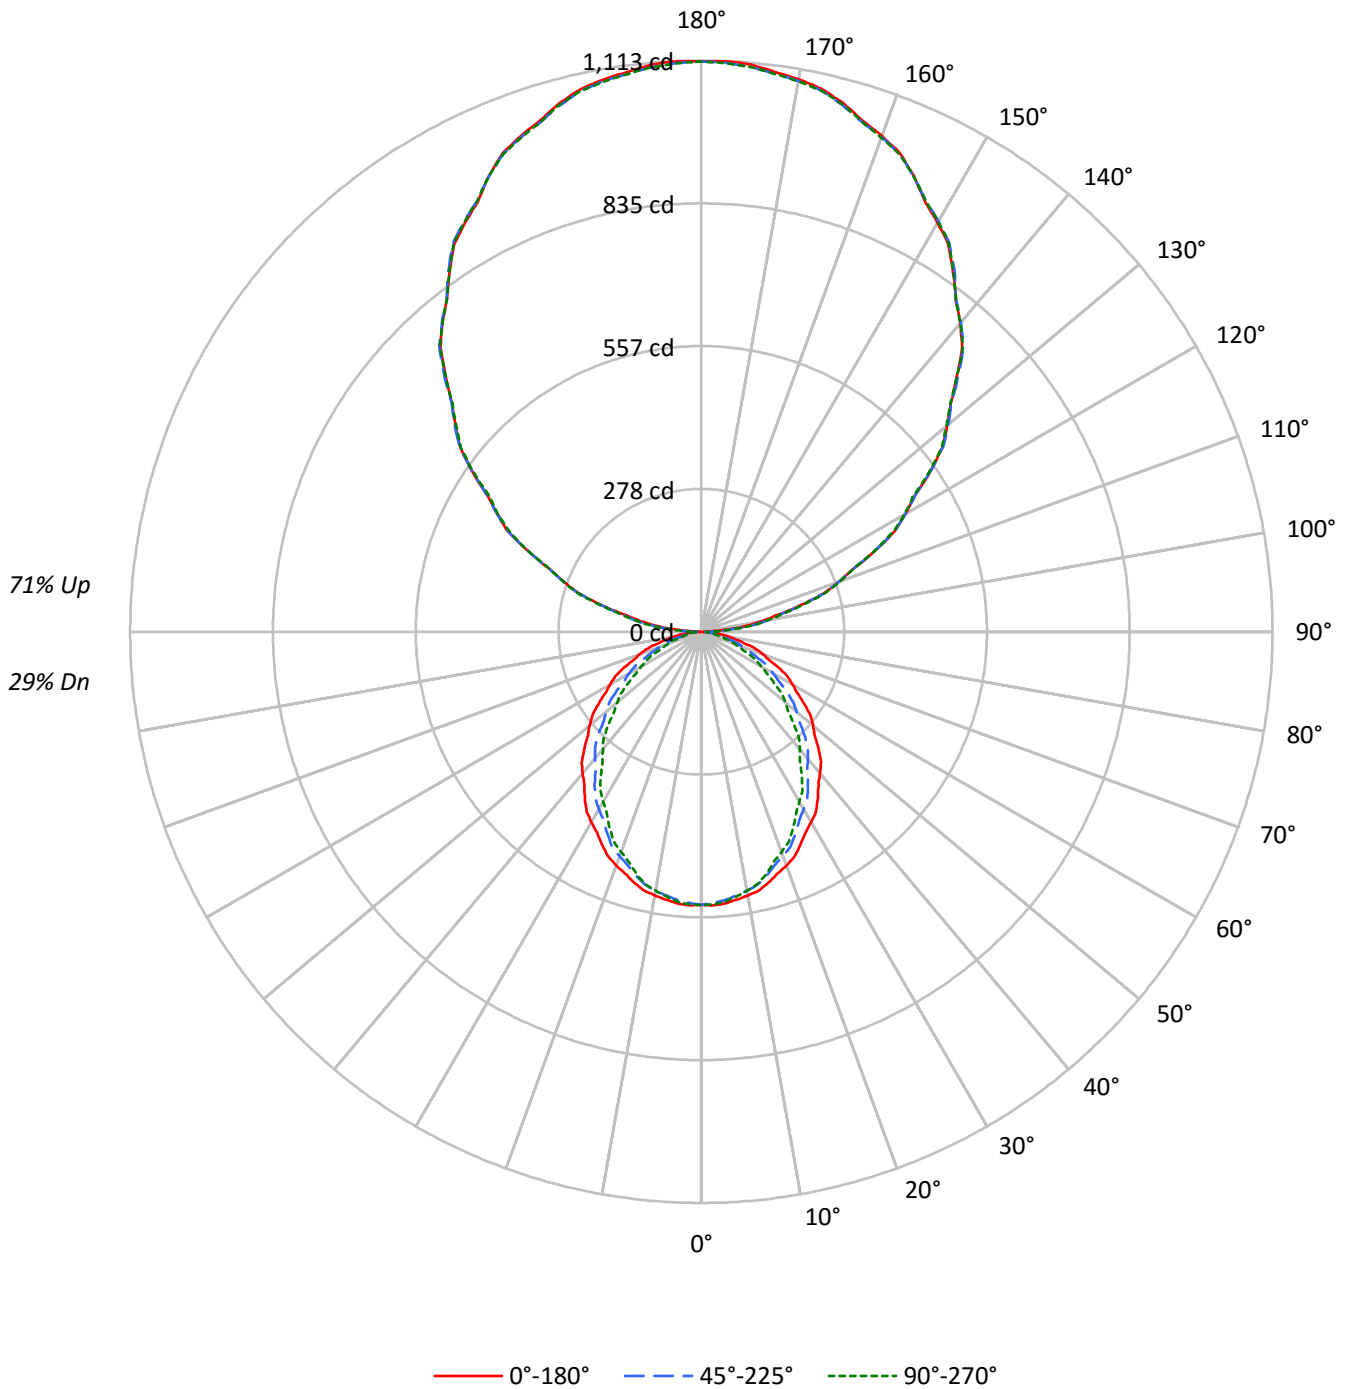



TEST NUMBER: P332887-935

CATALOG NUMBER: SA4XXRDIP-C350D1035U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	29
1	93	89	85	82	83	80	77	74	63	61	59	47	46	44	32	32	31	24
2	85	78	72	67	76	70	65	61	55	52	49	41	39	37	29	27	26	21
3	77	68	62	56	69	62	56	51	49	45	41	37	34	32	26	24	23	18
4	71	61	53	47	63	55	48	43	43	39	35	33	30	27	23	21	19	15
5	65	54	46	40	58	49	42	37	39	34	30	29	26	24	21	19	17	13
6	60	48	40	35	53	44	37	32	35	30	26	26	23	21	19	17	15	12
7	55	43	36	30	49	39	33	28	31	27	23	24	21	18	17	15	13	10
8	51	39	32	27	46	36	29	25	29	24	20	22	19	16	16	14	12	9
9	48	36	29	24	43	32	26	22	26	21	18	20	17	14	14	12	11	9
10	44	33	26	21	40	30	24	20	24	19	16	19	15	13	13	11	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4297	4297	4297
5°	4306	4254	4280
10°	4279	4203	4203
15°	4231	4115	4084
20°	4163	3998	3924
25°	4077	3862	3764
30°	3993	3719	3564
35°	3900	3571	3362
40°	3789	3402	3144
45°	3685	3234	2923
50°	3567	3041	2688
55°	3441	2839	2432
60°	3303	2619	2172
65°	3177	2344	1914
70°	2991	2039	1626
75°	2757	1691	1323
80°	2404	1288	1213
85°	2038	1176	1093



TEST NUMBER: P332887-935

CATALOG NUMBER: SA4XXRDIP-C350D1035U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.0	1.2
10°-20°	139.4	3.2
20°-30°	201.3	4.7
30°-40°	228.2	5.3
40°-50°	220.4	5.1
50°-60°	183.2	4.2
60°-70°	126.5	2.9
70°-80°	64.1	1.5
80°-90°	19.8	0.5
90°-100°	73.3	1.7
100°-110°	217.1	5.0
110°-120°	368.5	8.5
120°-130°	485.9	11.3
130°-140°	545.7	12.6
140°-150°	536.2	12.4
150°-160°	451.0	10.5
160°-170°	300.1	7.0
170°-180°	105.1	2.4
0°-30°	390.7	9.1
0°-40°	619.0	14.3
0°-60°	1022.6	23.7
0°-90°	1233.0	28.6
90°-120°	658.9	15.3
90°-150°	2226.8	51.6
90°-180°	3083.0	71.4
0°-180°	4316.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	532	532	532	532	532	
5°	531	530	525	529	528	50
15°	506	502	492	491	489	143
25°	458	450	434	427	423	211
35°	396	382	362	349	341	247
45°	323	307	283	264	256	249
55°	244	228	202	181	173	219
65°	166	148	123	106	100	164
75°	88	73	54	45	42	93
85°	22	14	13	12	12	25
90°	3	12	19	24	26	4
95°	52	59	65	68	68	57
105°	200	201	205	207	210	213
115°	375	375	373	372	371	369
125°	546	546	545	543	541	486
135°	704	709	709	707	705	544
145°	855	858	859	858	856	535
155°	980	980	979	982	979	451
165°	1066	1064	1062	1067	1064	301
175°	1110	1105	1104	1110	1104	105
180°	1111	1111	1111	1111	1111	



TEST NUMBER: P332887-935

CATALOG NUMBER: SA4XXRDIP-C350D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3
2.5°	533.6	533.2	533.0	532.7	532.4	531.8	531.1	530.3	529.4	528.7	529.4
5°	531.4	531.1	530.7	530.4	529.9	529.3	528.1	527.1	526.0	525.0	525.8
7.5°	526.6	526.2	525.9	525.5	525.1	524.2	522.8	521.3	520.0	518.6	519.1
10°	522.0	521.6	521.2	520.7	520.2	519.2	517.5	515.9	514.3	512.7	513.1
12.5°	516.2	515.7	515.1	514.6	514.1	512.9	510.9	509.0	507.1	505.1	505.4
15°	506.2	505.3	504.5	503.7	502.9	501.4	499.1	496.8	494.6	492.3	492.1
17.5°	494.0	492.8	491.6	490.5	489.3	487.3	484.7	481.9	479.2	476.5	476.0
20°	484.6	483.4	482.2	481.0	479.8	477.8	474.7	471.6	468.5	465.4	464.7
22.5°	474.2	472.8	471.5	470.2	468.8	466.5	463.2	459.9	456.7	453.3	452.3
25°	457.7	456.1	454.4	452.8	451.2	448.5	444.8	441.1	437.3	433.6	432.0
27.5°	440.4	438.3	436.3	434.3	432.2	429.2	425.2	421.3	417.3	413.4	411.4
30°	428.3	426.0	423.8	421.5	419.3	416.0	411.7	407.5	403.2	399.0	396.7
32.5°	415.6	413.0	410.5	407.9	405.4	401.9	397.5	393.1	388.7	384.4	381.7
35°	395.7	392.8	389.9	387.0	384.1	380.4	375.9	371.3	366.9	362.3	359.2
37.5°	374.4	371.4	368.5	365.5	362.5	358.5	353.4	348.4	343.5	338.5	335.0
40°	359.5	356.5	353.4	350.5	347.5	343.5	338.3	333.1	328.0	322.8	319.0
42.5°	345.1	342.0	338.8	335.7	332.6	328.3	323.0	317.5	312.2	306.8	302.9
45°	322.8	319.4	316.1	312.7	309.4	305.0	299.5	294.1	288.7	283.3	278.8
47.5°	299.7	296.3	292.8	289.3	285.9	281.3	275.7	270.0	264.3	258.7	254.1
50°	284.0	280.5	277.0	273.5	269.9	265.3	259.5	253.7	247.9	242.1	237.5
52.5°	268.1	264.6	261.1	257.7	254.3	249.5	243.6	237.6	231.7	225.8	221.2
55°	244.5	240.9	237.3	233.7	230.1	225.2	219.4	213.5	207.6	201.7	197.0
57.5°	221.2	217.4	213.7	209.9	206.1	201.4	195.5	189.8	184.0	178.1	173.4
60°	204.6	201.0	197.3	193.7	190.1	185.4	179.6	173.7	168.0	162.2	157.5
62.5°	189.6	185.8	182.0	178.3	174.5	169.7	163.8	157.8	151.9	145.9	141.5
65°	166.3	162.4	158.5	154.6	150.7	145.9	140.1	134.2	128.5	122.7	118.8
67.5°	142.1	138.4	134.6	130.9	127.2	122.6	117.2	111.8	106.4	101.1	97.7
70°	126.7	123.0	119.2	115.4	111.5	107.0	101.9	96.7	91.5	86.4	83.4
72.5°	110.5	107.0	103.6	100.1	96.7	92.6	87.6	82.7	77.9	73.0	70.5
75°	88.4	85.1	81.7	78.4	75.0	71.2	67.0	62.7	58.5	54.2	52.1
77.5°	66.1	63.3	60.4	57.6	54.8	51.6	48.1	44.7	41.2	37.8	36.6
80°	51.7	49.2	46.5	43.9	41.2	38.6	35.9	33.1	30.4	27.7	27.5
82.5°	39.3	36.9	34.5	32.1	29.7	27.7	26.2	24.6	23.1	21.5	21.4
85°	22.0	20.2	18.4	16.5	14.7	13.7	13.4	13.2	12.9	12.7	12.5
87.5°	8.0	7.8	7.7	7.6	7.4	7.4	7.7	7.9	8.1	8.4	8.5
90°	2.6	4.6	6.8	8.9	11.0	12.8	14.3	15.8	17.4	18.9	20.1
92.5°	18.4	20.8	23.2	25.6	28.0	29.8	30.8	31.9	33.0	34.0	34.7
95°	51.6	53.3	55.0	56.7	58.5	59.9	61.3	62.7	64.0	65.3	65.9
97.5°	90.1	91.4	92.8	94.2	95.6	97.0	98.6	100.1	101.8	103.3	104.0
100°	120.3	121.1	121.8	122.6	123.4	124.6	126.3	128.0	129.8	131.5	131.9
102.5°	152.0	152.2	152.6	152.8	153.2	154.1	155.7	157.2	158.8	160.4	160.9
105°	200.3	200.4	200.6	200.8	201.0	201.5	202.2	203.0	203.8	204.6	205.1
107.5°	251.0	251.2	251.4	251.7	251.8	252.0	252.2	252.3	252.4	252.5	253.0
110°	285.3	285.7	286.1	286.5	286.9	287.0	286.7	286.5	286.4	286.2	285.8



TEST NUMBER: P332887-935

CATALOG NUMBER: SA4XXRDIP-C350D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	321.1	321.2	321.2	321.3	321.4	321.2	320.9	320.6	320.2	319.9	319.8
115°	374.7	374.7	374.7	374.7	374.7	374.5	374.1	373.8	373.3	373.0	372.8
117.5°	425.2	425.4	425.5	425.7	425.9	425.8	425.5	425.2	425.0	424.7	424.0
120°	458.9	459.7	460.5	461.2	462.0	462.1	461.5	460.9	460.4	459.8	458.8
122.5°	494.0	494.3	494.6	494.9	495.2	495.2	495.0	494.6	494.4	494.1	493.5
125°	545.7	545.7	545.7	545.7	545.7	545.6	545.4	545.3	545.0	544.8	544.5
127.5°	592.6	593.2	593.7	594.3	595.0	595.0	594.8	594.4	594.2	593.8	593.5
130°	625.6	626.2	626.8	627.3	627.9	628.2	628.2	628.2	628.2	628.2	627.8
132.5°	659.4	659.8	660.1	660.6	661.0	661.2	661.0	660.8	660.6	660.6	660.1
135°	703.9	705.0	706.1	707.3	708.4	709.0	709.0	709.0	709.0	709.0	708.6
137.5°	752.3	752.9	753.4	753.9	754.5	754.8	755.2	755.5	755.8	756.1	755.6
140°	784.6	785.0	785.4	785.7	786.2	786.4	786.4	786.4	786.4	786.4	786.2
142.5°	814.2	814.6	814.9	815.4	815.7	815.8	815.7	815.5	815.4	815.2	815.2
145°	855.1	855.8	856.6	857.4	858.2	858.6	858.8	859.0	859.2	859.4	859.2
147.5°	895.7	896.6	897.5	898.5	899.3	899.7	899.6	899.4	899.2	899.1	899.0
150°	920.4	921.2	922.0	922.7	923.5	923.9	923.9	923.9	923.9	923.9	923.9
152.5°	943.8	944.3	944.7	945.2	945.6	945.9	946.1	946.2	946.4	946.5	947.0
155°	979.7	979.7	979.7	979.7	979.7	979.6	979.4	979.2	979.0	978.9	979.6
157.5°	1010.0	1009.6	1009.3	1008.9	1008.6	1008.4	1008.3	1008.3	1008.3	1008.2	1008.8
160°	1027.9	1027.6	1027.4	1027.3	1027.1	1026.9	1026.7	1026.5	1026.3	1026.1	1026.7
162.5°	1044.3	1043.9	1043.4	1042.8	1042.3	1042.0	1041.8	1041.6	1041.5	1041.2	1042.2
165°	1066.5	1065.9	1065.4	1064.8	1064.2	1063.8	1063.3	1063.0	1062.6	1062.2	1063.3
167.5°	1083.6	1082.7	1081.9	1081.2	1080.3	1080.0	1080.0	1080.0	1080.0	1080.1	1081.2
170°	1093.1	1092.2	1091.2	1090.3	1089.3	1088.9	1089.2	1089.3	1089.5	1089.7	1090.9
172.5°	1100.0	1099.2	1098.5	1097.6	1096.8	1096.4	1096.5	1096.5	1096.6	1096.6	1097.9
175°	1109.5	1108.5	1107.6	1106.6	1105.7	1105.1	1104.9	1104.7	1104.5	1104.3	1105.7
177.5°	1112.6	1111.8	1111.0	1110.3	1109.5	1109.1	1109.1	1109.1	1109.1	1109.1	1110.2
180°	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2



TEST NUMBER: P332887-935

CATALOG NUMBER: SA4XXRDIP-C350D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3
2.5°	530.3	531.1	531.8	532.2	532.1	532.1	532.0	531.9
5°	526.8	527.6	528.6	528.9	528.7	528.6	528.3	528.1
7.5°	519.7	520.3	520.9	521.0	520.7	520.5	520.1	519.9
10°	513.4	513.8	514.1	514.1	513.8	513.4	513.1	512.7
12.5°	505.6	505.8	506.1	505.9	505.4	504.9	504.4	503.9
15°	492.0	491.8	491.5	491.2	490.5	489.9	489.3	488.6
17.5°	475.4	475.0	474.5	473.7	472.8	471.8	470.9	469.9
20°	464.0	463.2	462.5	461.6	460.4	459.2	458.1	456.8
22.5°	451.2	450.0	449.0	448.0	447.0	446.1	445.1	444.1
25°	430.5	429.0	427.5	426.3	425.3	424.4	423.5	422.6
27.5°	409.5	407.6	405.7	404.2	402.8	401.5	400.2	398.9
30°	394.4	392.2	389.9	388.1	386.6	385.2	383.7	382.3
32.5°	379.1	376.4	373.8	371.8	370.4	369.0	367.6	366.3
35°	356.1	353.1	350.0	347.7	346.0	344.4	342.8	341.1
37.5°	331.6	328.1	324.7	322.1	320.5	318.8	317.2	315.6
40°	315.1	311.3	307.5	304.9	303.2	301.6	300.0	298.3
42.5°	299.0	295.2	291.3	288.5	286.8	285.1	283.4	281.7
45°	274.4	269.9	265.4	262.4	260.8	259.2	257.5	256.0
47.5°	249.5	244.9	240.3	237.1	235.3	233.5	231.7	230.0
50°	233.0	228.5	223.9	220.8	219.1	217.4	215.7	214.0
52.5°	216.5	212.0	207.4	204.1	202.4	200.6	198.8	197.0
55°	192.3	187.6	182.9	179.7	178.0	176.2	174.5	172.8
57.5°	168.6	163.8	159.0	156.0	154.7	153.4	152.1	150.8
60°	152.7	148.1	143.4	140.3	138.8	137.4	136.0	134.5
62.5°	137.2	132.9	128.5	125.8	124.6	123.5	122.3	121.1
65°	114.9	111.0	107.1	104.6	103.5	102.5	101.3	100.2
67.5°	94.4	91.0	87.6	85.4	84.2	83.0	81.8	80.6
70°	80.4	77.4	74.5	72.5	71.5	70.7	69.7	68.9
72.5°	67.9	65.3	62.9	61.1	60.3	59.5	58.6	57.8
75°	50.0	48.0	45.9	44.6	44.0	43.5	43.0	42.4
77.5°	35.4	34.2	33.0	32.3	32.1	31.9	31.8	31.6
80°	27.2	26.9	26.6	26.4	26.3	26.3	26.2	26.1
82.5°	21.1	20.9	20.8	20.6	20.5	20.4	20.3	20.2
85°	12.3	12.1	11.9	11.8	11.8	11.8	11.8	11.8
87.5°	8.7	8.8	9.0	9.1	9.3	9.4	9.6	9.7
90°	21.2	22.4	23.5	24.3	24.6	25.1	25.4	25.7
92.5°	35.4	36.1	36.8	37.3	37.5	37.7	38.0	38.1
95°	66.5	67.1	67.6	67.9	67.9	67.9	67.9	67.9
97.5°	104.7	105.4	106.1	106.4	106.4	106.4	106.4	106.4
100°	132.2	132.6	133.0	133.2	133.2	133.2	133.2	133.2
102.5°	161.4	162.0	162.5	162.8	163.0	163.2	163.3	163.4
105°	205.7	206.3	206.8	207.4	207.9	208.5	209.1	209.7
107.5°	253.6	254.1	254.6	254.9	254.9	254.8	254.8	254.7
110°	285.4	285.0	284.6	284.7	285.3	285.9	286.5	287.1



TEST NUMBER: P332887-935

CATALOG NUMBER: SA4XXRDIP-C350D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	319.7	319.6	319.6	319.6	319.7	319.8	319.9	320.0
115°	372.6	372.4	372.2	372.0	371.9	371.6	371.4	371.3
117.5°	423.4	422.8	422.1	421.6	421.2	420.9	420.4	420.1
120°	457.9	456.9	456.0	455.6	456.1	456.4	456.8	457.2
122.5°	492.8	492.2	491.5	490.9	490.2	489.5	488.8	488.1
125°	544.1	543.7	543.3	542.9	542.6	542.2	541.8	541.4
127.5°	593.1	592.7	592.3	591.9	591.7	591.3	591.1	590.7
130°	627.5	627.1	626.7	626.1	625.3	624.6	623.8	623.0
132.5°	659.8	659.4	659.0	658.7	658.3	658.1	657.7	657.5
135°	708.3	707.8	707.5	707.0	706.5	705.8	705.2	704.7
137.5°	755.1	754.6	754.1	753.9	754.1	754.1	754.2	754.4
140°	786.0	785.7	785.6	785.4	785.2	785.0	784.8	784.6
142.5°	815.1	815.1	815.1	815.0	815.0	814.9	814.9	814.9
145°	859.0	858.8	858.6	858.2	857.6	857.1	856.5	855.9
147.5°	898.8	898.6	898.5	898.3	898.1	897.9	897.8	897.6
150°	923.9	923.9	923.9	923.8	923.6	923.3	923.2	923.0
152.5°	947.4	947.9	948.4	948.4	947.9	947.4	946.8	946.3
155°	980.4	981.1	981.9	981.9	981.1	980.4	979.6	978.9
157.5°	1009.4	1010.0	1010.6	1010.5	1009.9	1009.2	1008.6	1007.9
160°	1027.3	1027.9	1028.4	1028.2	1027.3	1026.3	1025.4	1024.4
162.5°	1043.3	1044.3	1045.3	1045.4	1044.5	1043.5	1042.6	1041.6
165°	1064.5	1065.7	1066.8	1067.0	1066.3	1065.5	1064.7	1063.9
167.5°	1082.4	1083.6	1084.7	1084.7	1083.5	1082.3	1081.1	1080.0
170°	1092.0	1093.1	1094.3	1094.2	1092.9	1091.5	1090.2	1088.8
172.5°	1099.2	1100.4	1101.8	1101.7	1100.4	1099.1	1097.8	1096.4
175°	1107.0	1108.4	1109.7	1109.7	1108.4	1107.0	1105.7	1104.3
177.5°	1111.3	1112.3	1113.4	1113.4	1112.2	1110.9	1109.7	1108.5
180°	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2

(END OF REPORT)