

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332923-935

Luminaire Tested: **SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332923-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5613.9 lumens
Efficiency: N/A
Efficacy: 113.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332923-935
CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

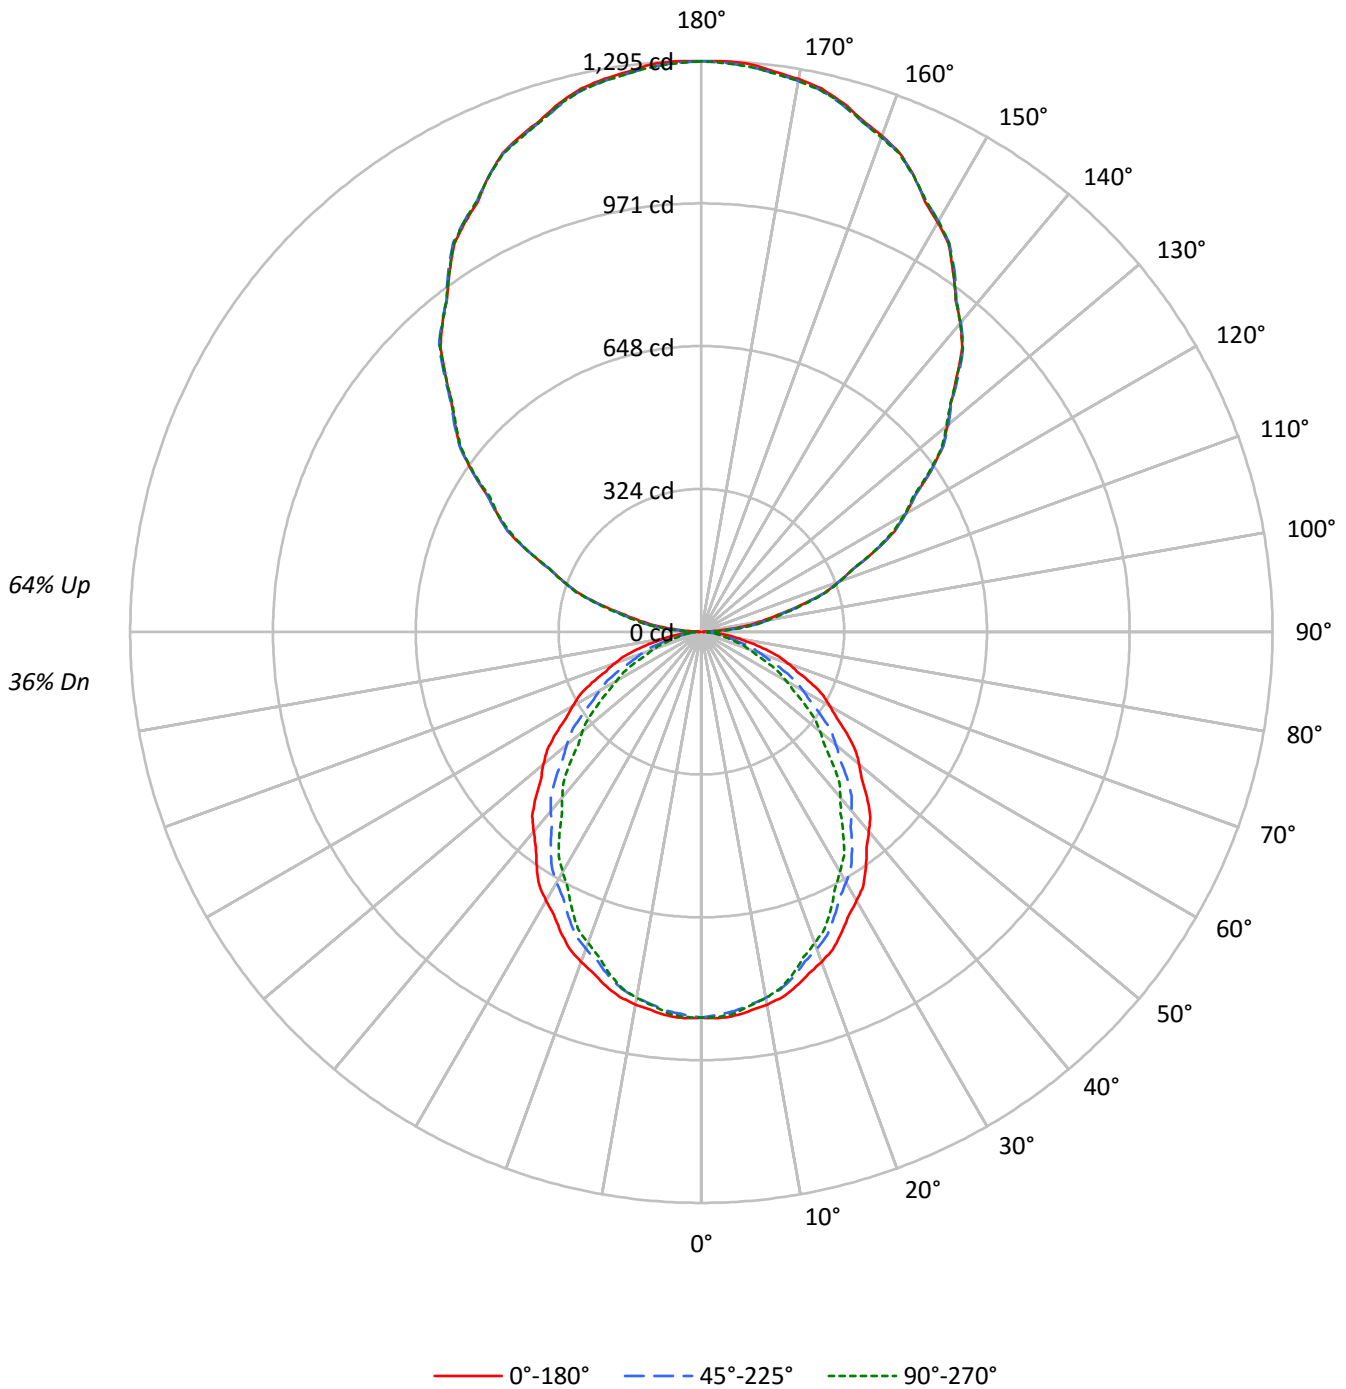



TEST NUMBER: P332923-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	43	43	43	36				36
1	95	91	87	84	86	82	79	76	66	64	62	52	51	49	39	38	37	31				31
2	86	79	73	69	78	72	67	63	58	55	52	46	43	41	34	33	31	26				26
3	79	70	63	57	71	64	58	53	52	47	44	41	38	35	30	29	27	22				22
4	72	62	54	48	65	56	50	45	46	41	37	36	33	30	27	25	23	19				19
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	22	20	17				17
6	61	49	42	36	55	45	38	33	37	32	28	29	26	23	22	20	18	15				15
7	56	45	37	31	51	41	34	29	34	28	25	27	23	20	20	18	16	13				13
8	52	40	33	28	47	37	30	26	31	26	22	24	21	18	19	16	14	12				12
9	49	37	30	25	44	34	27	23	28	23	20	23	19	16	17	15	13	11				11
10	45	34	27	22	41	31	25	21	26	21	18	21	17	15	16	14	12	10				10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7064	7064	7064
5°	7080	6994	7037
10°	7035	6909	6909
15°	6955	6764	6714
20°	6844	6574	6453
25°	6702	6350	6188
30°	6564	6114	5858
35°	6412	5870	5527
40°	6227	5592	5168
45°	6058	5316	4804
50°	5865	4999	4417
55°	5658	4669	3997
60°	5430	4306	3570
65°	5223	3851	3148
70°	4919	3354	2672
75°	4535	2779	2174
80°	3956	2115	1994
85°	3353	1927	1806



TEST NUMBER: P332923-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	82.2	1.5
10°-20°	229.2	4.1
20°-30°	331.0	5.9
30°-40°	375.2	6.7
40°-50°	362.3	6.5
50°-60°	301.3	5.4
60°-70°	208.0	3.7
70°-80°	105.4	1.9
80°-90°	30.9	0.6
90°-100°	85.3	1.5
100°-110°	252.7	4.5
110°-120°	428.9	7.6
120°-130°	565.6	10.1
130°-140°	635.2	11.3
140°-150°	624.2	11.1
150°-160°	525.0	9.4
160°-170°	349.3	6.2
170°-180°	122.3	2.2
0°-30°	642.4	11.4
0°-40°	1017.6	18.1
0°-60°	1681.1	29.9
0°-90°	2025.5	36.1
90°-120°	767.0	13.7
90°-150°	2591.9	46.2
90°-180°	3588.0	63.9
0°-180°	5613.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	875	875	875	875	875	
5°	874	871	863	869	868	83
15°	832	825	809	808	803	234
25°	752	740	713	702	695	347
35°	651	628	596	573	561	406
45°	531	505	466	434	421	409
55°	402	374	332	298	284	359
65°	273	244	202	174	165	270
75°	145	120	89	74	70	154
85°	36	23	21	20	20	41
90°	3	14	22	28	30	6
95°	60	69	76	79	79	67
105°	233	234	238	241	244	247
115°	436	436	434	433	432	430
125°	635	635	634	632	630	566
135°	819	825	825	823	820	634
145°	995	999	1000	999	996	623
155°	1140	1140	1139	1143	1139	524
165°	1241	1238	1236	1242	1238	350
175°	1291	1287	1285	1292	1285	123
180°	1293	1293	1293	1293	1293	



TEST NUMBER: P332923-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0
2.5°	877.2	876.7	876.2	875.7	875.3	874.3	873.1	871.8	870.4	869.1	870.4
5°	873.7	873.1	872.5	871.8	871.3	870.1	868.3	866.5	864.7	863.0	864.4
7.5°	865.7	865.1	864.5	863.9	863.2	861.8	859.5	857.1	854.8	852.5	853.4
10°	858.2	857.6	856.8	856.0	855.3	853.6	850.9	848.2	845.5	842.8	843.4
12.5°	848.6	847.7	846.9	846.0	845.2	843.2	840.0	836.8	833.7	830.5	830.9
15°	832.2	830.8	829.5	828.1	826.7	824.2	820.5	816.8	813.0	809.3	809.1
17.5°	812.2	810.2	808.3	806.3	804.4	801.2	796.8	792.3	787.8	783.3	782.6
20°	796.6	794.7	792.7	790.8	788.8	785.4	780.3	775.2	770.2	765.2	764.0
22.5°	779.5	777.3	775.2	772.9	770.8	767.0	761.6	756.1	750.7	745.3	743.5
25°	752.4	749.8	747.0	744.3	741.7	737.3	731.2	725.0	718.9	712.9	710.3
27.5°	724.0	720.7	717.3	713.9	710.5	705.6	699.0	692.6	686.0	679.5	676.4
30°	704.1	700.4	696.7	693.0	689.3	683.9	676.9	669.9	662.9	655.9	652.2
32.5°	683.3	679.1	674.9	670.6	666.5	660.7	653.5	646.3	639.0	631.8	627.5
35°	650.6	645.8	641.0	636.3	631.5	625.4	617.9	610.5	603.0	595.6	590.6
37.5°	615.6	610.7	605.8	600.9	595.9	589.4	581.1	572.8	564.6	556.4	550.7
40°	590.9	586.0	581.1	576.2	571.3	564.6	556.1	547.6	539.2	530.6	524.3
42.5°	567.3	562.2	557.1	551.9	546.7	539.8	530.9	522.0	513.2	504.4	498.0
45°	530.6	525.1	519.6	514.1	508.6	501.4	492.4	483.5	474.6	465.6	458.3
47.5°	492.8	487.1	481.3	475.6	469.9	462.4	453.1	443.9	434.6	425.3	417.8
50°	467.0	461.2	455.4	449.5	443.8	436.1	426.5	417.1	407.5	398.0	390.5
52.5°	440.7	435.1	429.4	423.7	417.9	410.3	400.5	390.7	380.9	371.2	363.6
55°	402.0	396.1	390.1	384.1	378.2	370.3	360.7	351.0	341.3	331.7	323.9
57.5°	363.7	357.5	351.3	345.1	338.9	331.1	321.5	311.9	302.5	292.9	285.1
60°	336.3	330.4	324.4	318.5	312.5	304.8	295.2	285.7	276.2	266.7	258.9
62.5°	311.7	305.5	299.3	293.1	286.9	279.0	269.1	259.4	249.6	239.9	232.7
65°	273.4	267.0	260.5	254.2	247.7	239.8	230.2	220.8	211.2	201.6	195.3
67.5°	233.6	227.4	221.3	215.2	209.1	201.6	192.7	183.8	175.0	166.2	160.7
70°	208.4	202.1	195.9	189.6	183.4	176.0	167.5	159.0	150.5	142.1	137.2
72.5°	181.6	175.9	170.2	164.6	158.9	152.1	144.1	136.1	128.0	120.0	115.9
75°	145.4	139.9	134.4	128.9	123.4	117.1	110.1	103.1	96.1	89.1	85.7
77.5°	108.7	104.0	99.4	94.6	90.0	84.8	79.1	73.5	67.8	62.2	60.2
80°	85.1	80.8	76.5	72.2	67.8	63.5	59.0	54.5	50.0	45.5	45.1
82.5°	64.7	60.8	56.8	52.9	48.9	45.6	43.0	40.5	38.0	35.4	35.0
85°	36.2	33.2	30.2	27.2	24.3	22.6	22.1	21.7	21.2	20.8	20.5
87.5°	12.9	12.5	12.0	11.5	11.1	10.9	11.2	11.5	11.7	11.9	12.1
90°	3.0	5.4	7.9	10.3	12.7	14.9	16.7	18.4	20.2	22.0	23.3
92.5°	21.4	24.2	27.0	29.8	32.6	34.6	35.9	37.1	38.4	39.6	40.4
95°	60.0	62.0	64.1	66.0	68.0	69.8	71.4	72.9	74.5	76.0	76.7
97.5°	104.9	106.4	108.1	109.6	111.2	113.0	114.8	116.6	118.4	120.2	121.1
100°	140.1	140.9	141.8	142.7	143.6	145.1	147.1	149.0	151.0	153.1	153.5
102.5°	176.8	177.2	177.5	177.9	178.3	179.3	181.2	183.0	184.9	186.7	187.3
105°	233.1	233.3	233.5	233.8	233.9	234.5	235.4	236.3	237.2	238.1	238.8
107.5°	292.1	292.4	292.7	292.9	293.2	293.3	293.5	293.6	293.8	293.9	294.5
110°	332.1	332.5	332.9	333.5	333.9	334.0	333.8	333.6	333.3	333.1	332.7



TEST NUMBER: P332923-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	373.7	373.8	373.9	374.0	374.1	373.9	373.5	373.2	372.7	372.3	372.2
115°	436.1	436.1	436.1	436.1	436.1	435.9	435.5	435.1	434.5	434.1	433.9
117.5°	495.0	495.2	495.3	495.5	495.7	495.6	495.2	495.0	494.6	494.4	493.6
120°	534.2	535.0	536.0	536.8	537.7	537.9	537.2	536.5	535.8	535.2	534.1
122.5°	575.0	575.3	575.7	576.0	576.4	576.4	576.1	575.8	575.5	575.1	574.5
125°	635.2	635.2	635.2	635.2	635.2	635.1	634.9	634.6	634.4	634.2	633.8
127.5°	689.8	690.5	691.1	691.8	692.5	692.7	692.2	691.9	691.6	691.2	690.8
130°	728.2	728.9	729.5	730.2	730.9	731.2	731.2	731.2	731.2	731.2	730.8
132.5°	767.4	767.9	768.4	768.9	769.4	769.6	769.4	769.2	769.0	768.9	768.4
135°	819.2	820.6	821.9	823.3	824.6	825.3	825.3	825.3	825.3	825.3	824.8
137.5°	875.6	876.3	876.9	877.5	878.1	878.7	879.0	879.3	879.7	880.0	879.5
140°	913.3	913.7	914.2	914.6	915.1	915.2	915.2	915.2	915.2	915.2	915.1
142.5°	947.7	948.1	948.6	949.0	949.5	949.6	949.4	949.3	949.1	948.9	948.8
145°	995.3	996.2	997.1	998.0	998.8	999.4	999.6	999.9	1000.1	1000.3	1000.1
147.5°	1042.5	1043.6	1044.7	1045.7	1046.8	1047.2	1047.1	1046.9	1046.7	1046.5	1046.4
150°	1071.3	1072.2	1073.2	1074.0	1074.9	1075.3	1075.3	1075.3	1075.3	1075.3	1075.3
152.5°	1098.5	1099.1	1099.6	1100.1	1100.7	1101.0	1101.2	1101.4	1101.6	1101.7	1102.3
155°	1140.3	1140.3	1140.3	1140.3	1140.3	1140.2	1140.1	1139.8	1139.5	1139.4	1140.2
157.5°	1175.5	1175.2	1174.7	1174.4	1174.0	1173.7	1173.7	1173.6	1173.6	1173.5	1174.2
160°	1196.4	1196.2	1195.9	1195.7	1195.5	1195.2	1195.1	1194.8	1194.6	1194.4	1195.1
162.5°	1215.6	1215.0	1214.4	1213.8	1213.2	1212.9	1212.6	1212.5	1212.2	1211.9	1213.1
165°	1241.4	1240.7	1240.0	1239.4	1238.7	1238.1	1237.7	1237.3	1236.8	1236.4	1237.7
167.5°	1261.2	1260.2	1259.3	1258.4	1257.5	1257.0	1257.1	1257.1	1257.1	1257.1	1258.5
170°	1272.4	1271.3	1270.1	1269.0	1267.9	1267.5	1267.7	1267.9	1268.2	1268.4	1269.7
172.5°	1280.4	1279.4	1278.5	1277.6	1276.7	1276.2	1276.3	1276.3	1276.3	1276.4	1277.9
175°	1291.4	1290.3	1289.2	1288.1	1286.9	1286.2	1286.1	1285.8	1285.6	1285.4	1286.9
177.5°	1295.0	1294.1	1293.2	1292.4	1291.4	1291.0	1291.0	1291.0	1291.0	1291.0	1292.3
180°	1293.4	1293.4	1293.4	1293.4	1293.4	1293.4	1293.4	1293.4	1293.4	1293.4	1293.4



TEST NUMBER: P332923-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0
2.5°	871.8	873.1	874.3	874.9	874.9	874.7	874.6	874.5
5°	865.9	867.5	868.9	869.5	869.2	868.9	868.6	868.3
7.5°	854.4	855.3	856.4	856.5	856.1	855.6	855.1	854.6
10°	844.0	844.6	845.2	845.2	844.6	844.0	843.4	842.8
12.5°	831.2	831.6	832.0	831.7	830.9	830.1	829.2	828.4
15°	808.7	808.5	808.1	807.5	806.4	805.4	804.3	803.3
17.5°	781.7	780.8	780.0	778.8	777.2	775.7	774.0	772.5
20°	762.8	761.6	760.3	758.8	756.9	754.9	753.0	751.1
22.5°	741.8	739.9	738.1	736.5	734.9	733.3	731.8	730.1
25°	707.8	705.2	702.7	700.8	699.2	697.8	696.3	694.7
27.5°	673.2	670.1	667.0	664.3	662.2	660.0	658.0	655.8
30°	648.5	644.7	641.0	638.0	635.6	633.2	630.9	628.4
32.5°	623.2	618.9	614.5	611.2	609.0	606.7	604.4	602.2
35°	585.5	580.4	575.4	571.5	568.9	566.1	563.4	560.8
37.5°	545.0	539.4	533.7	529.6	526.8	524.2	521.5	518.8
40°	518.1	511.9	505.6	501.2	498.4	495.8	493.1	490.4
42.5°	491.6	485.3	478.9	474.3	471.5	468.7	465.9	463.1
45°	451.1	443.8	436.4	431.4	428.8	426.1	423.4	420.8
47.5°	410.2	402.6	395.0	389.8	386.8	383.9	381.0	378.0
50°	383.1	375.7	368.2	363.1	360.2	357.4	354.6	351.7
52.5°	356.0	348.4	341.0	335.7	332.7	329.8	326.8	323.9
55°	316.2	308.4	300.7	295.4	292.6	289.7	286.9	284.0
57.5°	277.2	269.3	261.5	256.5	254.3	252.2	250.0	247.9
60°	251.2	243.4	235.7	230.7	228.3	225.8	223.5	221.1
62.5°	225.6	218.4	211.3	206.7	204.8	202.9	201.0	199.1
65°	188.9	182.4	176.1	171.9	170.2	168.4	166.6	164.8
67.5°	155.2	149.6	144.1	140.4	138.4	136.5	134.5	132.5
70°	132.2	127.3	122.3	119.2	117.7	116.2	114.7	113.2
72.5°	111.7	107.5	103.2	100.5	99.1	97.7	96.3	95.0
75°	82.2	78.9	75.4	73.3	72.3	71.5	70.6	69.7
77.5°	58.2	56.2	54.2	53.0	52.8	52.5	52.3	52.0
80°	44.7	44.3	43.7	43.5	43.3	43.1	43.0	42.9
82.5°	34.7	34.4	34.1	33.8	33.7	33.5	33.4	33.2
85°	20.1	19.9	19.5	19.5	19.5	19.5	19.5	19.5
87.5°	12.2	12.3	12.5	12.7	12.9	13.1	13.3	13.5
90°	24.7	26.0	27.4	28.2	28.7	29.1	29.5	30.0
92.5°	41.2	42.0	42.8	43.3	43.7	43.9	44.2	44.4
95°	77.3	78.0	78.7	79.0	79.0	79.0	79.0	79.0
97.5°	121.8	122.6	123.5	123.8	123.8	123.8	123.8	123.8
100°	153.9	154.4	154.8	155.1	155.1	155.1	155.1	155.1
102.5°	187.9	188.6	189.2	189.5	189.8	189.9	190.1	190.3
105°	239.4	240.0	240.7	241.4	242.1	242.7	243.4	244.1
107.5°	295.2	295.8	296.4	296.7	296.6	296.6	296.5	296.5
110°	332.2	331.7	331.3	331.4	332.1	332.8	333.5	334.1



TEST NUMBER: P332923-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	372.1	372.0	372.0	372.0	372.1	372.2	372.4	372.6
115°	433.7	433.4	433.3	433.0	432.8	432.6	432.4	432.1
117.5°	492.8	492.1	491.3	490.8	490.3	489.8	489.4	489.0
120°	533.0	531.8	530.7	530.4	530.8	531.2	531.8	532.2
122.5°	573.7	572.9	572.1	571.4	570.6	569.8	568.9	568.2
125°	633.3	632.8	632.4	632.0	631.5	631.1	630.6	630.2
127.5°	690.3	689.9	689.4	689.1	688.7	688.3	687.9	687.6
130°	730.3	729.9	729.4	728.8	727.9	727.0	726.1	725.2
132.5°	767.9	767.5	767.1	766.6	766.3	765.9	765.6	765.3
135°	824.4	823.9	823.5	822.9	822.3	821.6	820.9	820.3
137.5°	878.9	878.3	877.8	877.5	877.7	877.8	878.0	878.0
140°	914.8	914.6	914.4	914.2	914.0	913.7	913.5	913.3
142.5°	948.8	948.7	948.7	948.6	948.6	948.6	948.6	948.5
145°	999.9	999.6	999.4	998.9	998.3	997.6	997.0	996.3
147.5°	1046.2	1046.0	1045.8	1045.6	1045.4	1045.2	1044.9	1044.7
150°	1075.3	1075.3	1075.3	1075.2	1075.0	1074.8	1074.5	1074.4
152.5°	1102.8	1103.4	1103.9	1103.9	1103.3	1102.7	1102.1	1101.6
155°	1141.2	1142.0	1142.9	1142.9	1142.0	1141.2	1140.2	1139.4
157.5°	1174.9	1175.5	1176.2	1176.2	1175.4	1174.7	1173.9	1173.2
160°	1195.7	1196.4	1197.0	1196.8	1195.7	1194.6	1193.5	1192.4
162.5°	1214.4	1215.6	1216.8	1216.9	1215.7	1214.6	1213.5	1212.4
165°	1239.1	1240.4	1241.7	1241.9	1241.0	1240.2	1239.2	1238.4
167.5°	1259.8	1261.2	1262.5	1262.5	1261.1	1259.7	1258.4	1257.0
170°	1271.1	1272.4	1273.8	1273.6	1272.0	1270.5	1268.9	1267.4
172.5°	1279.4	1280.9	1282.5	1282.5	1280.8	1279.3	1277.7	1276.2
175°	1288.5	1290.0	1291.6	1291.6	1290.0	1288.5	1286.9	1285.4
177.5°	1293.5	1294.8	1296.0	1295.9	1294.4	1293.0	1291.6	1290.2
180°	1293.4	1293.4	1293.4	1293.4	1293.4	1293.4	1293.4	1293.4

(END OF REPORT)