

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332924-935

Luminaire Tested: **SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332924-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5728.1 lumens
Efficiency: N/A
Efficacy: 116.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332924-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

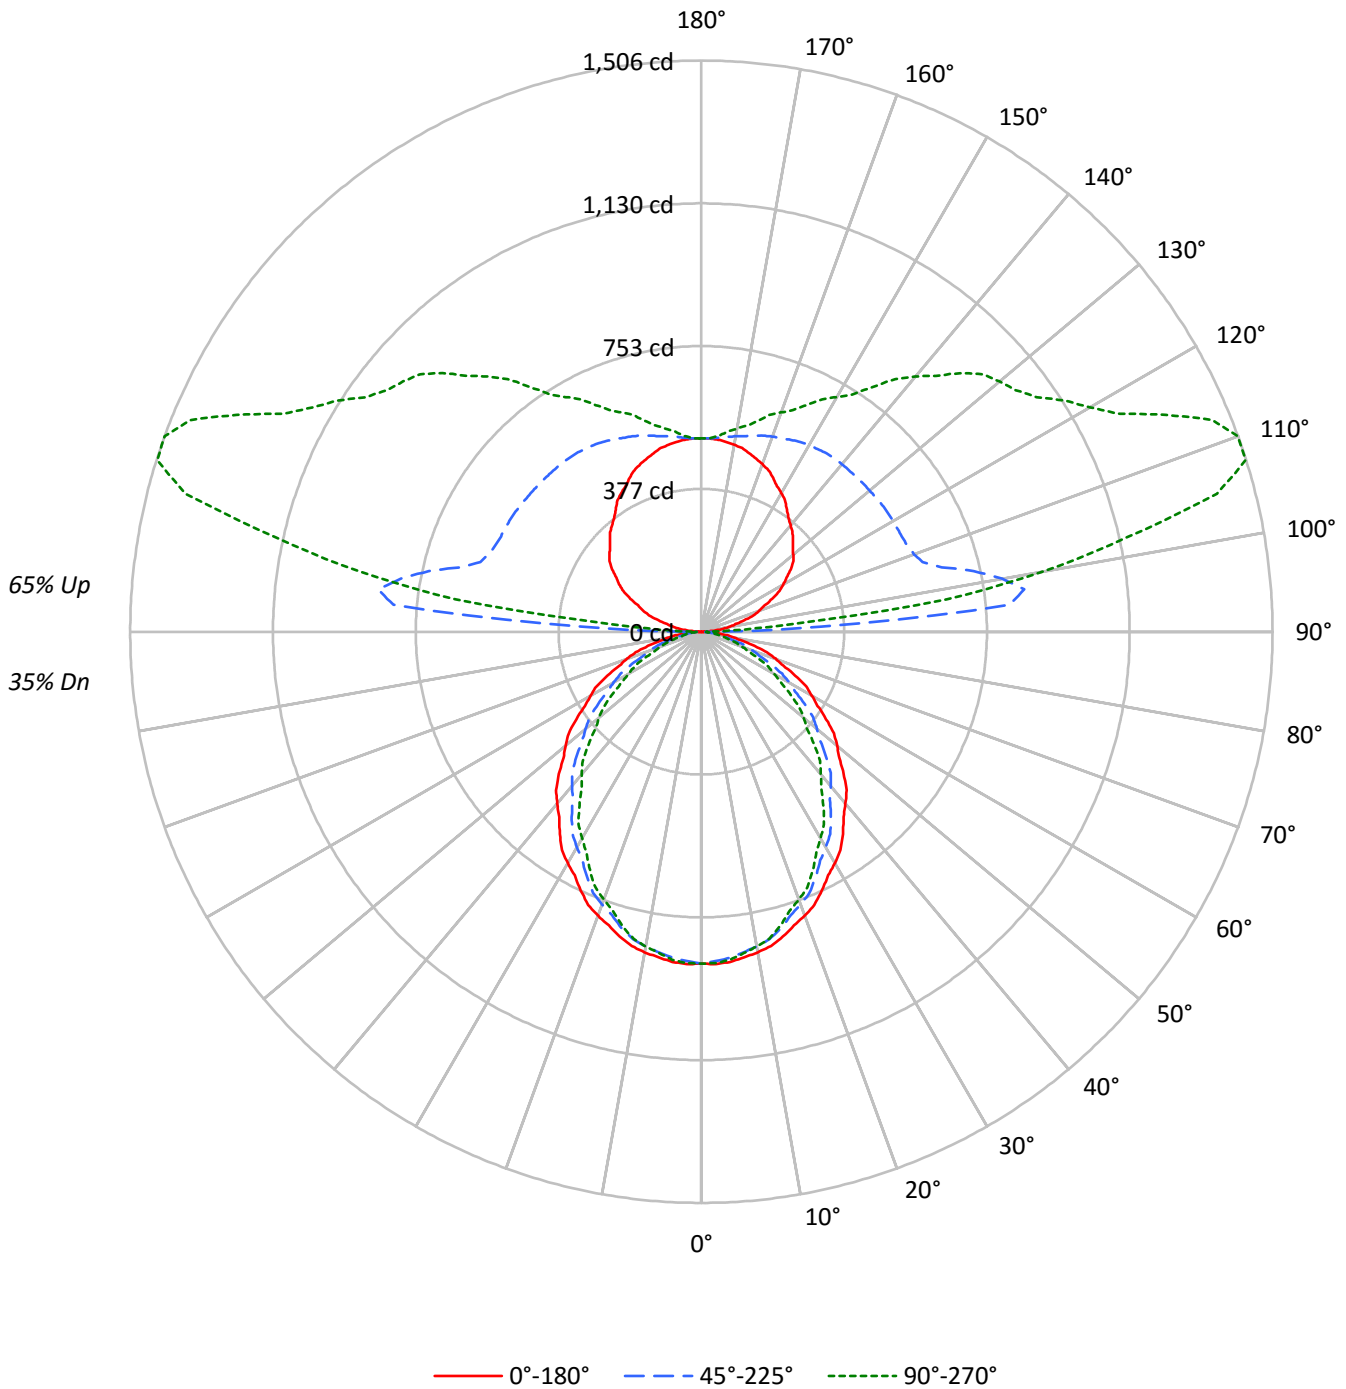



TEST NUMBER: P332924-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43	35				
1	95	91	87	83	85	82	79	76	66	64	62	51	50	49	38	37	36	30				
2	86	79	73	68	78	72	67	63	58	55	52	45	43	41	34	32	31	26				
3	79	70	63	57	71	63	57	52	51	47	44	40	37	35	30	28	26	22				
4	72	62	54	48	65	56	50	45	46	41	37	36	33	30	27	25	23	19				
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	24	22	20	16				
6	61	49	41	36	55	45	38	33	37	32	28	29	26	23	22	20	18	15				
7	56	44	37	31	51	41	34	29	33	28	25	27	23	20	20	18	16	13				
8	52	40	33	28	47	37	30	26	30	25	22	24	21	18	18	16	14	12				
9	49	37	29	25	44	34	27	23	28	23	19	22	19	16	17	15	13	11				
10	45	34	27	22	41	31	25	20	26	21	17	21	17	15	16	13	12	10				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7064	7064	7064
5°	7080	6994	7037
10°	7035	6909	6909
15°	6955	6764	6714
20°	6844	6574	6453
25°	6702	6350	6188
30°	6564	6114	5858
35°	6412	5870	5527
40°	6227	5592	5168
45°	6058	5316	4804
50°	5865	4999	4417
55°	5658	4669	3997
60°	5430	4306	3570
65°	5223	3851	3148
70°	4919	3354	2672
75°	4535	2779	2174
80°	3956	2115	1994
85°	3353	1927	1806



TEST NUMBER: P332924-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	82.2	1.4
10°-20°	229.2	4.0
20°-30°	331.0	5.8
30°-40°	375.2	6.5
40°-50°	362.3	6.3
50°-60°	301.3	5.3
60°-70°	208.0	3.6
70°-80°	105.4	1.8
80°-90°	29.9	0.5
90°-100°	367.8	6.4
100°-110°	765.5	13.4
110°-120°	685.7	12.0
120°-130°	576.8	10.1
130°-140°	480.9	8.4
140°-150°	367.4	6.4
150°-160°	258.2	4.5
160°-170°	151.9	2.7
170°-180°	49.4	0.9
0°-30°	642.4	11.2
0°-40°	1017.6	17.8
0°-60°	1681.1	29.3
0°-90°	2024.4	35.3
90°-120°	1819.0	31.8
90°-150°	3244.1	56.6
90°-180°	3704.0	64.7
0°-180°	5728.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	875	875	875	875	875	
5°	874	871	863	869	868	83
15°	832	825	809	808	803	234
25°	752	740	713	702	695	347
35°	651	628	596	573	561	406
45°	531	505	466	434	421	409
55°	402	374	332	298	284	359
65°	273	244	202	174	165	270
75°	145	120	89	74	70	154
85°	36	23	21	20	20	41
90°	1	8	18	20	21	4
95°	33	104	815	404	244	37
105°	117	170	656	1413	1408	125
115°	206	259	585	1125	1352	204
125°	287	341	582	957	1078	256
135°	341	406	577	849	964	264
145°	393	450	574	716	787	247
155°	447	483	558	632	659	206
165°	487	502	535	567	575	138
175°	508	509	513	520	518	48
180°	509	509	509	509	509	



TEST NUMBER: P332924-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0
2.5°	877.2	876.7	876.2	875.7	875.3	874.3	873.1	871.8	870.4	869.1	870.4
5°	873.7	873.1	872.5	871.8	871.3	870.1	868.3	866.5	864.7	863.0	864.4
7.5°	865.7	865.1	864.5	863.9	863.2	861.8	859.5	857.1	854.8	852.5	853.4
10°	858.2	857.6	856.8	856.0	855.3	853.6	850.9	848.2	845.5	842.8	843.4
12.5°	848.6	847.7	846.9	846.0	845.2	843.2	840.0	836.8	833.7	830.5	830.9
15°	832.2	830.8	829.5	828.1	826.7	824.2	820.5	816.8	813.0	809.3	809.1
17.5°	812.2	810.2	808.3	806.3	804.4	801.2	796.8	792.3	787.8	783.3	782.6
20°	796.6	794.7	792.7	790.8	788.8	785.4	780.3	775.2	770.2	765.2	764.0
22.5°	779.5	777.3	775.2	772.9	770.8	767.0	761.6	756.1	750.7	745.3	743.5
25°	752.4	749.8	747.0	744.3	741.7	737.3	731.2	725.0	718.9	712.9	710.3
27.5°	724.0	720.7	717.3	713.9	710.5	705.6	699.0	692.6	686.0	679.5	676.4
30°	704.1	700.4	696.7	693.0	689.3	683.9	676.9	669.9	662.9	655.9	652.2
32.5°	683.3	679.1	674.9	670.6	666.5	660.7	653.5	646.3	639.0	631.8	627.5
35°	650.6	645.8	641.0	636.3	631.5	625.4	617.9	610.5	603.0	595.6	590.6
37.5°	615.6	610.7	605.8	600.9	595.9	589.4	581.1	572.8	564.6	556.4	550.7
40°	590.9	586.0	581.1	576.2	571.3	564.6	556.1	547.6	539.2	530.6	524.3
42.5°	567.3	562.2	557.1	551.9	546.7	539.8	530.9	522.0	513.2	504.4	498.0
45°	530.6	525.1	519.6	514.1	508.6	501.4	492.4	483.5	474.6	465.6	458.3
47.5°	492.8	487.1	481.3	475.6	469.9	462.4	453.1	443.9	434.6	425.3	417.8
50°	467.0	461.2	455.4	449.5	443.8	436.1	426.5	417.1	407.5	398.0	390.5
52.5°	440.7	435.1	429.4	423.7	417.9	410.3	400.5	390.7	380.9	371.2	363.6
55°	402.0	396.1	390.1	384.1	378.2	370.3	360.7	351.0	341.3	331.7	323.9
57.5°	363.7	357.5	351.3	345.1	338.9	331.1	321.5	311.9	302.5	292.9	285.1
60°	336.3	330.4	324.4	318.5	312.5	304.8	295.2	285.7	276.2	266.7	258.9
62.5°	311.7	305.5	299.3	293.1	286.9	279.0	269.1	259.4	249.6	239.9	232.7
65°	273.4	267.0	260.5	254.2	247.7	239.8	230.2	220.8	211.2	201.6	195.3
67.5°	233.6	227.4	221.3	215.2	209.1	201.6	192.7	183.8	175.0	166.2	160.7
70°	208.4	202.1	195.9	189.6	183.4	176.0	167.5	159.0	150.5	142.1	137.2
72.5°	181.6	175.9	170.2	164.6	158.9	152.1	144.1	136.1	128.0	120.0	115.9
75°	145.4	139.9	134.4	128.9	123.4	117.1	110.1	103.1	96.1	89.1	85.7
77.5°	108.7	104.0	99.4	94.6	90.0	84.8	79.1	73.5	67.8	62.2	60.2
80°	85.1	80.8	76.5	72.2	67.8	63.5	59.0	54.5	50.0	45.5	45.1
82.5°	64.7	60.8	56.8	52.9	48.9	45.6	43.0	40.5	38.0	35.4	35.0
85°	36.2	33.2	30.2	27.2	24.3	22.6	22.1	21.7	21.2	20.8	20.5
87.5°	12.6	12.0	11.6	10.8	10.2	9.6	10.7	10.5	10.8	11.1	10.8
90°	1.0	3.0	6.0	7.0	8.0	8.0	14.0	14.0	16.0	18.0	17.0
92.5°	11.4	16.6	26.0	38.2	52.9	73.6	124.5	202.1	277.8	317.4	264.3
95°	33.0	36.0	46.1	59.1	83.0	125.1	212.1	376.2	615.3	815.4	838.4
97.5°	59.2	59.2	67.8	79.8	100.5	135.7	202.7	338.2	575.8	858.8	1053.3
100°	76.0	76.0	83.0	95.1	114.1	146.1	205.1	318.1	522.3	804.3	1060.5
102.5°	92.0	93.7	99.9	111.1	129.2	159.7	213.1	312.5	486.2	736.3	1000.5
105°	117.1	120.0	125.1	137.1	155.1	184.1	232.1	315.1	455.2	656.3	891.4
107.5°	144.6	146.6	151.7	164.5	181.7	210.3	254.3	329.9	449.6	611.5	803.4
110°	163.1	165.1	170.0	182.1	200.1	227.1	271.1	341.1	451.3	596.3	759.4



TEST NUMBER: P332924-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	180.7	182.7	188.5	199.7	217.7	244.7	287.1	353.2	456.0	589.1	734.5
115°	206.1	209.1	216.1	226.1	245.1	272.2	312.1	372.2	465.2	585.3	711.4
117.5°	232.5	235.3	241.5	252.5	270.4	298.3	336.4	391.6	475.0	584.3	700.9
120°	250.1	252.1	259.2	270.1	287.1	315.1	353.2	405.2	482.2	584.3	695.3
122.5°	266.1	268.1	275.2	285.3	303.9	331.1	369.2	418.0	489.5	583.5	689.0
125°	287.1	291.1	297.1	308.2	327.2	355.2	391.2	437.2	500.2	582.3	678.3
127.5°	305.7	308.9	316.2	328.7	348.5	376.8	411.6	453.8	508.9	580.1	664.1
130°	316.2	320.1	328.1	343.2	362.1	391.2	425.2	464.3	515.2	579.3	655.3
132.5°	326.6	329.8	340.2	354.4	375.0	402.4	436.4	474.7	520.8	578.5	647.3
135°	341.1	345.2	355.2	372.2	393.2	419.2	452.2	488.3	529.3	577.3	635.3
137.5°	355.8	359.6	370.6	386.8	408.6	433.4	464.3	497.8	534.3	577.0	624.9
140°	366.2	369.2	380.2	397.2	418.2	442.2	472.3	504.2	538.3	576.3	619.3
142.5°	377.4	380.4	390.5	406.8	427.0	450.2	479.4	509.0	541.5	576.3	614.5
145°	393.2	396.2	406.2	420.2	439.2	461.2	487.2	514.3	543.3	574.3	606.3
147.5°	411.0	412.0	420.8	435.2	451.0	470.8	495.2	518.8	544.2	570.7	598.9
150°	422.2	423.2	431.2	443.2	458.2	477.3	499.2	521.2	544.2	568.3	593.3
152.5°	432.6	432.8	440.8	452.0	465.5	482.8	502.5	522.9	542.7	564.3	586.9
155°	447.2	448.2	454.2	464.3	475.3	490.3	507.2	524.3	540.3	558.3	577.3
157.5°	461.4	461.4	467.0	474.8	484.4	496.3	510.7	524.3	537.7	552.1	567.5
160°	470.2	470.2	474.2	481.2	489.2	500.2	512.2	524.3	535.3	547.3	560.3
162.5°	478.2	477.4	480.6	486.8	494.0	502.7	513.8	524.3	532.9	542.4	553.9
165°	487.2	487.2	489.2	494.2	499.2	505.2	514.3	522.3	528.2	535.3	543.3
167.5°	496.3	495.2	496.3	500.1	502.8	507.5	514.0	519.9	523.5	528.1	533.6
170°	500.2	499.2	500.2	503.3	505.2	508.2	513.2	518.2	520.2	523.2	527.3
172.5°	504.2	503.3	503.4	505.7	506.9	509.0	512.5	516.7	517.0	518.4	521.7
175°	508.2	507.2	507.2	508.2	509.3	509.3	511.3	514.3	513.2	513.2	515.2
177.5°	510.1	509.3	508.4	509.3	509.3	509.3	510.1	511.6	510.1	510.1	510.8
180°	509.3	509.3	509.3	509.3	509.3	509.3	509.3	509.3	509.3	509.3	509.3



TEST NUMBER: P332924-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0
2.5°	871.8	873.1	874.3	874.9	874.9	874.7	874.6	874.5
5°	865.9	867.5	868.9	869.5	869.2	868.9	868.6	868.3
7.5°	854.4	855.3	856.4	856.5	856.1	855.6	855.1	854.6
10°	844.0	844.6	845.2	845.2	844.6	844.0	843.4	842.8
12.5°	831.2	831.6	832.0	831.7	830.9	830.1	829.2	828.4
15°	808.7	808.5	808.1	807.5	806.4	805.4	804.3	803.3
17.5°	781.7	780.8	780.0	778.8	777.2	775.7	774.0	772.5
20°	762.8	761.6	760.3	758.8	756.9	754.9	753.0	751.1
22.5°	741.8	739.9	738.1	736.5	734.9	733.3	731.8	730.1
25°	707.8	705.2	702.7	700.8	699.2	697.8	696.3	694.7
27.5°	673.2	670.1	667.0	664.3	662.2	660.0	658.0	655.8
30°	648.5	644.7	641.0	638.0	635.6	633.2	630.9	628.4
32.5°	623.2	618.9	614.5	611.2	609.0	606.7	604.4	602.2
35°	585.5	580.4	575.4	571.5	568.9	566.1	563.4	560.8
37.5°	545.0	539.4	533.7	529.6	526.8	524.2	521.5	518.8
40°	518.1	511.9	505.6	501.2	498.4	495.8	493.1	490.4
42.5°	491.6	485.3	478.9	474.3	471.5	468.7	465.9	463.1
45°	451.1	443.8	436.4	431.4	428.8	426.1	423.4	420.8
47.5°	410.2	402.6	395.0	389.8	386.8	383.9	381.0	378.0
50°	383.1	375.7	368.2	363.1	360.2	357.4	354.6	351.7
52.5°	356.0	348.4	341.0	335.7	332.7	329.8	326.8	323.9
55°	316.2	308.4	300.7	295.4	292.6	289.7	286.9	284.0
57.5°	277.2	269.3	261.5	256.5	254.3	252.2	250.0	247.9
60°	251.2	243.4	235.7	230.7	228.3	225.8	223.5	221.1
62.5°	225.6	218.4	211.3	206.7	204.8	202.9	201.0	199.1
65°	188.9	182.4	176.1	171.9	170.2	168.4	166.6	164.8
67.5°	155.2	149.6	144.1	140.4	138.4	136.5	134.5	132.5
70°	132.2	127.3	122.3	119.2	117.7	116.2	114.7	113.2
72.5°	111.7	107.5	103.2	100.5	99.1	97.7	96.3	95.0
75°	82.2	78.9	75.4	73.3	72.3	71.5	70.6	69.7
77.5°	58.2	56.2	54.2	53.0	52.8	52.5	52.3	52.0
80°	44.7	44.3	43.7	43.5	43.3	43.1	43.0	42.9
82.5°	34.7	34.4	34.1	33.8	33.7	33.5	33.4	33.2
85°	20.1	19.9	19.5	19.5	19.5	19.5	19.5	19.5
87.5°	10.8	10.9	11.0	11.0	11.4	11.7	11.6	11.7
90°	18.0	19.0	20.0	20.0	21.0	22.0	21.0	21.0
92.5°	196.5	147.8	117.7	97.6	85.8	80.4	77.1	77.1
95°	741.3	586.3	452.2	355.2	306.2	275.2	257.1	244.1
97.5°	1095.4	1037.7	939.9	835.4	763.5	703.4	673.3	652.6
100°	1206.6	1226.6	1177.6	1103.5	1016.5	955.5	925.5	917.5
102.5°	1201.0	1300.2	1314.4	1283.6	1230.2	1185.9	1154.3	1148.0
105°	1120.5	1293.7	1392.7	1433.7	1435.7	1427.7	1413.7	1407.6
107.5°	1006.3	1190.6	1330.1	1419.3	1468.7	1491.5	1501.5	1504.2
110°	937.5	1110.5	1255.6	1365.6	1436.7	1478.7	1496.8	1505.7



TEST NUMBER: P332924-935

CATALOG NUMBER: SA4XXRDIP-C575D1205U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	887.0	1040.1	1177.2	1287.2	1367.9	1418.7	1443.9	1458.5
115°	836.4	959.5	1076.5	1172.6	1251.6	1311.6	1343.7	1351.7
117.5°	811.6	913.4	1005.5	1086.9	1154.3	1204.8	1237.2	1243.4
120°	800.4	893.5	973.4	1044.5	1101.6	1145.6	1171.6	1182.6
122.5°	790.7	880.6	953.5	1015.7	1063.9	1101.6	1123.5	1134.5
125°	774.4	860.4	929.4	984.5	1024.5	1053.5	1072.5	1078.5
127.5°	754.3	836.6	905.4	957.7	997.9	1023.7	1039.7	1045.7
130°	738.4	817.4	885.5	938.5	979.5	1004.4	1020.5	1026.5
132.5°	721.5	795.8	862.2	915.2	955.5	983.7	998.8	1004.9
135°	698.4	763.4	824.4	874.4	914.5	942.5	958.5	964.5
137.5°	677.3	732.4	783.8	829.0	866.4	894.1	907.2	914.5
140°	665.3	712.3	757.3	799.4	834.4	856.4	870.4	878.4
142.5°	654.1	695.5	734.2	770.6	801.6	822.0	834.4	840.0
145°	638.3	672.4	702.3	730.4	755.4	772.4	782.4	787.4
147.5°	625.3	652.3	676.3	698.4	716.8	731.3	739.0	740.7
150°	617.3	640.3	660.3	678.3	694.3	707.3	713.3	714.4
152.5°	608.5	628.3	646.7	661.5	675.1	685.7	689.3	690.3
155°	595.3	611.3	626.3	638.3	648.3	656.3	659.4	659.4
157.5°	581.1	594.5	607.1	616.7	624.3	630.3	632.1	632.1
160°	572.3	583.2	594.3	602.3	608.3	614.3	615.3	615.3
162.5°	563.4	572.9	581.5	588.7	593.1	599.1	600.1	599.3
165°	551.3	557.2	564.3	569.3	573.3	577.3	576.3	575.3
167.5°	539.5	544.1	549.7	552.7	554.7	557.2	557.1	556.3
170°	532.3	535.3	539.2	542.3	544.2	545.3	544.2	544.2
172.5°	525.8	528.1	530.5	532.6	533.8	534.9	533.8	532.3
175°	517.3	518.2	520.2	520.2	520.2	522.3	520.2	518.2
177.5°	511.6	512.5	512.5	513.2	512.5	513.2	511.6	510.1
180°	509.3	509.3	509.3	509.3	509.3	509.3	509.3	509.3

(END OF REPORT)