

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332581-840

Luminaire Tested: **SA4XXDIP-C795D365U840-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332581-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4858.7 lumens  
Efficiency: N/A  
Efficacy: 138.8 lumens/watt  
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41  
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 35  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332581-840  
CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

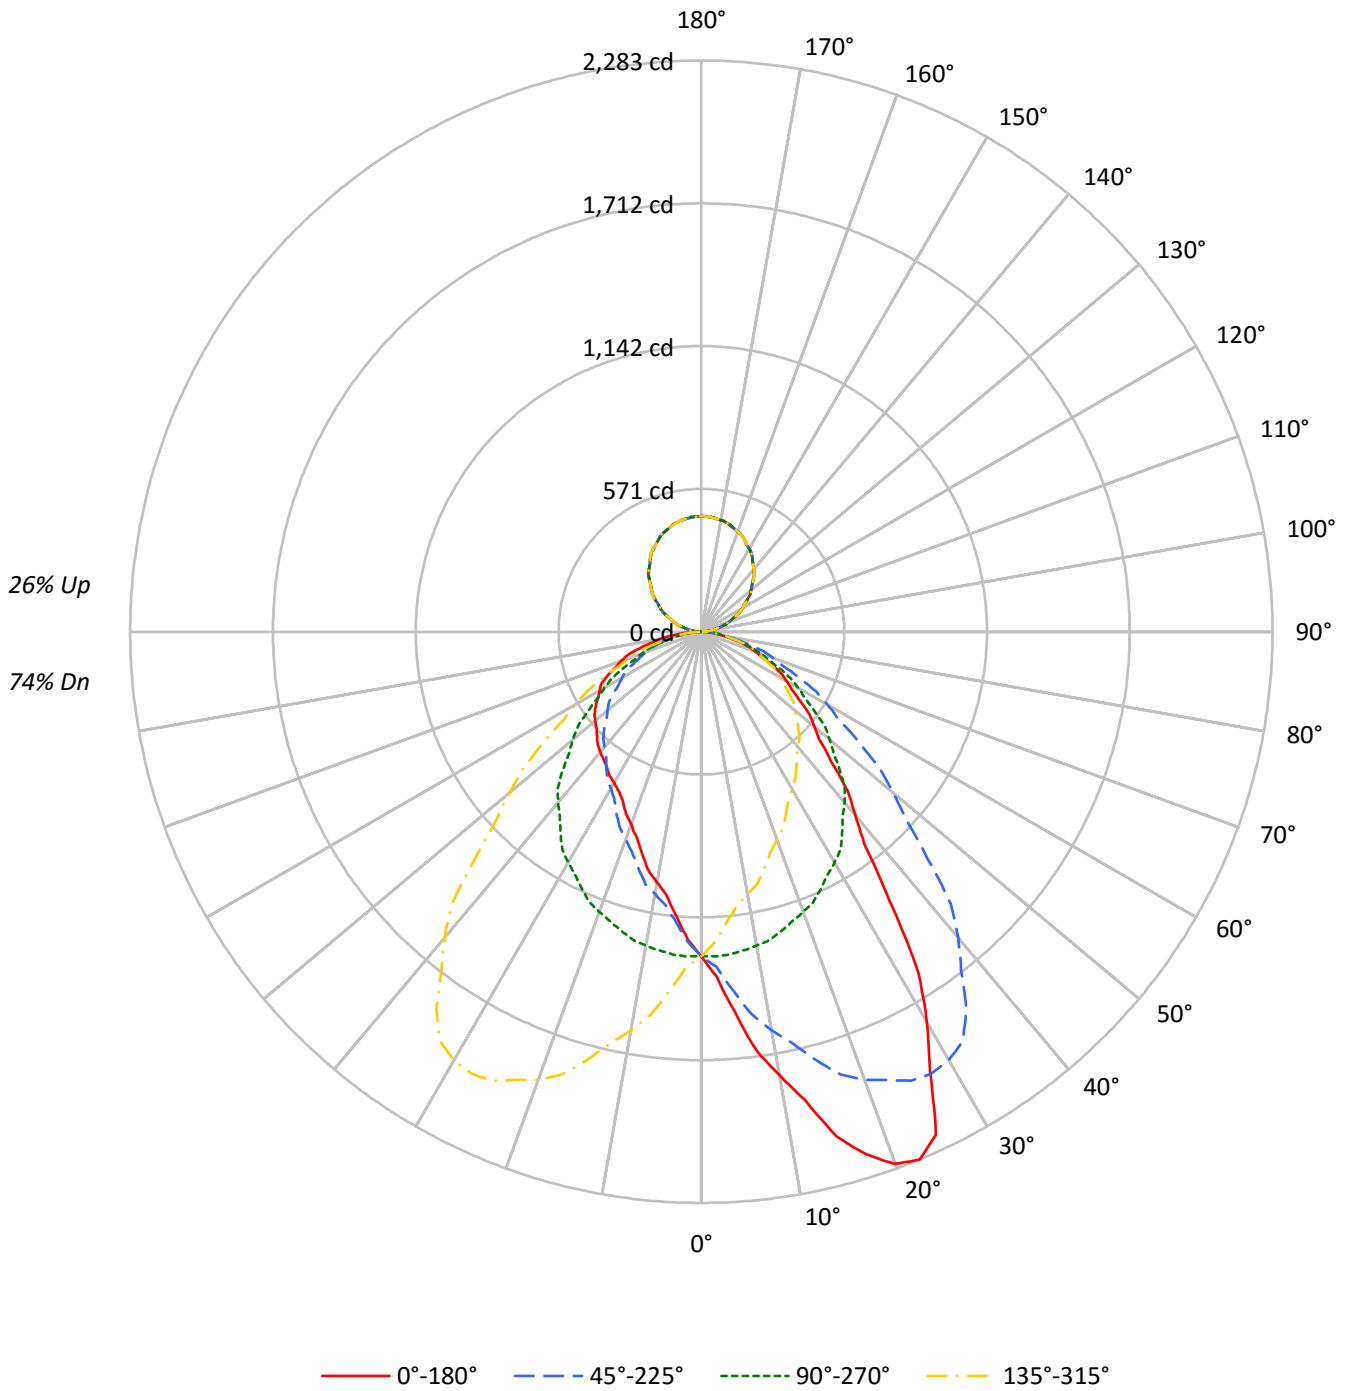



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	113	113	113	113	107	107	107	107	96	96	96	87	87	87	78	78	78	74				
1	103	99	95	92	98	94	91	88	85	83	80	77	75	73	69	68	66	63				
2	94	87	81	75	89	83	77	73	75	71	67	68	65	62	61	59	56	53				
3	86	77	69	63	82	73	67	61	67	61	57	60	56	53	55	51	48	45				
4	79	68	60	54	75	65	58	52	59	53	49	54	49	45	49	45	42	39				
5	73	61	53	47	69	58	51	45	53	47	42	49	44	40	44	40	37	34				
6	67	55	47	41	64	53	45	40	48	42	37	44	39	35	40	36	33	30				
7	63	50	42	36	59	48	40	35	44	38	33	40	35	31	37	33	29	27				
8	58	46	38	32	55	44	36	31	40	34	30	37	32	28	34	30	26	24				
9	54	42	34	29	52	40	33	28	37	31	27	34	29	25	32	27	24	22				
10	51	38	31	26	48	37	30	25	34	28	24	32	27	23	29	25	22	20				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	10467	10467	10467	10467
5°	12327	10494	9263	10494
10°	14758	10449	8338	10449
15°	17462	10343	7658	10343
20°	19444	10234	7050	10234
25°	19759	10075	6631	10075
30°	16812	9923	6498	9923
35°	12925	9676	6500	9676
40°	10075	9385	6622	9385
45°	8401	8947	6734	8947
50°	7394	8411	6962	8411
55°	6773	7771	7241	7771
60°	6347	7198	7579	7198
65°	5908	6556	7859	6556
70°	5401	5922	8037	5922
75°	4825	5209	7941	5209
80°	4049	4268	7689	4268
85°	2983	3084	7364	3084



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	126.3	2.6
10°-20°	389.3	8.0
20°-30°	617.4	12.7
30°-40°	687.1	14.1
40°-50°	625.4	12.9
50°-60°	511.1	10.5
60°-70°	364.8	7.5
70°-80°	200.9	4.1
80°-90°	56.2	1.2
90°-100°	30.4	0.6
100°-110°	90.2	1.9
110°-120°	153.0	3.1
120°-130°	201.8	4.2
130°-140°	226.6	4.7
140°-150°	222.7	4.6
150°-160°	187.3	3.9
160°-170°	124.6	2.6
170°-180°	43.6	0.9
0°-30°	1133.0	23.3
0°-40°	1820.1	37.5
0°-60°	2956.5	60.9
0°-90°	3578.5	73.7
90°-120°	273.6	5.6
90°-150°	924.6	19.0
90°-180°	1280.0	26.3
0°-180°	4858.7	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1297	1297	1297	1297	1297	
5°	1521	1295	1143	1295	1521	155
15°	2089	1238	916	1238	2089	590
25°	2218	1131	744	1131	2218	978
35°	1312	982	660	982	1312	832
45°	736	784	590	784	736	580
55°	481	552	514	552	481	435
65°	309	343	411	343	309	306
75°	155	167	255	167	155	164
85°	32	33	80	33	32	40
90°	11	1	11	1	11	7
95°	28	21	28	21	28	29
105°	87	83	87	83	87	92
115°	154	156	154	156	154	152
125°	225	227	225	227	225	201
135°	293	292	293	292	293	226
145°	356	355	356	355	356	222
155°	406	407	406	407	406	187
165°	442	443	442	443	442	124
175°	459	461	459	461	459	44
180°	461	461	461	461	461	



TEST NUMBER: P332581-840  
 CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6
2.5°	1379.9	1379.5	1375.1	1374.3	1371.3	1367.5	1366.5	1359.7	1345.9	1339.5	1337.8
5°	1521.1	1531.8	1517.8	1515.1	1513.5	1495.8	1486.6	1475.9	1451.2	1436.7	1425.4
7.5°	1689.5	1690.7	1684.7	1679.7	1666.1	1650.5	1627.4	1602.7	1573.3	1542.6	1519.5
10°	1800.3	1804.6	1797.7	1796.5	1769.2	1752.0	1717.6	1688.6	1655.3	1618.2	1584.4
12.5°	1917.2	1911.2	1907.6	1884.6	1879.6	1848.3	1808.3	1778.4	1727.1	1684.5	1639.4
15°	2089.3	2077.5	2069.9	2038.2	2022.7	1979.1	1936.7	1904.0	1836.8	1772.9	1724.5
17.5°	2190.2	2202.0	2184.6	2171.6	2131.3	2100.8	2057.5	1988.7	1936.2	1856.8	1795.8
20°	2263.3	2264.3	2254.7	2241.3	2209.6	2170.9	2123.6	2048.4	1985.6	1906.6	1822.9
22.5°	2283.0	2283.3	2279.2	2266.6	2242.6	2211.3	2163.6	2100.8	2024.7	1938.8	1855.1
25°	2218.2	2216.0	2220.9	2234.8	2225.6	2216.0	2188.6	2141.9	2071.0	1980.2	1890.0
27.5°	1977.1	1992.0	2019.2	2053.6	2086.7	2111.9	2119.0	2109.4	2065.5	1990.8	1896.3
30°	1803.5	1821.8	1842.2	1876.5	1943.2	1981.4	2023.2	2054.9	2037.2	1977.5	1889.5
32.5°	1612.8	1617.3	1647.6	1686.7	1747.7	1821.1	1887.4	1951.8	1973.2	1941.9	1868.5
35°	1311.5	1319.1	1351.8	1390.5	1465.2	1554.9	1654.8	1743.9	1817.5	1847.0	1809.5
37.5°	1070.3	1091.9	1115.0	1156.6	1222.3	1303.0	1406.8	1522.2	1631.8	1705.4	1717.8
40°	956.0	969.5	986.1	1017.7	1073.6	1153.2	1242.2	1374.4	1491.0	1596.2	1630.6
42.5°	865.8	873.6	883.8	912.5	955.0	1034.1	1115.5	1231.7	1348.8	1474.6	1532.2
45°	735.8	743.9	761.0	777.7	809.9	864.7	940.4	1036.0	1153.7	1275.1	1381.4
47.5°	642.0	647.1	657.3	675.1	702.5	738.6	800.2	880.1	989.1	1106.9	1220.2
50°	588.7	592.9	601.0	617.1	638.0	670.2	720.7	795.5	880.8	999.6	1110.6
52.5°	546.5	548.3	554.2	565.1	581.8	608.8	650.3	712.1	791.4	897.3	1008.0
55°	481.2	483.4	488.8	496.9	511.3	528.5	560.2	606.3	675.7	767.5	863.6
57.5°	427.5	429.0	433.5	436.7	448.6	462.5	487.0	519.9	572.4	650.3	736.1
60°	393.1	392.0	397.5	400.1	408.2	420.0	438.8	470.5	516.1	579.0	657.9
62.5°	359.6	358.1	362.6	366.2	370.8	380.9	396.3	421.1	458.2	514.9	583.2
65°	309.3	307.2	309.9	314.2	318.5	323.9	335.2	357.2	386.7	427.5	479.6
67.5°	258.8	261.2	261.6	263.7	266.2	273.5	281.2	296.8	317.6	350.3	394.5
70°	228.8	229.3	231.5	231.5	233.1	239.5	246.0	255.1	275.5	305.6	341.5
72.5°	198.7	201.0	200.2	201.9	203.0	207.3	212.1	220.8	238.1	260.4	290.8
75°	154.7	156.3	156.3	156.8	158.4	160.1	163.8	170.3	182.6	199.2	220.3
77.5°	112.8	113.0	113.7	115.7	115.7	118.3	121.1	126.2	132.3	143.7	156.5
80°	87.1	88.1	87.6	88.7	88.7	90.8	91.8	98.3	101.0	108.5	118.7
82.5°	63.8	64.8	64.7	66.2	67.2	67.6	69.1	71.6	74.3	81.0	85.1
85°	32.2	33.3	32.2	33.3	34.9	35.4	37.1	37.6	39.8	41.4	45.1
87.5°	11.6	12.8	12.8	13.2	14.0	14.4	14.7	14.2	15.9	16.2	17.8
90°	10.7	10.5	10.4	10.2	10.1	9.8	9.3	8.8	8.3	7.9	7.2
92.5°	15.9	15.8	15.7	15.6	15.5	15.2	14.9	14.7	14.4	14.1	13.7
95°	28.2	28.2	28.2	28.2	28.2	28.1	27.9	27.6	27.4	27.2	26.6
97.5°	44.1	44.1	44.1	44.1	44.1	44.0	43.7	43.4	43.2	42.9	42.2
100°	55.3	55.3	55.3	55.3	55.3	55.2	55.0	54.9	54.7	54.6	53.9
102.5°	67.9	67.8	67.8	67.7	67.7	67.5	67.3	67.1	66.9	66.6	65.9
105°	87.1	86.8	86.6	86.3	86.1	85.8	85.6	85.4	85.1	84.9	84.6
107.5°	105.7	105.8	105.8	105.8	105.8	105.7	105.5	105.3	105.0	104.8	104.8
110°	119.2	119.0	118.8	118.5	118.3	118.2	118.4	118.6	118.7	118.9	118.9



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	132.9	132.8	132.8	132.8	132.7	132.7	132.7	132.8	132.8	132.8	133.0
115°	154.2	154.2	154.3	154.4	154.5	154.5	154.6	154.7	154.8	154.9	155.0
117.5°	174.4	174.6	174.7	174.9	175.1	175.3	175.5	175.8	176.1	176.3	176.4
120°	189.9	189.7	189.6	189.3	189.2	189.3	189.8	190.2	190.6	191.0	191.2
122.5°	202.7	203.0	203.3	203.6	203.8	204.1	204.4	204.7	204.9	205.2	205.3
125°	224.8	225.0	225.1	225.3	225.4	225.6	225.8	225.9	226.1	226.2	226.3
127.5°	245.3	245.4	245.6	245.7	245.8	245.9	246.1	246.3	246.4	246.6	246.7
130°	258.7	259.0	259.3	259.6	259.9	260.2	260.3	260.5	260.7	260.8	260.8
132.5°	273.0	273.2	273.3	273.4	273.5	273.7	273.8	274.0	274.1	274.3	274.4
135°	292.7	292.9	293.1	293.4	293.6	293.8	294.0	294.1	294.3	294.4	294.4
137.5°	313.3	313.2	313.2	313.1	313.1	313.2	313.4	313.6	313.8	314.0	313.9
140°	325.8	325.9	326.0	326.1	326.1	326.2	326.3	326.4	326.5	326.5	326.5
142.5°	338.4	338.4	338.4	338.4	338.4	338.4	338.5	338.5	338.5	338.5	338.6
145°	355.5	355.7	355.9	356.2	356.4	356.6	356.6	356.7	356.8	356.9	356.8
147.5°	372.7	372.7	372.8	372.9	373.0	373.0	373.1	373.2	373.2	373.3	373.4
150°	383.2	383.3	383.4	383.5	383.5	383.6	383.6	383.6	383.6	383.6	383.6
152.5°	392.9	393.1	393.3	393.5	393.7	393.8	393.6	393.4	393.2	393.0	392.9
155°	406.5	406.8	407.1	407.4	407.7	407.7	407.4	407.1	406.8	406.5	406.6
157.5°	418.5	418.8	419.1	419.3	419.6	419.6	419.4	419.1	418.9	418.7	418.7
160°	425.4	425.8	426.2	426.6	427.0	427.1	426.8	426.6	426.4	426.1	426.2
162.5°	432.5	432.9	433.3	433.7	434.0	434.0	433.6	433.2	432.8	432.3	432.4
165°	441.8	442.1	442.4	442.7	443.0	442.9	442.5	442.0	441.5	441.1	441.2
167.5°	448.4	448.9	449.4	449.9	450.4	450.4	449.9	449.5	449.0	448.5	448.5
170°	452.1	452.7	453.2	453.8	454.3	454.4	453.9	453.4	452.9	452.5	452.4
172.5°	455.2	455.9	456.4	457.0	457.5	457.5	457.0	456.5	455.9	455.3	455.3
175°	458.6	459.1	459.7	460.2	460.8	460.8	460.2	459.7	459.1	458.6	458.7
177.5°	460.3	460.8	461.3	461.8	462.3	462.3	461.9	461.4	461.0	460.6	460.6
180°	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6
2.5°	1338.2	1332.2	1327.9	1324.4	1315.0	1309.4	1305.1	1299.1	1292.2	1285.0	1275.9
5°	1414.1	1395.8	1382.5	1362.0	1342.7	1326.6	1310.0	1294.9	1276.7	1256.8	1242.2
7.5°	1494.0	1466.8	1432.0	1401.8	1367.9	1338.3	1311.9	1284.9	1256.7	1229.4	1204.4
10°	1544.7	1509.7	1471.1	1425.4	1382.5	1344.3	1308.9	1274.6	1241.2	1207.9	1179.4
12.5°	1599.2	1555.7	1498.5	1445.2	1397.0	1346.0	1303.3	1261.2	1221.0	1186.0	1152.8
15°	1672.4	1609.6	1543.6	1472.2	1408.8	1349.2	1290.6	1237.5	1192.3	1146.1	1113.9
17.5°	1717.5	1639.7	1564.2	1489.6	1412.9	1337.7	1274.6	1213.2	1156.7	1110.8	1070.2
20°	1747.2	1669.8	1575.8	1501.2	1409.9	1332.5	1259.5	1191.2	1132.2	1083.3	1041.4
22.5°	1772.9	1683.5	1589.5	1491.3	1400.4	1318.4	1238.4	1169.7	1109.4	1057.9	1017.7
25°	1786.9	1684.3	1582.3	1484.5	1381.4	1284.1	1211.6	1131.1	1066.6	1012.4	969.5
27.5°	1788.4	1678.7	1563.3	1454.6	1348.2	1257.7	1166.1	1094.2	1027.2	969.9	928.6
30°	1783.6	1669.3	1545.2	1427.5	1320.7	1222.4	1143.0	1064.5	996.3	939.4	896.4
32.5°	1768.6	1649.5	1522.0	1397.5	1286.8	1190.6	1108.5	1034.0	967.6	911.4	866.4
35°	1725.2	1607.5	1471.6	1342.2	1228.8	1131.7	1057.5	981.8	915.2	862.0	818.5
37.5°	1657.1	1550.7	1412.6	1278.7	1167.4	1069.8	996.3	927.9	867.8	813.7	769.2
40°	1597.8	1504.4	1365.8	1235.3	1115.0	1022.1	953.3	890.5	830.9	779.8	737.4
42.5°	1529.5	1448.0	1320.3	1182.0	1066.0	972.7	905.6	849.2	793.0	745.9	703.5
45°	1407.7	1354.0	1233.7	1105.9	985.0	897.0	833.0	783.7	736.4	690.1	654.7
47.5°	1267.6	1241.0	1139.7	1018.3	903.6	816.8	761.3	715.7	674.3	635.2	603.9
50°	1173.6	1160.6	1073.1	956.0	846.5	764.8	708.9	669.7	634.3	600.0	570.4
52.5°	1080.8	1080.3	1001.4	894.1	792.7	714.1	658.6	622.1	591.4	563.4	536.8
55°	938.9	953.8	892.1	796.5	705.7	634.8	584.9	552.1	530.7	507.6	487.7
57.5°	808.5	833.4	782.5	698.3	622.6	557.2	513.8	489.2	466.3	452.3	437.9
60°	723.5	747.1	707.3	636.4	565.0	509.2	467.8	445.8	425.9	416.3	406.1
62.5°	647.8	668.9	639.4	573.7	511.7	458.1	423.1	401.9	388.5	378.0	371.2
65°	539.8	557.4	532.3	484.4	431.3	388.3	359.8	343.2	330.3	326.0	318.5
67.5°	436.4	452.4	438.8	398.2	355.6	323.0	300.7	284.8	277.1	273.4	268.0
70°	374.9	391.0	376.5	341.0	308.3	280.9	259.9	250.9	242.8	241.2	233.6
72.5°	322.9	333.9	319.3	291.6	263.6	240.5	224.3	214.7	210.6	207.6	203.6
75°	242.3	251.9	242.3	220.8	200.9	184.8	170.8	167.0	162.2	160.6	157.9
77.5°	171.5	179.9	172.4	159.0	144.1	131.7	124.2	119.4	118.3	115.4	116.7
80°	131.1	136.4	129.5	120.3	108.5	99.9	94.5	91.8	88.7	87.6	89.7
82.5°	94.1	96.4	92.9	86.7	78.0	72.4	68.8	65.6	65.0	65.2	65.2
85°	48.9	48.4	47.8	42.4	39.8	36.0	33.8	33.3	32.7	33.8	34.9
87.5°	17.7	18.0	17.4	15.6	14.0	12.6	12.0	11.4	12.0	12.6	13.2
90°	6.6	6.0	5.4	4.5	3.7	2.8	1.9	1.1	1.9	2.8	3.7
92.5°	13.2	12.8	12.3	11.6	10.6	9.6	8.7	7.7	8.7	9.6	10.6
95°	26.1	25.4	24.9	24.2	23.5	22.8	22.1	21.4	22.1	22.8	23.5
97.5°	41.6	40.9	40.3	39.7	39.1	38.6	38.0	37.4	38.0	38.6	39.1
100°	53.2	52.4	51.7	51.2	50.9	50.6	50.3	50.0	50.3	50.6	50.9
102.5°	65.3	64.6	64.0	63.6	63.5	63.3	63.2	63.1	63.2	63.3	63.5
105°	84.3	84.0	83.6	83.4	83.4	83.3	83.2	83.1	83.2	83.3	83.4
107.5°	104.7	104.7	104.6	104.6	104.5	104.4	104.3	104.2	104.3	104.4	104.5
110°	119.0	119.1	119.2	119.1	119.0	118.8	118.7	118.5	118.7	118.8	119.0





TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	133.1	133.2	133.4	133.4	133.4	133.4	133.3	133.3	133.3	133.4	133.4
115°	155.2	155.3	155.5	155.6	155.6	155.6	155.6	155.6	155.6	155.6	155.6
117.5°	176.6	176.7	176.8	176.8	176.7	176.7	176.6	176.5	176.6	176.7	176.7
120°	191.4	191.7	191.9	191.9	191.5	191.2	190.9	190.6	190.9	191.2	191.5
122.5°	205.4	205.5	205.6	205.6	205.5	205.4	205.2	205.1	205.2	205.4	205.5
125°	226.4	226.5	226.5	226.6	226.6	226.6	226.6	226.6	226.6	226.6	226.6
127.5°	246.8	247.0	247.1	247.0	246.8	246.6	246.3	246.1	246.3	246.6	246.8
130°	260.8	260.8	260.8	260.7	260.5	260.2	260.0	259.8	260.0	260.2	260.5
132.5°	274.4	274.5	274.5	274.5	274.3	274.1	274.0	273.8	274.0	274.1	274.3
135°	294.4	294.4	294.4	294.2	293.7	293.2	292.8	292.3	292.8	293.2	293.7
137.5°	313.7	313.6	313.5	313.3	313.1	312.9	312.7	312.4	312.7	312.9	313.1
140°	326.5	326.5	326.5	326.5	326.3	326.1	326.0	325.8	326.0	326.1	326.3
142.5°	338.6	338.7	338.8	338.7	338.5	338.4	338.2	338.1	338.2	338.4	338.5
145°	356.7	356.6	356.6	356.4	356.0	355.7	355.4	355.1	355.4	355.7	356.0
147.5°	373.4	373.5	373.5	373.4	373.0	372.6	372.3	371.9	372.3	372.6	373.0
150°	383.6	383.6	383.6	383.4	383.1	382.8	382.5	382.2	382.5	382.8	383.1
152.5°	392.9	392.8	392.7	392.6	392.4	392.2	392.1	391.9	392.1	392.2	392.4
155°	406.6	406.7	406.8	406.8	406.8	406.8	406.8	406.8	406.8	406.8	406.8
157.5°	418.7	418.7	418.7	418.8	419.0	419.1	419.2	419.4	419.2	419.1	419.0
160°	426.3	426.4	426.4	426.5	426.6	426.7	426.7	426.8	426.7	426.7	426.6
162.5°	432.5	432.6	432.7	432.8	433.0	433.2	433.4	433.6	433.4	433.2	433.0
165°	441.4	441.5	441.7	441.9	442.1	442.4	442.6	442.8	442.6	442.4	442.1
167.5°	448.5	448.5	448.4	448.6	448.9	449.3	449.6	449.9	449.6	449.3	448.9
170°	452.3	452.2	452.2	452.3	452.7	453.1	453.5	453.9	453.5	453.1	452.7
172.5°	455.3	455.2	455.2	455.4	455.8	456.1	456.5	456.8	456.5	456.1	455.8
175°	458.7	458.8	458.9	459.1	459.5	459.9	460.3	460.7	460.3	459.9	459.5
177.5°	460.6	460.6	460.6	460.7	461.0	461.3	461.7	462.0	461.7	461.3	461.0
180°	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6
2.5°	1271.6	1267.8	1262.1	1254.5	1248.0	1241.1	1239.4	1236.8	1241.9	1237.7	1236.4
5°	1229.9	1218.6	1204.2	1187.5	1177.8	1163.9	1161.1	1155.8	1150.4	1149.9	1144.5
7.5°	1185.8	1169.2	1150.2	1133.3	1117.5	1102.3	1092.4	1090.1	1082.3	1077.6	1072.3
10°	1157.4	1137.0	1115.0	1098.8	1080.7	1064.5	1053.2	1046.8	1041.4	1035.5	1030.2
12.5°	1123.9	1102.2	1084.1	1066.6	1044.9	1032.7	1014.1	1003.0	1001.9	1002.0	988.1
15°	1084.9	1063.4	1035.5	1010.8	999.0	975.3	965.1	952.2	944.2	936.1	929.7
17.5°	1040.4	1013.6	991.8	963.4	940.9	922.1	908.7	900.9	888.8	877.4	869.1
20°	1012.4	983.9	960.9	930.8	906.1	882.9	871.7	860.9	851.8	842.1	833.0
22.5°	984.0	954.3	926.0	896.9	873.8	849.5	838.6	823.9	815.3	809.9	800.8
25°	939.4	907.2	874.9	847.0	823.3	801.8	787.4	776.1	766.4	762.1	756.2
27.5°	890.8	858.8	827.7	796.0	769.1	753.6	741.9	733.5	727.8	722.2	719.5
30°	859.9	826.6	793.2	763.8	739.0	723.5	712.7	706.8	702.5	699.8	697.1
32.5°	828.5	795.7	760.6	733.7	711.6	697.7	689.5	683.6	681.5	680.4	679.5
35°	778.2	745.0	712.7	688.5	667.6	662.3	655.2	652.1	651.0	654.7	656.3
37.5°	729.5	698.6	669.0	645.6	631.9	624.0	621.6	621.8	625.6	628.9	632.8
40°	698.2	668.1	640.3	619.8	606.9	602.1	601.0	603.7	607.9	611.8	616.0
42.5°	667.7	638.0	612.7	593.6	584.6	580.2	580.8	583.5	589.5	594.1	600.6
45°	620.4	595.6	570.9	555.3	547.9	548.9	548.9	553.7	559.7	566.6	573.6
47.5°	575.7	550.9	530.5	517.5	513.5	512.6	515.6	521.9	530.4	539.1	548.8
50°	545.6	522.0	504.3	492.5	488.2	489.8	494.1	500.0	510.2	521.0	531.2
52.5°	515.1	493.7	477.3	466.3	463.3	466.2	470.5	479.8	488.8	500.4	512.7
55°	467.8	449.5	436.7	428.6	427.5	429.1	433.9	444.1	457.1	471.6	483.4
57.5°	420.6	405.4	393.5	388.0	388.5	390.0	398.0	410.1	423.8	439.3	454.5
60°	388.9	374.9	365.3	360.9	361.4	364.7	374.4	385.7	402.8	417.9	433.9
62.5°	358.8	346.5	337.3	333.5	332.6	339.7	349.0	360.7	377.9	394.7	412.0
65°	310.4	300.7	293.3	291.1	292.8	298.1	309.9	325.5	340.0	357.7	376.0
67.5°	263.2	255.2	250.0	251.1	253.0	260.9	270.8	284.2	300.6	319.0	337.1
70°	233.1	225.6	221.3	221.8	225.0	234.7	243.3	256.7	274.5	293.3	308.3
72.5°	202.2	197.2	193.4	195.6	198.8	205.5	216.2	229.6	245.2	262.8	278.6
75°	155.2	155.2	153.1	154.7	159.6	165.9	174.0	187.9	203.6	217.5	230.5
77.5°	115.1	114.0	115.3	117.3	120.1	127.7	136.9	146.9	158.6	172.6	183.3
80°	88.1	88.7	91.3	94.5	95.6	101.5	111.2	120.3	129.5	141.3	151.5
82.5°	66.1	66.8	68.1	72.2	73.2	79.6	85.8	94.9	103.2	111.2	119.7
85°	36.0	36.0	38.7	40.3	42.9	47.3	51.0	56.4	63.9	69.3	77.4
87.5°	14.6	14.8	16.7	17.7	19.1	21.3	22.3	27.1	28.9	31.2	35.1
90°	4.5	5.4	6.0	6.6	7.2	7.9	8.3	8.8	9.3	9.8	10.1
92.5°	11.6	12.3	12.8	13.2	13.7	14.1	14.4	14.7	14.9	15.2	15.5
95°	24.2	24.9	25.4	26.1	26.6	27.2	27.4	27.6	27.9	28.1	28.2
97.5°	39.7	40.3	40.9	41.6	42.2	42.9	43.2	43.4	43.7	44.0	44.1
100°	51.2	51.7	52.4	53.2	53.9	54.6	54.7	54.9	55.0	55.2	55.3
102.5°	63.6	64.0	64.6	65.3	65.9	66.6	66.9	67.1	67.3	67.5	67.7
105°	83.4	83.6	84.0	84.3	84.6	84.9	85.1	85.4	85.6	85.8	86.1
107.5°	104.6	104.6	104.7	104.7	104.8	104.8	105.0	105.3	105.5	105.7	105.8
110°	119.1	119.2	119.1	119.0	118.9	118.9	118.7	118.6	118.4	118.2	118.3



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	133.4	133.4	133.2	133.1	133.0	132.8	132.8	132.8	132.7	132.7	132.7
115°	155.6	155.5	155.3	155.2	155.0	154.9	154.8	154.7	154.6	154.5	154.5
117.5°	176.8	176.8	176.7	176.6	176.4	176.3	176.1	175.8	175.5	175.3	175.1
120°	191.9	191.9	191.7	191.4	191.2	191.0	190.6	190.2	189.8	189.3	189.2
122.5°	205.6	205.6	205.5	205.4	205.3	205.2	204.9	204.7	204.4	204.1	203.8
125°	226.6	226.5	226.5	226.4	226.3	226.2	226.1	225.9	225.8	225.6	225.4
127.5°	247.0	247.1	247.0	246.8	246.7	246.6	246.4	246.3	246.1	245.9	245.8
130°	260.7	260.8	260.8	260.8	260.8	260.8	260.7	260.5	260.3	260.2	259.9
132.5°	274.5	274.5	274.5	274.4	274.4	274.3	274.1	274.0	273.8	273.7	273.5
135°	294.2	294.4	294.4	294.4	294.4	294.4	294.3	294.1	294.0	293.8	293.6
137.5°	313.3	313.5	313.6	313.7	313.9	314.0	313.8	313.6	313.4	313.2	313.1
140°	326.5	326.5	326.5	326.5	326.5	326.5	326.5	326.4	326.3	326.2	326.1
142.5°	338.7	338.8	338.7	338.6	338.6	338.5	338.5	338.5	338.5	338.4	338.4
145°	356.4	356.6	356.6	356.7	356.8	356.9	356.8	356.7	356.6	356.6	356.4
147.5°	373.4	373.5	373.5	373.4	373.4	373.3	373.2	373.2	373.1	373.0	373.0
150°	383.4	383.6	383.6	383.6	383.6	383.6	383.6	383.6	383.6	383.6	383.5
152.5°	392.6	392.7	392.8	392.9	392.9	393.0	393.2	393.4	393.6	393.8	393.7
155°	406.8	406.8	406.7	406.6	406.6	406.5	406.8	407.1	407.4	407.7	407.7
157.5°	418.8	418.7	418.7	418.7	418.7	418.7	418.9	419.1	419.4	419.6	419.6
160°	426.5	426.4	426.4	426.3	426.2	426.1	426.4	426.6	426.8	427.1	427.0
162.5°	432.8	432.7	432.6	432.5	432.4	432.3	432.8	433.2	433.6	434.0	434.0
165°	441.9	441.7	441.5	441.4	441.2	441.1	441.5	442.0	442.5	442.9	443.0
167.5°	448.6	448.4	448.5	448.5	448.5	448.5	449.0	449.5	449.9	450.4	450.4
170°	452.3	452.2	452.2	452.3	452.4	452.5	452.9	453.4	453.9	454.4	454.3
172.5°	455.4	455.2	455.2	455.3	455.3	455.3	455.9	456.5	457.0	457.5	457.5
175°	459.1	458.9	458.8	458.7	458.7	458.6	459.1	459.7	460.2	460.8	460.8
177.5°	460.7	460.6	460.6	460.6	460.6	460.6	461.0	461.4	461.9	462.3	462.3
180°	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6
2.5°	1235.5	1234.7	1231.6	1231.2	1231.6	1234.7	1235.5	1236.4	1237.7	1241.9	1236.8
5°	1141.3	1138.6	1137.0	1143.0	1137.0	1138.6	1141.3	1144.5	1149.9	1150.4	1155.8
7.5°	1070.3	1068.1	1063.4	1062.0	1063.4	1068.1	1070.3	1072.3	1077.6	1082.3	1090.1
10°	1024.7	1022.6	1018.3	1017.2	1018.3	1022.6	1024.7	1030.2	1035.5	1041.4	1046.8
12.5°	980.9	976.6	975.7	976.8	975.7	976.6	980.9	988.1	1002.0	1001.9	1003.0
15°	922.7	920.6	914.6	916.3	914.6	920.6	922.7	929.7	936.1	944.2	952.2
17.5°	865.4	862.7	855.6	861.9	855.6	862.7	865.4	869.1	877.4	888.8	900.9
20°	829.3	825.0	821.2	820.6	821.2	825.0	829.3	833.0	842.1	851.8	860.9
22.5°	794.9	791.0	790.7	787.2	790.7	791.0	794.9	800.8	809.9	815.3	823.9
25°	751.9	748.2	747.1	744.4	747.1	748.2	751.9	756.2	762.1	766.4	776.1
27.5°	718.9	717.1	715.2	716.0	715.2	717.1	718.9	719.5	722.2	727.8	733.5
30°	698.7	698.2	697.1	697.1	697.1	698.2	698.7	697.1	699.8	702.5	706.8
32.5°	682.0	681.9	682.6	682.6	682.6	681.9	682.0	679.5	680.4	681.5	683.6
35°	658.4	660.0	661.2	659.5	661.2	660.0	658.4	656.3	654.7	651.0	652.1
37.5°	637.2	638.8	640.4	642.2	640.4	638.8	637.2	632.8	628.9	625.6	621.8
40°	620.9	624.6	625.7	628.4	625.7	624.6	620.9	616.0	611.8	607.9	603.7
42.5°	605.4	609.6	612.4	612.9	612.4	609.6	605.4	600.6	594.1	589.5	583.5
45°	581.7	585.9	589.8	589.8	589.8	585.9	581.7	573.6	566.6	559.7	553.7
47.5°	557.0	563.3	567.0	568.0	567.0	563.3	557.0	548.8	539.1	530.4	521.9
50°	540.3	547.9	551.6	554.3	551.6	547.9	540.3	531.2	521.0	510.2	500.0
52.5°	524.0	531.5	536.5	538.0	536.5	531.5	524.0	512.7	500.4	488.8	479.8
55°	495.7	506.4	512.4	514.5	512.4	506.4	495.7	483.4	471.6	457.1	444.1
57.5°	469.1	479.0	485.8	487.5	485.8	479.0	469.1	454.5	439.3	423.8	410.1
60°	448.5	459.2	467.8	469.4	467.8	459.2	448.5	433.9	417.9	402.8	385.7
62.5°	427.4	438.6	446.4	450.5	446.4	438.6	427.4	412.0	394.7	377.9	360.7
65°	391.0	402.2	409.8	411.4	409.8	402.2	391.0	376.0	357.7	340.0	325.5
67.5°	351.2	362.5	367.5	370.6	367.5	362.5	351.2	337.1	319.0	300.6	284.2
70°	323.4	332.4	337.8	340.5	337.8	332.4	323.4	308.3	293.3	274.5	256.7
72.5°	291.5	301.0	307.3	307.8	307.3	301.0	291.5	278.6	262.8	245.2	229.6
75°	242.8	251.4	254.6	254.6	254.6	251.4	242.8	230.5	217.5	203.6	187.9
77.5°	192.2	196.6	200.7	201.5	200.7	196.6	192.2	183.3	172.6	158.6	146.9
80°	159.6	162.2	165.4	165.4	165.4	162.2	159.6	151.5	141.3	129.5	120.3
82.5°	126.0	128.3	131.5	131.1	131.5	128.3	126.0	119.7	111.2	103.2	94.9
85°	76.2	81.1	80.6	79.5	80.6	81.1	76.2	77.4	69.3	63.9	56.4
87.5°	36.5	36.9	38.2	39.1	38.2	36.9	36.5	35.1	31.2	28.9	27.1
90°	10.2	10.4	10.5	10.7	10.5	10.4	10.2	10.1	9.8	9.3	8.8
92.5°	15.6	15.7	15.8	15.9	15.8	15.7	15.6	15.5	15.2	14.9	14.7
95°	28.2	28.2	28.2	28.2	28.2	28.2	28.2	28.2	28.1	27.9	27.6
97.5°	44.1	44.1	44.1	44.1	44.1	44.1	44.1	44.1	44.0	43.7	43.4
100°	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.2	55.0	54.9
102.5°	67.7	67.8	67.8	67.9	67.8	67.8	67.7	67.7	67.5	67.3	67.1
105°	86.3	86.6	86.8	87.1	86.8	86.6	86.3	86.1	85.8	85.6	85.4
107.5°	105.8	105.8	105.8	105.7	105.8	105.8	105.8	105.8	105.7	105.5	105.3
110°	118.5	118.8	119.0	119.2	119.0	118.8	118.5	118.3	118.2	118.4	118.6



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	132.8	132.8	132.8	132.9	132.8	132.8	132.8	132.7	132.7	132.7	132.8
115°	154.4	154.3	154.2	154.2	154.2	154.3	154.4	154.5	154.5	154.6	154.7
117.5°	174.9	174.7	174.6	174.4	174.6	174.7	174.9	175.1	175.3	175.5	175.8
120°	189.3	189.6	189.7	189.9	189.7	189.6	189.3	189.2	189.3	189.8	190.2
122.5°	203.6	203.3	203.0	202.7	203.0	203.3	203.6	203.8	204.1	204.4	204.7
125°	225.3	225.1	225.0	224.8	225.0	225.1	225.3	225.4	225.6	225.8	225.9
127.5°	245.7	245.6	245.4	245.3	245.4	245.6	245.7	245.8	245.9	246.1	246.3
130°	259.6	259.3	259.0	258.7	259.0	259.3	259.6	259.9	260.2	260.3	260.5
132.5°	273.4	273.3	273.2	273.0	273.2	273.3	273.4	273.5	273.7	273.8	274.0
135°	293.4	293.1	292.9	292.7	292.9	293.1	293.4	293.6	293.8	294.0	294.1
137.5°	313.1	313.2	313.2	313.3	313.2	313.2	313.1	313.1	313.2	313.4	313.6
140°	326.1	326.0	325.9	325.8	325.9	326.0	326.1	326.1	326.2	326.3	326.4
142.5°	338.4	338.4	338.4	338.4	338.4	338.4	338.4	338.4	338.4	338.5	338.5
145°	356.2	355.9	355.7	355.5	355.7	355.9	356.2	356.4	356.6	356.6	356.7
147.5°	372.9	372.8	372.7	372.7	372.7	372.8	372.9	373.0	373.0	373.1	373.2
150°	383.5	383.4	383.3	383.2	383.3	383.4	383.5	383.5	383.6	383.6	383.6
152.5°	393.5	393.3	393.1	392.9	393.1	393.3	393.5	393.7	393.8	393.6	393.4
155°	407.4	407.1	406.8	406.5	406.8	407.1	407.4	407.7	407.7	407.4	407.1
157.5°	419.3	419.1	418.8	418.5	418.8	419.1	419.3	419.6	419.6	419.4	419.1
160°	426.6	426.2	425.8	425.4	425.8	426.2	426.6	427.0	427.1	426.8	426.6
162.5°	433.7	433.3	432.9	432.5	432.9	433.3	433.7	434.0	434.0	433.6	433.2
165°	442.7	442.4	442.1	441.8	442.1	442.4	442.7	443.0	442.9	442.5	442.0
167.5°	449.9	449.4	448.9	448.4	448.9	449.4	449.9	450.4	450.4	449.9	449.5
170°	453.8	453.2	452.7	452.1	452.7	453.2	453.8	454.3	454.4	453.9	453.4
172.5°	457.0	456.4	455.9	455.2	455.9	456.4	457.0	457.5	457.5	457.0	456.5
175°	460.2	459.7	459.1	458.6	459.1	459.7	460.2	460.8	460.8	460.2	459.7
177.5°	461.8	461.3	460.8	460.3	460.8	461.3	461.8	462.3	462.3	461.9	461.4
180°	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4



TEST NUMBER: P332581-840  
 CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6
2.5°	1239.4	1241.1	1248.0	1254.5	1262.1	1267.8	1271.6	1275.9	1285.0	1292.2	1299.1
5°	1161.1	1163.9	1177.8	1187.5	1204.2	1218.6	1229.9	1242.2	1256.8	1276.7	1294.9
7.5°	1092.4	1102.3	1117.5	1133.3	1150.2	1169.2	1185.8	1204.4	1229.4	1256.7	1284.9
10°	1053.2	1064.5	1080.7	1098.8	1115.0	1137.0	1157.4	1179.4	1207.9	1241.2	1274.6
12.5°	1014.1	1032.7	1044.9	1066.6	1084.1	1102.2	1123.9	1152.8	1186.0	1221.0	1261.2
15°	965.1	975.3	999.0	1010.8	1035.5	1063.4	1084.9	1113.9	1146.1	1192.3	1237.5
17.5°	908.7	922.1	940.9	963.4	991.8	1013.6	1040.4	1070.2	1110.8	1156.7	1213.2
20°	871.7	882.9	906.1	930.8	960.9	983.9	1012.4	1041.4	1083.3	1132.2	1191.2
22.5°	838.6	849.5	873.8	896.9	926.0	954.3	984.0	1017.7	1057.9	1109.4	1169.7
25°	787.4	801.8	823.3	847.0	874.9	907.2	939.4	969.5	1012.4	1066.6	1131.1
27.5°	741.9	753.6	769.1	796.0	827.7	858.8	890.8	928.6	969.9	1027.2	1094.2
30°	712.7	723.5	739.0	763.8	793.2	826.6	859.9	896.4	939.4	996.3	1064.5
32.5°	689.5	697.7	711.6	733.7	760.6	795.7	828.5	866.4	911.4	967.6	1034.0
35°	655.2	662.3	667.6	688.5	712.7	745.0	778.2	818.5	862.0	915.2	981.8
37.5°	621.6	624.0	631.9	645.6	669.0	698.6	729.5	769.2	813.7	867.8	927.9
40°	601.0	602.1	606.9	619.8	640.3	668.1	698.2	737.4	779.8	830.9	890.5
42.5°	580.8	580.2	584.6	593.6	612.7	638.0	667.7	703.5	745.9	793.0	849.2
45°	548.9	548.9	547.9	555.3	570.9	595.6	620.4	654.7	690.1	736.4	783.7
47.5°	515.6	512.6	513.5	517.5	530.5	550.9	575.7	603.9	635.2	674.3	715.7
50°	494.1	489.8	488.2	492.5	504.3	522.0	545.6	570.4	600.0	634.3	669.7
52.5°	470.5	466.2	463.3	466.3	477.3	493.7	515.1	536.8	563.4	591.4	622.1
55°	433.9	429.1	427.5	428.6	436.7	449.5	467.8	487.7	507.6	530.7	552.1
57.5°	398.0	390.0	388.5	388.0	393.5	405.4	420.6	437.9	452.3	466.3	489.2
60°	374.4	364.7	361.4	360.9	365.3	374.9	388.9	406.1	416.3	425.9	445.8
62.5°	349.0	339.7	332.6	333.5	337.3	346.5	358.8	371.2	378.0	388.5	401.9
65°	309.9	298.1	292.8	291.1	293.3	300.7	310.4	318.5	326.0	330.3	343.2
67.5°	270.8	260.9	253.0	251.1	250.0	255.2	263.2	268.0	273.4	277.1	284.8
70°	243.3	234.7	225.0	221.8	221.3	225.6	233.1	233.6	241.2	242.8	250.9
72.5°	216.2	205.5	198.8	195.6	193.4	197.2	202.2	203.6	207.6	210.6	214.7
75°	174.0	165.9	159.6	154.7	153.1	155.2	155.2	157.9	160.6	162.2	167.0
77.5°	136.9	127.7	120.1	117.3	115.3	114.0	115.1	116.7	115.4	118.3	119.4
80°	111.2	101.5	95.6	94.5	91.3	88.7	88.1	89.7	87.6	88.7	91.8
82.5°	85.8	79.6	73.2	72.2	68.1	66.8	66.1	65.2	65.2	65.0	65.6
85°	51.0	47.3	42.9	40.3	38.7	36.0	36.0	34.9	33.8	32.7	33.3
87.5°	22.3	21.3	19.1	17.7	16.7	14.8	14.6	13.2	12.6	12.0	11.4
90°	8.3	7.9	7.2	6.6	6.0	5.4	4.5	3.7	2.8	1.9	1.1
92.5°	14.4	14.1	13.7	13.2	12.8	12.3	11.6	10.6	9.6	8.7	7.7
95°	27.4	27.2	26.6	26.1	25.4	24.9	24.2	23.5	22.8	22.1	21.4
97.5°	43.2	42.9	42.2	41.6	40.9	40.3	39.7	39.1	38.6	38.0	37.4
100°	54.7	54.6	53.9	53.2	52.4	51.7	51.2	50.9	50.6	50.3	50.0
102.5°	66.9	66.6	65.9	65.3	64.6	64.0	63.6	63.5	63.3	63.2	63.1
105°	85.1	84.9	84.6	84.3	84.0	83.6	83.4	83.4	83.3	83.2	83.1
107.5°	105.0	104.8	104.8	104.7	104.7	104.6	104.6	104.5	104.4	104.3	104.2
110°	118.7	118.9	118.9	119.0	119.1	119.2	119.1	119.0	118.8	118.7	118.5



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	132.8	132.8	133.0	133.1	133.2	133.4	133.4	133.4	133.4	133.3	133.3
115°	154.8	154.9	155.0	155.2	155.3	155.5	155.6	155.6	155.6	155.6	155.6
117.5°	176.1	176.3	176.4	176.6	176.7	176.8	176.8	176.7	176.7	176.6	176.5
120°	190.6	191.0	191.2	191.4	191.7	191.9	191.9	191.5	191.2	190.9	190.6
122.5°	204.9	205.2	205.3	205.4	205.5	205.6	205.6	205.5	205.4	205.2	205.1
125°	226.1	226.2	226.3	226.4	226.5	226.5	226.6	226.6	226.6	226.6	226.6
127.5°	246.4	246.6	246.7	246.8	247.0	247.1	247.0	246.8	246.6	246.3	246.1
130°	260.7	260.8	260.8	260.8	260.8	260.8	260.7	260.5	260.2	260.0	259.8
132.5°	274.1	274.3	274.4	274.4	274.5	274.5	274.5	274.3	274.1	274.0	273.8
135°	294.3	294.4	294.4	294.4	294.4	294.4	294.2	293.7	293.2	292.8	292.3
137.5°	313.8	314.0	313.9	313.7	313.6	313.5	313.3	313.1	312.9	312.7	312.4
140°	326.5	326.5	326.5	326.5	326.5	326.5	326.5	326.3	326.1	326.0	325.8
142.5°	338.5	338.5	338.6	338.6	338.7	338.8	338.7	338.5	338.4	338.2	338.1
145°	356.8	356.9	356.8	356.7	356.6	356.6	356.4	356.0	355.7	355.4	355.1
147.5°	373.2	373.3	373.4	373.4	373.5	373.5	373.4	373.0	372.6	372.3	371.9
150°	383.6	383.6	383.6	383.6	383.6	383.6	383.4	383.1	382.8	382.5	382.2
152.5°	393.2	393.0	392.9	392.9	392.8	392.7	392.6	392.4	392.2	392.1	391.9
155°	406.8	406.5	406.6	406.6	406.7	406.8	406.8	406.8	406.8	406.8	406.8
157.5°	418.9	418.7	418.7	418.7	418.7	418.7	418.8	419.0	419.1	419.2	419.4
160°	426.4	426.1	426.2	426.3	426.4	426.4	426.5	426.6	426.7	426.7	426.8
162.5°	432.8	432.3	432.4	432.5	432.6	432.7	432.8	433.0	433.2	433.4	433.6
165°	441.5	441.1	441.2	441.4	441.5	441.7	441.9	442.1	442.4	442.6	442.8
167.5°	449.0	448.5	448.5	448.5	448.5	448.4	448.6	448.9	449.3	449.6	449.9
170°	452.9	452.5	452.4	452.3	452.2	452.2	452.3	452.7	453.1	453.5	453.9
172.5°	455.9	455.3	455.3	455.3	455.2	455.2	455.4	455.8	456.1	456.5	456.8
175°	459.1	458.6	458.7	458.7	458.8	458.9	459.1	459.5	459.9	460.3	460.7
177.5°	461.0	460.6	460.6	460.6	460.6	460.6	460.7	461.0	461.3	461.7	462.0
180°	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6
2.5°	1305.1	1309.4	1315.0	1324.4	1327.9	1332.2	1338.2	1337.8	1339.5	1345.9	1359.7
5°	1310.0	1326.6	1342.7	1362.0	1382.5	1395.8	1414.1	1425.4	1436.7	1451.2	1475.9
7.5°	1311.9	1338.3	1367.9	1401.8	1432.0	1466.8	1494.0	1519.5	1542.6	1573.3	1602.7
10°	1308.9	1344.3	1382.5	1425.4	1471.1	1509.7	1544.7	1584.4	1618.2	1655.3	1688.6
12.5°	1303.3	1346.0	1397.0	1445.2	1498.5	1555.7	1599.2	1639.4	1684.5	1727.1	1778.4
15°	1290.6	1349.2	1408.8	1472.2	1543.6	1609.6	1672.4	1724.5	1772.9	1836.8	1904.0
17.5°	1274.6	1337.7	1412.9	1489.6	1564.2	1639.7	1717.5	1795.8	1856.8	1936.2	1988.7
20°	1259.5	1332.5	1409.9	1501.2	1575.8	1669.8	1747.2	1822.9	1906.6	1985.6	2048.4
22.5°	1238.4	1318.4	1400.4	1491.3	1589.5	1683.5	1772.9	1855.1	1938.8	2024.7	2100.8
25°	1211.6	1284.1	1381.4	1484.5	1582.3	1684.3	1786.9	1890.0	1980.2	2071.0	2141.9
27.5°	1166.1	1257.7	1348.2	1454.6	1563.3	1678.7	1788.4	1896.3	1990.8	2065.5	2109.4
30°	1143.0	1222.4	1320.7	1427.5	1545.2	1669.3	1783.6	1889.5	1977.5	2037.2	2054.9
32.5°	1108.5	1190.6	1286.8	1397.5	1522.0	1649.5	1768.6	1868.5	1941.9	1973.2	1951.8
35°	1057.5	1131.7	1228.8	1342.2	1471.6	1607.5	1725.2	1809.5	1847.0	1817.5	1743.9
37.5°	996.3	1069.8	1167.4	1278.7	1412.6	1550.7	1657.1	1717.8	1705.4	1631.8	1522.2
40°	953.3	1022.1	1115.0	1235.3	1365.8	1504.4	1597.8	1630.6	1596.2	1491.0	1374.4
42.5°	905.6	972.7	1066.0	1182.0	1320.3	1448.0	1529.5	1532.2	1474.6	1348.8	1231.7
45°	833.0	897.0	985.0	1105.9	1233.7	1354.0	1407.7	1381.4	1275.1	1153.7	1036.0
47.5°	761.3	816.8	903.6	1018.3	1139.7	1241.0	1267.6	1220.2	1106.9	989.1	880.1
50°	708.9	764.8	846.5	956.0	1073.1	1160.6	1173.6	1110.6	999.6	880.8	795.5
52.5°	658.6	714.1	792.7	894.1	1001.4	1080.3	1080.8	1008.0	897.3	791.4	712.1
55°	584.9	634.8	705.7	796.5	892.1	953.8	938.9	863.6	767.5	675.7	606.3
57.5°	513.8	557.2	622.6	698.3	782.5	833.4	808.5	736.1	650.3	572.4	519.9
60°	467.8	509.2	565.0	636.4	707.3	747.1	723.5	657.9	579.0	516.1	470.5
62.5°	423.1	458.1	511.7	573.7	639.4	668.9	647.8	583.2	514.9	458.2	421.1
65°	359.8	388.3	431.3	484.4	532.3	557.4	539.8	479.6	427.5	386.7	357.2
67.5°	300.7	323.0	355.6	398.2	438.8	452.4	436.4	394.5	350.3	317.6	296.8
70°	259.9	280.9	308.3	341.0	376.5	391.0	374.9	341.5	305.6	275.5	255.1
72.5°	224.3	240.5	263.6	291.6	319.3	333.9	322.9	290.8	260.4	238.1	220.8
75°	170.8	184.8	200.9	220.8	242.3	251.9	242.3	220.3	199.2	182.6	170.3
77.5°	124.2	131.7	144.1	159.0	172.4	179.9	171.5	156.5	143.7	132.3	126.2
80°	94.5	99.9	108.5	120.3	129.5	136.4	131.1	118.7	108.5	101.0	98.3
82.5°	68.8	72.4	78.0	86.7	92.9	96.4	94.1	85.1	81.0	74.3	71.6
85°	33.8	36.0	39.8	42.4	47.8	48.4	48.9	45.1	41.4	39.8	37.6
87.5°	12.0	12.6	14.0	15.6	17.4	18.0	17.7	17.8	16.2	15.9	14.2
90°	1.9	2.8	3.7	4.5	5.4	6.0	6.6	7.2	7.9	8.3	8.8
92.5°	8.7	9.6	10.6	11.6	12.3	12.8	13.2	13.7	14.1	14.4	14.7
95°	22.1	22.8	23.5	24.2	24.9	25.4	26.1	26.6	27.2	27.4	27.6
97.5°	38.0	38.6	39.1	39.7	40.3	40.9	41.6	42.2	42.9	43.2	43.4
100°	50.3	50.6	50.9	51.2	51.7	52.4	53.2	53.9	54.6	54.7	54.9
102.5°	63.2	63.3	63.5	63.6	64.0	64.6	65.3	65.9	66.6	66.9	67.1
105°	83.2	83.3	83.4	83.4	83.6	84.0	84.3	84.6	84.9	85.1	85.4
107.5°	104.3	104.4	104.5	104.6	104.6	104.7	104.7	104.8	104.8	105.0	105.3
110°	118.7	118.8	119.0	119.1	119.2	119.1	119.0	118.9	118.9	118.7	118.6





TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	133.3	133.4	133.4	133.4	133.4	133.2	133.1	133.0	132.8	132.8	132.8
115°	155.6	155.6	155.6	155.6	155.5	155.3	155.2	155.0	154.9	154.8	154.7
117.5°	176.6	176.7	176.7	176.8	176.8	176.7	176.6	176.4	176.3	176.1	175.8
120°	190.9	191.2	191.5	191.9	191.9	191.7	191.4	191.2	191.0	190.6	190.2
122.5°	205.2	205.4	205.5	205.6	205.6	205.5	205.4	205.3	205.2	204.9	204.7
125°	226.6	226.6	226.6	226.6	226.5	226.5	226.4	226.3	226.2	226.1	225.9
127.5°	246.3	246.6	246.8	247.0	247.1	247.0	246.8	246.7	246.6	246.4	246.3
130°	260.0	260.2	260.5	260.7	260.8	260.8	260.8	260.8	260.8	260.7	260.5
132.5°	274.0	274.1	274.3	274.5	274.5	274.5	274.4	274.4	274.3	274.1	274.0
135°	292.8	293.2	293.7	294.2	294.4	294.4	294.4	294.4	294.4	294.3	294.1
137.5°	312.7	312.9	313.1	313.3	313.5	313.6	313.7	313.9	314.0	313.8	313.6
140°	326.0	326.1	326.3	326.5	326.5	326.5	326.5	326.5	326.5	326.5	326.4
142.5°	338.2	338.4	338.5	338.7	338.8	338.7	338.6	338.6	338.5	338.5	338.5
145°	355.4	355.7	356.0	356.4	356.6	356.6	356.7	356.8	356.9	356.8	356.7
147.5°	372.3	372.6	373.0	373.4	373.5	373.5	373.4	373.4	373.3	373.2	373.2
150°	382.5	382.8	383.1	383.4	383.6	383.6	383.6	383.6	383.6	383.6	383.6
152.5°	392.1	392.2	392.4	392.6	392.7	392.8	392.9	392.9	393.0	393.2	393.4
155°	406.8	406.8	406.8	406.8	406.8	406.7	406.6	406.6	406.5	406.8	407.1
157.5°	419.2	419.1	419.0	418.8	418.7	418.7	418.7	418.7	418.7	418.9	419.1
160°	426.7	426.7	426.6	426.5	426.4	426.4	426.3	426.2	426.1	426.4	426.6
162.5°	433.4	433.2	433.0	432.8	432.7	432.6	432.5	432.4	432.3	432.8	433.2
165°	442.6	442.4	442.1	441.9	441.7	441.5	441.4	441.2	441.1	441.5	442.0
167.5°	449.6	449.3	448.9	448.6	448.4	448.5	448.5	448.5	448.5	449.0	449.5
170°	453.5	453.1	452.7	452.3	452.2	452.2	452.3	452.4	452.5	452.9	453.4
172.5°	456.5	456.1	455.8	455.4	455.2	455.2	455.3	455.3	455.3	455.9	456.5
175°	460.3	459.9	459.5	459.1	458.9	458.8	458.7	458.7	458.6	459.1	459.7
177.5°	461.7	461.3	461.0	460.7	460.6	460.6	460.6	460.6	460.6	461.0	461.4
180°	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6	1296.6
2.5°	1366.5	1367.5	1371.3	1374.3	1375.1	1379.5	1379.9
5°	1486.6	1495.8	1513.5	1515.1	1517.8	1531.8	1521.1
7.5°	1627.4	1650.5	1666.1	1679.7	1684.7	1690.7	1689.5
10°	1717.6	1752.0	1769.2	1796.5	1797.7	1804.6	1800.3
12.5°	1808.3	1848.3	1879.6	1884.6	1907.6	1911.2	1917.2
15°	1936.7	1979.1	2022.7	2038.2	2069.9	2077.5	2089.3
17.5°	2057.5	2100.8	2131.3	2171.6	2184.6	2202.0	2190.2
20°	2123.6	2170.9	2209.6	2241.3	2254.7	2264.3	2263.3
22.5°	2163.6	2211.3	2242.6	2266.6	2279.2	2283.3	2283.0
25°	2188.6	2216.0	2225.6	2234.8	2220.9	2216.0	2218.2
27.5°	2119.0	2111.9	2086.7	2053.6	2019.2	1992.0	1977.1
30°	2023.2	1981.4	1943.2	1876.5	1842.2	1821.8	1803.5
32.5°	1887.4	1821.1	1747.7	1686.7	1647.6	1617.3	1612.8
35°	1654.8	1554.9	1465.2	1390.5	1351.8	1319.1	1311.5
37.5°	1406.8	1303.0	1222.3	1156.6	1115.0	1091.9	1070.3
40°	1242.2	1153.2	1073.6	1017.7	986.1	969.5	956.0
42.5°	1115.5	1034.1	955.0	912.5	883.8	873.6	865.8
45°	940.4	864.7	809.9	777.7	761.0	743.9	735.8
47.5°	800.2	738.6	702.5	675.1	657.3	647.1	642.0
50°	720.7	670.2	638.0	617.1	601.0	592.9	588.7
52.5°	650.3	608.8	581.8	565.1	554.2	548.3	546.5
55°	560.2	528.5	511.3	496.9	488.8	483.4	481.2
57.5°	487.0	462.5	448.6	436.7	433.5	429.0	427.5
60°	438.8	420.0	408.2	400.1	397.5	392.0	393.1
62.5°	396.3	380.9	370.8	366.2	362.6	358.1	359.6
65°	335.2	323.9	318.5	314.2	309.9	307.2	309.3
67.5°	281.2	273.5	266.2	263.7	261.6	261.2	258.8
70°	246.0	239.5	233.1	231.5	231.5	229.3	228.8
72.5°	212.1	207.3	203.0	201.9	200.2	201.0	198.7
75°	163.8	160.1	158.4	156.8	156.3	156.3	154.7
77.5°	121.1	118.3	115.7	115.7	113.7	113.0	112.8
80°	91.8	90.8	88.7	88.7	87.6	88.1	87.1
82.5°	69.1	67.6	67.2	66.2	64.7	64.8	63.8
85°	37.1	35.4	34.9	33.3	32.2	33.3	32.2
87.5°	14.7	14.4	14.0	13.2	12.8	12.8	11.6
90°	9.3	9.8	10.1	10.2	10.4	10.5	10.7
92.5°	14.9	15.2	15.5	15.6	15.7	15.8	15.9
95°	27.9	28.1	28.2	28.2	28.2	28.2	28.2
97.5°	43.7	44.0	44.1	44.1	44.1	44.1	44.1
100°	55.0	55.2	55.3	55.3	55.3	55.3	55.3
102.5°	67.3	67.5	67.7	67.7	67.8	67.8	67.9
105°	85.6	85.8	86.1	86.3	86.6	86.8	87.1
107.5°	105.5	105.7	105.8	105.8	105.8	105.8	105.7
110°	118.4	118.2	118.3	118.5	118.8	119.0	119.2



TEST NUMBER: P332581-840

CATALOG NUMBER: SA4XXDIP-C795D365U840-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	132.7	132.7	132.7	132.8	132.8	132.8	132.9
115°	154.6	154.5	154.5	154.4	154.3	154.2	154.2
117.5°	175.5	175.3	175.1	174.9	174.7	174.6	174.4
120°	189.8	189.3	189.2	189.3	189.6	189.7	189.9
122.5°	204.4	204.1	203.8	203.6	203.3	203.0	202.7
125°	225.8	225.6	225.4	225.3	225.1	225.0	224.8
127.5°	246.1	245.9	245.8	245.7	245.6	245.4	245.3
130°	260.3	260.2	259.9	259.6	259.3	259.0	258.7
132.5°	273.8	273.7	273.5	273.4	273.3	273.2	273.0
135°	294.0	293.8	293.6	293.4	293.1	292.9	292.7
137.5°	313.4	313.2	313.1	313.1	313.2	313.2	313.3
140°	326.3	326.2	326.1	326.1	326.0	325.9	325.8
142.5°	338.5	338.4	338.4	338.4	338.4	338.4	338.4
145°	356.6	356.6	356.4	356.2	355.9	355.7	355.5
147.5°	373.1	373.0	373.0	372.9	372.8	372.7	372.7
150°	383.6	383.6	383.5	383.5	383.4	383.3	383.2
152.5°	393.6	393.8	393.7	393.5	393.3	393.1	392.9
155°	407.4	407.7	407.7	407.4	407.1	406.8	406.5
157.5°	419.4	419.6	419.6	419.3	419.1	418.8	418.5
160°	426.8	427.1	427.0	426.6	426.2	425.8	425.4
162.5°	433.6	434.0	434.0	433.7	433.3	432.9	432.5
165°	442.5	442.9	443.0	442.7	442.4	442.1	441.8
167.5°	449.9	450.4	450.4	449.9	449.4	448.9	448.4
170°	453.9	454.4	454.3	453.8	453.2	452.7	452.1
172.5°	457.0	457.5	457.5	457.0	456.4	455.9	455.2
175°	460.2	460.8	460.8	460.2	459.7	459.1	458.6
177.5°	461.9	462.3	462.3	461.8	461.3	460.8	460.3
180°	461.4	461.4	461.4	461.4	461.4	461.4	461.4

(END OF REPORT)