

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332605-840

Luminaire Tested: **SA4XXDIP-C795D810U840-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332605-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C795D810U840-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6275.3 lumens
Efficiency: N/A
Efficacy: 136.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332605-840

CATALOG NUMBER: SA4XXDIP-C795D810U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

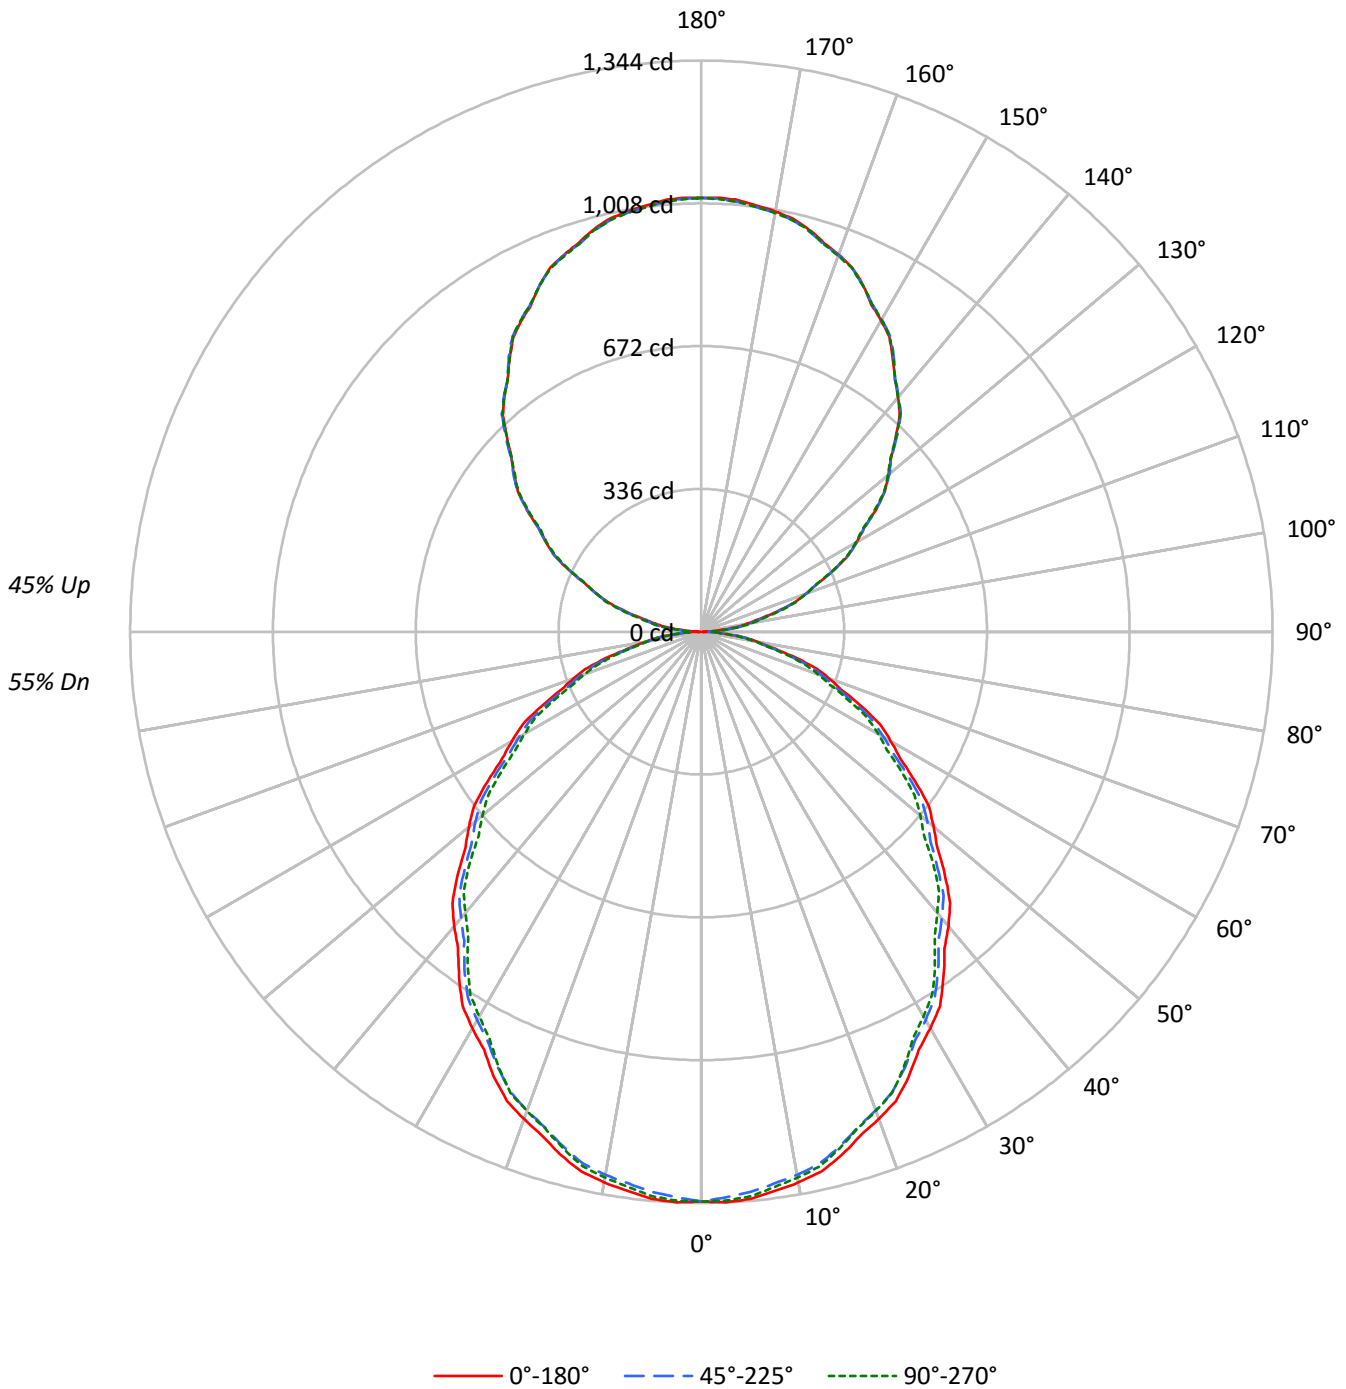



TEST NUMBER: P332605-840

CATALOG NUMBER: SA4XXDIP-C795D810U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55				
1	99	94	90	87	92	88	84	81	75	73	71	64	62	61	53	52	51	46				
2	90	82	76	71	83	77	71	67	66	62	58	56	53	51	47	45	43	39				
3	82	72	65	59	76	68	61	56	58	53	49	50	46	43	42	39	37	33				
4	75	64	56	50	69	60	53	47	52	46	42	44	40	37	37	34	32	28				
5	69	57	49	43	64	53	46	41	46	41	36	40	35	32	34	30	27	24				
6	64	51	43	37	59	48	41	35	42	36	32	36	31	28	30	27	24	21				
7	59	46	38	33	54	43	36	31	38	32	28	33	28	25	28	24	22	19				
8	55	42	34	29	51	40	32	28	35	29	25	30	25	22	26	22	19	17				
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	17	15				
10	48	35	28	23	44	33	27	22	29	24	20	25	21	18	22	18	16	14				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10823	10823	10823
5°	10855	10724	10802
10°	10787	10637	10690
15°	10657	10486	10513
20°	10483	10299	10308
25°	10286	10085	10056
30°	10043	9833	9743
35°	9792	9570	9443
40°	9531	9271	9101
45°	9259	8977	8805
50°	8959	8715	8446
55°	8633	8376	8103
60°	8307	7995	7753
65°	7941	7633	7324
70°	7530	7152	6871
75°	6903	6569	6400
80°	6141	5890	5742
85°	5372	5169	5067



TEST NUMBER: P332605-840

CATALOG NUMBER: SA4XXDIP-C795D810U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	126.2	2.0
10°-20°	355.7	5.7
20°-30°	523.5	8.3
30°-40°	608.6	9.7
40°-50°	608.7	9.7
50°-60°	532.4	8.5
60°-70°	395.4	6.3
70°-80°	224.6	3.6
80°-90°	67.9	1.1
90°-100°	67.3	1.1
100°-110°	199.5	3.2
110°-120°	338.5	5.4
120°-130°	446.4	7.1
130°-140°	501.3	8.0
140°-150°	492.6	7.9
150°-160°	414.3	6.6
160°-170°	275.7	4.4
170°-180°	96.5	1.5
0°-30°	1005.5	16.0
0°-40°	1614.1	25.7
0°-60°	2755.2	43.9
0°-90°	3443.1	54.9
90°-120°	605.4	9.6
90°-150°	2045.7	32.6
90°-180°	2832.0	45.1
0°-180°	6275.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1341	1341	1341	1341	1341	
5°	1340	1335	1323	1334	1333	127
15°	1275	1270	1255	1260	1258	359
25°	1155	1147	1132	1133	1129	531
35°	994	986	971	964	958	621
45°	811	803	786	775	771	625
55°	613	609	595	583	576	549
65°	416	410	400	389	383	411
75°	221	216	211	206	205	235
85°	58	58	56	56	55	64
90°	2	11	17	22	24	6
95°	47	54	60	62	62	53
105°	184	185	188	190	193	195
115°	344	344	343	342	341	339
125°	501	501	501	499	497	447
135°	647	651	651	650	647	500
145°	786	789	790	789	786	491
155°	900	900	899	902	899	414
165°	980	977	976	980	977	276
175°	1019	1015	1014	1020	1014	97
180°	1021	1021	1021	1021	1021	



TEST NUMBER: P332605-840

CATALOG NUMBER: SA4XXDIP-C795D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6
2.5°	1344.0	1343.4	1342.8	1342.3	1341.7	1340.4	1338.3	1336.2	1334.0	1332.0	1333.8
5°	1339.5	1338.6	1337.6	1336.7	1335.6	1333.8	1331.2	1328.6	1326.0	1323.3	1326.0
7.5°	1327.1	1326.1	1325.1	1324.1	1323.2	1321.3	1318.4	1315.5	1312.5	1309.6	1311.7
10°	1315.9	1314.9	1313.9	1313.0	1312.0	1310.0	1306.9	1303.8	1300.7	1297.6	1299.5
12.5°	1301.2	1300.3	1299.3	1298.4	1297.5	1295.3	1292.0	1288.7	1285.5	1282.1	1284.2
15°	1275.1	1274.0	1273.1	1272.1	1271.2	1269.0	1265.4	1261.8	1258.2	1254.7	1256.1
17.5°	1243.4	1242.2	1241.0	1239.9	1238.7	1236.4	1233.0	1229.6	1226.2	1222.8	1223.8
20°	1220.2	1219.0	1217.9	1216.7	1215.5	1213.0	1209.5	1205.9	1202.3	1198.8	1199.5
22.5°	1195.4	1193.8	1192.1	1190.6	1189.0	1186.5	1182.9	1179.3	1175.7	1172.2	1173.5
25°	1154.7	1153.1	1151.3	1149.7	1148.0	1145.5	1142.2	1138.8	1135.5	1132.2	1132.4
27.5°	1108.3	1106.6	1104.9	1103.2	1101.5	1099.0	1095.9	1092.9	1089.7	1086.6	1086.0
30°	1077.4	1075.5	1073.6	1071.7	1069.8	1067.2	1064.1	1061.1	1057.9	1054.8	1053.9
32.5°	1044.7	1043.0	1041.3	1039.6	1037.8	1035.3	1032.1	1028.7	1025.5	1022.2	1021.1
35°	993.6	991.9	990.3	988.6	986.9	984.4	981.1	977.8	974.4	971.1	969.4
37.5°	939.7	938.2	936.6	935.1	933.5	931.0	927.5	923.8	920.3	916.7	914.8
40°	904.4	902.5	900.6	898.7	896.8	894.0	890.5	886.9	883.3	879.7	877.4
42.5°	866.7	865.5	864.3	863.2	862.0	859.5	855.6	851.6	847.6	843.6	840.9
45°	811.0	809.3	807.7	806.0	804.4	801.5	797.8	794.0	790.1	786.3	783.7
47.5°	752.8	751.6	750.5	749.3	748.2	745.9	742.4	738.8	735.3	731.7	728.7
50°	713.3	712.3	711.3	710.3	709.4	707.3	704.0	700.6	697.2	693.9	690.5
52.5°	674.6	673.5	672.3	671.2	669.9	667.6	664.1	660.6	657.0	653.5	650.6
55°	613.4	612.6	611.9	611.2	610.5	608.4	605.1	601.8	598.4	595.1	592.2
57.5°	554.9	554.1	553.3	552.5	551.7	549.6	546.3	543.0	539.8	536.4	533.7
60°	514.5	513.3	512.1	511.0	509.8	507.6	504.5	501.4	498.3	495.2	493.0
62.5°	475.0	474.0	473.0	472.0	471.0	468.9	465.5	462.2	459.0	455.7	453.7
65°	415.7	414.5	413.3	412.1	410.9	409.1	406.8	404.3	401.9	399.6	397.2
67.5°	356.0	354.9	353.8	352.6	351.6	349.9	347.6	345.3	343.1	340.7	338.4
70°	319.0	317.4	315.7	314.0	312.4	310.5	308.6	306.7	304.8	303.0	301.0
72.5°	279.5	277.8	276.2	274.5	272.8	271.2	269.7	268.1	266.6	265.1	263.6
75°	221.3	220.0	218.9	217.7	216.5	215.3	214.1	212.9	211.8	210.6	209.5
77.5°	165.6	165.1	164.6	164.1	163.5	162.8	161.7	160.7	159.6	158.5	158.2
80°	132.1	131.4	130.7	130.0	129.3	128.7	128.2	127.7	127.2	126.7	126.2
82.5°	99.5	99.2	98.8	98.5	98.2	98.0	97.9	97.8	97.7	97.6	97.3
85°	58.0	58.0	58.0	58.0	58.0	57.8	57.3	56.9	56.4	55.8	55.8
87.5°	22.8	23.0	23.2	23.4	23.6	23.7	23.8	23.9	24.0	24.1	24.3
90°	2.3	4.3	6.3	8.2	10.1	11.7	13.1	14.5	16.0	17.4	18.4
92.5°	16.9	19.1	21.3	23.5	25.8	27.4	28.3	29.3	30.3	31.3	31.9
95°	47.4	49.0	50.5	52.1	53.7	55.1	56.4	57.6	58.8	60.0	60.5
97.5°	82.7	84.0	85.2	86.5	87.8	89.2	90.6	92.0	93.4	94.9	95.5
100°	110.6	111.2	111.9	112.6	113.3	114.5	116.0	117.6	119.2	120.8	121.2
102.5°	139.6	139.9	140.2	140.5	140.7	141.6	143.0	144.4	145.9	147.3	147.8
105°	184.0	184.1	184.3	184.5	184.7	185.1	185.8	186.5	187.2	187.9	188.4
107.5°	230.6	230.8	231.0	231.2	231.4	231.6	231.7	231.8	231.9	232.0	232.5
110°	262.2	262.5	262.8	263.2	263.5	263.6	263.5	263.3	263.1	262.9	262.6



TEST NUMBER: P332605-840

CATALOG NUMBER: SA4XXDIP-C795D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	295.0	295.0	295.1	295.2	295.3	295.1	294.8	294.5	294.2	293.9	293.8
115°	344.3	344.3	344.3	344.3	344.3	344.1	343.7	343.4	343.0	342.6	342.4
117.5°	390.6	390.8	390.9	391.0	391.2	391.1	390.9	390.6	390.4	390.2	389.6
120°	421.6	422.3	423.0	423.7	424.4	424.4	423.9	423.4	422.9	422.4	421.5
122.5°	453.8	454.0	454.3	454.6	454.9	454.9	454.7	454.4	454.2	453.9	453.3
125°	501.3	501.3	501.3	501.3	501.3	501.2	501.1	500.9	500.7	500.6	500.2
127.5°	544.4	544.9	545.5	546.0	546.5	546.6	546.3	546.1	545.8	545.5	545.2
130°	574.7	575.3	575.8	576.3	576.8	577.1	577.1	577.1	577.1	577.1	576.7
132.5°	605.7	606.1	606.5	606.8	607.2	607.3	607.2	607.1	606.9	606.8	606.4
135°	646.6	647.6	648.7	649.7	650.9	651.4	651.4	651.4	651.4	651.4	651.0
137.5°	691.2	691.7	692.1	692.6	693.1	693.5	693.8	694.1	694.3	694.6	694.2
140°	720.8	721.1	721.5	721.9	722.3	722.4	722.4	722.4	722.4	722.4	722.3
142.5°	748.0	748.3	748.7	749.0	749.4	749.5	749.3	749.2	749.0	748.9	748.9
145°	785.6	786.3	787.0	787.7	788.4	788.8	789.0	789.1	789.3	789.5	789.3
147.5°	822.8	823.6	824.5	825.4	826.2	826.6	826.4	826.3	826.1	826.0	825.9
150°	845.6	846.3	847.0	847.7	848.4	848.7	848.7	848.7	848.7	848.7	848.7
152.5°	867.1	867.5	867.9	868.3	868.7	869.0	869.1	869.3	869.4	869.6	870.0
155°	900.0	900.0	900.0	900.0	900.0	899.9	899.8	899.6	899.4	899.3	899.9
157.5°	927.9	927.5	927.2	926.9	926.6	926.3	926.3	926.3	926.2	926.2	926.8
160°	944.2	944.0	943.9	943.7	943.5	943.3	943.2	943.0	942.8	942.7	943.2
162.5°	959.4	959.0	958.5	958.1	957.6	957.3	957.0	956.9	956.7	956.5	957.6
165°	979.8	979.3	978.8	978.2	977.7	977.2	976.8	976.5	976.1	975.8	976.8
167.5°	995.4	994.6	993.9	993.2	992.5	992.1	992.1	992.2	992.2	992.2	993.3
170°	1004.2	1003.4	1002.5	1001.6	1000.8	1000.4	1000.6	1000.8	1000.9	1001.1	1002.1
172.5°	1010.6	1009.9	1009.1	1008.4	1007.6	1007.2	1007.3	1007.3	1007.3	1007.4	1008.6
175°	1019.3	1018.3	1017.4	1016.6	1015.7	1015.2	1015.0	1014.8	1014.7	1014.5	1015.7
177.5°	1022.1	1021.4	1020.7	1020.0	1019.3	1019.0	1019.0	1019.0	1019.0	1019.0	1019.9
180°	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8



TEST NUMBER: P332605-840

CATALOG NUMBER: SA4XXDIP-C795D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6
2.5°	1335.7	1337.7	1339.6	1340.5	1340.3	1340.1	1339.9	1339.7
5°	1328.6	1331.2	1333.8	1334.9	1334.4	1334.0	1333.5	1333.0
7.5°	1313.8	1316.0	1318.0	1318.9	1318.7	1318.4	1318.1	1317.8
10°	1301.4	1303.3	1305.3	1306.0	1305.5	1304.9	1304.5	1304.0
12.5°	1286.4	1288.4	1290.5	1291.2	1290.6	1289.9	1289.2	1288.6
15°	1257.5	1258.9	1260.3	1260.7	1260.0	1259.3	1258.6	1257.9
17.5°	1224.7	1225.6	1226.5	1226.7	1226.2	1225.7	1225.3	1224.8
20°	1200.2	1200.9	1201.6	1201.7	1201.2	1200.8	1200.3	1199.8
22.5°	1174.7	1176.0	1177.3	1177.5	1176.6	1175.8	1174.9	1174.1
25°	1132.7	1132.9	1133.2	1132.8	1131.9	1130.8	1129.9	1128.9
27.5°	1085.5	1084.9	1084.3	1083.5	1082.3	1081.1	1079.8	1078.6
30°	1052.9	1052.0	1051.0	1050.0	1048.7	1047.5	1046.3	1045.2
32.5°	1019.9	1018.8	1017.6	1016.4	1015.2	1014.0	1012.8	1011.7
35°	967.8	966.0	964.3	962.9	961.7	960.6	959.4	958.2
37.5°	913.0	911.2	909.5	907.8	906.2	904.6	903.0	901.4
40°	874.9	872.6	870.2	868.4	867.2	866.1	864.8	863.6
42.5°	838.1	835.4	832.5	830.8	830.0	829.2	828.4	827.6
45°	781.0	778.4	775.8	774.2	773.4	772.6	771.9	771.2
47.5°	725.8	722.9	719.8	717.5	715.7	713.9	712.1	710.2
50°	687.2	683.9	680.5	678.1	676.7	675.3	673.9	672.5
52.5°	647.6	644.6	641.7	639.3	637.5	635.7	633.9	632.1
55°	589.4	586.5	583.6	581.5	580.1	578.7	577.1	575.7
57.5°	531.0	528.3	525.5	523.5	522.1	520.7	519.4	518.0
60°	490.9	488.8	486.6	484.9	483.7	482.5	481.3	480.2
62.5°	451.7	449.8	447.9	446.3	445.0	443.8	442.7	441.5
65°	394.9	392.4	390.0	388.3	387.1	385.9	384.7	383.4
67.5°	336.2	333.9	331.5	330.2	329.9	329.6	329.2	328.9
70°	299.1	297.2	295.3	294.0	293.3	292.6	291.9	291.1
72.5°	262.1	260.5	259.0	257.9	257.1	256.4	255.7	255.0
75°	208.6	207.6	206.7	206.1	205.9	205.6	205.4	205.2
77.5°	157.9	157.6	157.4	156.9	156.3	155.7	155.1	154.5
80°	125.8	125.3	124.8	124.5	124.2	124.0	123.8	123.5
82.5°	96.9	96.6	96.3	96.1	95.9	95.6	95.4	95.1
85°	55.8	55.8	55.8	55.7	55.5	55.2	55.0	54.7
87.5°	24.5	24.7	24.9	25.0	25.1	25.2	25.2	25.3
90°	19.5	20.5	21.6	22.3	22.6	23.0	23.3	23.7
92.5°	32.5	33.1	33.8	34.2	34.4	34.6	34.8	35.0
95°	61.1	61.6	62.1	62.4	62.4	62.4	62.4	62.4
97.5°	96.1	96.7	97.5	97.8	97.8	97.8	97.8	97.8
100°	121.5	121.9	122.2	122.4	122.4	122.4	122.4	122.4
102.5°	148.3	148.8	149.3	149.6	149.8	149.9	150.1	150.2
105°	188.9	189.5	190.0	190.6	191.1	191.6	192.1	192.7
107.5°	233.0	233.4	233.9	234.2	234.1	234.1	234.1	234.0
110°	262.2	261.9	261.5	261.6	262.2	262.7	263.2	263.7



TEST NUMBER: P332605-840

CATALOG NUMBER: SA4XXDIP-C795D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	293.7	293.7	293.6	293.6	293.7	293.8	293.9	294.0
115°	342.2	342.1	341.9	341.7	341.6	341.4	341.2	341.0
117.5°	389.0	388.4	387.8	387.3	387.0	386.6	386.3	385.9
120°	420.6	419.7	418.9	418.6	419.0	419.3	419.7	420.0
122.5°	452.7	452.2	451.6	451.0	450.3	449.7	449.1	448.5
125°	499.9	499.5	499.2	498.8	498.5	498.1	497.8	497.4
127.5°	544.8	544.5	544.1	543.8	543.5	543.3	543.0	542.7
130°	576.4	576.0	575.7	575.2	574.5	573.8	573.1	572.4
132.5°	606.1	605.7	605.4	605.1	604.8	604.5	604.2	604.0
135°	650.7	650.3	649.9	649.4	648.9	648.4	647.9	647.4
137.5°	693.7	693.3	692.8	692.6	692.7	692.8	692.9	693.1
140°	722.1	721.9	721.6	721.5	721.3	721.1	720.9	720.8
142.5°	748.8	748.8	748.8	748.7	748.7	748.7	748.6	748.6
145°	789.1	789.0	788.8	788.4	787.9	787.4	786.9	786.4
147.5°	825.7	825.6	825.4	825.3	825.1	824.9	824.8	824.6
150°	848.7	848.7	848.7	848.6	848.5	848.3	848.1	847.9
152.5°	870.4	870.8	871.2	871.2	870.8	870.3	869.9	869.4
155°	900.6	901.3	902.0	902.0	901.3	900.6	899.9	899.3
157.5°	927.3	927.9	928.4	928.3	927.8	927.2	926.6	925.9
160°	943.7	944.2	944.7	944.6	943.7	942.8	942.0	941.1
162.5°	958.5	959.4	960.4	960.4	959.5	958.7	957.8	956.8
165°	978.0	979.0	980.1	980.2	979.5	978.8	978.1	977.4
167.5°	994.3	995.4	996.4	996.4	995.3	994.2	993.2	992.1
170°	1003.2	1004.2	1005.3	1005.2	1004.0	1002.8	1001.5	1000.3
172.5°	1009.8	1011.0	1012.2	1012.2	1011.0	1009.7	1008.5	1007.2
175°	1016.9	1018.1	1019.5	1019.5	1018.1	1016.9	1015.7	1014.5
177.5°	1020.9	1021.9	1022.9	1022.8	1021.7	1020.6	1019.5	1018.2
180°	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8

(END OF REPORT)