

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332708-940

Luminaire Tested: **SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332708-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8580.5 lumens
Efficiency: N/A
Efficacy: 119.7 lumens/watt
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

Luminous Intensity Polar Plot

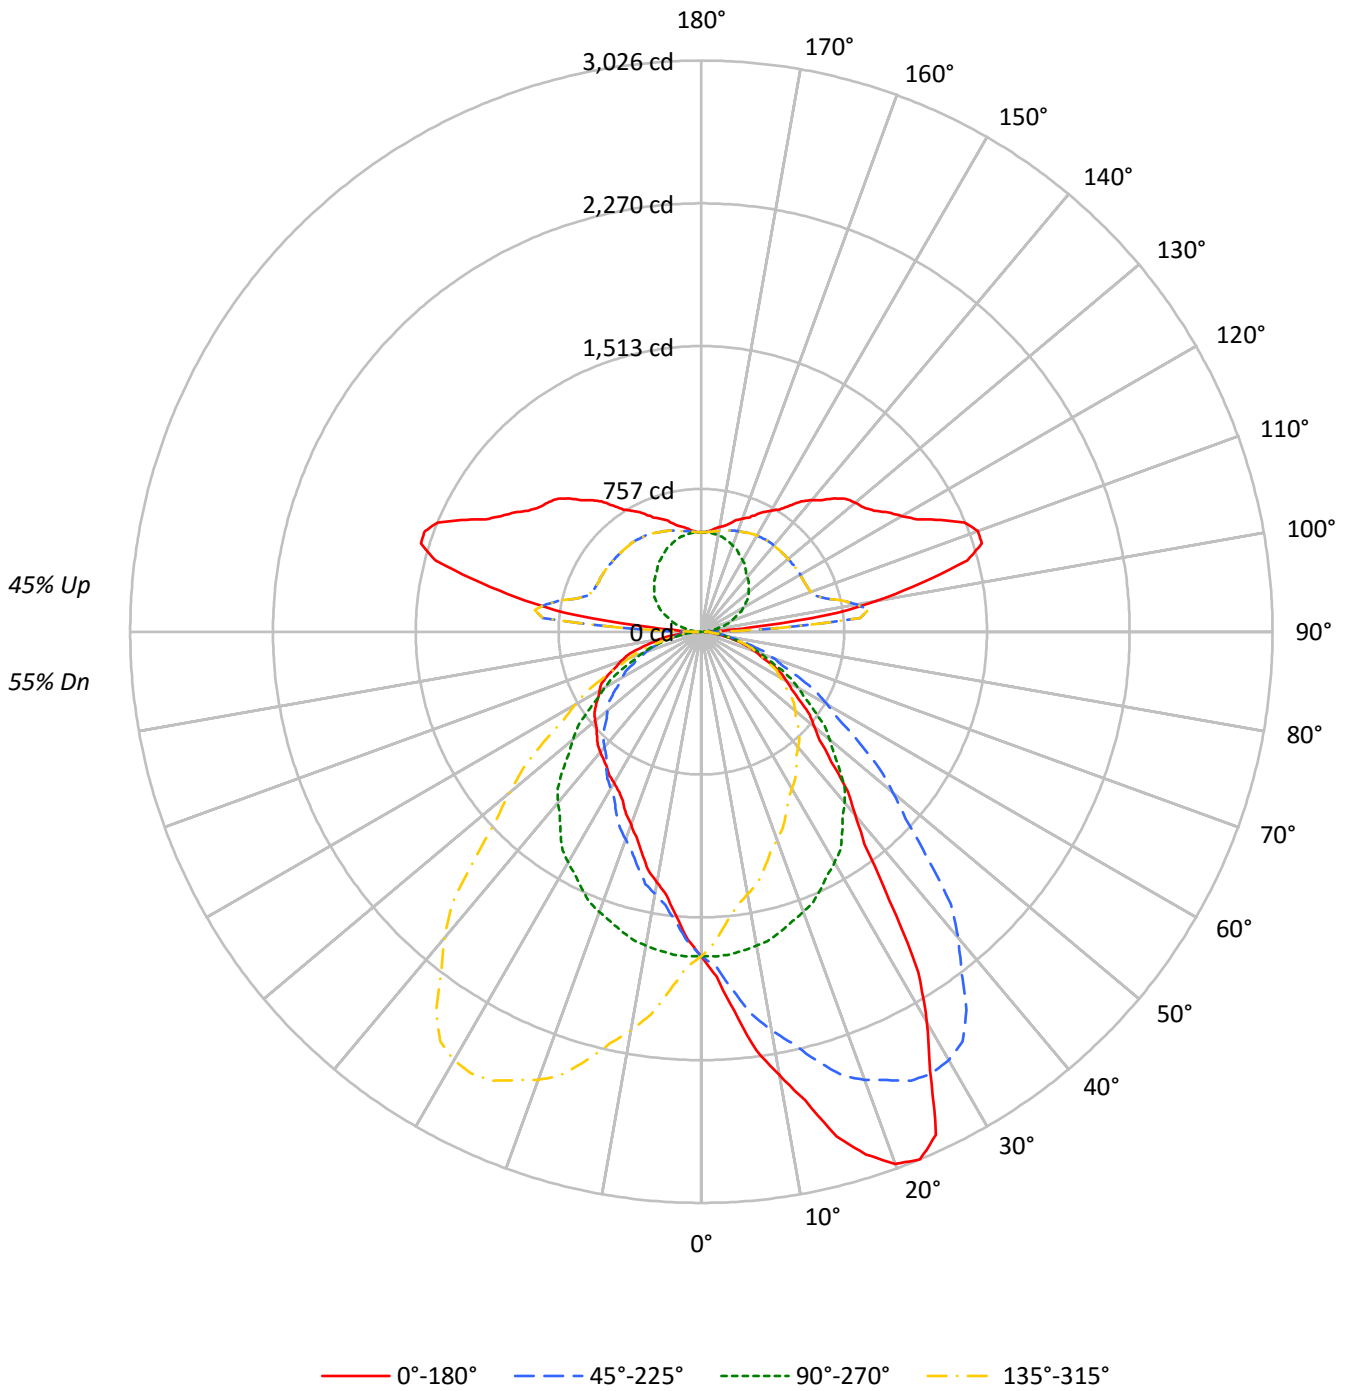



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55				
1	99	95	91	88	92	88	85	82	76	74	71	65	63	61	54	53	52	47				
2	91	83	77	72	84	78	72	68	67	63	60	57	54	52	48	46	44	40				
3	83	73	66	60	77	68	62	57	59	54	50	51	47	44	43	40	38	34				
4	76	65	57	51	70	61	54	49	53	47	43	45	41	38	38	35	33	29				
5	70	58	50	44	65	54	47	42	47	42	37	41	36	33	35	31	29	26				
6	64	52	44	38	60	49	42	36	43	37	33	37	33	29	32	28	25	23				
7	60	47	39	34	55	44	37	32	39	33	29	34	29	26	29	25	23	20				
8	55	43	35	30	51	40	33	29	36	30	26	31	26	23	27	23	20	18				
9	52	39	32	27	48	37	30	26	33	27	23	28	24	21	25	21	18	16				
10	48	36	29	24	45	34	27	23	30	25	21	26	22	19	23	19	17	15				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13875	13875	13875	13875
5°	16339	13910	12277	13910
10°	19563	13849	11053	13849
15°	23147	13709	10151	13709
20°	25775	13566	9346	13566
25°	26191	13356	8790	13356
30°	22287	13154	8614	13154
35°	17134	12827	8615	12827
40°	13355	12440	8778	12440
45°	11136	11860	8926	11860
50°	9800	11150	9229	11150
55°	8978	10301	9600	10301
60°	8414	9541	10046	9541
65°	7834	8692	10418	8692
70°	7159	7848	10655	7848
75°	6394	6906	10524	6906
80°	5360	5658	10195	5658
85°	3955	4085	9763	4085



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.4	2.0
10°-20°	516.1	6.0
20°-30°	818.4	9.5
30°-40°	910.7	10.6
40°-50°	829.0	9.7
50°-60°	677.5	7.9
60°-70°	483.6	5.6
70°-80°	266.3	3.1
80°-90°	75.6	0.9
90°-100°	380.9	4.4
100°-110°	792.8	9.2
110°-120°	710.1	8.3
120°-130°	597.3	7.0
130°-140°	498.1	5.8
140°-150°	380.5	4.4
150°-160°	267.5	3.1
160°-170°	157.3	1.8
170°-180°	51.2	0.6
0°-30°	1501.9	17.5
0°-40°	2412.6	28.1
0°-60°	3919.1	45.7
0°-90°	4744.7	55.3
90°-120°	1883.9	22.0
90°-150°	3359.8	39.2
90°-180°	3836.0	44.7
0°-180°	8580.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1719	1719	1719	1719	1719	
5°	2016	1716	1515	1716	2016	205
15°	2770	1640	1215	1640	2770	782
25°	2940	1499	987	1499	2940	1296
35°	1739	1302	874	1302	1739	1104
45°	975	1039	782	1039	975	768
55°	638	732	682	732	638	576
65°	410	455	545	455	410	406
75°	205	221	337	221	205	218
85°	43	44	105	44	43	53
90°	22	1	22	1	22	19
95°	253	34	253	34	253	392
105°	1458	121	1458	121	1458	1441
115°	1400	214	1400	214	1400	1390
125°	1117	297	1117	297	1117	1015
135°	999	353	999	353	999	771
145°	816	407	816	407	816	517
155°	683	463	683	463	683	319
165°	596	505	596	505	596	171
175°	537	526	537	526	537	52
180°	527	527	527	527	527	



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7
2.5°	1829.2	1828.5	1822.9	1821.8	1817.8	1812.7	1811.5	1802.4	1784.1	1775.6	1773.3
5°	2016.2	2030.5	2012.0	2008.4	2006.3	1982.8	1970.7	1956.4	1923.7	1904.5	1889.5
7.5°	2239.5	2241.2	2233.1	2226.6	2208.5	2188.0	2157.2	2124.5	2085.4	2044.9	2014.3
10°	2386.5	2392.2	2382.9	2381.5	2345.2	2322.4	2276.8	2238.4	2194.2	2145.1	2100.2
12.5°	2541.4	2533.4	2528.7	2498.2	2491.5	2450.0	2397.0	2357.4	2289.4	2232.8	2173.2
15°	2769.5	2753.9	2743.9	2701.9	2681.2	2623.5	2567.3	2523.9	2434.9	2350.2	2286.1
17.5°	2903.3	2919.0	2895.9	2878.7	2825.3	2784.9	2727.4	2636.3	2566.6	2461.4	2380.5
20°	3000.2	3001.6	2988.7	2971.0	2929.0	2877.7	2815.0	2715.3	2632.1	2527.5	2416.4
22.5°	3026.4	3026.6	3021.2	3004.6	2972.8	2931.2	2868.0	2784.9	2684.0	2570.2	2459.1
25°	2940.3	2937.5	2943.9	2962.4	2950.3	2937.5	2901.2	2839.3	2745.3	2624.9	2505.4
27.5°	2620.8	2640.4	2676.6	2722.2	2766.1	2799.5	2809.0	2796.2	2738.0	2639.1	2513.7
30°	2390.8	2414.9	2442.0	2487.5	2575.9	2626.4	2681.9	2723.9	2700.5	2621.5	2504.6
32.5°	2137.9	2143.9	2184.0	2235.8	2316.7	2414.0	2502.0	2587.2	2615.6	2574.1	2476.7
35°	1738.6	1748.6	1792.0	1843.3	1942.2	2061.1	2193.5	2311.7	2409.2	2448.4	2398.5
37.5°	1418.8	1447.4	1478.0	1533.1	1620.2	1727.3	1864.9	2017.9	2163.2	2260.6	2277.1
40°	1267.3	1285.0	1307.2	1349.2	1423.2	1528.6	1646.7	1821.9	1976.4	2115.9	2161.5
42.5°	1147.6	1158.1	1171.6	1209.6	1266.0	1370.8	1478.7	1632.8	1787.9	1954.7	2031.0
45°	975.4	986.1	1008.8	1030.9	1073.6	1146.2	1246.6	1373.3	1529.3	1690.1	1831.1
47.5°	851.0	857.7	871.3	894.9	931.2	979.1	1060.8	1166.6	1311.2	1467.3	1617.6
50°	780.3	786.0	796.7	818.1	845.8	888.5	955.5	1054.4	1167.6	1324.9	1472.3
52.5°	724.5	726.7	734.6	749.1	771.2	807.1	862.0	943.9	1049.1	1189.4	1336.2
55°	637.9	640.8	647.9	658.5	677.8	700.5	742.5	803.8	895.6	1017.4	1144.8
57.5°	566.7	568.7	574.7	578.8	594.6	613.1	645.4	689.2	758.8	862.0	975.8
60°	521.1	519.7	526.8	530.4	541.1	556.8	581.7	623.7	684.2	767.5	872.2
62.5°	476.7	474.7	480.7	485.4	491.5	504.9	525.3	558.2	607.3	682.6	773.0
65°	410.1	407.2	410.8	416.5	422.2	429.3	444.3	473.4	512.6	566.7	635.8
67.5°	343.1	346.2	346.7	349.6	352.8	362.6	372.7	393.4	421.1	464.3	522.9
70°	303.3	304.0	306.8	306.8	309.0	317.5	326.1	338.1	365.2	405.1	452.8
72.5°	263.4	266.4	265.3	267.5	269.1	274.8	281.1	292.6	315.7	345.3	385.6
75°	205.0	207.1	207.1	207.9	210.0	212.1	217.1	225.7	242.1	264.1	291.9
77.5°	149.5	149.8	150.8	153.4	153.4	156.8	160.5	167.3	175.4	190.6	207.5
80°	115.3	116.7	116.0	117.4	117.4	120.3	121.7	130.3	133.8	143.8	157.3
82.5°	84.6	86.0	85.9	87.8	89.0	89.5	91.6	95.0	98.5	107.4	112.9
85°	42.7	44.1	42.7	44.1	46.3	47.0	49.1	49.8	52.7	54.8	59.8
87.5°	16.9	18.5	18.8	19.2	20.1	20.7	21.0	20.2	22.3	23.1	25.0
90°	21.8	21.8	22.8	21.8	20.7	20.7	19.7	18.6	17.7	18.6	16.6
92.5°	79.8	79.8	83.3	88.9	101.1	121.9	153.1	203.5	273.8	328.7	287.7
95°	252.8	266.3	285.0	317.1	367.8	468.3	607.2	767.8	868.3	844.5	637.2
97.5°	675.8	697.3	728.4	790.8	865.2	973.4	1074.7	1134.4	1090.9	889.5	596.4
100°	950.2	958.5	989.5	1052.8	1142.9	1219.6	1270.3	1249.6	1098.3	833.0	540.9
102.5°	1188.9	1195.5	1228.2	1274.1	1329.4	1361.3	1346.6	1243.8	1036.2	762.6	503.5
105°	1457.9	1464.1	1478.6	1486.9	1484.8	1442.3	1339.8	1160.5	923.2	679.8	471.4
107.5°	1557.8	1555.1	1544.7	1521.1	1469.9	1377.5	1233.1	1042.1	832.1	633.3	465.7
110°	1559.4	1550.2	1531.4	1487.9	1414.3	1300.4	1150.1	970.9	786.5	617.6	467.3



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	1510.6	1495.4	1469.3	1416.7	1333.1	1219.1	1077.2	918.6	760.7	610.1	472.3
115°	1399.9	1391.6	1358.4	1296.3	1214.4	1114.9	993.7	866.2	736.7	606.2	481.8
117.5°	1287.7	1281.3	1247.8	1195.5	1125.7	1041.3	946.0	840.5	725.9	605.1	492.0
120°	1224.8	1213.4	1186.4	1140.9	1081.7	1008.2	925.3	828.9	720.1	605.1	499.4
122.5°	1175.0	1163.6	1140.9	1101.9	1052.0	987.5	912.0	818.9	713.5	604.3	506.9
125°	1117.0	1110.8	1091.1	1061.0	1019.6	962.6	891.1	802.0	702.5	603.1	518.1
127.5°	1083.0	1076.8	1060.2	1033.5	991.8	937.7	866.5	781.2	687.8	600.7	527.0
130°	1063.1	1056.9	1040.3	1014.4	972.0	917.0	846.6	764.7	678.7	599.9	533.6
132.5°	1040.7	1034.5	1018.8	989.5	947.9	893.0	824.2	747.3	670.4	599.1	539.4
135°	998.9	992.7	976.1	947.1	905.6	853.8	790.6	723.3	658.0	597.9	548.1
137.5°	947.1	939.6	926.0	897.3	858.5	811.7	758.5	701.5	647.2	597.6	553.3
140°	909.7	901.4	887.0	864.2	827.9	784.3	737.7	689.0	641.4	596.8	557.5
142.5°	870.0	864.2	851.3	830.2	798.1	760.4	720.3	677.4	636.4	596.8	560.8
145°	815.5	810.3	800.0	782.3	756.4	727.4	696.3	661.1	627.9	594.8	562.7
147.5°	767.1	765.4	757.4	742.3	723.3	700.4	675.6	647.6	620.3	591.0	563.7
150°	739.9	738.8	732.5	719.1	702.5	683.9	663.2	639.4	614.5	588.5	563.7
152.5°	715.0	713.9	710.2	699.2	685.1	669.8	650.7	630.2	607.8	584.4	562.0
155°	682.9	682.9	679.8	671.5	661.1	648.6	633.1	616.5	597.9	578.2	559.5
157.5°	654.7	654.7	652.8	646.6	638.7	628.7	615.7	601.8	587.7	571.8	556.9
160°	637.2	637.2	636.2	630.0	623.8	615.5	604.0	592.7	580.2	566.8	554.4
162.5°	620.6	621.5	620.5	614.2	609.7	602.3	593.3	583.5	573.6	561.8	551.9
165°	595.8	596.8	597.9	593.7	589.6	584.4	577.1	571.0	562.7	554.4	547.1
167.5°	576.1	576.9	577.1	574.4	572.4	569.3	563.5	558.7	552.7	546.9	542.2
170°	563.7	563.7	564.7	563.7	561.6	558.5	554.4	551.3	546.1	541.9	538.8
172.5°	551.3	552.9	553.9	552.9	551.6	549.4	546.9	544.6	540.3	536.9	535.5
175°	536.7	538.8	540.9	538.8	538.8	538.8	536.7	535.7	533.6	531.5	531.5
177.5°	528.2	529.9	531.5	530.7	531.5	530.7	530.7	529.9	529.1	528.2	528.2
180°	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7
2.5°	1773.9	1765.9	1760.2	1755.7	1743.1	1735.7	1730.0	1722.1	1713.0	1703.3	1691.3
5°	1874.6	1850.4	1832.6	1805.5	1779.9	1758.5	1736.4	1716.5	1692.3	1666.0	1646.7
7.5°	1980.4	1944.4	1898.2	1858.2	1813.2	1774.1	1739.0	1703.2	1665.8	1629.7	1596.5
10°	2047.5	2001.3	1950.0	1889.5	1832.6	1782.0	1735.0	1689.4	1645.3	1601.2	1563.4
12.5°	2120.0	2062.3	1986.5	1915.8	1851.9	1784.3	1727.6	1671.8	1618.5	1572.2	1528.1
15°	2217.1	2133.7	2046.1	1951.4	1867.4	1788.4	1710.8	1640.3	1580.6	1519.3	1476.6
17.5°	2276.7	2173.6	2073.5	1974.5	1872.9	1773.2	1689.4	1608.2	1533.3	1472.5	1418.6
20°	2316.0	2213.5	2088.8	1989.9	1868.8	1766.4	1669.6	1579.1	1500.8	1436.0	1380.5
22.5°	2350.2	2231.7	2107.1	1976.8	1856.4	1747.6	1641.6	1550.6	1470.6	1402.4	1349.2
25°	2368.7	2232.7	2097.4	1967.8	1831.1	1702.3	1606.1	1499.4	1413.9	1342.0	1285.0
27.5°	2370.7	2225.3	2072.2	1928.2	1787.2	1667.1	1545.8	1450.4	1361.6	1285.7	1231.0
30°	2364.4	2212.8	2048.3	1892.4	1750.7	1620.4	1515.0	1411.1	1320.7	1245.2	1188.2
32.5°	2344.5	2186.6	2017.5	1852.5	1705.7	1578.2	1469.5	1370.6	1282.5	1208.2	1148.3
35°	2286.8	2130.8	1950.7	1779.1	1629.0	1500.1	1401.9	1301.5	1213.2	1142.7	1085.0
37.5°	2196.6	2055.7	1872.6	1695.1	1547.5	1418.1	1320.7	1229.9	1150.4	1078.8	1019.7
40°	2118.1	1994.2	1810.5	1637.4	1478.0	1354.9	1263.7	1180.4	1101.4	1033.8	977.5
42.5°	2027.5	1919.6	1750.2	1566.8	1413.1	1289.3	1200.5	1125.7	1051.2	988.7	932.6
45°	1866.0	1794.8	1635.4	1465.9	1305.7	1188.9	1104.2	1038.8	976.1	914.9	867.9
47.5°	1680.3	1645.0	1510.7	1349.9	1197.7	1082.7	1009.2	948.8	893.8	842.0	800.5
50°	1555.6	1538.6	1422.5	1267.3	1122.0	1013.8	939.8	887.8	840.8	795.2	756.1
52.5°	1432.6	1432.0	1327.4	1185.3	1050.9	946.6	873.2	824.6	783.9	746.8	711.7
55°	1244.5	1264.4	1182.6	1055.8	935.5	841.5	775.3	731.9	703.4	672.8	646.5
57.5°	1071.7	1104.8	1037.3	925.7	825.3	738.7	681.1	648.5	618.1	599.6	580.4
60°	959.0	990.3	937.6	843.6	748.9	674.9	620.1	590.9	564.5	551.8	538.2
62.5°	858.7	886.6	847.7	760.5	678.3	607.2	560.9	532.8	515.1	501.1	492.1
65°	715.5	739.0	705.5	642.2	571.7	514.8	477.0	455.0	437.8	432.1	422.2
67.5°	578.4	599.8	581.7	527.8	471.3	428.2	398.7	377.5	367.4	362.4	355.3
70°	497.0	518.3	499.1	452.1	408.7	372.4	344.6	332.5	321.8	319.7	309.7
72.5°	428.0	442.6	423.3	386.6	349.5	318.8	297.3	284.6	279.1	275.3	269.8
75°	321.1	333.9	321.1	292.6	266.3	245.0	226.4	221.4	215.0	212.9	209.3
77.5°	227.3	238.4	228.5	210.7	191.1	174.6	164.6	158.2	156.8	153.1	154.8
80°	173.7	180.8	171.6	159.4	143.8	132.4	125.3	121.7	117.4	116.0	118.9
82.5°	124.8	127.9	123.1	115.0	103.3	95.9	91.1	87.0	86.1	86.4	86.4
85°	64.8	64.1	63.4	56.3	52.7	47.7	44.9	44.1	43.4	44.9	46.3
87.5°	24.5	25.1	23.3	21.0	19.1	17.2	16.0	15.0	16.0	17.2	17.9
90°	14.5	14.5	8.3	8.3	7.2	6.2	3.1	1.1	3.1	6.2	7.2
92.5°	209.3	128.9	76.2	54.8	39.6	26.9	17.2	11.8	17.2	26.9	39.6
95°	389.6	219.6	129.6	86.0	61.2	47.7	37.3	34.2	37.3	47.7	61.2
97.5°	350.3	209.9	140.5	104.1	82.7	70.3	61.3	61.3	61.3	70.3	82.7
100°	329.5	212.4	151.3	118.2	98.4	86.0	78.7	78.7	78.7	86.0	98.4
102.5°	323.7	220.7	165.4	133.8	115.0	103.4	97.0	95.3	97.0	103.4	115.0
105°	326.4	240.4	190.6	160.6	142.0	129.6	124.3	121.3	124.3	129.6	142.0
107.5°	341.7	263.4	217.8	188.2	170.3	157.1	151.9	149.8	151.9	157.1	170.3
110°	353.3	280.8	235.2	207.2	188.6	176.1	170.9	168.9	170.9	176.1	188.6



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	365.8	297.4	253.4	225.5	206.8	195.2	189.2	187.2	189.2	195.2	206.8
115°	385.5	323.2	281.9	253.9	234.2	223.8	216.6	213.5	216.6	223.8	234.2
117.5°	405.6	348.4	309.0	280.0	261.5	250.1	243.7	240.8	243.7	250.1	261.5
120°	419.6	365.8	326.4	297.4	279.7	268.4	261.1	259.0	261.1	268.4	279.7
122.5°	432.9	382.4	343.0	314.8	295.5	285.0	277.7	275.6	277.7	285.0	295.5
125°	452.8	405.1	367.8	338.9	319.1	307.7	301.5	297.4	301.5	307.7	319.1
127.5°	470.0	426.2	390.2	361.0	340.5	327.4	319.9	316.6	319.9	327.4	340.5
130°	480.8	440.4	405.1	375.1	355.4	339.8	331.5	327.4	331.5	339.8	355.4
132.5°	491.6	452.0	416.8	388.3	367.0	352.3	341.5	338.2	341.5	352.3	367.0
135°	505.7	468.3	434.2	407.2	385.5	367.8	357.5	353.3	357.5	367.8	385.5
137.5°	515.6	480.8	448.9	423.2	400.6	383.8	372.4	368.5	372.4	383.8	400.6
140°	522.2	489.1	458.0	433.1	411.3	393.8	382.4	379.2	382.4	393.8	411.3
142.5°	527.2	496.5	466.3	442.2	421.3	404.5	394.0	390.8	394.0	404.5	421.3
145°	532.6	504.6	477.7	454.9	435.2	420.7	410.4	407.2	410.4	420.7	435.2
147.5°	537.3	512.9	487.6	467.1	450.8	435.8	426.7	425.6	426.7	435.8	450.8
150°	539.8	517.0	494.3	474.6	459.1	446.6	438.3	437.3	438.3	446.6	459.1
152.5°	541.5	520.4	500.1	482.1	468.1	456.6	448.3	448.0	448.3	456.6	468.1
155°	543.0	525.3	507.7	492.2	480.8	470.4	464.2	463.2	464.2	470.4	480.8
157.5°	543.0	528.9	514.0	501.7	491.8	483.7	477.9	477.9	477.9	483.7	491.8
160°	543.0	530.5	518.1	506.7	498.4	491.2	487.0	487.0	487.0	491.2	498.4
162.5°	543.0	532.2	520.6	511.7	504.2	497.8	494.5	495.3	494.5	497.8	504.2
165°	540.9	532.6	523.3	517.0	511.8	506.7	504.6	504.6	504.6	506.7	511.8
167.5°	538.4	532.4	525.6	520.8	517.9	514.0	512.9	514.0	512.9	514.0	517.9
170°	536.7	531.5	526.4	523.3	521.2	518.1	517.0	518.1	517.0	518.1	521.2
172.5°	535.1	530.7	527.2	525.0	523.7	521.4	521.2	522.2	521.2	521.4	523.7
175°	532.6	529.5	527.4	527.4	526.4	525.3	525.3	526.4	525.3	525.3	526.4
177.5°	529.9	528.2	527.4	527.4	527.4	526.6	527.4	528.2	527.4	526.6	527.4
180°	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7
2.5°	1685.6	1680.5	1673.1	1662.9	1654.3	1645.2	1642.9	1639.5	1646.3	1640.7	1638.9
5°	1630.4	1615.4	1596.2	1574.1	1561.3	1542.8	1539.3	1532.1	1525.0	1524.3	1517.2
7.5°	1571.8	1549.9	1524.7	1502.2	1481.4	1461.2	1448.0	1445.1	1434.6	1428.4	1421.3
10°	1534.3	1507.2	1478.0	1456.7	1432.4	1411.1	1396.2	1387.6	1380.5	1372.6	1365.6
12.5°	1489.9	1461.1	1437.0	1413.9	1385.2	1369.0	1344.3	1329.5	1328.1	1328.2	1309.7
15°	1438.2	1409.7	1372.6	1339.9	1324.2	1292.9	1279.3	1262.3	1251.6	1240.9	1232.4
17.5°	1379.0	1343.6	1314.6	1277.1	1247.2	1222.3	1204.5	1194.3	1178.1	1163.1	1152.1
20°	1342.0	1304.3	1273.7	1233.8	1201.0	1170.5	1155.5	1141.3	1129.2	1116.3	1104.2
22.5°	1304.4	1265.0	1227.5	1188.8	1158.3	1126.1	1111.6	1092.3	1080.8	1073.6	1061.5
25°	1245.2	1202.5	1159.8	1122.8	1091.5	1062.9	1043.7	1028.8	1015.9	1010.2	1002.5
27.5°	1180.8	1138.4	1097.2	1055.1	1019.5	998.9	983.5	972.2	964.8	957.3	953.8
30°	1139.9	1095.7	1051.6	1012.4	979.6	959.0	944.8	936.9	931.2	927.6	924.1
32.5°	1098.2	1054.7	1008.3	972.5	943.2	924.8	914.0	906.2	903.3	902.1	900.8
35°	1031.6	987.5	944.8	912.8	884.9	877.8	868.6	864.3	862.9	867.9	870.0
37.5°	967.1	926.1	886.8	855.8	837.6	827.2	824.0	824.1	829.3	833.7	838.8
40°	925.5	885.6	848.6	821.6	804.5	798.1	796.7	800.2	805.9	810.9	816.6
42.5°	885.1	845.8	812.2	786.8	774.9	769.0	769.9	773.5	781.4	787.6	796.1
45°	822.3	789.5	756.8	736.2	726.2	727.6	727.6	734.1	741.8	751.1	760.4
47.5°	763.2	730.2	703.3	685.9	680.7	679.5	683.5	691.9	703.1	714.5	727.5
50°	723.4	692.1	668.5	652.8	647.2	649.3	655.0	662.8	676.4	690.6	704.1
52.5°	682.9	654.4	632.7	618.1	614.1	618.0	623.7	636.1	647.9	663.3	679.7
55°	620.1	595.9	578.8	568.1	566.7	568.8	575.2	588.8	605.8	625.1	640.8
57.5°	557.6	537.3	521.7	514.3	515.1	517.0	527.5	543.7	561.9	582.4	602.6
60°	515.4	497.0	484.1	478.4	479.1	483.4	496.2	511.2	534.0	553.9	575.2
62.5°	475.5	459.3	447.1	442.0	441.0	450.4	462.6	478.1	501.0	523.2	546.2
65°	411.5	398.7	388.7	385.8	388.0	395.1	410.8	431.4	450.7	474.1	498.4
67.5°	348.8	338.3	331.4	332.8	335.4	345.9	359.0	376.7	398.6	422.9	446.8
70°	309.0	299.0	293.3	294.0	298.3	311.1	322.5	340.3	363.8	388.7	408.7
72.5°	268.0	261.4	256.3	259.3	263.6	272.4	286.6	304.4	325.1	348.3	369.3
75°	205.7	205.7	202.9	205.0	211.4	220.0	230.7	249.1	269.8	288.4	305.4
77.5°	152.7	151.1	152.9	155.5	159.2	169.3	181.6	194.7	210.4	228.8	242.9
80°	116.7	117.4	121.0	125.3	126.7	134.6	147.4	159.4	171.6	187.3	200.8
82.5°	87.7	88.5	90.2	95.7	97.1	105.5	113.8	125.9	136.9	147.4	158.6
85°	47.7	47.7	51.3	53.4	57.0	62.7	67.6	74.7	84.7	91.8	102.5
87.5°	19.9	19.9	23.4	24.5	26.7	30.0	30.9	37.4	39.9	42.9	48.0
90°	8.3	8.3	14.5	14.5	16.6	18.6	17.7	18.6	19.7	20.7	20.7
92.5°	54.8	76.2	128.9	209.3	287.7	328.7	273.8	203.5	153.1	121.9	101.1
95°	86.0	129.6	219.6	389.6	637.2	844.5	868.3	767.8	607.2	468.3	367.8
97.5°	104.1	140.5	209.9	350.3	596.4	889.5	1090.9	1134.4	1074.7	973.4	865.2
100°	118.2	151.3	212.4	329.5	540.9	833.0	1098.3	1249.6	1270.3	1219.6	1142.9
102.5°	133.8	165.4	220.7	323.7	503.5	762.6	1036.2	1243.8	1346.6	1361.3	1329.4
105°	160.6	190.6	240.4	326.4	471.4	679.8	923.2	1160.5	1339.8	1442.3	1484.8
107.5°	188.2	217.8	263.4	341.7	465.7	633.3	832.1	1042.1	1233.1	1377.5	1469.9
110°	207.2	235.2	280.8	353.3	467.3	617.6	786.5	970.9	1150.1	1300.4	1414.3



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	225.5	253.4	297.4	365.8	472.3	610.1	760.7	918.6	1077.2	1219.1	1333.1
115°	253.9	281.9	323.2	385.5	481.8	606.2	736.7	866.2	993.7	1114.9	1214.4
117.5°	280.0	309.0	348.4	405.6	492.0	605.1	725.9	840.5	946.0	1041.3	1125.7
120°	297.4	326.4	365.8	419.6	499.4	605.1	720.1	828.9	925.3	1008.2	1081.7
122.5°	314.8	343.0	382.4	432.9	506.9	604.3	713.5	818.9	912.0	987.5	1052.0
125°	338.9	367.8	405.1	452.8	518.1	603.1	702.5	802.0	891.1	962.6	1019.6
127.5°	361.0	390.2	426.2	470.0	527.0	600.7	687.8	781.2	866.5	937.7	991.8
130°	375.1	405.1	440.4	480.8	533.6	599.9	678.7	764.7	846.6	917.0	972.0
132.5°	388.3	416.8	452.0	491.6	539.4	599.1	670.4	747.3	824.2	893.0	947.9
135°	407.2	434.2	468.3	505.7	548.1	597.9	658.0	723.3	790.6	853.8	905.6
137.5°	423.2	448.9	480.8	515.6	553.3	597.6	647.2	701.5	758.5	811.7	858.5
140°	433.1	458.0	489.1	522.2	557.5	596.8	641.4	689.0	737.7	784.3	827.9
142.5°	442.2	466.3	496.5	527.2	560.8	596.8	636.4	677.4	720.3	760.4	798.1
145°	454.9	477.7	504.6	532.6	562.7	594.8	627.9	661.1	696.3	727.4	756.4
147.5°	467.1	487.6	512.9	537.3	563.7	591.0	620.3	647.6	675.6	700.4	723.3
150°	474.6	494.3	517.0	539.8	563.7	588.5	614.5	639.4	663.2	683.9	702.5
152.5°	482.1	500.1	520.4	541.5	562.0	584.4	607.8	630.2	650.7	669.8	685.1
155°	492.2	507.7	525.3	543.0	559.5	578.2	597.9	616.5	633.1	648.6	661.1
157.5°	501.7	514.0	528.9	543.0	556.9	571.8	587.7	601.8	615.7	628.7	638.7
160°	506.7	518.1	530.5	543.0	554.4	566.8	580.2	592.7	604.0	615.5	623.8
162.5°	511.7	520.6	532.2	543.0	551.9	561.8	573.6	583.5	593.3	602.3	609.7
165°	517.0	523.3	532.6	540.9	547.1	554.4	562.7	571.0	577.1	584.4	589.6
167.5°	520.8	525.6	532.4	538.4	542.2	546.9	552.7	558.7	563.5	569.3	572.4
170°	523.3	526.4	531.5	536.7	538.8	541.9	546.1	551.3	554.4	558.5	561.6
172.5°	525.0	527.2	530.7	535.1	535.5	536.9	540.3	544.6	546.9	549.4	551.6
175°	527.4	527.4	529.5	532.6	531.5	531.5	533.6	535.7	536.7	538.8	538.8
177.5°	527.4	527.4	528.2	529.9	528.2	528.2	529.1	529.9	530.7	530.7	531.5
180°	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7
2.5°	1637.8	1636.6	1632.6	1632.1	1632.6	1636.6	1637.8	1638.9	1640.7	1646.3	1639.5
5°	1512.9	1509.3	1507.2	1515.0	1507.2	1509.3	1512.9	1517.2	1524.3	1525.0	1532.1
7.5°	1418.8	1415.9	1409.7	1407.7	1409.7	1415.9	1418.8	1421.3	1428.4	1434.6	1445.1
10°	1358.4	1355.6	1349.9	1348.4	1349.9	1355.6	1358.4	1365.6	1372.6	1380.5	1387.6
12.5°	1300.3	1294.6	1293.5	1294.9	1293.5	1294.6	1300.3	1309.7	1328.2	1328.1	1329.5
15°	1223.2	1220.3	1212.5	1214.6	1212.5	1220.3	1223.2	1232.4	1240.9	1251.6	1262.3
17.5°	1147.1	1143.7	1134.2	1142.5	1134.2	1143.7	1147.1	1152.1	1163.1	1178.1	1194.3
20°	1099.2	1093.6	1088.6	1087.9	1088.6	1093.6	1099.2	1104.2	1116.3	1129.2	1141.3
22.5°	1053.6	1048.6	1048.1	1043.5	1048.1	1048.6	1053.6	1061.5	1073.6	1080.8	1092.3
25°	996.8	991.8	990.3	986.8	990.3	991.8	996.8	1002.5	1010.2	1015.9	1028.8
27.5°	953.1	950.6	948.1	949.1	948.1	950.6	953.1	953.8	957.3	964.8	972.2
30°	926.2	925.5	924.1	924.1	924.1	925.5	926.2	924.1	927.6	931.2	936.9
32.5°	904.0	903.9	904.7	904.7	904.7	903.9	904.0	900.8	902.1	903.3	906.2
35°	872.9	874.9	876.4	874.2	876.4	874.9	872.9	870.0	867.9	862.9	864.3
37.5°	844.6	846.8	848.8	851.2	848.8	846.8	844.6	838.8	833.7	829.3	824.1
40°	823.0	828.0	829.4	832.9	829.4	828.0	823.0	816.6	810.9	805.9	800.2
42.5°	802.5	808.1	811.7	812.4	811.7	808.1	802.5	796.1	787.6	781.4	773.5
45°	771.1	776.8	781.8	781.8	781.8	776.8	771.1	760.4	751.1	741.8	734.1
47.5°	738.4	746.7	751.7	753.0	751.7	746.7	738.4	727.5	714.5	703.1	691.9
50°	716.2	726.2	731.2	734.8	731.2	726.2	716.2	704.1	690.6	676.4	662.8
52.5°	694.6	704.5	711.2	713.1	711.2	704.5	694.6	679.7	663.3	647.9	636.1
55°	657.1	671.4	679.2	682.1	679.2	671.4	657.1	640.8	625.1	605.8	588.8
57.5°	621.8	634.9	644.0	646.1	644.0	634.9	621.8	602.6	582.4	561.9	543.7
60°	594.5	608.7	620.1	622.2	620.1	608.7	594.5	575.2	553.9	534.0	511.2
62.5°	566.6	581.4	591.7	597.2	591.7	581.4	566.6	546.2	523.2	501.0	478.1
65°	518.3	533.2	543.2	545.4	543.2	533.2	518.3	498.4	474.1	450.7	431.4
67.5°	465.7	480.5	487.1	491.2	487.1	480.5	465.7	446.8	422.9	398.6	376.7
70°	428.6	440.7	447.8	451.4	447.8	440.7	428.6	408.7	388.7	363.8	340.3
72.5°	386.5	399.1	407.4	408.0	407.4	399.1	386.5	369.3	348.3	325.1	304.4
75°	321.8	333.2	337.4	337.4	337.4	333.2	321.8	305.4	288.4	269.8	249.1
77.5°	254.8	260.6	266.0	267.2	266.0	260.6	254.8	242.9	228.8	210.4	194.7
80°	211.4	215.0	219.3	219.3	219.3	215.0	211.4	200.8	187.3	171.6	159.4
82.5°	167.0	170.0	174.3	173.7	174.3	170.0	167.0	158.6	147.4	136.9	125.9
85°	101.1	107.5	106.8	105.4	106.8	107.5	101.1	102.5	91.8	84.7	74.7
87.5°	49.9	50.6	52.2	53.3	52.2	50.6	49.9	48.0	42.9	39.9	37.4
90°	21.8	22.8	21.8	21.8	21.8	22.8	21.8	20.7	20.7	19.7	18.6
92.5°	88.9	83.3	79.8	79.8	79.8	83.3	88.9	101.1	121.9	153.1	203.5
95°	317.1	285.0	266.3	252.8	266.3	285.0	317.1	367.8	468.3	607.2	767.8
97.5°	790.8	728.4	697.3	675.8	697.3	728.4	790.8	865.2	973.4	1074.7	1134.4
100°	1052.8	989.5	958.5	950.2	958.5	989.5	1052.8	1142.9	1219.6	1270.3	1249.6
102.5°	1274.1	1228.2	1195.5	1188.9	1195.5	1228.2	1274.1	1329.4	1361.3	1346.6	1243.8
105°	1486.9	1478.6	1464.1	1457.9	1464.1	1478.6	1486.9	1484.8	1442.3	1339.8	1160.5
107.5°	1521.1	1544.7	1555.1	1557.8	1555.1	1544.7	1521.1	1469.9	1377.5	1233.1	1042.1
110°	1487.9	1531.4	1550.2	1559.4	1550.2	1531.4	1487.9	1414.3	1300.4	1150.1	970.9



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	1416.7	1469.3	1495.4	1510.6	1495.4	1469.3	1416.7	1333.1	1219.1	1077.2	918.6
115°	1296.3	1358.4	1391.6	1399.9	1391.6	1358.4	1296.3	1214.4	1114.9	993.7	866.2
117.5°	1195.5	1247.8	1281.3	1287.7	1281.3	1247.8	1195.5	1125.7	1041.3	946.0	840.5
120°	1140.9	1186.4	1213.4	1224.8	1213.4	1186.4	1140.9	1081.7	1008.2	925.3	828.9
122.5°	1101.9	1140.9	1163.6	1175.0	1163.6	1140.9	1101.9	1052.0	987.5	912.0	818.9
125°	1061.0	1091.1	1110.8	1117.0	1110.8	1091.1	1061.0	1019.6	962.6	891.1	802.0
127.5°	1033.5	1060.2	1076.8	1083.0	1076.8	1060.2	1033.5	991.8	937.7	866.5	781.2
130°	1014.4	1040.3	1056.9	1063.1	1056.9	1040.3	1014.4	972.0	917.0	846.6	764.7
132.5°	989.5	1018.8	1034.5	1040.7	1034.5	1018.8	989.5	947.9	893.0	824.2	747.3
135°	947.1	976.1	992.7	998.9	992.7	976.1	947.1	905.6	853.8	790.6	723.3
137.5°	897.3	926.0	939.6	947.1	939.6	926.0	897.3	858.5	811.7	758.5	701.5
140°	864.2	887.0	901.4	909.7	901.4	887.0	864.2	827.9	784.3	737.7	689.0
142.5°	830.2	851.3	864.2	870.0	864.2	851.3	830.2	798.1	760.4	720.3	677.4
145°	782.3	800.0	810.3	815.5	810.3	800.0	782.3	756.4	727.4	696.3	661.1
147.5°	742.3	757.4	765.4	767.1	765.4	757.4	742.3	723.3	700.4	675.6	647.6
150°	719.1	732.5	738.8	739.9	738.8	732.5	719.1	702.5	683.9	663.2	639.4
152.5°	699.2	710.2	713.9	715.0	713.9	710.2	699.2	685.1	669.8	650.7	630.2
155°	671.5	679.8	682.9	682.9	682.9	679.8	671.5	661.1	648.6	633.1	616.5
157.5°	646.6	652.8	654.7	654.7	654.7	652.8	646.6	638.7	628.7	615.7	601.8
160°	630.0	636.2	637.2	637.2	637.2	636.2	630.0	623.8	615.5	604.0	592.7
162.5°	614.2	620.5	621.5	620.6	621.5	620.5	614.2	609.7	602.3	593.3	583.5
165°	593.7	597.9	596.8	595.8	596.8	597.9	593.7	589.6	584.4	577.1	571.0
167.5°	574.4	577.1	576.9	576.1	576.9	577.1	574.4	572.4	569.3	563.5	558.7
170°	563.7	564.7	563.7	563.7	563.7	564.7	563.7	561.6	558.5	554.4	551.3
172.5°	552.9	553.9	552.9	551.3	552.9	553.9	552.9	551.6	549.4	546.9	544.6
175°	538.8	540.9	538.8	536.7	538.8	540.9	538.8	538.8	538.8	536.7	535.7
177.5°	530.7	531.5	529.9	528.2	529.9	531.5	530.7	531.5	530.7	530.7	529.9
180°	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7
2.5°	1642.9	1645.2	1654.3	1662.9	1673.1	1680.5	1685.6	1691.3	1703.3	1713.0	1722.1
5°	1539.3	1542.8	1561.3	1574.1	1596.2	1615.4	1630.4	1646.7	1666.0	1692.3	1716.5
7.5°	1448.0	1461.2	1481.4	1502.2	1524.7	1549.9	1571.8	1596.5	1629.7	1665.8	1703.2
10°	1396.2	1411.1	1432.4	1456.7	1478.0	1507.2	1534.3	1563.4	1601.2	1645.3	1689.4
12.5°	1344.3	1369.0	1385.2	1413.9	1437.0	1461.1	1489.9	1528.1	1572.2	1618.5	1671.8
15°	1279.3	1292.9	1324.2	1339.9	1372.6	1409.7	1438.2	1476.6	1519.3	1580.6	1640.3
17.5°	1204.5	1222.3	1247.2	1277.1	1314.6	1343.6	1379.0	1418.6	1472.5	1533.3	1608.2
20°	1155.5	1170.5	1201.0	1233.8	1273.7	1304.3	1342.0	1380.5	1436.0	1500.8	1579.1
22.5°	1111.6	1126.1	1158.3	1188.8	1227.5	1265.0	1304.4	1349.2	1402.4	1470.6	1550.6
25°	1043.7	1062.9	1091.5	1122.8	1159.8	1202.5	1245.2	1285.0	1342.0	1413.9	1499.4
27.5°	983.5	998.9	1019.5	1055.1	1097.2	1138.4	1180.8	1231.0	1285.7	1361.6	1450.4
30°	944.8	959.0	979.6	1012.4	1051.6	1095.7	1139.9	1188.2	1245.2	1320.7	1411.1
32.5°	914.0	924.8	943.2	972.5	1008.3	1054.7	1098.2	1148.3	1208.2	1282.5	1370.6
35°	868.6	877.8	884.9	912.8	944.8	987.5	1031.6	1085.0	1142.7	1213.2	1301.5
37.5°	824.0	827.2	837.6	855.8	886.8	926.1	967.1	1019.7	1078.8	1150.4	1229.9
40°	796.7	798.1	804.5	821.6	848.6	885.6	925.5	977.5	1033.8	1101.4	1180.4
42.5°	769.9	769.0	774.9	786.8	812.2	845.8	885.1	932.6	988.7	1051.2	1125.7
45°	727.6	727.6	726.2	736.2	756.8	789.5	822.3	867.9	914.9	976.1	1038.8
47.5°	683.5	679.5	680.7	685.9	703.3	730.2	763.2	800.5	842.0	893.8	948.8
50°	655.0	649.3	647.2	652.8	668.5	692.1	723.4	756.1	795.2	840.8	887.8
52.5°	623.7	618.0	614.1	618.1	632.7	654.4	682.9	711.7	746.8	783.9	824.6
55°	575.2	568.8	566.7	568.1	578.8	595.9	620.1	646.5	672.8	703.4	731.9
57.5°	527.5	517.0	515.1	514.3	521.7	537.3	557.6	580.4	599.6	618.1	648.5
60°	496.2	483.4	479.1	478.4	484.1	497.0	515.4	538.2	551.8	564.5	590.9
62.5°	462.6	450.4	441.0	442.0	447.1	459.3	475.5	492.1	501.1	515.1	532.8
65°	410.8	395.1	388.0	385.8	388.7	398.7	411.5	422.2	432.1	437.8	455.0
67.5°	359.0	345.9	335.4	332.8	331.4	338.3	348.8	355.3	362.4	367.4	377.5
70°	322.5	311.1	298.3	294.0	293.3	299.0	309.0	309.7	319.7	321.8	332.5
72.5°	286.6	272.4	263.6	259.3	256.3	261.4	268.0	269.8	275.3	279.1	284.6
75°	230.7	220.0	211.4	205.0	202.9	205.7	205.7	209.3	212.9	215.0	221.4
77.5°	181.6	169.3	159.2	155.5	152.9	151.1	152.7	154.8	153.1	156.8	158.2
80°	147.4	134.6	126.7	125.3	121.0	117.4	116.7	118.9	116.0	117.4	121.7
82.5°	113.8	105.5	97.1	95.7	90.2	88.5	87.7	86.4	86.4	86.1	87.0
85°	67.6	62.7	57.0	53.4	51.3	47.7	47.7	46.3	44.9	43.4	44.1
87.5°	30.9	30.0	26.7	24.5	23.4	19.9	19.9	17.9	17.2	16.0	15.0
90°	17.7	18.6	16.6	14.5	14.5	8.3	8.3	7.2	6.2	3.1	1.1
92.5°	273.8	328.7	287.7	209.3	128.9	76.2	54.8	39.6	26.9	17.2	11.8
95°	868.3	844.5	637.2	389.6	219.6	129.6	86.0	61.2	47.7	37.3	34.2
97.5°	1090.9	889.5	596.4	350.3	209.9	140.5	104.1	82.7	70.3	61.3	61.3
100°	1098.3	833.0	540.9	329.5	212.4	151.3	118.2	98.4	86.0	78.7	78.7
102.5°	1036.2	762.6	503.5	323.7	220.7	165.4	133.8	115.0	103.4	97.0	95.3
105°	923.2	679.8	471.4	326.4	240.4	190.6	160.6	142.0	129.6	124.3	121.3
107.5°	832.1	633.3	465.7	341.7	263.4	217.8	188.2	170.3	157.1	151.9	149.8
110°	786.5	617.6	467.3	353.3	280.8	235.2	207.2	188.6	176.1	170.9	168.9



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	760.7	610.1	472.3	365.8	297.4	253.4	225.5	206.8	195.2	189.2	187.2
115°	736.7	606.2	481.8	385.5	323.2	281.9	253.9	234.2	223.8	216.6	213.5
117.5°	725.9	605.1	492.0	405.6	348.4	309.0	280.0	261.5	250.1	243.7	240.8
120°	720.1	605.1	499.4	419.6	365.8	326.4	297.4	279.7	268.4	261.1	259.0
122.5°	713.5	604.3	506.9	432.9	382.4	343.0	314.8	295.5	285.0	277.7	275.6
125°	702.5	603.1	518.1	452.8	405.1	367.8	338.9	319.1	307.7	301.5	297.4
127.5°	687.8	600.7	527.0	470.0	426.2	390.2	361.0	340.5	327.4	319.9	316.6
130°	678.7	599.9	533.6	480.8	440.4	405.1	375.1	355.4	339.8	331.5	327.4
132.5°	670.4	599.1	539.4	491.6	452.0	416.8	388.3	367.0	352.3	341.5	338.2
135°	658.0	597.9	548.1	505.7	468.3	434.2	407.2	385.5	367.8	357.5	353.3
137.5°	647.2	597.6	553.3	515.6	480.8	448.9	423.2	400.6	383.8	372.4	368.5
140°	641.4	596.8	557.5	522.2	489.1	458.0	433.1	411.3	393.8	382.4	379.2
142.5°	636.4	596.8	560.8	527.2	496.5	466.3	442.2	421.3	404.5	394.0	390.8
145°	627.9	594.8	562.7	532.6	504.6	477.7	454.9	435.2	420.7	410.4	407.2
147.5°	620.3	591.0	563.7	537.3	512.9	487.6	467.1	450.8	435.8	426.7	425.6
150°	614.5	588.5	563.7	539.8	517.0	494.3	474.6	459.1	446.6	438.3	437.3
152.5°	607.8	584.4	562.0	541.5	520.4	500.1	482.1	468.1	456.6	448.3	448.0
155°	597.9	578.2	559.5	543.0	525.3	507.7	492.2	480.8	470.4	464.2	463.2
157.5°	587.7	571.8	556.9	543.0	528.9	514.0	501.7	491.8	483.7	477.9	477.9
160°	580.2	566.8	554.4	543.0	530.5	518.1	506.7	498.4	491.2	487.0	487.0
162.5°	573.6	561.8	551.9	543.0	532.2	520.6	511.7	504.2	497.8	494.5	495.3
165°	562.7	554.4	547.1	540.9	532.6	523.3	517.0	511.8	506.7	504.6	504.6
167.5°	552.7	546.9	542.2	538.4	532.4	525.6	520.8	517.9	514.0	512.9	514.0
170°	546.1	541.9	538.8	536.7	531.5	526.4	523.3	521.2	518.1	517.0	518.1
172.5°	540.3	536.9	535.5	535.1	530.7	527.2	525.0	523.7	521.4	521.2	522.2
175°	533.6	531.5	531.5	532.6	529.5	527.4	527.4	526.4	525.3	525.3	526.4
177.5°	529.1	528.2	528.2	529.9	528.2	527.4	527.4	527.4	526.6	527.4	528.2
180°	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7
2.5°	1730.0	1735.7	1743.1	1755.7	1760.2	1765.9	1773.9	1773.3	1775.6	1784.1	1802.4
5°	1736.4	1758.5	1779.9	1805.5	1832.6	1850.4	1874.6	1889.5	1904.5	1923.7	1956.4
7.5°	1739.0	1774.1	1813.2	1858.2	1898.2	1944.4	1980.4	2014.3	2044.9	2085.4	2124.5
10°	1735.0	1782.0	1832.6	1889.5	1950.0	2001.3	2047.5	2100.2	2145.1	2194.2	2238.4
12.5°	1727.6	1784.3	1851.9	1915.8	1986.5	2062.3	2120.0	2173.2	2232.8	2289.4	2357.4
15°	1710.8	1788.4	1867.4	1951.4	2046.1	2133.7	2217.1	2286.1	2350.2	2434.9	2523.9
17.5°	1689.4	1773.2	1872.9	1974.5	2073.5	2173.6	2276.7	2380.5	2461.4	2566.6	2636.3
20°	1669.6	1766.4	1868.8	1989.9	2088.8	2213.5	2316.0	2416.4	2527.5	2632.1	2715.3
22.5°	1641.6	1747.6	1856.4	1976.8	2107.1	2231.7	2350.2	2459.1	2570.2	2684.0	2784.9
25°	1606.1	1702.3	1831.1	1967.8	2097.4	2232.7	2368.7	2505.4	2624.9	2745.3	2839.3
27.5°	1545.8	1667.1	1787.2	1928.2	2072.2	2225.3	2370.7	2513.7	2639.1	2738.0	2796.2
30°	1515.0	1620.4	1750.7	1892.4	2048.3	2212.8	2364.4	2504.6	2621.5	2700.5	2723.9
32.5°	1469.5	1578.2	1705.7	1852.5	2017.5	2186.6	2344.5	2476.7	2574.1	2615.6	2587.2
35°	1401.9	1500.1	1629.0	1779.1	1950.7	2130.8	2286.8	2398.5	2448.4	2409.2	2311.7
37.5°	1320.7	1418.1	1547.5	1695.1	1872.6	2055.7	2196.6	2277.1	2260.6	2163.2	2017.9
40°	1263.7	1354.9	1478.0	1637.4	1810.5	1994.2	2118.1	2161.5	2115.9	1976.4	1821.9
42.5°	1200.5	1289.3	1413.1	1566.8	1750.2	1919.6	2027.5	2031.0	1954.7	1787.9	1632.8
45°	1104.2	1188.9	1305.7	1465.9	1635.4	1794.8	1866.0	1831.1	1690.1	1529.3	1373.3
47.5°	1009.2	1082.7	1197.7	1349.9	1510.7	1645.0	1680.3	1617.6	1467.3	1311.2	1166.6
50°	939.8	1013.8	1122.0	1267.3	1422.5	1538.6	1555.6	1472.3	1324.9	1167.6	1054.4
52.5°	873.2	946.6	1050.9	1185.3	1327.4	1432.0	1432.6	1336.2	1189.4	1049.1	943.9
55°	775.3	841.5	935.5	1055.8	1182.6	1264.4	1244.5	1144.8	1017.4	895.6	803.8
57.5°	681.1	738.7	825.3	925.7	1037.3	1104.8	1071.7	975.8	862.0	758.8	689.2
60°	620.1	674.9	748.9	843.6	937.6	990.3	959.0	872.2	767.5	684.2	623.7
62.5°	560.9	607.2	678.3	760.5	847.7	886.6	858.7	773.0	682.6	607.3	558.2
65°	477.0	514.8	571.7	642.2	705.5	739.0	715.5	635.8	566.7	512.6	473.4
67.5°	398.7	428.2	471.3	527.8	581.7	599.8	578.4	522.9	464.3	421.1	393.4
70°	344.6	372.4	408.7	452.1	499.1	518.3	497.0	452.8	405.1	365.2	338.1
72.5°	297.3	318.8	349.5	386.6	423.3	442.6	428.0	385.6	345.3	315.7	292.6
75°	226.4	245.0	266.3	292.6	321.1	333.9	321.1	291.9	264.1	242.1	225.7
77.5°	164.6	174.6	191.1	210.7	228.5	238.4	227.3	207.5	190.6	175.4	167.3
80°	125.3	132.4	143.8	159.4	171.6	180.8	173.7	157.3	143.8	133.8	130.3
82.5°	91.1	95.9	103.3	115.0	123.1	127.9	124.8	112.9	107.4	98.5	95.0
85°	44.9	47.7	52.7	56.3	63.4	64.1	64.8	59.8	54.8	52.7	49.8
87.5°	16.0	17.2	19.1	21.0	23.3	25.1	24.5	25.0	23.1	22.3	20.2
90°	3.1	6.2	7.2	8.3	8.3	14.5	14.5	16.6	18.6	17.7	18.6
92.5°	17.2	26.9	39.6	54.8	76.2	128.9	209.3	287.7	328.7	273.8	203.5
95°	37.3	47.7	61.2	86.0	129.6	219.6	389.6	637.2	844.5	868.3	767.8
97.5°	61.3	70.3	82.7	104.1	140.5	209.9	350.3	596.4	889.5	1090.9	1134.4
100°	78.7	86.0	98.4	118.2	151.3	212.4	329.5	540.9	833.0	1098.3	1249.6
102.5°	97.0	103.4	115.0	133.8	165.4	220.7	323.7	503.5	762.6	1036.2	1243.8
105°	124.3	129.6	142.0	160.6	190.6	240.4	326.4	471.4	679.8	923.2	1160.5
107.5°	151.9	157.1	170.3	188.2	217.8	263.4	341.7	465.7	633.3	832.1	1042.1
110°	170.9	176.1	188.6	207.2	235.2	280.8	353.3	467.3	617.6	786.5	970.9



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	189.2	195.2	206.8	225.5	253.4	297.4	365.8	472.3	610.1	760.7	918.6
115°	216.6	223.8	234.2	253.9	281.9	323.2	385.5	481.8	606.2	736.7	866.2
117.5°	243.7	250.1	261.5	280.0	309.0	348.4	405.6	492.0	605.1	725.9	840.5
120°	261.1	268.4	279.7	297.4	326.4	365.8	419.6	499.4	605.1	720.1	828.9
122.5°	277.7	285.0	295.5	314.8	343.0	382.4	432.9	506.9	604.3	713.5	818.9
125°	301.5	307.7	319.1	338.9	367.8	405.1	452.8	518.1	603.1	702.5	802.0
127.5°	319.9	327.4	340.5	361.0	390.2	426.2	470.0	527.0	600.7	687.8	781.2
130°	331.5	339.8	355.4	375.1	405.1	440.4	480.8	533.6	599.9	678.7	764.7
132.5°	341.5	352.3	367.0	388.3	416.8	452.0	491.6	539.4	599.1	670.4	747.3
135°	357.5	367.8	385.5	407.2	434.2	468.3	505.7	548.1	597.9	658.0	723.3
137.5°	372.4	383.8	400.6	423.2	448.9	480.8	515.6	553.3	597.6	647.2	701.5
140°	382.4	393.8	411.3	433.1	458.0	489.1	522.2	557.5	596.8	641.4	689.0
142.5°	394.0	404.5	421.3	442.2	466.3	496.5	527.2	560.8	596.8	636.4	677.4
145°	410.4	420.7	435.2	454.9	477.7	504.6	532.6	562.7	594.8	627.9	661.1
147.5°	426.7	435.8	450.8	467.1	487.6	512.9	537.3	563.7	591.0	620.3	647.6
150°	438.3	446.6	459.1	474.6	494.3	517.0	539.8	563.7	588.5	614.5	639.4
152.5°	448.3	456.6	468.1	482.1	500.1	520.4	541.5	562.0	584.4	607.8	630.2
155°	464.2	470.4	480.8	492.2	507.7	525.3	543.0	559.5	578.2	597.9	616.5
157.5°	477.9	483.7	491.8	501.7	514.0	528.9	543.0	556.9	571.8	587.7	601.8
160°	487.0	491.2	498.4	506.7	518.1	530.5	543.0	554.4	566.8	580.2	592.7
162.5°	494.5	497.8	504.2	511.7	520.6	532.2	543.0	551.9	561.8	573.6	583.5
165°	504.6	506.7	511.8	517.0	523.3	532.6	540.9	547.1	554.4	562.7	571.0
167.5°	512.9	514.0	517.9	520.8	525.6	532.4	538.4	542.2	546.9	552.7	558.7
170°	517.0	518.1	521.2	523.3	526.4	531.5	536.7	538.8	541.9	546.1	551.3
172.5°	521.2	521.4	523.7	525.0	527.2	530.7	535.1	535.5	536.9	540.3	544.6
175°	525.3	525.3	526.4	527.4	527.4	529.5	532.6	531.5	531.5	533.6	535.7
177.5°	527.4	526.6	527.4	527.4	527.4	528.2	529.9	528.2	528.2	529.1	529.9
180°	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7	1718.7
2.5°	1811.5	1812.7	1817.8	1821.8	1822.9	1828.5	1829.2
5°	1970.7	1982.8	2006.3	2008.4	2012.0	2030.5	2016.2
7.5°	2157.2	2188.0	2208.5	2226.6	2233.1	2241.2	2239.5
10°	2276.8	2322.4	2345.2	2381.5	2382.9	2392.2	2386.5
12.5°	2397.0	2450.0	2491.5	2498.2	2528.7	2533.4	2541.4
15°	2567.3	2623.5	2681.2	2701.9	2743.9	2753.9	2769.5
17.5°	2727.4	2784.9	2825.3	2878.7	2895.9	2919.0	2903.3
20°	2815.0	2877.7	2929.0	2971.0	2988.7	3001.6	3000.2
22.5°	2868.0	2931.2	2972.8	3004.6	3021.2	3026.6	3026.4
25°	2901.2	2937.5	2950.3	2962.4	2943.9	2937.5	2940.3
27.5°	2809.0	2799.5	2766.1	2722.2	2676.6	2640.4	2620.8
30°	2681.9	2626.4	2575.9	2487.5	2442.0	2414.9	2390.8
32.5°	2502.0	2414.0	2316.7	2235.8	2184.0	2143.9	2137.9
35°	2193.5	2061.1	1942.2	1843.3	1792.0	1748.6	1738.6
37.5°	1864.9	1727.3	1620.2	1533.1	1478.0	1447.4	1418.8
40°	1646.7	1528.6	1423.2	1349.2	1307.2	1285.0	1267.3
42.5°	1478.7	1370.8	1266.0	1209.6	1171.6	1158.1	1147.6
45°	1246.6	1146.2	1073.6	1030.9	1008.8	986.1	975.4
47.5°	1060.8	979.1	931.2	894.9	871.3	857.7	851.0
50°	955.5	888.5	845.8	818.1	796.7	786.0	780.3
52.5°	862.0	807.1	771.2	749.1	734.6	726.7	724.5
55°	742.5	700.5	677.8	658.5	647.9	640.8	637.9
57.5°	645.4	613.1	594.6	578.8	574.7	568.7	566.7
60°	581.7	556.8	541.1	530.4	526.8	519.7	521.1
62.5°	525.3	504.9	491.5	485.4	480.7	474.7	476.7
65°	444.3	429.3	422.2	416.5	410.8	407.2	410.1
67.5°	372.7	362.6	352.8	349.6	346.7	346.2	343.1
70°	326.1	317.5	309.0	306.8	306.8	304.0	303.3
72.5°	281.1	274.8	269.1	267.5	265.3	266.4	263.4
75°	217.1	212.1	210.0	207.9	207.1	207.1	205.0
77.5°	160.5	156.8	153.4	153.4	150.8	149.8	149.5
80°	121.7	120.3	117.4	117.4	116.0	116.7	115.3
82.5°	91.6	89.5	89.0	87.8	85.9	86.0	84.6
85°	49.1	47.0	46.3	44.1	42.7	44.1	42.7
87.5°	21.0	20.7	20.1	19.2	18.8	18.5	16.9
90°	19.7	20.7	20.7	21.8	22.8	21.8	21.8
92.5°	153.1	121.9	101.1	88.9	83.3	79.8	79.8
95°	607.2	468.3	367.8	317.1	285.0	266.3	252.8
97.5°	1074.7	973.4	865.2	790.8	728.4	697.3	675.8
100°	1270.3	1219.6	1142.9	1052.8	989.5	958.5	950.2
102.5°	1346.6	1361.3	1329.4	1274.1	1228.2	1195.5	1188.9
105°	1339.8	1442.3	1484.8	1486.9	1478.6	1464.1	1457.9
107.5°	1233.1	1377.5	1469.9	1521.1	1544.7	1555.1	1557.8
110°	1150.1	1300.4	1414.3	1487.9	1531.4	1550.2	1559.4



TEST NUMBER: P332708-940

CATALOG NUMBER: SA4XXDIP-C1195D1205U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	1077.2	1219.1	1333.1	1416.7	1469.3	1495.4	1510.6
115°	993.7	1114.9	1214.4	1296.3	1358.4	1391.6	1399.9
117.5°	946.0	1041.3	1125.7	1195.5	1247.8	1281.3	1287.7
120°	925.3	1008.2	1081.7	1140.9	1186.4	1213.4	1224.8
122.5°	912.0	987.5	1052.0	1101.9	1140.9	1163.6	1175.0
125°	891.1	962.6	1019.6	1061.0	1091.1	1110.8	1117.0
127.5°	866.5	937.7	991.8	1033.5	1060.2	1076.8	1083.0
130°	846.6	917.0	972.0	1014.4	1040.3	1056.9	1063.1
132.5°	824.2	893.0	947.9	989.5	1018.8	1034.5	1040.7
135°	790.6	853.8	905.6	947.1	976.1	992.7	998.9
137.5°	758.5	811.7	858.5	897.3	926.0	939.6	947.1
140°	737.7	784.3	827.9	864.2	887.0	901.4	909.7
142.5°	720.3	760.4	798.1	830.2	851.3	864.2	870.0
145°	696.3	727.4	756.4	782.3	800.0	810.3	815.5
147.5°	675.6	700.4	723.3	742.3	757.4	765.4	767.1
150°	663.2	683.9	702.5	719.1	732.5	738.8	739.9
152.5°	650.7	669.8	685.1	699.2	710.2	713.9	715.0
155°	633.1	648.6	661.1	671.5	679.8	682.9	682.9
157.5°	615.7	628.7	638.7	646.6	652.8	654.7	654.7
160°	604.0	615.5	623.8	630.0	636.2	637.2	637.2
162.5°	593.3	602.3	609.7	614.2	620.5	621.5	620.6
165°	577.1	584.4	589.6	593.7	597.9	596.8	595.8
167.5°	563.5	569.3	572.4	574.4	577.1	576.9	576.1
170°	554.4	558.5	561.6	563.7	564.7	563.7	563.7
172.5°	546.9	549.4	551.6	552.9	553.9	552.9	551.3
175°	536.7	538.8	538.8	538.8	540.9	538.8	536.7
177.5°	530.7	530.7	531.5	530.7	531.5	529.9	528.2
180°	527.4	527.4	527.4	527.4	527.4	527.4	527.4

(END OF REPORT)