

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332694-940

Luminaire Tested: **SA4XXDIP-C1195D810U940-4F0-1E-UDD-F**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332694-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C1195D810U940-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7446.3 lumens
Efficiency: N/A
Efficacy: 122.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332694-940
CATALOG NUMBER: SA4XXDIP-C1195D810U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

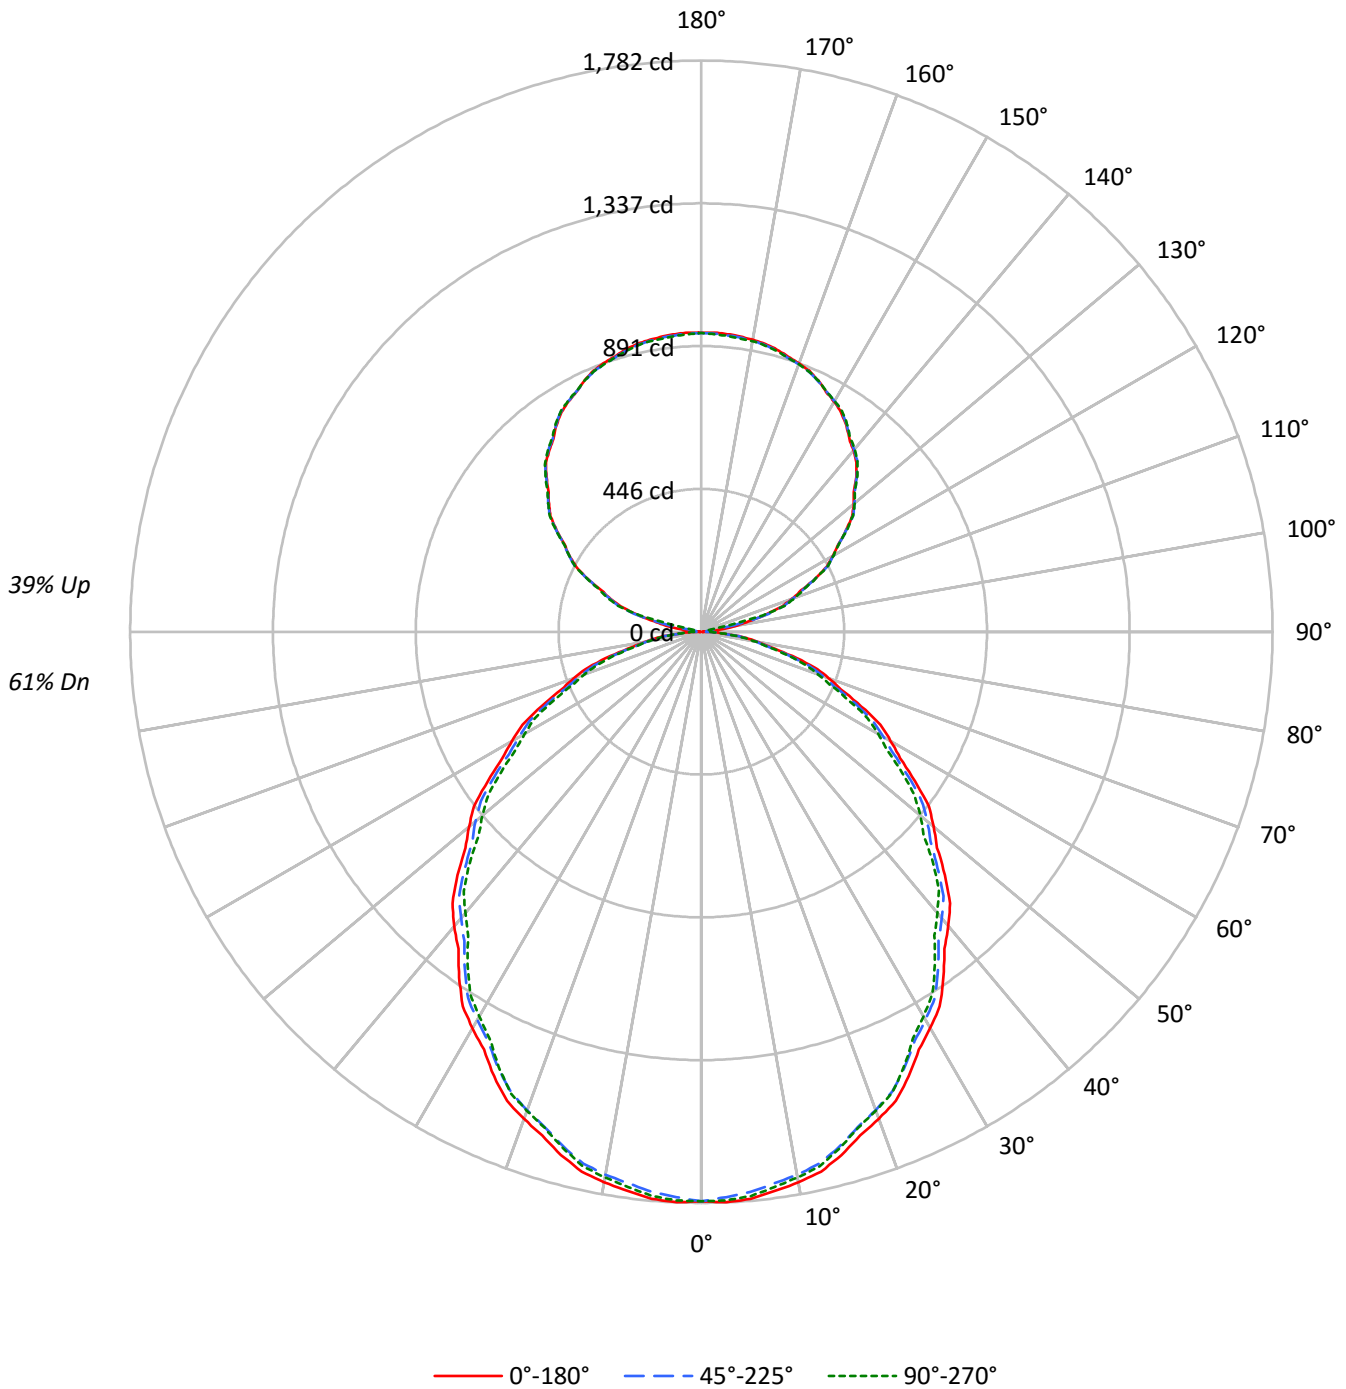



TEST NUMBER: P332694-940

CATALOG NUMBER: SA4XXDIP-C1195D810U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	66	66	66	61
1	100	96	92	88	94	90	86	83	79	76	74	68	66	65	59	57	56	52
2	91	84	77	72	85	79	73	68	69	65	61	60	57	54	52	49	47	43
3	83	74	66	60	78	69	62	57	61	56	51	53	49	46	46	43	40	37
4	76	65	57	51	71	61	54	48	54	48	44	47	43	39	41	37	35	31
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	27
6	65	52	44	38	60	49	42	36	44	38	33	38	34	30	33	30	27	24
7	60	47	39	33	56	45	37	32	40	34	29	35	30	26	31	27	24	21
8	56	43	35	30	52	41	33	28	36	30	26	32	27	24	28	24	21	19
9	52	39	32	26	48	37	30	25	33	27	23	29	25	21	26	22	19	17
10	48	36	29	24	45	34	27	23	31	25	21	27	23	19	24	20	17	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14346	14346	14346
5°	14389	14216	14319
10°	14299	14100	14170
15°	14125	13900	13936
20°	13897	13651	13664
25°	13635	13367	13331
30°	13313	13035	12915
35°	12980	12686	12518
40°	12635	12290	12064
45°	12273	11900	11671
50°	11875	11552	11195
55°	11444	11102	10742
60°	11013	10598	10277
65°	10527	10118	9712
70°	9982	9477	9106
75°	9148	8706	8484
80°	8140	7810	7610
85°	7123	6854	6725



TEST NUMBER: P332694-940

CATALOG NUMBER: SA4XXDIP-C1195D810U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.3	2.2
10°-20°	471.5	6.3
20°-30°	694.0	9.3
30°-40°	806.8	10.8
40°-50°	806.8	10.8
50°-60°	705.8	9.5
60°-70°	524.1	7.0
70°-80°	297.8	4.0
80°-90°	88.6	1.2
90°-100°	31.9	0.4
100°-110°	203.3	2.7
110°-120°	388.9	5.2
120°-130°	493.7	6.6
130°-140°	528.2	7.1
140°-150°	493.9	6.6
150°-160°	398.3	5.3
160°-170°	256.9	3.4
170°-180°	88.5	1.2
0°-30°	1332.9	17.9
0°-40°	2139.7	28.7
0°-60°	3652.3	49.0
0°-90°	4562.8	61.3
90°-120°	624.1	8.4
90°-150°	2139.8	28.7
90°-180°	2884.0	38.7
0°-180°	7446.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1777	1777	1777	1777	1777	
5°	1776	1769	1754	1769	1767	168
15°	1690	1684	1663	1671	1667	476
25°	1531	1520	1501	1502	1497	704
35°	1317	1307	1287	1277	1270	823
45°	1075	1064	1042	1027	1022	828
55°	813	808	789	772	763	728
65°	551	544	530	516	508	545
75°	293	286	279	274	272	312
85°	77	77	74	74	73	85
90°	2	10	15	19	21	6
95°	38	16	15	19	20	49
105°	210	214	218	222	199	220
115°	392	394	393	395	395	385
125°	551	553	552	554	555	492
135°	683	683	685	687	688	526
145°	788	790	790	791	792	492
155°	864	864	862	865	863	398
165°	911	908	908	913	907	257
175°	932	928	929	934	927	89
180°	932	932	932	932	932	



TEST NUMBER: P332694-940

CATALOG NUMBER: SA4XXDIP-C1195D810U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0
2.5°	1781.5	1780.8	1780.0	1779.3	1778.5	1776.7	1774.0	1771.2	1768.4	1765.7	1768.2
5°	1775.6	1774.3	1773.1	1771.8	1770.6	1768.2	1764.7	1761.2	1757.7	1754.3	1757.7
7.5°	1759.1	1757.8	1756.6	1755.2	1754.0	1751.5	1747.6	1743.7	1739.9	1736.0	1738.8
10°	1744.3	1743.0	1741.8	1740.4	1739.2	1736.5	1732.4	1728.3	1724.2	1720.1	1722.6
12.5°	1724.9	1723.7	1722.3	1721.1	1719.8	1717.0	1712.7	1708.3	1704.0	1699.6	1702.4
15°	1690.1	1688.9	1687.7	1686.4	1685.1	1682.1	1677.3	1672.6	1667.9	1663.1	1665.0
17.5°	1648.3	1646.7	1645.1	1643.6	1642.0	1639.0	1634.4	1630.0	1625.5	1621.0	1622.2
20°	1617.6	1616.0	1614.4	1612.8	1611.2	1608.0	1603.3	1598.6	1593.8	1589.0	1590.0
22.5°	1584.5	1582.4	1580.4	1578.2	1576.2	1572.7	1568.0	1563.3	1558.5	1553.7	1555.5
25°	1530.7	1528.5	1526.3	1524.0	1521.8	1518.5	1514.0	1509.7	1505.2	1500.7	1501.1
27.5°	1469.2	1466.9	1464.6	1462.3	1460.1	1456.9	1452.8	1448.7	1444.6	1440.4	1439.7
30°	1428.2	1425.7	1423.1	1420.6	1418.1	1414.7	1410.6	1406.5	1402.4	1398.3	1397.0
32.5°	1384.9	1382.6	1380.4	1378.0	1375.7	1372.4	1368.1	1363.7	1359.3	1355.0	1353.4
35°	1317.1	1314.9	1312.7	1310.5	1308.2	1304.9	1300.5	1296.1	1291.6	1287.2	1285.0
37.5°	1245.6	1243.6	1241.6	1239.6	1237.5	1234.1	1229.4	1224.7	1219.9	1215.1	1212.7
40°	1198.9	1196.4	1193.8	1191.3	1188.8	1185.2	1180.4	1175.6	1170.9	1166.2	1163.0
42.5°	1148.8	1147.3	1145.8	1144.2	1142.7	1139.3	1134.1	1128.8	1123.6	1118.3	1114.6
45°	1075.0	1072.8	1070.6	1068.4	1066.2	1062.6	1057.5	1052.4	1047.3	1042.3	1038.8
47.5°	997.8	996.3	994.8	993.3	991.8	988.7	984.0	979.4	974.6	970.0	966.1
50°	945.5	944.2	942.9	941.6	940.4	937.5	933.1	928.7	924.3	919.8	915.4
52.5°	894.2	892.7	891.2	889.7	888.1	885.0	880.4	875.7	871.0	866.3	862.4
55°	813.1	812.1	811.2	810.2	809.2	806.6	802.1	797.7	793.3	788.8	785.1
57.5°	735.6	734.5	733.4	732.4	731.3	728.5	724.2	719.8	715.4	711.1	707.5
60°	682.1	680.5	678.9	677.3	675.7	672.9	668.8	664.7	660.5	656.4	653.5
62.5°	629.6	628.3	627.0	625.6	624.4	621.5	617.2	612.8	608.4	604.0	601.5
65°	551.1	549.5	547.9	546.3	544.7	542.3	539.2	536.0	532.9	529.7	526.6
67.5°	471.9	470.5	469.0	467.5	466.1	463.8	460.7	457.7	454.7	451.7	448.6
70°	422.9	420.7	418.5	416.3	414.0	411.7	409.1	406.6	404.0	401.5	399.0
72.5°	370.5	368.3	366.0	363.8	361.7	359.5	357.5	355.4	353.5	351.4	349.4
75°	293.3	291.8	290.2	288.6	287.0	285.4	283.8	282.2	280.7	279.1	277.9
77.5°	219.5	218.8	218.2	217.5	216.8	215.7	214.4	212.9	211.6	210.2	209.8
80°	175.1	174.2	173.3	172.3	171.4	170.6	170.0	169.2	168.6	168.0	167.4
82.5°	131.9	131.4	131.0	130.5	130.1	129.8	129.7	129.6	129.4	129.3	128.9
85°	76.9	76.9	76.9	76.9	76.9	76.6	76.0	75.3	74.6	74.0	74.0
87.5°	30.1	30.1	30.2	30.3	30.4	30.4	30.4	30.4	30.4	30.4	30.6
90°	2.1	3.8	5.5	7.2	8.9	10.3	11.6	12.8	14.1	15.3	16.2
92.5°	8.8	8.9	9.0	9.1	9.2	9.8	11.1	12.3	13.6	14.8	15.7
95°	38.3	33.1	27.8	22.6	17.3	14.7	14.9	15.1	15.2	15.3	16.2
97.5°	81.4	84.7	88.0	91.3	94.6	87.6	70.3	53.0	35.7	18.4	18.5
100°	114.3	117.2	119.9	122.7	125.5	116.2	94.8	73.5	52.1	30.7	28.0
102.5°	151.1	153.2	155.2	157.3	159.3	159.0	156.1	153.4	150.6	147.8	119.4
105°	209.8	210.8	211.7	212.7	213.6	214.5	215.2	216.0	216.8	217.5	218.9
107.5°	264.4	264.8	265.3	265.8	266.3	267.0	268.0	269.1	270.2	271.3	271.9
110°	301.2	301.7	302.1	302.6	303.1	303.7	304.7	305.6	306.6	307.5	307.8



TEST NUMBER: P332694-940

CATALOG NUMBER: SA4XXDIP-C1195D810U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	336.9	337.7	338.6	339.4	340.3	340.9	341.3	341.7	342.1	342.6	342.6
115°	391.8	392.3	392.8	393.2	393.7	393.9	393.7	393.5	393.4	393.2	393.5
117.5°	441.3	441.9	442.6	443.2	443.8	444.3	444.6	445.0	445.3	445.7	445.6
120°	474.8	475.5	476.1	476.7	477.2	477.5	477.3	477.2	477.1	476.9	477.2
122.5°	506.0	506.4	506.8	507.1	507.6	507.8	508.0	508.3	508.5	508.7	508.9
125°	550.8	551.4	552.1	552.7	553.3	553.4	553.1	552.9	552.5	552.2	552.7
127.5°	593.2	593.3	593.5	593.7	593.8	594.2	594.9	595.7	596.4	597.1	597.0
130°	620.5	620.7	620.8	621.0	621.2	621.4	621.9	622.4	622.9	623.3	623.5
132.5°	645.6	645.9	646.2	646.5	646.8	647.2	647.7	648.4	648.9	649.5	649.7
135°	683.3	683.1	683.0	682.8	682.7	682.9	683.5	684.1	684.7	685.4	685.6
137.5°	716.6	716.7	716.8	716.8	716.8	717.2	717.9	718.6	719.3	720.0	720.3
140°	738.3	738.7	739.0	739.3	739.6	739.9	740.2	740.6	740.8	741.1	741.6
142.5°	757.9	758.4	759.0	759.6	760.1	760.5	760.6	760.9	761.1	761.3	761.6
145°	787.8	788.4	788.8	789.3	789.7	790.0	790.0	790.0	790.0	790.0	790.1
147.5°	811.7	812.6	813.4	814.3	815.2	815.6	815.4	815.2	815.0	814.9	815.0
150°	829.0	829.6	830.3	830.9	831.4	831.7	831.5	831.4	831.3	831.1	831.1
152.5°	843.5	844.0	844.5	845.0	845.5	845.6	845.3	845.1	844.7	844.5	844.7
155°	863.9	864.0	864.2	864.3	864.5	864.3	863.9	863.4	862.9	862.5	863.1
157.5°	881.0	880.9	880.8	880.7	880.7	880.3	879.8	879.3	878.8	878.2	879.0
160°	891.1	890.6	890.1	889.7	889.2	888.9	888.8	888.6	888.4	888.2	889.2
162.5°	900.0	899.4	898.8	898.2	897.6	897.2	897.1	897.0	896.8	896.6	897.6
165°	911.2	910.5	909.7	908.9	908.2	907.8	907.8	907.8	907.8	907.8	909.0
167.5°	920.2	919.4	918.6	917.7	916.9	916.5	916.4	916.3	916.2	916.1	917.5
170°	925.2	924.3	923.4	922.4	921.5	921.1	921.2	921.4	921.6	921.8	922.9
172.5°	928.5	927.6	926.7	925.8	924.9	924.4	924.6	924.8	924.9	925.1	926.3
175°	932.2	931.2	930.3	929.4	928.4	928.1	928.3	928.4	928.5	928.7	930.1
177.5°	933.9	933.0	932.1	931.2	930.4	930.1	930.3	930.6	930.9	931.0	932.0
180°	932.2	932.2	932.2	932.2	932.2	932.2	932.2	932.2	932.2	932.2	932.2



TEST NUMBER: P332694-940

CATALOG NUMBER: SA4XXDIP-C1195D810U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0
2.5°	1770.7	1773.3	1775.8	1776.9	1776.6	1776.4	1776.1	1775.8
5°	1761.2	1764.7	1768.2	1769.6	1769.0	1768.4	1767.7	1767.0
7.5°	1741.6	1744.4	1747.1	1748.4	1748.0	1747.6	1747.2	1746.9
10°	1725.1	1727.7	1730.2	1731.2	1730.5	1729.9	1729.2	1728.6
12.5°	1705.1	1707.9	1710.7	1711.6	1710.7	1709.9	1709.0	1708.1
15°	1666.9	1668.8	1670.7	1671.2	1670.3	1669.3	1668.3	1667.4
17.5°	1623.4	1624.6	1625.8	1626.0	1625.4	1624.8	1624.2	1623.5
20°	1591.0	1591.9	1592.9	1593.0	1592.4	1591.8	1591.2	1590.5
22.5°	1557.2	1558.9	1560.6	1560.9	1559.8	1558.6	1557.5	1556.3
25°	1501.5	1501.7	1502.1	1501.6	1500.3	1499.1	1497.8	1496.6
27.5°	1438.9	1438.2	1437.3	1436.2	1434.6	1433.1	1431.5	1429.9
30°	1395.7	1394.5	1393.2	1391.8	1390.2	1388.7	1387.1	1385.5
32.5°	1351.9	1350.4	1348.9	1347.4	1345.8	1344.2	1342.6	1341.0
35°	1282.8	1280.6	1278.4	1276.5	1274.9	1273.3	1271.7	1270.2
37.5°	1210.3	1207.9	1205.5	1203.3	1201.2	1199.1	1197.0	1194.9
40°	1159.8	1156.6	1153.5	1151.1	1149.6	1148.0	1146.4	1144.8
42.5°	1111.0	1107.3	1103.7	1101.3	1100.2	1099.1	1098.1	1097.0
45°	1035.4	1031.9	1028.4	1026.2	1025.2	1024.2	1023.3	1022.3
47.5°	962.2	958.2	954.3	951.1	948.7	946.3	943.9	941.5
50°	911.0	906.5	902.1	898.9	897.1	895.2	893.2	891.4
52.5°	858.4	854.5	850.6	847.5	845.1	842.7	840.3	837.9
55°	781.2	777.5	773.6	770.8	768.9	767.0	765.1	763.2
57.5°	703.9	700.3	696.7	693.9	692.1	690.3	688.4	686.6
60°	650.7	647.9	645.1	642.8	641.2	639.6	638.1	636.5
62.5°	598.8	596.2	593.6	591.6	590.0	588.4	586.8	585.2
65°	523.3	520.2	517.0	514.7	513.1	511.5	509.9	508.4
67.5°	445.6	442.6	439.5	437.7	437.3	436.8	436.4	436.0
70°	396.5	394.0	391.4	389.7	388.7	387.8	386.8	385.8
72.5°	347.4	345.4	343.3	341.8	340.9	339.9	338.9	338.0
75°	276.5	275.3	274.0	273.2	273.0	272.6	272.2	272.0
77.5°	209.4	209.0	208.7	208.0	207.2	206.4	205.5	204.7
80°	166.7	166.1	165.5	165.1	164.7	164.3	164.1	163.7
82.5°	128.5	128.1	127.8	127.4	127.1	126.8	126.4	126.2
85°	74.0	74.0	74.0	73.9	73.6	73.2	72.9	72.6
87.5°	30.8	30.9	31.1	31.3	31.3	31.4	31.5	31.6
90°	17.2	18.1	19.1	19.7	20.0	20.3	20.6	21.0
92.5°	16.7	17.6	18.5	19.0	19.1	19.1	19.2	19.3
95°	17.2	18.1	19.1	19.6	19.8	19.9	20.1	20.2
97.5°	18.6	18.7	18.8	18.9	19.1	19.2	19.4	19.5
100°	25.4	22.7	20.2	18.9	19.1	19.2	19.4	19.5
102.5°	91.0	62.6	34.2	20.0	20.0	20.0	20.1	20.1
105°	220.3	221.7	223.1	221.1	215.4	209.8	204.3	198.7
107.5°	272.6	273.2	273.9	274.6	275.2	275.7	276.3	277.0
110°	308.1	308.4	308.7	309.1	309.6	310.0	310.5	310.9



TEST NUMBER: P332694-940

CATALOG NUMBER: SA4XXDIP-C1195D810U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	342.5	342.4	342.3	342.6	343.2	343.8	344.4	345.0
115°	393.9	394.1	394.5	394.7	394.7	394.7	394.7	394.7
117.5°	445.5	445.5	445.4	445.3	445.3	445.2	445.1	445.1
120°	477.5	477.9	478.1	478.1	477.9	477.5	477.2	476.9
122.5°	509.1	509.3	509.4	509.3	509.1	508.7	508.5	508.1
125°	553.1	553.6	554.0	554.4	554.6	554.6	554.8	555.0
127.5°	596.9	596.8	596.7	596.6	596.5	596.4	596.3	596.1
130°	623.7	623.8	623.9	624.0	624.0	624.0	624.0	624.0
132.5°	649.9	650.0	650.1	650.1	650.1	649.9	649.8	649.7
135°	686.0	686.3	686.6	686.9	687.2	687.5	687.9	688.1
137.5°	720.6	720.9	721.3	721.4	721.3	721.2	721.1	721.0
140°	742.1	742.5	743.0	743.3	743.5	743.6	743.8	744.0
142.5°	761.9	762.2	762.6	762.8	762.8	762.9	762.9	762.9
145°	790.2	790.4	790.6	790.8	791.1	791.4	791.8	792.0
147.5°	815.2	815.3	815.4	815.6	815.7	815.8	816.0	816.2
150°	831.1	831.1	831.1	831.2	831.3	831.4	831.6	831.8
152.5°	845.0	845.3	845.4	845.5	845.4	845.3	845.3	845.2
155°	863.7	864.3	865.0	865.0	864.5	864.1	863.6	863.2
157.5°	879.9	880.7	881.5	881.5	880.7	879.9	879.0	878.2
160°	890.1	891.1	892.0	892.0	891.1	890.1	889.2	888.2
162.5°	898.5	899.4	900.4	900.3	899.2	898.1	897.2	896.1
165°	910.3	911.5	912.8	912.7	911.2	909.9	908.5	907.0
167.5°	918.9	920.2	921.6	921.5	920.0	918.4	916.9	915.3
170°	924.2	925.4	926.7	926.5	925.0	923.5	921.9	920.3
172.5°	927.6	928.8	930.1	929.8	928.2	926.5	924.8	923.1
175°	931.5	932.9	934.2	934.1	932.2	930.3	928.4	926.6
177.5°	933.1	934.1	935.0	934.8	933.3	931.8	930.3	928.8
180°	932.2	932.2	932.2	932.2	932.2	932.2	932.2	932.2

(END OF REPORT)