

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332534-940

Luminaire Tested: **SA4XXDIP-C350D1205U940-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332534-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C350D1205U940-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5190.4 lumens
Efficiency: N/A
Efficacy: 123.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 42.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332534-940
CATALOG NUMBER: SA4XXDIP-C350D1205U940-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

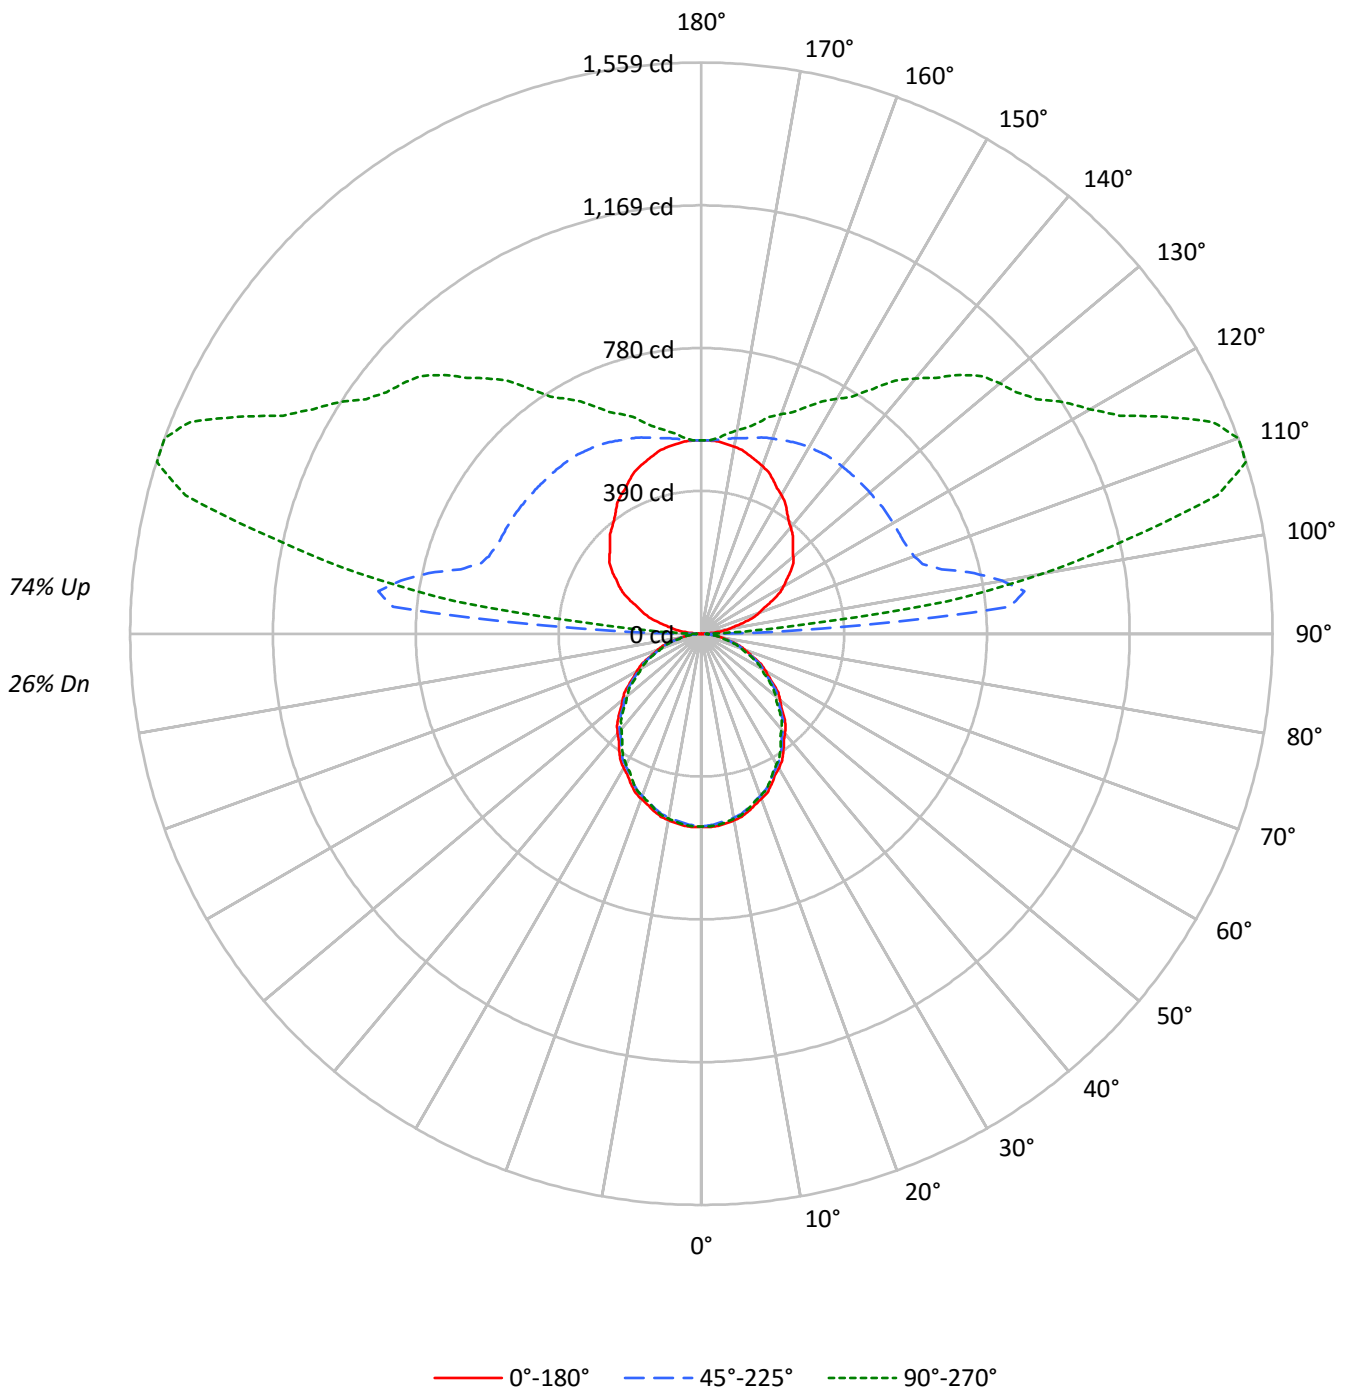



TEST NUMBER: P332534-940

CATALOG NUMBER: SA4XXDIP-C350D1205U940-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34	26				26
1	92	88	84	81	82	79	76	73	61	59	57	45	44	43	30	29	29	22				22
2	84	77	71	66	75	69	64	60	54	50	47	39	37	35	26	25	24	18				18
3	77	68	61	55	68	61	55	50	47	43	40	35	32	30	23	22	21	16				16
4	70	60	52	46	62	54	47	42	42	37	34	31	28	26	21	19	18	13				13
5	64	53	45	39	57	48	41	36	37	33	29	28	25	22	19	17	15	12				12
6	59	47	40	34	52	43	36	31	33	29	25	25	22	19	17	15	13	10				10
7	54	43	35	30	48	38	32	27	30	25	22	23	19	17	16	13	12	9				9
8	50	39	31	26	45	35	28	24	27	23	19	21	17	15	14	12	11	8				8
9	47	35	28	23	42	32	25	21	25	20	17	19	16	13	13	11	10	7				7
10	44	32	25	20	39	29	23	19	23	18	15	17	14	12	12	10	9	7				7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4252	4252	4252
5°	4265	4214	4245
10°	4238	4180	4200
15°	4187	4120	4131
20°	4119	4046	4050
25°	4041	3963	3951
30°	3947	3864	3828
35°	3847	3761	3710
40°	3744	3643	3577
45°	3639	3528	3460
50°	3520	3425	3318
55°	3392	3291	3184
60°	3265	3142	3047
65°	3121	2999	2879
70°	2960	2809	2700
75°	2711	2583	2514
80°	2413	2315	2255
85°	2112	2029	1991



TEST NUMBER: P332534-940

CATALOG NUMBER: SA4XXDIP-C350D1205U940-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.6	1.0
10°-20°	139.8	2.7
20°-30°	205.7	4.0
30°-40°	239.2	4.6
40°-50°	239.2	4.6
50°-60°	209.2	4.0
60°-70°	155.4	3.0
70°-80°	88.3	1.7
80°-90°	28.4	0.5
90°-100°	380.9	7.3
100°-110°	792.8	15.3
110°-120°	710.1	13.7
120°-130°	597.3	11.5
130°-140°	498.1	9.6
140°-150°	380.5	7.3
150°-160°	267.5	5.2
160°-170°	157.3	3.0
170°-180°	51.2	1.0
0°-30°	395.1	7.6
0°-40°	634.2	12.2
0°-60°	1082.6	20.9
0°-90°	1354.6	26.1
90°-120°	1883.9	36.3
90°-150°	3359.8	64.7
90°-180°	3836.0	73.9
0°-180°	5190.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	527	527	527	527	527	
5°	526	524	520	524	524	50
15°	501	499	493	495	494	141
25°	454	451	445	445	444	209
35°	390	387	382	379	376	244
45°	319	316	309	305	303	246
55°	241	240	234	229	226	216
65°	163	161	157	153	151	162
75°	87	85	83	81	81	92
85°	23	23	22	22	22	25
90°	1	8	19	21	22	3
95°	34	108	844	418	253	38
105°	121	176	680	1464	1458	129
115°	214	268	606	1165	1400	212
125°	297	353	603	991	1117	265
135°	353	421	598	880	999	273
145°	407	466	595	742	816	256
155°	463	500	578	655	683	213
165°	505	520	554	587	596	142
175°	526	527	532	539	537	50
180°	527	527	527	527	527	



TEST NUMBER: P332534-940

CATALOG NUMBER: SA4XXDIP-C350D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7
2.5°	528.1	527.9	527.6	527.4	527.2	526.6	525.8	525.0	524.2	523.3	524.1
5°	526.3	525.9	525.6	525.2	524.9	524.1	523.1	522.1	521.0	520.0	521.0
7.5°	521.5	521.0	520.7	520.3	520.0	519.2	518.0	516.9	515.8	514.6	515.4
10°	517.0	516.7	516.3	515.9	515.6	514.8	513.5	512.3	511.1	509.9	510.6
12.5°	511.3	511.0	510.6	510.1	509.8	509.0	507.7	506.4	505.1	503.8	504.6
15°	501.0	500.6	500.2	499.9	499.5	498.6	497.2	495.8	494.4	493.0	493.6
17.5°	488.6	488.1	487.7	487.2	486.7	485.8	484.5	483.1	481.8	480.5	480.8
20°	479.5	479.0	478.6	478.0	477.6	476.7	475.3	473.9	472.4	471.0	471.4
22.5°	469.7	469.0	468.4	467.8	467.2	466.2	464.8	463.4	462.0	460.6	461.1
25°	453.7	453.1	452.5	451.7	451.1	450.1	448.8	447.5	446.2	444.9	445.0
27.5°	435.5	434.8	434.2	433.5	432.8	431.9	430.6	429.4	428.2	427.0	426.8
30°	423.4	422.6	421.9	421.1	420.4	419.4	418.1	416.9	415.7	414.5	414.1
32.5°	410.5	409.8	409.1	408.5	407.8	406.8	405.6	404.2	403.0	401.6	401.2
35°	390.4	389.8	389.1	388.4	387.8	386.8	385.5	384.1	382.9	381.6	380.9
37.5°	369.3	368.6	368.0	367.5	366.8	365.9	364.4	363.0	361.6	360.2	359.4
40°	355.3	354.6	353.9	353.1	352.4	351.3	349.9	348.5	347.1	345.7	344.7
42.5°	340.5	340.1	339.7	339.2	338.8	337.7	336.2	334.6	333.1	331.5	330.4
45°	318.7	318.0	317.4	316.7	316.0	315.0	313.4	311.9	310.5	309.0	307.9
47.5°	295.8	295.3	294.9	294.4	294.0	293.1	291.7	290.3	288.9	287.5	286.3
50°	280.3	279.9	279.6	279.1	278.7	277.9	276.6	275.3	273.9	272.7	271.3
52.5°	265.1	264.6	264.1	263.7	263.2	262.3	260.9	259.6	258.2	256.8	255.7
55°	241.0	240.8	240.4	240.1	239.9	239.1	237.7	236.5	235.1	233.8	232.7
57.5°	218.0	217.8	217.4	217.1	216.8	216.0	214.6	213.4	212.0	210.8	209.7
60°	202.2	201.7	201.3	200.7	200.3	199.5	198.2	197.0	195.8	194.6	193.8
62.5°	186.6	186.3	185.8	185.5	185.0	184.2	182.9	181.6	180.3	179.1	178.3
65°	163.4	162.9	162.4	161.9	161.5	160.8	159.8	158.9	157.9	157.0	156.0
67.5°	139.9	139.5	139.0	138.6	138.1	137.5	136.6	135.7	134.8	133.8	133.0
70°	125.4	124.7	124.0	123.4	122.7	122.0	121.3	120.6	119.8	119.0	118.2
72.5°	109.9	109.1	108.5	107.9	107.2	106.6	105.9	105.4	104.8	104.2	103.5
75°	86.9	86.5	86.1	85.5	85.1	84.6	84.2	83.6	83.2	82.8	82.4
77.5°	65.1	64.9	64.6	64.5	64.3	63.9	63.6	63.1	62.7	62.3	62.2
80°	51.9	51.6	51.4	51.1	50.8	50.6	50.4	50.2	50.0	49.8	49.6
82.5°	39.1	39.0	38.8	38.7	38.5	38.4	38.4	38.4	38.3	38.3	38.3
85°	22.8	22.8	22.8	22.8	22.8	22.7	22.5	22.3	22.1	21.9	21.9
87.5°	9.0	9.4	9.9	10.0	10.2	10.1	11.2	11.1	11.5	11.9	11.6
90°	1.1	3.1	6.2	7.2	8.3	8.3	14.5	14.5	16.6	18.6	17.7
92.5°	11.8	17.2	26.9	39.6	54.8	76.2	128.9	209.3	287.7	328.7	273.8
95°	34.2	37.3	47.7	61.2	86.0	129.6	219.6	389.6	637.2	844.5	868.3
97.5°	61.3	61.3	70.3	82.7	104.1	140.5	209.9	350.3	596.4	889.5	1090.9
100°	78.7	78.7	86.0	98.4	118.2	151.3	212.4	329.5	540.9	833.0	1098.3
102.5°	95.3	97.0	103.4	115.0	133.8	165.4	220.7	323.7	503.5	762.6	1036.2
105°	121.3	124.3	129.6	142.0	160.6	190.6	240.4	326.4	471.4	679.8	923.2
107.5°	149.8	151.9	157.1	170.3	188.2	217.8	263.4	341.7	465.7	633.3	832.1
110°	168.9	170.9	176.1	188.6	207.2	235.2	280.8	353.3	467.3	617.6	786.5



TEST NUMBER: P332534-940

CATALOG NUMBER: SA4XXDIP-C350D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	187.2	189.2	195.2	206.8	225.5	253.4	297.4	365.8	472.3	610.1	760.7
115°	213.5	216.6	223.8	234.2	253.9	281.9	323.2	385.5	481.8	606.2	736.7
117.5°	240.8	243.7	250.1	261.5	280.0	309.0	348.4	405.6	492.0	605.1	725.9
120°	259.0	261.1	268.4	279.7	297.4	326.4	365.8	419.6	499.4	605.1	720.1
122.5°	275.6	277.7	285.0	295.5	314.8	343.0	382.4	432.9	506.9	604.3	713.5
125°	297.4	301.5	307.7	319.1	338.9	367.8	405.1	452.8	518.1	603.1	702.5
127.5°	316.6	319.9	327.4	340.5	361.0	390.2	426.2	470.0	527.0	600.7	687.8
130°	327.4	331.5	339.8	355.4	375.1	405.1	440.4	480.8	533.6	599.9	678.7
132.5°	338.2	341.5	352.3	367.0	388.3	416.8	452.0	491.6	539.4	599.1	670.4
135°	353.3	357.5	367.8	385.5	407.2	434.2	468.3	505.7	548.1	597.9	658.0
137.5°	368.5	372.4	383.8	400.6	423.2	448.9	480.8	515.6	553.3	597.6	647.2
140°	379.2	382.4	393.8	411.3	433.1	458.0	489.1	522.2	557.5	596.8	641.4
142.5°	390.8	394.0	404.5	421.3	442.2	466.3	496.5	527.2	560.8	596.8	636.4
145°	407.2	410.4	420.7	435.2	454.9	477.7	504.6	532.6	562.7	594.8	627.9
147.5°	425.6	426.7	435.8	450.8	467.1	487.6	512.9	537.3	563.7	591.0	620.3
150°	437.3	438.3	446.6	459.1	474.6	494.3	517.0	539.8	563.7	588.5	614.5
152.5°	448.0	448.3	456.6	468.1	482.1	500.1	520.4	541.5	562.0	584.4	607.8
155°	463.2	464.2	470.4	480.8	492.2	507.7	525.3	543.0	559.5	578.2	597.9
157.5°	477.9	477.9	483.7	491.8	501.7	514.0	528.9	543.0	556.9	571.8	587.7
160°	487.0	487.0	491.2	498.4	506.7	518.1	530.5	543.0	554.4	566.8	580.2
162.5°	495.3	494.5	497.8	504.2	511.7	520.6	532.2	543.0	551.9	561.8	573.6
165°	504.6	504.6	506.7	511.8	517.0	523.3	532.6	540.9	547.1	554.4	562.7
167.5°	514.0	512.9	514.0	517.9	520.8	525.6	532.4	538.4	542.2	546.9	552.7
170°	518.1	517.0	518.1	521.2	523.3	526.4	531.5	536.7	538.8	541.9	546.1
172.5°	522.2	521.2	521.4	523.7	525.0	527.2	530.7	535.1	535.5	536.9	540.3
175°	526.4	525.3	525.3	526.4	527.4	527.4	529.5	532.6	531.5	531.5	533.6
177.5°	528.2	527.4	526.6	527.4	527.4	527.4	528.2	529.9	528.2	528.2	529.1
180°	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4



TEST NUMBER: P332534-940

CATALOG NUMBER: SA4XXDIP-C350D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7
2.5°	524.9	525.7	526.4	526.7	526.6	526.6	526.5	526.4
5°	522.1	523.1	524.1	524.5	524.3	524.1	524.0	523.8
7.5°	516.2	517.1	517.9	518.3	518.2	518.0	517.9	517.8
10°	511.4	512.1	512.9	513.2	513.0	512.7	512.6	512.4
12.5°	505.4	506.2	507.1	507.4	507.1	506.8	506.6	506.3
15°	494.1	494.6	495.3	495.3	495.1	494.8	494.5	494.3
17.5°	481.2	481.5	481.9	482.0	481.8	481.6	481.4	481.3
20°	471.6	471.9	472.2	472.3	472.0	471.8	471.6	471.4
22.5°	461.5	462.1	462.6	462.7	462.4	462.0	461.6	461.4
25°	445.1	445.1	445.2	445.1	444.7	444.3	444.0	443.6
27.5°	426.5	426.3	426.1	425.7	425.3	424.8	424.3	423.8
30°	413.8	413.4	413.0	412.6	412.1	411.6	411.2	410.7
32.5°	400.7	400.3	399.8	399.4	399.0	398.4	398.0	397.5
35°	380.2	379.6	378.9	378.4	377.9	377.5	376.9	376.5
37.5°	358.7	358.0	357.3	356.7	356.1	355.4	354.8	354.2
40°	343.8	342.9	342.0	341.3	340.7	340.3	339.8	339.4
42.5°	329.3	328.2	327.2	326.5	326.1	325.8	325.5	325.2
45°	306.9	305.9	304.9	304.2	303.9	303.6	303.4	303.1
47.5°	285.2	284.0	282.9	282.0	281.2	280.5	279.8	279.1
50°	270.0	268.8	267.4	266.4	265.9	265.4	264.7	264.2
52.5°	254.5	253.3	252.2	251.2	250.5	249.8	249.1	248.3
55°	231.6	230.4	229.3	228.5	227.9	227.4	226.8	226.2
57.5°	208.7	207.6	206.5	205.7	205.2	204.6	204.1	203.5
60°	192.9	192.1	191.2	190.6	190.1	189.6	189.1	188.7
62.5°	177.5	176.7	175.9	175.3	174.9	174.4	174.0	173.4
65°	155.2	154.2	153.3	152.6	152.1	151.6	151.1	150.7
67.5°	132.1	131.2	130.3	129.7	129.7	129.5	129.4	129.2
70°	117.5	116.8	116.0	115.5	115.2	114.9	114.7	114.4
72.5°	103.0	102.4	101.7	101.3	101.0	100.8	100.5	100.2
75°	81.9	81.6	81.2	81.0	80.9	80.8	80.7	80.6
77.5°	62.1	62.0	61.9	61.7	61.4	61.2	60.9	60.7
80°	49.4	49.2	49.0	49.0	48.8	48.7	48.6	48.5
82.5°	38.1	38.0	37.9	37.8	37.7	37.5	37.5	37.4
85°	21.9	21.9	21.9	21.9	21.8	21.8	21.6	21.5
87.5°	11.9	12.0	12.2	12.2	12.5	12.7	12.5	12.5
90°	18.6	19.7	20.7	20.7	21.8	22.8	21.8	21.8
92.5°	203.5	153.1	121.9	101.1	88.9	83.3	79.8	79.8
95°	767.8	607.2	468.3	367.8	317.1	285.0	266.3	252.8
97.5°	1134.4	1074.7	973.4	865.2	790.8	728.4	697.3	675.8
100°	1249.6	1270.3	1219.6	1142.9	1052.8	989.5	958.5	950.2
102.5°	1243.8	1346.6	1361.3	1329.4	1274.1	1228.2	1195.5	1188.9
105°	1160.5	1339.8	1442.3	1484.8	1486.9	1478.6	1464.1	1457.9
107.5°	1042.1	1233.1	1377.5	1469.9	1521.1	1544.7	1555.1	1557.8
110°	970.9	1150.1	1300.4	1414.3	1487.9	1531.4	1550.2	1559.4



TEST NUMBER: P332534-940

CATALOG NUMBER: SA4XXDIP-C350D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	918.6	1077.2	1219.1	1333.1	1416.7	1469.3	1495.4	1510.6
115°	866.2	993.7	1114.9	1214.4	1296.3	1358.4	1391.6	1399.9
117.5°	840.5	946.0	1041.3	1125.7	1195.5	1247.8	1281.3	1287.7
120°	828.9	925.3	1008.2	1081.7	1140.9	1186.4	1213.4	1224.8
122.5°	818.9	912.0	987.5	1052.0	1101.9	1140.9	1163.6	1175.0
125°	802.0	891.1	962.6	1019.6	1061.0	1091.1	1110.8	1117.0
127.5°	781.2	866.5	937.7	991.8	1033.5	1060.2	1076.8	1083.0
130°	764.7	846.6	917.0	972.0	1014.4	1040.3	1056.9	1063.1
132.5°	747.3	824.2	893.0	947.9	989.5	1018.8	1034.5	1040.7
135°	723.3	790.6	853.8	905.6	947.1	976.1	992.7	998.9
137.5°	701.5	758.5	811.7	858.5	897.3	926.0	939.6	947.1
140°	689.0	737.7	784.3	827.9	864.2	887.0	901.4	909.7
142.5°	677.4	720.3	760.4	798.1	830.2	851.3	864.2	870.0
145°	661.1	696.3	727.4	756.4	782.3	800.0	810.3	815.5
147.5°	647.6	675.6	700.4	723.3	742.3	757.4	765.4	767.1
150°	639.4	663.2	683.9	702.5	719.1	732.5	738.8	739.9
152.5°	630.2	650.7	669.8	685.1	699.2	710.2	713.9	715.0
155°	616.5	633.1	648.6	661.1	671.5	679.8	682.9	682.9
157.5°	601.8	615.7	628.7	638.7	646.6	652.8	654.7	654.7
160°	592.7	604.0	615.5	623.8	630.0	636.2	637.2	637.2
162.5°	583.5	593.3	602.3	609.7	614.2	620.5	621.5	620.6
165°	571.0	577.1	584.4	589.6	593.7	597.9	596.8	595.8
167.5°	558.7	563.5	569.3	572.4	574.4	577.1	576.9	576.1
170°	551.3	554.4	558.5	561.6	563.7	564.7	563.7	563.7
172.5°	544.6	546.9	549.4	551.6	552.9	553.9	552.9	551.3
175°	535.7	536.7	538.8	538.8	538.8	540.9	538.8	536.7
177.5°	529.9	530.7	530.7	531.5	530.7	531.5	529.9	528.2
180°	527.4	527.4	527.4	527.4	527.4	527.4	527.4	527.4

(END OF REPORT)