

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332617-940

Luminaire Tested: **SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332617-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6879.1 lumens  
Efficiency: N/A  
Efficacy: 120.9 lumens/watt  
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41  
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 56.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332617-940  
CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

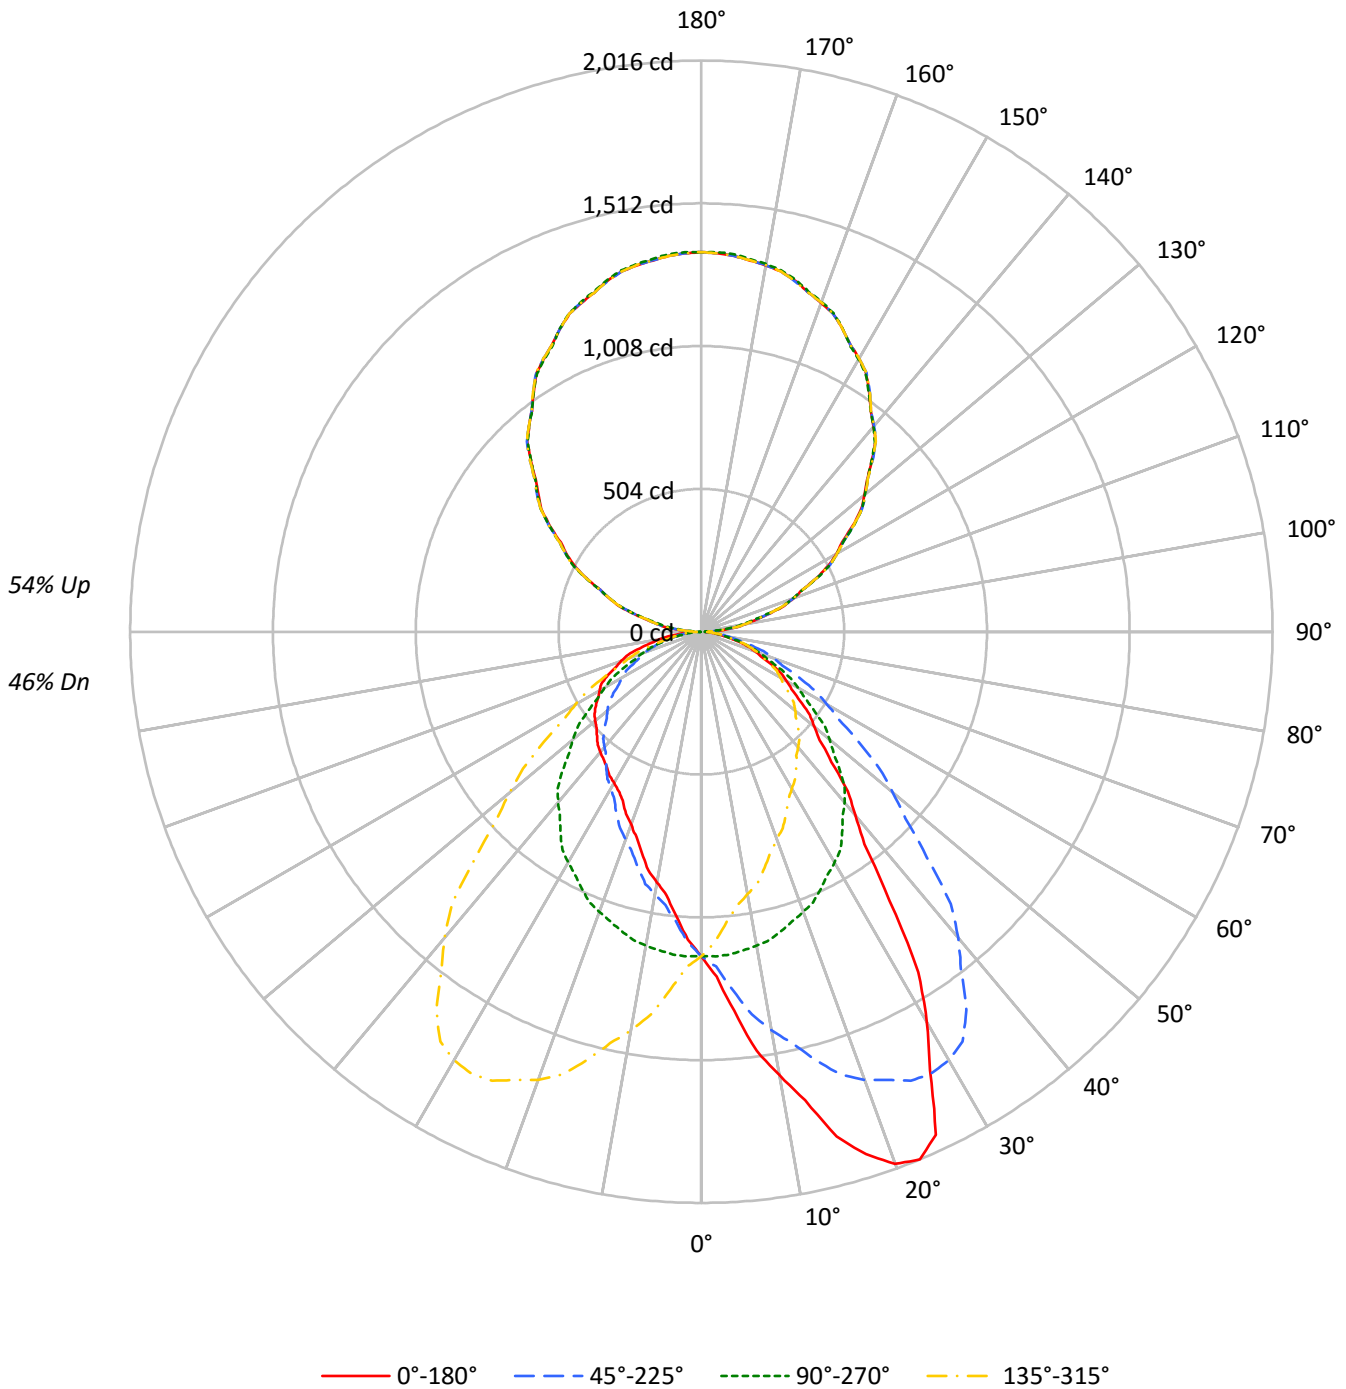



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	46				46
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	47	46	45				39	
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	41	39	38				33	
3	81	72	64	59	74	66	60	55	56	51	47	46	42	40	37	34	32				28	
4	74	64	56	50	68	59	52	47	49	44	40	41	37	34	33	30	28				24	
5	68	57	49	43	62	52	45	40	44	39	35	37	33	30	30	27	25				21	
6	63	51	43	37	57	47	40	35	40	35	30	33	29	26	27	24	22				19	
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	25	22	19				17	
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	17				15	
9	50	38	31	26	46	35	29	24	30	25	21	26	21	19	21	18	16				14	
10	47	35	28	23	43	32	26	22	28	23	19	24	20	17	19	16	14				12	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	9243	9243	9243	9243
5°	10884	9266	8178	9266
10°	13032	9225	7363	9225
15°	15419	9132	6761	9132
20°	17169	9037	6225	9037
25°	17446	8897	5855	8897
30°	14845	8763	5738	8763
35°	11413	8544	5740	8544
40°	8897	8286	5848	8286
45°	7418	7900	5946	7900
50°	6528	7428	6148	7428
55°	5980	6861	6394	6861
60°	5604	6355	6692	6355
65°	5217	5788	6940	5788
70°	4770	5228	7098	5228
75°	4261	4601	7012	4601
80°	3575	3770	6792	3770
85°	2631	2723	6502	2723



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	111.5	1.6
10°-20°	343.8	5.0
20°-30°	545.1	7.9
30°-40°	606.7	8.8
40°-50°	552.2	8.0
50°-60°	451.3	6.6
60°-70°	322.2	4.7
70°-80°	177.4	2.6
80°-90°	52.4	0.8
90°-100°	88.4	1.3
100°-110°	261.7	3.8
110°-120°	444.2	6.5
120°-130°	585.7	8.5
130°-140°	657.8	9.6
140°-150°	646.4	9.4
150°-160°	543.7	7.9
160°-170°	361.7	5.3
170°-180°	126.7	1.8
0°-30°	1000.4	14.5
0°-40°	1607.1	23.4
0°-60°	2610.6	38.0
0°-90°	3162.6	46.0
90°-120°	794.3	11.5
90°-150°	2684.3	39.0
90°-180°	3716.0	54.0
0°-180°	6879.1	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1145	1145	1145	1145	1145	
5°	1343	1143	1009	1143	1343	137
15°	1845	1093	809	1093	1845	521
25°	1959	999	657	999	1959	863
35°	1158	867	582	867	1158	735
45°	650	692	521	692	650	512
55°	425	488	454	488	425	384
65°	273	303	363	303	273	270
75°	137	148	225	148	137	145
85°	28	29	70	29	28	35
90°	31	3	31	3	31	17
95°	82	62	82	62	82	85
105°	253	241	253	241	253	266
115°	448	452	448	452	448	442
125°	653	658	653	658	653	582
135°	850	848	850	848	850	656
145°	1032	1031	1032	1031	1032	646
155°	1180	1181	1180	1181	1180	543
165°	1282	1286	1282	1286	1282	361
175°	1331	1338	1331	1338	1331	126
180°	1340	1340	1340	1340	1340	



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9
2.5°	1218.4	1218.1	1214.2	1213.5	1210.9	1207.5	1206.7	1200.6	1188.5	1182.8	1181.2
5°	1343.1	1352.5	1340.2	1337.8	1336.4	1320.8	1312.7	1303.2	1281.4	1268.6	1258.6
7.5°	1491.8	1492.9	1487.6	1483.2	1471.1	1457.4	1437.0	1415.1	1389.2	1362.1	1341.8
10°	1589.7	1593.5	1587.3	1586.4	1562.2	1547.0	1516.6	1491.0	1461.6	1428.9	1399.0
12.5°	1692.9	1687.6	1684.4	1664.1	1659.7	1632.0	1596.7	1570.3	1525.0	1487.4	1447.6
15°	1844.9	1834.4	1827.7	1799.7	1786.0	1747.6	1710.1	1681.2	1621.9	1565.5	1522.8
17.5°	1933.9	1944.4	1929.0	1917.5	1882.0	1855.0	1816.8	1756.0	1709.7	1639.6	1585.7
20°	1998.5	1999.4	1990.9	1979.1	1951.1	1916.9	1875.2	1808.7	1753.3	1683.6	1609.6
22.5°	2015.9	2016.2	2012.5	2001.4	1980.2	1952.6	1910.5	1855.0	1787.8	1712.0	1638.1
25°	1958.6	1956.8	1961.1	1973.4	1965.2	1956.8	1932.5	1891.3	1828.7	1748.6	1668.8
27.5°	1745.8	1758.9	1783.0	1813.3	1842.5	1864.8	1871.1	1862.6	1823.8	1757.9	1674.5
30°	1592.5	1608.6	1626.7	1657.0	1715.8	1749.5	1786.5	1814.5	1798.8	1746.1	1668.4
32.5°	1424.1	1428.1	1454.8	1489.3	1543.2	1608.0	1666.6	1723.4	1742.3	1714.7	1649.8
35°	1158.1	1164.8	1193.6	1227.8	1293.8	1373.0	1461.2	1539.9	1604.8	1630.9	1597.8
37.5°	945.0	964.1	984.5	1021.3	1079.3	1150.6	1242.2	1344.1	1440.9	1505.8	1516.8
40°	844.2	856.0	870.8	898.7	948.0	1018.2	1096.9	1213.6	1316.5	1409.4	1439.8
42.5°	764.5	771.4	780.4	805.7	843.3	913.1	985.0	1087.6	1191.0	1302.1	1352.9
45°	649.7	656.8	672.0	686.7	715.2	763.6	830.4	914.8	1018.7	1125.9	1219.8
47.5°	566.9	571.4	580.4	596.1	620.3	652.2	706.6	777.1	873.3	977.4	1077.5
50°	519.8	523.5	530.7	544.9	563.4	591.8	636.4	702.4	777.8	882.6	980.7
52.5°	482.6	484.1	489.4	499.0	513.7	537.6	574.2	628.7	698.8	792.3	890.1
55°	424.9	426.9	431.6	438.7	451.5	466.6	494.6	535.4	596.6	677.7	762.6
57.5°	377.5	378.8	382.8	385.6	396.1	408.4	430.0	459.1	505.4	574.2	650.0
60°	347.1	346.2	351.0	353.3	360.4	370.9	387.4	415.4	455.8	511.2	580.9
62.5°	317.5	316.2	320.2	323.3	327.4	336.4	349.9	371.8	404.6	454.7	515.0
65°	273.1	271.3	273.7	277.4	281.2	286.0	296.0	315.4	341.4	377.5	423.5
67.5°	228.5	230.6	231.0	232.8	235.1	241.5	248.3	262.1	280.4	309.3	348.3
70°	202.1	202.5	204.4	204.4	205.8	211.5	217.2	225.2	243.3	269.8	301.6
72.5°	175.5	177.5	176.7	178.3	179.2	183.1	187.3	194.9	210.3	230.0	256.8
75°	136.6	138.0	138.0	138.5	139.9	141.3	144.6	150.3	161.2	175.9	194.5
77.5°	99.6	99.8	100.4	102.2	102.2	104.4	106.9	111.5	116.8	126.9	138.2
80°	76.9	77.8	77.3	78.3	78.3	80.2	81.1	86.8	89.2	95.8	104.8
82.5°	56.4	57.2	57.2	58.5	59.3	59.7	61.0	63.2	65.6	71.5	75.2
85°	28.4	29.4	28.4	29.4	30.9	31.3	32.7	33.2	35.1	36.6	39.9
87.5°	14.5	15.6	15.5	15.8	16.5	16.7	16.8	16.1	17.4	17.5	18.6
90°	31.1	30.6	30.1	29.7	29.2	28.4	26.9	25.6	24.2	22.8	21.0
92.5°	46.0	45.7	45.5	45.2	44.9	44.3	43.5	42.7	41.8	41.0	39.8
95°	81.9	81.9	81.9	81.9	81.9	81.5	80.8	80.1	79.5	78.7	77.1
97.5°	128.2	128.2	128.2	128.2	128.2	127.9	127.0	126.2	125.4	124.5	122.6
100°	160.6	160.6	160.6	160.6	160.6	160.3	159.9	159.4	159.0	158.5	156.4
102.5°	197.1	196.9	196.7	196.5	196.3	195.9	195.3	194.6	193.9	193.3	191.5
105°	252.8	252.1	251.4	250.7	250.0	249.3	248.6	248.0	247.3	246.6	245.7
107.5°	307.1	307.1	307.2	307.2	307.3	306.9	306.3	305.7	305.1	304.3	304.3
110°	346.0	345.4	344.6	343.9	343.2	343.1	343.6	344.0	344.6	345.0	345.2



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	385.8	385.7	385.5	385.4	385.2	385.2	385.3	385.4	385.5	385.6	386.0
115°	447.5	447.8	448.0	448.3	448.4	448.7	448.9	449.2	449.4	449.6	450.0
117.5°	506.4	506.8	507.3	507.7	508.3	508.8	509.6	510.4	511.2	512.0	512.3
120°	551.2	550.7	550.2	549.7	549.3	549.7	550.8	552.0	553.1	554.3	554.9
122.5°	588.4	589.2	590.1	590.9	591.7	592.5	593.3	594.1	594.9	595.7	596.0
125°	652.6	653.1	653.6	654.1	654.5	655.0	655.4	655.9	656.4	656.8	657.0
127.5°	712.1	712.5	712.8	713.3	713.6	714.0	714.5	715.0	715.4	715.9	716.2
130°	751.1	752.0	753.0	753.9	754.7	755.5	755.9	756.3	756.9	757.3	757.3
132.5°	792.6	792.9	793.3	793.6	794.0	794.4	794.9	795.3	795.8	796.3	796.5
135°	849.5	850.2	850.9	851.6	852.3	852.8	853.3	853.8	854.3	854.7	854.7
137.5°	909.4	909.3	909.1	909.0	908.8	909.1	909.6	910.3	910.9	911.4	911.1
140°	945.8	946.1	946.3	946.6	946.8	947.0	947.3	947.4	947.7	947.9	947.9
142.5°	982.3	982.4	982.4	982.5	982.5	982.6	982.6	982.7	982.7	982.8	982.9
145°	1031.9	1032.5	1033.2	1033.9	1034.6	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7
147.5°	1082.0	1082.2	1082.4	1082.7	1082.9	1083.1	1083.3	1083.5	1083.7	1083.9	1084.1
150°	1112.7	1112.9	1113.1	1113.3	1113.6	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7
152.5°	1140.9	1141.4	1142.0	1142.6	1143.3	1143.3	1142.7	1142.1	1141.6	1141.0	1140.9
155°	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7	1182.8	1181.9	1180.9	1180.0	1180.2
157.5°	1215.0	1215.8	1216.6	1217.4	1218.2	1218.2	1217.5	1216.8	1216.1	1215.4	1215.5
160°	1234.9	1236.1	1237.2	1238.3	1239.5	1239.7	1239.0	1238.3	1237.7	1237.0	1237.2
162.5°	1255.6	1256.8	1257.9	1259.1	1260.3	1260.2	1258.9	1257.7	1256.4	1255.2	1255.4
165°	1282.5	1283.4	1284.4	1285.3	1286.2	1286.0	1284.6	1283.3	1281.8	1280.5	1280.9
167.5°	1301.8	1303.2	1304.7	1306.1	1307.5	1307.5	1306.2	1304.8	1303.4	1302.0	1302.0
170°	1312.6	1314.2	1315.8	1317.4	1319.0	1319.2	1317.8	1316.4	1315.0	1313.7	1313.4
172.5°	1321.7	1323.3	1324.9	1326.5	1328.2	1328.2	1326.6	1325.1	1323.5	1322.0	1321.9
175°	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7	1336.1	1334.4	1332.8	1331.2	1331.5
177.5°	1336.2	1337.7	1339.2	1340.6	1342.1	1342.2	1341.0	1339.6	1338.4	1337.0	1337.0
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9
2.5°	1181.6	1176.3	1172.5	1169.5	1161.2	1156.2	1152.4	1147.1	1141.0	1134.6	1126.6
5°	1248.7	1232.5	1220.8	1202.7	1185.6	1171.4	1156.7	1143.4	1127.3	1109.7	1096.9
7.5°	1319.2	1295.2	1264.4	1237.8	1207.8	1181.7	1158.4	1134.5	1109.6	1085.6	1063.5
10°	1364.0	1333.1	1299.0	1258.6	1220.8	1187.0	1155.7	1125.4	1096.0	1066.6	1041.4
12.5°	1412.1	1373.7	1323.2	1276.1	1233.6	1188.6	1150.8	1113.7	1078.2	1047.2	1017.9
15°	1476.8	1421.3	1363.0	1299.9	1243.9	1191.3	1139.6	1092.7	1052.8	1012.0	983.6
17.5°	1516.5	1447.9	1381.2	1315.3	1247.6	1181.2	1125.4	1071.2	1021.4	980.8	944.9
20°	1542.7	1474.4	1391.4	1325.5	1244.9	1176.6	1112.1	1051.9	999.7	956.5	919.5
22.5°	1565.5	1486.6	1403.6	1316.8	1236.5	1164.1	1093.5	1032.9	979.6	934.2	898.7
25°	1577.8	1487.2	1397.1	1310.8	1219.8	1133.9	1069.9	998.8	941.8	893.9	856.0
27.5°	1579.1	1482.3	1380.4	1284.4	1190.4	1110.5	1029.7	966.2	907.0	856.4	819.9
30°	1574.9	1474.0	1364.4	1260.5	1166.2	1079.4	1009.2	940.0	879.8	829.5	791.5
32.5°	1561.7	1456.5	1343.9	1233.9	1136.2	1051.3	978.8	913.0	854.3	804.8	765.0
35°	1523.3	1419.4	1299.4	1185.2	1085.0	999.3	933.8	866.9	808.2	761.2	722.7
37.5°	1463.2	1369.3	1247.3	1129.1	1030.8	944.6	879.8	819.3	766.2	718.5	679.2
40°	1410.9	1328.4	1206.0	1090.7	984.5	902.5	841.8	786.3	733.7	688.6	651.1
42.5°	1350.6	1278.6	1165.8	1043.7	941.3	858.9	799.7	749.8	700.3	658.6	621.2
45°	1243.0	1195.6	1089.3	976.5	869.8	792.0	735.6	692.0	650.2	609.4	578.1
47.5°	1119.3	1095.8	1006.4	899.2	797.9	721.2	672.3	632.0	595.4	560.9	533.2
50°	1036.3	1024.8	947.5	844.2	747.4	675.3	626.0	591.4	560.1	529.8	503.6
52.5°	954.3	953.9	884.2	789.5	700.0	630.5	581.6	549.3	522.2	497.5	474.0
55°	829.0	842.2	787.7	703.3	623.1	560.5	516.5	487.5	468.6	448.2	430.6
57.5°	713.9	735.9	691.0	616.6	549.7	492.0	453.7	431.9	411.7	399.4	386.6
60°	638.8	659.7	624.6	562.0	498.9	449.6	413.0	393.6	376.0	367.6	358.6
62.5°	572.0	590.7	564.6	506.6	451.8	404.5	373.6	354.9	343.0	333.8	327.8
65°	476.6	492.2	470.0	427.8	380.8	342.9	317.7	303.0	291.7	287.8	281.2
67.5°	385.3	399.5	387.4	351.6	314.0	285.2	265.6	251.5	244.7	241.4	236.7
70°	331.0	345.3	332.4	301.1	272.2	248.1	229.5	221.5	214.4	212.9	206.3
72.5°	285.1	294.8	282.0	257.5	232.7	212.4	198.0	189.6	185.9	183.3	179.8
75°	213.9	222.4	213.9	194.9	177.4	163.2	150.8	147.5	143.2	141.8	139.5
77.5°	151.4	158.8	152.2	140.4	127.2	116.3	109.7	105.4	104.4	101.9	103.1
80°	115.7	120.5	114.3	106.2	95.8	88.2	83.5	81.1	78.3	77.3	79.2
82.5°	83.1	85.2	82.0	76.6	68.8	63.9	60.7	58.0	57.4	57.6	57.6
85°	43.2	42.7	42.2	37.5	35.1	31.7	29.9	29.4	28.9	29.9	30.9
87.5°	18.3	18.3	17.5	15.5	13.9	12.2	11.4	10.5	11.4	12.2	13.1
90°	19.1	17.3	15.4	13.2	10.7	8.2	5.6	3.1	5.6	8.2	10.7
92.5°	38.4	37.2	35.8	33.8	30.9	28.0	25.1	22.2	25.1	28.0	30.9
95°	75.5	73.9	72.3	70.4	68.4	66.3	64.2	62.2	64.2	66.3	68.4
97.5°	120.7	118.9	117.0	115.2	113.5	111.9	110.2	108.6	110.2	111.9	113.5
100°	154.4	152.3	150.3	148.7	147.8	146.9	146.0	145.1	146.0	146.9	147.8
102.5°	189.6	187.6	185.7	184.7	184.2	183.9	183.5	183.2	183.5	183.9	184.2
105°	244.7	243.8	242.9	242.3	242.1	241.8	241.7	241.4	241.7	241.8	242.1
107.5°	304.1	304.0	303.8	303.6	303.4	303.1	302.8	302.5	302.8	303.1	303.4
110°	345.4	345.7	345.9	345.8	345.4	344.8	344.4	343.9	344.4	344.8	345.4





TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	386.5	386.8	387.3	387.4	387.4	387.3	387.2	387.0	387.2	387.3	387.4
115°	450.6	451.0	451.5	451.7	451.7	451.7	451.7	451.7	451.7	451.7	451.7
117.5°	512.6	512.9	513.3	513.4	513.2	513.0	512.8	512.6	512.8	513.0	513.2
120°	555.6	556.3	557.1	556.9	556.0	555.1	554.1	553.2	554.1	555.1	556.0
122.5°	596.4	596.6	597.0	597.0	596.6	596.2	595.8	595.5	595.8	596.2	596.6
125°	657.3	657.5	657.7	657.8	657.8	657.8	657.8	657.8	657.8	657.8	657.8
127.5°	716.6	716.9	717.4	717.2	716.5	715.8	715.2	714.4	715.2	715.8	716.5
130°	757.3	757.3	757.3	757.0	756.3	755.5	754.9	754.2	754.9	755.5	756.3
132.5°	796.7	796.8	797.0	796.8	796.3	795.9	795.3	794.8	795.3	795.9	796.3
135°	854.7	854.7	854.7	854.0	852.7	851.2	849.9	848.5	849.9	851.2	852.7
137.5°	910.7	910.3	910.0	909.5	908.8	908.2	907.6	906.9	907.6	908.2	908.8
140°	947.9	947.9	947.9	947.7	947.3	946.8	946.3	945.8	946.3	946.8	947.3
142.5°	983.1	983.3	983.5	983.4	982.8	982.4	982.0	981.5	982.0	982.4	982.8
145°	1035.5	1035.3	1035.1	1034.5	1033.6	1032.7	1031.7	1030.8	1031.7	1032.7	1033.6
147.5°	1084.2	1084.4	1084.6	1084.1	1083.0	1081.9	1080.8	1079.7	1080.8	1081.9	1083.0
150°	1113.7	1113.7	1113.7	1113.2	1112.3	1111.4	1110.4	1109.6	1110.4	1111.4	1112.3
152.5°	1140.7	1140.5	1140.3	1140.0	1139.3	1138.8	1138.3	1137.7	1138.3	1138.8	1139.3
155°	1180.4	1180.7	1180.9	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0
157.5°	1215.5	1215.6	1215.6	1215.8	1216.3	1216.7	1217.1	1217.5	1217.1	1216.7	1216.3
160°	1237.4	1237.7	1237.9	1238.1	1238.3	1238.6	1238.9	1239.0	1238.9	1238.6	1238.3
162.5°	1255.7	1255.9	1256.2	1256.5	1257.1	1257.8	1258.3	1258.9	1258.3	1257.8	1257.1
165°	1281.4	1281.8	1282.3	1282.9	1283.6	1284.2	1285.0	1285.7	1285.0	1284.2	1283.6
167.5°	1301.9	1301.9	1301.8	1302.3	1303.2	1304.2	1305.2	1306.2	1305.2	1304.2	1303.2
170°	1313.1	1313.0	1312.7	1313.1	1314.3	1315.5	1316.6	1317.8	1316.6	1315.5	1314.3
172.5°	1321.9	1321.8	1321.7	1322.2	1323.1	1324.1	1325.1	1326.1	1325.1	1324.1	1323.1
175°	1331.7	1331.9	1332.1	1332.8	1334.0	1335.2	1336.3	1337.5	1336.3	1335.2	1334.0
177.5°	1337.0	1337.0	1337.0	1337.5	1338.5	1339.3	1340.2	1341.2	1340.2	1339.3	1338.5
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9
2.5°	1122.8	1119.5	1114.5	1107.7	1102.0	1095.9	1094.4	1092.1	1096.6	1092.9	1091.7
5°	1086.0	1076.0	1063.3	1048.6	1040.0	1027.7	1025.3	1020.6	1015.8	1015.4	1010.6
7.5°	1047.0	1032.4	1015.7	1000.7	986.8	973.3	964.6	962.6	955.6	951.5	946.8
10°	1022.0	1004.0	984.5	970.3	954.2	940.0	930.0	924.3	919.5	914.4	909.6
12.5°	992.4	973.2	957.3	941.8	922.7	911.9	895.5	885.6	884.7	884.8	872.4
15°	958.0	939.0	914.4	892.5	882.1	861.2	852.2	840.8	833.7	826.6	820.9
17.5°	918.6	895.0	875.7	850.7	830.8	814.2	802.4	795.5	784.8	774.7	767.4
20°	893.9	868.8	848.5	821.9	800.0	779.6	769.7	760.2	752.2	743.6	735.6
22.5°	868.9	842.7	817.7	791.9	771.6	750.1	740.5	727.5	719.9	715.2	707.1
25°	829.5	801.0	772.6	747.9	727.0	708.0	695.3	685.3	676.7	673.0	667.7
27.5°	786.6	758.3	730.8	702.8	679.1	665.4	655.1	647.6	642.7	637.7	635.3
30°	759.3	729.9	700.4	674.4	652.6	638.8	629.3	624.1	620.3	618.0	615.5
32.5°	731.6	702.6	671.6	647.8	628.3	616.1	608.9	603.6	601.7	600.8	600.0
35°	687.2	657.8	629.3	608.0	589.5	584.8	578.5	575.8	574.8	578.1	579.5
37.5°	644.2	616.9	590.8	570.1	557.9	551.0	548.8	549.0	552.4	555.4	558.7
40°	616.5	590.0	565.3	547.2	535.9	531.6	530.7	533.1	536.8	540.2	543.9
42.5°	589.6	563.4	541.0	524.1	516.2	512.3	512.8	515.2	520.5	524.6	530.3
45°	547.8	525.9	504.1	490.4	483.8	484.6	484.6	488.9	494.2	500.3	506.5
47.5°	508.4	486.4	468.4	456.9	453.4	452.6	455.3	460.8	468.3	476.0	484.6
50°	481.8	460.9	445.3	434.9	431.1	432.5	436.3	441.5	450.5	460.0	469.0
52.5°	454.9	436.0	421.4	411.7	409.1	411.6	415.4	423.7	431.6	441.8	452.7
55°	413.0	396.9	385.6	378.4	377.5	378.9	383.2	392.2	403.6	416.4	426.9
57.5°	371.4	357.9	347.5	342.6	343.0	344.4	351.4	362.1	374.3	387.9	401.4
60°	343.4	331.0	322.5	318.7	319.1	322.0	330.6	340.5	355.7	369.0	383.2
62.5°	316.8	305.9	297.8	294.4	293.7	300.0	308.2	318.5	333.7	348.5	363.8
65°	274.1	265.6	259.0	257.1	258.5	263.2	273.7	287.4	300.2	315.8	332.0
67.5°	232.4	225.3	220.8	221.7	223.4	230.4	239.2	250.9	265.5	281.7	297.7
70°	205.8	199.2	195.4	195.8	198.7	207.2	214.8	226.7	242.4	259.0	272.2
72.5°	178.5	174.2	170.8	172.7	175.6	181.5	190.9	202.8	216.5	232.0	246.0
75°	137.1	137.1	135.2	136.6	140.9	146.5	153.6	165.9	179.8	192.1	203.5
77.5°	101.7	100.7	101.8	103.6	106.0	112.8	120.9	129.7	140.1	152.4	161.8
80°	77.8	78.3	80.6	83.5	84.4	89.6	98.2	106.2	114.3	124.8	133.8
82.5°	58.4	58.9	60.1	63.8	64.6	70.3	75.8	83.8	91.1	98.2	105.7
85°	31.7	31.7	34.2	35.6	37.9	41.7	45.0	49.8	56.4	61.2	68.3
87.5°	14.8	15.2	17.1	18.3	19.7	22.0	23.0	27.5	29.2	31.5	35.0
90°	13.2	15.4	17.3	19.1	21.0	22.8	24.2	25.6	26.9	28.4	29.2
92.5°	33.8	35.8	37.2	38.4	39.8	41.0	41.8	42.7	43.5	44.3	44.9
95°	70.4	72.3	73.9	75.5	77.1	78.7	79.5	80.1	80.8	81.5	81.9
97.5°	115.2	117.0	118.9	120.7	122.6	124.5	125.4	126.2	127.0	127.9	128.2
100°	148.7	150.3	152.3	154.4	156.4	158.5	159.0	159.4	159.9	160.3	160.6
102.5°	184.7	185.7	187.6	189.6	191.5	193.3	193.9	194.6	195.3	195.9	196.3
105°	242.3	242.9	243.8	244.7	245.7	246.6	247.3	248.0	248.6	249.3	250.0
107.5°	303.6	303.8	304.0	304.1	304.3	304.3	305.1	305.7	306.3	306.9	307.3
110°	345.8	345.9	345.7	345.4	345.2	345.0	344.6	344.0	343.6	343.1	343.2



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	387.4	387.3	386.8	386.5	386.0	385.6	385.5	385.4	385.3	385.2	385.2
115°	451.7	451.5	451.0	450.6	450.0	449.6	449.4	449.2	448.9	448.7	448.4
117.5°	513.4	513.3	512.9	512.6	512.3	512.0	511.2	510.4	509.6	508.8	508.3
120°	556.9	557.1	556.3	555.6	554.9	554.3	553.1	552.0	550.8	549.7	549.3
122.5°	597.0	597.0	596.6	596.4	596.0	595.7	594.9	594.1	593.3	592.5	591.7
125°	657.8	657.7	657.5	657.3	657.0	656.8	656.4	655.9	655.4	655.0	654.5
127.5°	717.2	717.4	716.9	716.6	716.2	715.9	715.4	715.0	714.5	714.0	713.6
130°	757.0	757.3	757.3	757.3	757.3	757.3	756.9	756.3	755.9	755.5	754.7
132.5°	796.8	797.0	796.8	796.7	796.5	796.3	795.8	795.3	794.9	794.4	794.0
135°	854.0	854.7	854.7	854.7	854.7	854.7	854.3	853.8	853.3	852.8	852.3
137.5°	909.5	910.0	910.3	910.7	911.1	911.4	910.9	910.3	909.6	909.1	908.8
140°	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.4	947.3	947.0	946.8
142.5°	983.4	983.5	983.3	983.1	982.9	982.8	982.7	982.7	982.6	982.6	982.5
145°	1034.5	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7	1035.5	1035.3	1035.1	1034.6
147.5°	1084.1	1084.6	1084.4	1084.2	1084.1	1083.9	1083.7	1083.5	1083.3	1083.1	1082.9
150°	1113.2	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.6
152.5°	1140.0	1140.3	1140.5	1140.7	1140.9	1141.0	1141.6	1142.1	1142.7	1143.3	1143.3
155°	1181.0	1180.9	1180.7	1180.4	1180.2	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7
157.5°	1215.8	1215.6	1215.6	1215.5	1215.5	1215.4	1216.1	1216.8	1217.5	1218.2	1218.2
160°	1238.1	1237.9	1237.7	1237.4	1237.2	1237.0	1237.7	1238.3	1239.0	1239.7	1239.5
162.5°	1256.5	1256.2	1255.9	1255.7	1255.4	1255.2	1256.4	1257.7	1258.9	1260.2	1260.3
165°	1282.9	1282.3	1281.8	1281.4	1280.9	1280.5	1281.8	1283.3	1284.6	1286.0	1286.2
167.5°	1302.3	1301.8	1301.9	1301.9	1302.0	1302.0	1303.4	1304.8	1306.2	1307.5	1307.5
170°	1313.1	1312.7	1313.0	1313.1	1313.4	1313.7	1315.0	1316.4	1317.8	1319.2	1319.0
172.5°	1322.2	1321.7	1321.8	1321.9	1321.9	1322.0	1323.5	1325.1	1326.6	1328.2	1328.2
175°	1332.8	1332.1	1331.9	1331.7	1331.5	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7
177.5°	1337.5	1337.0	1337.0	1337.0	1337.0	1337.0	1338.4	1339.6	1341.0	1342.2	1342.1
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9
2.5°	1090.9	1090.2	1087.5	1087.2	1087.5	1090.2	1090.9	1091.7	1092.9	1096.6	1092.1
5°	1007.8	1005.4	1004.0	1009.2	1004.0	1005.4	1007.8	1010.6	1015.4	1015.8	1020.6
7.5°	945.0	943.2	939.0	937.7	939.0	943.2	945.0	946.8	951.5	955.6	962.6
10°	904.8	902.9	899.2	898.2	899.2	902.9	904.8	909.6	914.4	919.5	924.3
12.5°	866.1	862.4	861.6	862.6	861.6	862.4	866.1	872.4	884.8	884.7	885.6
15°	814.8	812.9	807.6	809.0	807.6	812.9	814.8	820.9	826.6	833.7	840.8
17.5°	764.1	761.8	755.5	761.1	755.5	761.8	764.1	767.4	774.7	784.8	795.5
20°	732.3	728.4	725.1	724.6	725.1	728.4	732.3	735.6	743.6	752.2	760.2
22.5°	701.9	698.5	698.2	695.1	698.2	698.5	701.9	707.1	715.2	719.9	727.5
25°	664.0	660.7	659.7	657.3	659.7	660.7	664.0	667.7	673.0	676.7	685.3
27.5°	634.8	633.2	631.5	632.2	631.5	633.2	634.8	635.3	637.7	642.7	647.6
30°	617.0	616.5	615.5	615.5	615.5	616.5	617.0	615.5	618.0	620.3	624.1
32.5°	602.2	602.1	602.7	602.7	602.7	602.1	602.2	600.0	600.8	601.7	603.6
35°	581.4	582.8	583.8	582.4	583.8	582.8	581.4	579.5	578.1	574.8	575.8
37.5°	562.7	564.1	565.4	567.0	565.4	564.1	562.7	558.7	555.4	552.4	549.0
40°	548.2	551.5	552.5	554.9	552.5	551.5	548.2	543.9	540.2	536.8	533.1
42.5°	534.6	538.2	540.7	541.2	540.7	538.2	534.6	530.3	524.6	520.5	515.2
45°	513.6	517.4	520.8	520.8	520.8	517.4	513.6	506.5	500.3	494.2	488.9
47.5°	491.9	497.4	500.7	501.6	500.7	497.4	491.9	484.6	476.0	468.3	460.8
50°	477.1	483.8	487.1	489.5	487.1	483.8	477.1	469.0	460.0	450.5	441.5
52.5°	462.7	469.3	473.8	475.0	473.8	469.3	462.7	452.7	441.8	431.6	423.7
55°	437.7	447.2	452.5	454.3	452.5	447.2	437.7	426.9	416.4	403.6	392.2
57.5°	414.2	422.9	429.0	430.4	429.0	422.9	414.2	401.4	387.9	374.3	362.1
60°	396.0	405.5	413.0	414.5	413.0	405.5	396.0	383.2	369.0	355.7	340.5
62.5°	377.4	387.3	394.1	397.8	394.1	387.3	377.4	363.8	348.5	333.7	318.5
65°	345.3	355.2	361.9	363.3	361.9	355.2	345.3	332.0	315.8	300.2	287.4
67.5°	310.1	320.1	324.5	327.3	324.5	320.1	310.1	297.7	281.7	265.5	250.9
70°	285.5	293.6	298.3	300.7	298.3	293.6	285.5	272.2	259.0	242.4	226.7
72.5°	257.4	265.8	271.3	271.8	271.3	265.8	257.4	246.0	232.0	216.5	202.8
75°	214.4	221.9	224.8	224.8	224.8	221.9	214.4	203.5	192.1	179.8	165.9
77.5°	169.7	173.6	177.2	177.9	177.2	173.6	169.7	161.8	152.4	140.1	129.7
80°	140.9	143.2	146.1	146.1	146.1	143.2	140.9	133.8	124.8	114.3	106.2
82.5°	111.3	113.2	116.1	115.7	116.1	113.2	111.3	105.7	98.2	91.1	83.8
85°	67.3	71.6	71.2	70.2	71.2	71.6	67.3	68.3	61.2	56.4	49.8
87.5°	36.3	36.7	38.0	38.9	38.0	36.7	36.3	35.0	31.5	29.2	27.5
90°	29.7	30.1	30.6	31.1	30.6	30.1	29.7	29.2	28.4	26.9	25.6
92.5°	45.2	45.5	45.7	46.0	45.7	45.5	45.2	44.9	44.3	43.5	42.7
95°	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.5	80.8	80.1
97.5°	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	127.9	127.0	126.2
100°	160.6	160.6	160.6	160.6	160.6	160.6	160.6	160.6	160.3	159.9	159.4
102.5°	196.5	196.7	196.9	197.1	196.9	196.7	196.5	196.3	195.9	195.3	194.6
105°	250.7	251.4	252.1	252.8	252.1	251.4	250.7	250.0	249.3	248.6	248.0
107.5°	307.2	307.2	307.1	307.1	307.1	307.2	307.2	307.3	306.9	306.3	305.7
110°	343.9	344.6	345.4	346.0	345.4	344.6	343.9	343.2	343.1	343.6	344.0



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	385.4	385.5	385.7	385.8	385.7	385.5	385.4	385.2	385.2	385.3	385.4
115°	448.3	448.0	447.8	447.5	447.8	448.0	448.3	448.4	448.7	448.9	449.2
117.5°	507.7	507.3	506.8	506.4	506.8	507.3	507.7	508.3	508.8	509.6	510.4
120°	549.7	550.2	550.7	551.2	550.7	550.2	549.7	549.3	549.7	550.8	552.0
122.5°	590.9	590.1	589.2	588.4	589.2	590.1	590.9	591.7	592.5	593.3	594.1
125°	654.1	653.6	653.1	652.6	653.1	653.6	654.1	654.5	655.0	655.4	655.9
127.5°	713.3	712.8	712.5	712.1	712.5	712.8	713.3	713.6	714.0	714.5	715.0
130°	753.9	753.0	752.0	751.1	752.0	753.0	753.9	754.7	755.5	755.9	756.3
132.5°	793.6	793.3	792.9	792.6	792.9	793.3	793.6	794.0	794.4	794.9	795.3
135°	851.6	850.9	850.2	849.5	850.2	850.9	851.6	852.3	852.8	853.3	853.8
137.5°	909.0	909.1	909.3	909.4	909.3	909.1	909.0	908.8	909.1	909.6	910.3
140°	946.6	946.3	946.1	945.8	946.1	946.3	946.6	946.8	947.0	947.3	947.4
142.5°	982.5	982.4	982.4	982.3	982.4	982.4	982.5	982.5	982.6	982.6	982.7
145°	1033.9	1033.2	1032.5	1031.9	1032.5	1033.2	1033.9	1034.6	1035.1	1035.3	1035.5
147.5°	1082.7	1082.4	1082.2	1082.0	1082.2	1082.4	1082.7	1082.9	1083.1	1083.3	1083.5
150°	1113.3	1113.1	1112.9	1112.7	1112.9	1113.1	1113.3	1113.6	1113.7	1113.7	1113.7
152.5°	1142.6	1142.0	1141.4	1140.9	1141.4	1142.0	1142.6	1143.3	1143.3	1142.7	1142.1
155°	1182.8	1181.9	1180.9	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7	1182.8	1181.9
157.5°	1217.4	1216.6	1215.8	1215.0	1215.8	1216.6	1217.4	1218.2	1218.2	1217.5	1216.8
160°	1238.3	1237.2	1236.1	1234.9	1236.1	1237.2	1238.3	1239.5	1239.7	1239.0	1238.3
162.5°	1259.1	1257.9	1256.8	1255.6	1256.8	1257.9	1259.1	1260.3	1260.2	1258.9	1257.7
165°	1285.3	1284.4	1283.4	1282.5	1283.4	1284.4	1285.3	1286.2	1286.0	1284.6	1283.3
167.5°	1306.1	1304.7	1303.2	1301.8	1303.2	1304.7	1306.1	1307.5	1307.5	1306.2	1304.8
170°	1317.4	1315.8	1314.2	1312.6	1314.2	1315.8	1317.4	1319.0	1319.2	1317.8	1316.4
172.5°	1326.5	1324.9	1323.3	1321.7	1323.3	1324.9	1326.5	1328.2	1328.2	1326.6	1325.1
175°	1336.1	1334.4	1332.8	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7	1336.1	1334.4
177.5°	1340.6	1339.2	1337.7	1336.2	1337.7	1339.2	1340.6	1342.1	1342.2	1341.0	1339.6
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9
2.5°	1094.4	1095.9	1102.0	1107.7	1114.5	1119.5	1122.8	1126.6	1134.6	1141.0	1147.1
5°	1025.3	1027.7	1040.0	1048.6	1063.3	1076.0	1086.0	1096.9	1109.7	1127.3	1143.4
7.5°	964.6	973.3	986.8	1000.7	1015.7	1032.4	1047.0	1063.5	1085.6	1109.6	1134.5
10°	930.0	940.0	954.2	970.3	984.5	1004.0	1022.0	1041.4	1066.6	1096.0	1125.4
12.5°	895.5	911.9	922.7	941.8	957.3	973.2	992.4	1017.9	1047.2	1078.2	1113.7
15°	852.2	861.2	882.1	892.5	914.4	939.0	958.0	983.6	1012.0	1052.8	1092.7
17.5°	802.4	814.2	830.8	850.7	875.7	895.0	918.6	944.9	980.8	1021.4	1071.2
20°	769.7	779.6	800.0	821.9	848.5	868.8	893.9	919.5	956.5	999.7	1051.9
22.5°	740.5	750.1	771.6	791.9	817.7	842.7	868.9	898.7	934.2	979.6	1032.9
25°	695.3	708.0	727.0	747.9	772.6	801.0	829.5	856.0	893.9	941.8	998.8
27.5°	655.1	665.4	679.1	702.8	730.8	758.3	786.6	819.9	856.4	907.0	966.2
30°	629.3	638.8	652.6	674.4	700.4	729.9	759.3	791.5	829.5	879.8	940.0
32.5°	608.9	616.1	628.3	647.8	671.6	702.6	731.6	765.0	804.8	854.3	913.0
35°	578.5	584.8	589.5	608.0	629.3	657.8	687.2	722.7	761.2	808.2	866.9
37.5°	548.8	551.0	557.9	570.1	590.8	616.9	644.2	679.2	718.5	766.2	819.3
40°	530.7	531.6	535.9	547.2	565.3	590.0	616.5	651.1	688.6	733.7	786.3
42.5°	512.8	512.3	516.2	524.1	541.0	563.4	589.6	621.2	658.6	700.3	749.8
45°	484.6	484.6	483.8	490.4	504.1	525.9	547.8	578.1	609.4	650.2	692.0
47.5°	455.3	452.6	453.4	456.9	468.4	486.4	508.4	533.2	560.9	595.4	632.0
50°	436.3	432.5	431.1	434.9	445.3	460.9	481.8	503.6	529.8	560.1	591.4
52.5°	415.4	411.6	409.1	411.7	421.4	436.0	454.9	474.0	497.5	522.2	549.3
55°	383.2	378.9	377.5	378.4	385.6	396.9	413.0	430.6	448.2	468.6	487.5
57.5°	351.4	344.4	343.0	342.6	347.5	357.9	371.4	386.6	399.4	411.7	431.9
60°	330.6	322.0	319.1	318.7	322.5	331.0	343.4	358.6	367.6	376.0	393.6
62.5°	308.2	300.0	293.7	294.4	297.8	305.9	316.8	327.8	333.8	343.0	354.9
65°	273.7	263.2	258.5	257.1	259.0	265.6	274.1	281.2	287.8	291.7	303.0
67.5°	239.2	230.4	223.4	221.7	220.8	225.3	232.4	236.7	241.4	244.7	251.5
70°	214.8	207.2	198.7	195.8	195.4	199.2	205.8	206.3	212.9	214.4	221.5
72.5°	190.9	181.5	175.6	172.7	170.8	174.2	178.5	179.8	183.3	185.9	189.6
75°	153.6	146.5	140.9	136.6	135.2	137.1	137.1	139.5	141.8	143.2	147.5
77.5°	120.9	112.8	106.0	103.6	101.8	100.7	101.7	103.1	101.9	104.4	105.4
80°	98.2	89.6	84.4	83.5	80.6	78.3	77.8	79.2	77.3	78.3	81.1
82.5°	75.8	70.3	64.6	63.8	60.1	58.9	58.4	57.6	57.6	57.4	58.0
85°	45.0	41.7	37.9	35.6	34.2	31.7	31.7	30.9	29.9	28.9	29.4
87.5°	23.0	22.0	19.7	18.3	17.1	15.2	14.8	13.1	12.2	11.4	10.5
90°	24.2	22.8	21.0	19.1	17.3	15.4	13.2	10.7	8.2	5.6	3.1
92.5°	41.8	41.0	39.8	38.4	37.2	35.8	33.8	30.9	28.0	25.1	22.2
95°	79.5	78.7	77.1	75.5	73.9	72.3	70.4	68.4	66.3	64.2	62.2
97.5°	125.4	124.5	122.6	120.7	118.9	117.0	115.2	113.5	111.9	110.2	108.6
100°	159.0	158.5	156.4	154.4	152.3	150.3	148.7	147.8	146.9	146.0	145.1
102.5°	193.9	193.3	191.5	189.6	187.6	185.7	184.7	184.2	183.9	183.5	183.2
105°	247.3	246.6	245.7	244.7	243.8	242.9	242.3	242.1	241.8	241.7	241.4
107.5°	305.1	304.3	304.3	304.1	304.0	303.8	303.6	303.4	303.1	302.8	302.5
110°	344.6	345.0	345.2	345.4	345.7	345.9	345.8	345.4	344.8	344.4	343.9



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	385.5	385.6	386.0	386.5	386.8	387.3	387.4	387.4	387.3	387.2	387.0
115°	449.4	449.6	450.0	450.6	451.0	451.5	451.7	451.7	451.7	451.7	451.7
117.5°	511.2	512.0	512.3	512.6	512.9	513.3	513.4	513.2	513.0	512.8	512.6
120°	553.1	554.3	554.9	555.6	556.3	557.1	556.9	556.0	555.1	554.1	553.2
122.5°	594.9	595.7	596.0	596.4	596.6	597.0	597.0	596.6	596.2	595.8	595.5
125°	656.4	656.8	657.0	657.3	657.5	657.7	657.8	657.8	657.8	657.8	657.8
127.5°	715.4	715.9	716.2	716.6	716.9	717.4	717.2	716.5	715.8	715.2	714.4
130°	756.9	757.3	757.3	757.3	757.3	757.3	757.0	756.3	755.5	754.9	754.2
132.5°	795.8	796.3	796.5	796.7	796.8	797.0	796.8	796.3	795.9	795.3	794.8
135°	854.3	854.7	854.7	854.7	854.7	854.7	854.0	852.7	851.2	849.9	848.5
137.5°	910.9	911.4	911.1	910.7	910.3	910.0	909.5	908.8	908.2	907.6	906.9
140°	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.3	946.8	946.3	945.8
142.5°	982.7	982.8	982.9	983.1	983.3	983.5	983.4	982.8	982.4	982.0	981.5
145°	1035.7	1036.0	1035.7	1035.5	1035.3	1035.1	1034.5	1033.6	1032.7	1031.7	1030.8
147.5°	1083.7	1083.9	1084.1	1084.2	1084.4	1084.6	1084.1	1083.0	1081.9	1080.8	1079.7
150°	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.2	1112.3	1111.4	1110.4	1109.6
152.5°	1141.6	1141.0	1140.9	1140.7	1140.5	1140.3	1140.0	1139.3	1138.8	1138.3	1137.7
155°	1180.9	1180.0	1180.2	1180.4	1180.7	1180.9	1181.0	1181.0	1181.0	1181.0	1181.0
157.5°	1216.1	1215.4	1215.5	1215.5	1215.6	1215.6	1215.8	1216.3	1216.7	1217.1	1217.5
160°	1237.7	1237.0	1237.2	1237.4	1237.7	1237.9	1238.1	1238.3	1238.6	1238.9	1239.0
162.5°	1256.4	1255.2	1255.4	1255.7	1255.9	1256.2	1256.5	1257.1	1257.8	1258.3	1258.9
165°	1281.8	1280.5	1280.9	1281.4	1281.8	1282.3	1282.9	1283.6	1284.2	1285.0	1285.7
167.5°	1303.4	1302.0	1302.0	1301.9	1301.9	1301.8	1302.3	1303.2	1304.2	1305.2	1306.2
170°	1315.0	1313.7	1313.4	1313.1	1313.0	1312.7	1313.1	1314.3	1315.5	1316.6	1317.8
172.5°	1323.5	1322.0	1321.9	1321.9	1321.8	1321.7	1322.2	1323.1	1324.1	1325.1	1326.1
175°	1332.8	1331.2	1331.5	1331.7	1331.9	1332.1	1332.8	1334.0	1335.2	1336.3	1337.5
177.5°	1338.4	1337.0	1337.0	1337.0	1337.0	1337.0	1337.5	1338.5	1339.3	1340.2	1341.2
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9
2.5°	1152.4	1156.2	1161.2	1169.5	1172.5	1176.3	1181.6	1181.2	1182.8	1188.5	1200.6
5°	1156.7	1171.4	1185.6	1202.7	1220.8	1232.5	1248.7	1258.6	1268.6	1281.4	1303.2
7.5°	1158.4	1181.7	1207.8	1237.8	1264.4	1295.2	1319.2	1341.8	1362.1	1389.2	1415.1
10°	1155.7	1187.0	1220.8	1258.6	1299.0	1333.1	1364.0	1399.0	1428.9	1461.6	1491.0
12.5°	1150.8	1188.6	1233.6	1276.1	1323.2	1373.7	1412.1	1447.6	1487.4	1525.0	1570.3
15°	1139.6	1191.3	1243.9	1299.9	1363.0	1421.3	1476.8	1522.8	1565.5	1621.9	1681.2
17.5°	1125.4	1181.2	1247.6	1315.3	1381.2	1447.9	1516.5	1585.7	1639.6	1709.7	1756.0
20°	1112.1	1176.6	1244.9	1325.5	1391.4	1474.4	1542.7	1609.6	1683.6	1753.3	1808.7
22.5°	1093.5	1164.1	1236.5	1316.8	1403.6	1486.6	1565.5	1638.1	1712.0	1787.8	1855.0
25°	1069.9	1133.9	1219.8	1310.8	1397.1	1487.2	1577.8	1668.8	1748.6	1828.7	1891.3
27.5°	1029.7	1110.5	1190.4	1284.4	1380.4	1482.3	1579.1	1674.5	1757.9	1823.8	1862.6
30°	1009.2	1079.4	1166.2	1260.5	1364.4	1474.0	1574.9	1668.4	1746.1	1798.8	1814.5
32.5°	978.8	1051.3	1136.2	1233.9	1343.9	1456.5	1561.7	1649.8	1714.7	1742.3	1723.4
35°	933.8	999.3	1085.0	1185.2	1299.4	1419.4	1523.3	1597.8	1630.9	1604.8	1539.9
37.5°	879.8	944.6	1030.8	1129.1	1247.3	1369.3	1463.2	1516.8	1505.8	1440.9	1344.1
40°	841.8	902.5	984.5	1090.7	1206.0	1328.4	1410.9	1439.8	1409.4	1316.5	1213.6
42.5°	799.7	858.9	941.3	1043.7	1165.8	1278.6	1350.6	1352.9	1302.1	1191.0	1087.6
45°	735.6	792.0	869.8	976.5	1089.3	1195.6	1243.0	1219.8	1125.9	1018.7	914.8
47.5°	672.3	721.2	797.9	899.2	1006.4	1095.8	1119.3	1077.5	977.4	873.3	777.1
50°	626.0	675.3	747.4	844.2	947.5	1024.8	1036.3	980.7	882.6	777.8	702.4
52.5°	581.6	630.5	700.0	789.5	884.2	953.9	954.3	890.1	792.3	698.8	628.7
55°	516.5	560.5	623.1	703.3	787.7	842.2	829.0	762.6	677.7	596.6	535.4
57.5°	453.7	492.0	549.7	616.6	691.0	735.9	713.9	650.0	574.2	505.4	459.1
60°	413.0	449.6	498.9	562.0	624.6	659.7	638.8	580.9	511.2	455.8	415.4
62.5°	373.6	404.5	451.8	506.6	564.6	590.7	572.0	515.0	454.7	404.6	371.8
65°	317.7	342.9	380.8	427.8	470.0	492.2	476.6	423.5	377.5	341.4	315.4
67.5°	265.6	285.2	314.0	351.6	387.4	399.5	385.3	348.3	309.3	280.4	262.1
70°	229.5	248.1	272.2	301.1	332.4	345.3	331.0	301.6	269.8	243.3	225.2
72.5°	198.0	212.4	232.7	257.5	282.0	294.8	285.1	256.8	230.0	210.3	194.9
75°	150.8	163.2	177.4	194.9	213.9	222.4	213.9	194.5	175.9	161.2	150.3
77.5°	109.7	116.3	127.2	140.4	152.2	158.8	151.4	138.2	126.9	116.8	111.5
80°	83.5	88.2	95.8	106.2	114.3	120.5	115.7	104.8	95.8	89.2	86.8
82.5°	60.7	63.9	68.8	76.6	82.0	85.2	83.1	75.2	71.5	65.6	63.2
85°	29.9	31.7	35.1	37.5	42.2	42.7	43.2	39.9	36.6	35.1	33.2
87.5°	11.4	12.2	13.9	15.5	17.5	18.3	18.3	18.6	17.5	17.4	16.1
90°	5.6	8.2	10.7	13.2	15.4	17.3	19.1	21.0	22.8	24.2	25.6
92.5°	25.1	28.0	30.9	33.8	35.8	37.2	38.4	39.8	41.0	41.8	42.7
95°	64.2	66.3	68.4	70.4	72.3	73.9	75.5	77.1	78.7	79.5	80.1
97.5°	110.2	111.9	113.5	115.2	117.0	118.9	120.7	122.6	124.5	125.4	126.2
100°	146.0	146.9	147.8	148.7	150.3	152.3	154.4	156.4	158.5	159.0	159.4
102.5°	183.5	183.9	184.2	184.7	185.7	187.6	189.6	191.5	193.3	193.9	194.6
105°	241.7	241.8	242.1	242.3	242.9	243.8	244.7	245.7	246.6	247.3	248.0
107.5°	302.8	303.1	303.4	303.6	303.8	304.0	304.1	304.3	304.3	305.1	305.7
110°	344.4	344.8	345.4	345.8	345.9	345.7	345.4	345.2	345.0	344.6	344.0





TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	387.2	387.3	387.4	387.4	387.3	386.8	386.5	386.0	385.6	385.5	385.4
115°	451.7	451.7	451.7	451.7	451.5	451.0	450.6	450.0	449.6	449.4	449.2
117.5°	512.8	513.0	513.2	513.4	513.3	512.9	512.6	512.3	512.0	511.2	510.4
120°	554.1	555.1	556.0	556.9	557.1	556.3	555.6	554.9	554.3	553.1	552.0
122.5°	595.8	596.2	596.6	597.0	597.0	596.6	596.4	596.0	595.7	594.9	594.1
125°	657.8	657.8	657.8	657.8	657.7	657.5	657.3	657.0	656.8	656.4	655.9
127.5°	715.2	715.8	716.5	717.2	717.4	716.9	716.6	716.2	715.9	715.4	715.0
130°	754.9	755.5	756.3	757.0	757.3	757.3	757.3	757.3	757.3	756.9	756.3
132.5°	795.3	795.9	796.3	796.8	797.0	796.8	796.7	796.5	796.3	795.8	795.3
135°	849.9	851.2	852.7	854.0	854.7	854.7	854.7	854.7	854.7	854.3	853.8
137.5°	907.6	908.2	908.8	909.5	910.0	910.3	910.7	911.1	911.4	910.9	910.3
140°	946.3	946.8	947.3	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.4
142.5°	982.0	982.4	982.8	983.4	983.5	983.3	983.1	982.9	982.8	982.7	982.7
145°	1031.7	1032.7	1033.6	1034.5	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7	1035.5
147.5°	1080.8	1081.9	1083.0	1084.1	1084.6	1084.4	1084.2	1084.1	1083.9	1083.7	1083.5
150°	1110.4	1111.4	1112.3	1113.2	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7
152.5°	1138.3	1138.8	1139.3	1140.0	1140.3	1140.5	1140.7	1140.9	1141.0	1141.6	1142.1
155°	1181.0	1181.0	1181.0	1181.0	1180.9	1180.7	1180.4	1180.2	1180.0	1180.9	1181.9
157.5°	1217.1	1216.7	1216.3	1215.8	1215.6	1215.6	1215.5	1215.5	1215.4	1216.1	1216.8
160°	1238.9	1238.6	1238.3	1238.1	1237.9	1237.7	1237.4	1237.2	1237.0	1237.7	1238.3
162.5°	1258.3	1257.8	1257.1	1256.5	1256.2	1255.9	1255.7	1255.4	1255.2	1256.4	1257.7
165°	1285.0	1284.2	1283.6	1282.9	1282.3	1281.8	1281.4	1280.9	1280.5	1281.8	1283.3
167.5°	1305.2	1304.2	1303.2	1302.3	1301.8	1301.9	1301.9	1302.0	1302.0	1303.4	1304.8
170°	1316.6	1315.5	1314.3	1313.1	1312.7	1313.0	1313.1	1313.4	1313.7	1315.0	1316.4
172.5°	1325.1	1324.1	1323.1	1322.2	1321.7	1321.8	1321.9	1321.9	1322.0	1323.5	1325.1
175°	1336.3	1335.2	1334.0	1332.8	1332.1	1331.9	1331.7	1331.5	1331.2	1332.8	1334.4
177.5°	1340.2	1339.3	1338.5	1337.5	1337.0	1337.0	1337.0	1337.0	1337.0	1338.4	1339.6
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332617-940  
 CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9	1144.9
2.5°	1206.7	1207.5	1210.9	1213.5	1214.2	1218.1	1218.4
5°	1312.7	1320.8	1336.4	1337.8	1340.2	1352.5	1343.1
7.5°	1437.0	1457.4	1471.1	1483.2	1487.6	1492.9	1491.8
10°	1516.6	1547.0	1562.2	1586.4	1587.3	1593.5	1589.7
12.5°	1596.7	1632.0	1659.7	1664.1	1684.4	1687.6	1692.9
15°	1710.1	1747.6	1786.0	1799.7	1827.7	1834.4	1844.9
17.5°	1816.8	1855.0	1882.0	1917.5	1929.0	1944.4	1933.9
20°	1875.2	1916.9	1951.1	1979.1	1990.9	1999.4	1998.5
22.5°	1910.5	1952.6	1980.2	2001.4	2012.5	2016.2	2015.9
25°	1932.5	1956.8	1965.2	1973.4	1961.1	1956.8	1958.6
27.5°	1871.1	1864.8	1842.5	1813.3	1783.0	1758.9	1745.8
30°	1786.5	1749.5	1715.8	1657.0	1626.7	1608.6	1592.5
32.5°	1666.6	1608.0	1543.2	1489.3	1454.8	1428.1	1424.1
35°	1461.2	1373.0	1293.8	1227.8	1193.6	1164.8	1158.1
37.5°	1242.2	1150.6	1079.3	1021.3	984.5	964.1	945.0
40°	1096.9	1018.2	948.0	898.7	870.8	856.0	844.2
42.5°	985.0	913.1	843.3	805.7	780.4	771.4	764.5
45°	830.4	763.6	715.2	686.7	672.0	656.8	649.7
47.5°	706.6	652.2	620.3	596.1	580.4	571.4	566.9
50°	636.4	591.8	563.4	544.9	530.7	523.5	519.8
52.5°	574.2	537.6	513.7	499.0	489.4	484.1	482.6
55°	494.6	466.6	451.5	438.7	431.6	426.9	424.9
57.5°	430.0	408.4	396.1	385.6	382.8	378.8	377.5
60°	387.4	370.9	360.4	353.3	351.0	346.2	347.1
62.5°	349.9	336.4	327.4	323.3	320.2	316.2	317.5
65°	296.0	286.0	281.2	277.4	273.7	271.3	273.1
67.5°	248.3	241.5	235.1	232.8	231.0	230.6	228.5
70°	217.2	211.5	205.8	204.4	204.4	202.5	202.1
72.5°	187.3	183.1	179.2	178.3	176.7	177.5	175.5
75°	144.6	141.3	139.9	138.5	138.0	138.0	136.6
77.5°	106.9	104.4	102.2	102.2	100.4	99.8	99.6
80°	81.1	80.2	78.3	78.3	77.3	77.8	76.9
82.5°	61.0	59.7	59.3	58.5	57.2	57.2	56.4
85°	32.7	31.3	30.9	29.4	28.4	29.4	28.4
87.5°	16.8	16.7	16.5	15.8	15.5	15.6	14.5
90°	26.9	28.4	29.2	29.7	30.1	30.6	31.1
92.5°	43.5	44.3	44.9	45.2	45.5	45.7	46.0
95°	80.8	81.5	81.9	81.9	81.9	81.9	81.9
97.5°	127.0	127.9	128.2	128.2	128.2	128.2	128.2
100°	159.9	160.3	160.6	160.6	160.6	160.6	160.6
102.5°	195.3	195.9	196.3	196.5	196.7	196.9	197.1
105°	248.6	249.3	250.0	250.7	251.4	252.1	252.8
107.5°	306.3	306.9	307.3	307.2	307.2	307.1	307.1
110°	343.6	343.1	343.2	343.9	344.6	345.4	346.0



TEST NUMBER: P332617-940

CATALOG NUMBER: SA4XXDIP-C795D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	385.3	385.2	385.2	385.4	385.5	385.7	385.8
115°	448.9	448.7	448.4	448.3	448.0	447.8	447.5
117.5°	509.6	508.8	508.3	507.7	507.3	506.8	506.4
120°	550.8	549.7	549.3	549.7	550.2	550.7	551.2
122.5°	593.3	592.5	591.7	590.9	590.1	589.2	588.4
125°	655.4	655.0	654.5	654.1	653.6	653.1	652.6
127.5°	714.5	714.0	713.6	713.3	712.8	712.5	712.1
130°	755.9	755.5	754.7	753.9	753.0	752.0	751.1
132.5°	794.9	794.4	794.0	793.6	793.3	792.9	792.6
135°	853.3	852.8	852.3	851.6	850.9	850.2	849.5
137.5°	909.6	909.1	908.8	909.0	909.1	909.3	909.4
140°	947.3	947.0	946.8	946.6	946.3	946.1	945.8
142.5°	982.6	982.6	982.5	982.5	982.4	982.4	982.3
145°	1035.3	1035.1	1034.6	1033.9	1033.2	1032.5	1031.9
147.5°	1083.3	1083.1	1082.9	1082.7	1082.4	1082.2	1082.0
150°	1113.7	1113.7	1113.6	1113.3	1113.1	1112.9	1112.7
152.5°	1142.7	1143.3	1143.3	1142.6	1142.0	1141.4	1140.9
155°	1182.8	1183.7	1183.7	1182.8	1181.9	1180.9	1180.0
157.5°	1217.5	1218.2	1218.2	1217.4	1216.6	1215.8	1215.0
160°	1239.0	1239.7	1239.5	1238.3	1237.2	1236.1	1234.9
162.5°	1258.9	1260.2	1260.3	1259.1	1257.9	1256.8	1255.6
165°	1284.6	1286.0	1286.2	1285.3	1284.4	1283.4	1282.5
167.5°	1306.2	1307.5	1307.5	1306.1	1304.7	1303.2	1301.8
170°	1317.8	1319.2	1319.0	1317.4	1315.8	1314.2	1312.6
172.5°	1326.6	1328.2	1328.2	1326.5	1324.9	1323.3	1321.7
175°	1336.1	1337.7	1337.7	1336.1	1334.4	1332.8	1331.2
177.5°	1341.0	1342.2	1342.1	1340.6	1339.2	1337.7	1336.2
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5

(END OF REPORT)