

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333010-940

Luminaire Tested: **SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P333010-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8187.2 lumens
Efficiency: N/A
Efficacy: 114.2 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333010-940
CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

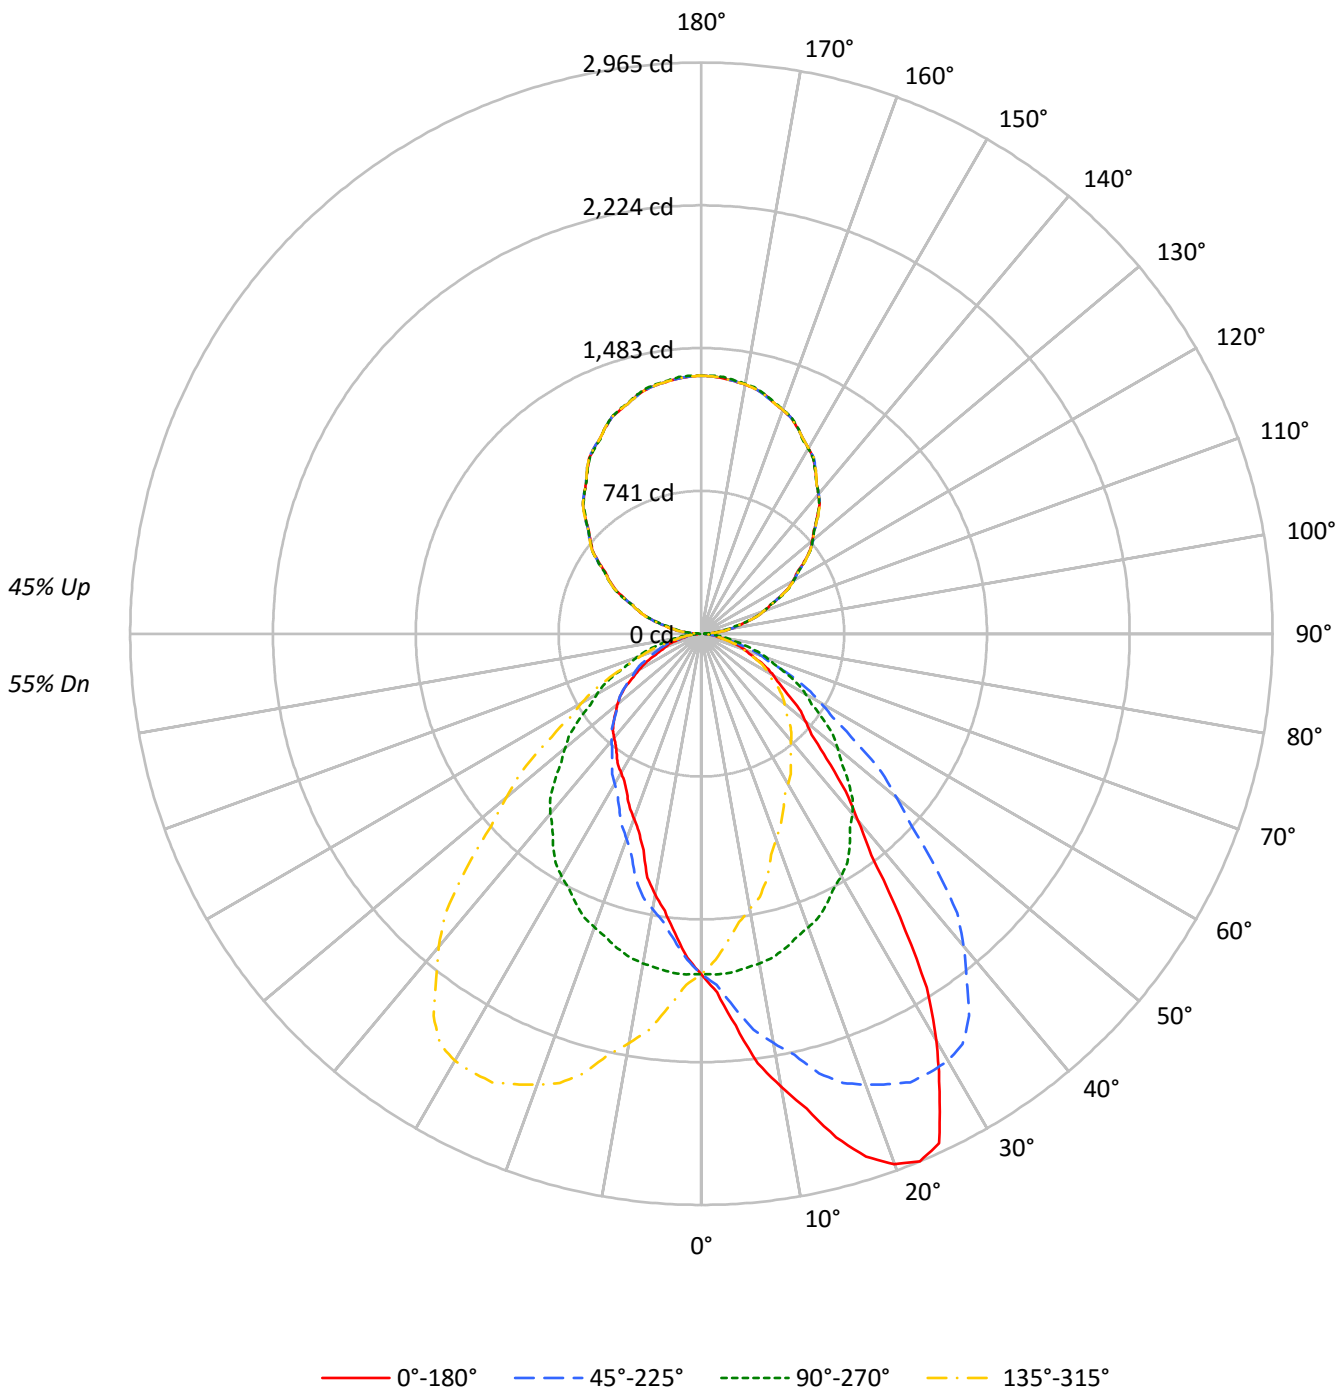



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	55				
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52	47				
2	91	84	78	73	84	78	73	68	67	63	60	57	55	52	48	46	45	40				
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	38	35				
4	76	66	58	52	71	61	55	49	53	48	44	46	42	39	39	36	33	30				
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	29	26				
6	65	53	45	39	60	50	43	37	43	38	34	38	33	30	32	29	26	23				
7	60	48	40	35	56	45	38	33	39	34	30	34	30	26	29	26	23	21				
8	56	44	36	31	52	41	34	29	36	30	27	31	27	24	27	24	21	19				
9	52	40	32	27	48	38	31	26	33	28	24	29	25	21	25	22	19	17				
10	49	37	30	25	45	35	28	24	31	25	22	27	22	19	23	20	17	15				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	14266	14266	14266	14266
5°	16546	14309	12647	14309
10°	19575	14246	11287	14246
15°	22612	14114	9699	14114
20°	25175	13933	8771	13933
25°	25989	13755	8143	13755
30°	22750	13539	7764	13539
35°	17710	13219	7535	13219
40°	13281	12853	7413	12853
45°	10485	12265	7348	12265
50°	8852	11588	7135	11588
55°	7716	10842	6753	10842
60°	6943	10070	5977	10070
65°	6120	9234	5140	9234
70°	5511	8368	4638	8368
75°	4619	7417	3952	7417
80°	3905	6323	3705	6323
85°	3298	4946	3298	4946



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	171.2	2.1
10°-20°	516.5	6.3
20°-30°	807.8	9.9
30°-40°	898.0	11.0
40°-50°	796.7	9.7
50°-60°	620.8	7.6
60°-70°	406.5	5.0
70°-80°	199.9	2.4
80°-90°	53.3	0.7
90°-100°	88.4	1.1
100°-110°	261.7	3.2
110°-120°	444.2	5.4
120°-130°	585.7	7.2
130°-140°	657.8	8.0
140°-150°	646.4	7.9
150°-160°	543.7	6.6
160°-170°	361.7	4.4
170°-180°	126.7	1.5
0°-30°	1495.5	18.3
0°-40°	2393.5	29.2
0°-60°	3811.0	46.5
0°-90°	4470.7	54.6
90°-120°	794.3	9.7
90°-150°	2684.3	32.8
90°-180°	3716.0	45.4
0°-180°	8187.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1767	1767	1767	1767	1767	
5°	2042	1766	1561	1766	2042	207
15°	2706	1689	1160	1689	2706	769
25°	2918	1544	914	1544	2918	1294
35°	1797	1341	765	1341	1797	1126
45°	918	1074	644	1074	918	727
55°	548	770	480	770	548	499
65°	320	483	269	483	320	322
75°	148	238	127	238	148	163
85°	36	53	36	53	36	41
90°	31	3	31	3	31	17
95°	82	62	82	62	82	85
105°	253	241	253	241	253	266
115°	448	452	448	452	448	442
125°	653	658	653	658	653	582
135°	850	848	850	848	850	656
145°	1032	1031	1032	1031	1032	646
155°	1180	1181	1180	1181	1180	543
165°	1282	1286	1282	1286	1282	361
175°	1331	1338	1331	1338	1331	126
180°	1340	1340	1340	1340	1340	



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1
2.5°	1863.9	1869.0	1863.9	1863.3	1857.6	1855.9	1853.6	1846.2	1832.6	1824.6	1826.3
5°	2041.8	2059.7	2049.7	2048.3	2032.7	2017.0	2007.0	1984.2	1960.0	1943.7	1930.1
7.5°	2247.7	2258.0	2251.7	2241.8	2216.4	2202.1	2179.0	2148.9	2105.5	2072.3	2042.0
10°	2387.9	2396.4	2393.6	2375.1	2356.5	2318.8	2297.5	2255.5	2200.7	2157.2	2116.7
12.5°	2525.7	2534.9	2509.8	2510.6	2475.6	2445.9	2412.0	2359.1	2295.8	2239.8	2189.0
15°	2705.5	2694.0	2694.0	2679.8	2640.6	2599.3	2564.5	2508.9	2429.2	2362.2	2291.8
17.5°	2846.1	2850.1	2844.2	2810.7	2779.9	2737.2	2673.3	2608.4	2534.4	2444.5	2372.5
20°	2930.4	2930.4	2924.0	2901.2	2861.3	2815.8	2746.7	2676.2	2582.2	2491.8	2410.7
22.5°	2964.6	2966.8	2959.3	2940.5	2904.7	2860.2	2801.4	2729.8	2633.0	2531.1	2430.6
25°	2917.6	2931.1	2932.5	2927.6	2916.9	2889.8	2839.3	2765.9	2679.1	2568.8	2460.5
27.5°	2678.6	2695.7	2710.7	2735.3	2768.0	2785.2	2787.4	2750.1	2674.3	2568.1	2459.2
30°	2440.5	2454.8	2501.1	2561.6	2608.6	2651.3	2688.3	2698.3	2655.6	2560.2	2445.5
32.5°	2176.3	2195.7	2241.9	2307.0	2385.3	2457.6	2540.8	2583.2	2582.1	2524.9	2418.8
35°	1797.0	1811.2	1854.0	1922.3	2016.2	2123.8	2255.5	2358.0	2427.8	2422.8	2358.0
37.5°	1449.2	1465.3	1508.5	1565.1	1656.3	1789.4	1916.8	2058.1	2187.1	2259.6	2237.9
40°	1260.2	1260.9	1302.9	1361.3	1446.7	1562.7	1701.6	1858.1	2002.0	2119.5	2142.2
42.5°	1110.9	1111.1	1138.8	1201.8	1263.3	1372.5	1505.0	1660.5	1828.9	1964.5	2024.9
45°	918.4	924.8	947.6	985.3	1033.8	1126.3	1232.3	1376.9	1565.6	1726.4	1826.8
47.5°	777.8	787.1	801.6	832.4	871.0	932.6	1020.4	1150.2	1303.7	1480.7	1623.5
50°	704.8	706.2	724.8	741.8	775.3	824.5	901.3	1009.5	1150.5	1320.6	1479.4
52.5°	642.2	641.9	653.0	674.7	701.9	740.1	802.2	900.7	1025.7	1178.3	1342.2
55°	548.2	551.8	560.3	577.4	598.1	625.1	674.2	748.2	846.5	976.8	1125.6
57.5°	476.7	478.6	485.3	492.5	511.5	531.1	568.0	619.4	702.3	809.0	947.6
60°	430.0	430.7	432.8	443.5	458.5	477.0	501.9	545.4	615.1	712.7	822.3
62.5°	384.4	385.8	389.1	396.8	408.4	421.2	447.3	482.1	539.9	623.2	722.0
65°	320.4	321.1	326.1	329.0	338.1	349.6	368.8	392.3	432.1	501.9	576.7
67.5°	267.7	267.7	268.0	271.8	278.2	285.8	297.3	316.1	346.2	389.1	455.0
70°	233.5	233.5	235.0	237.1	240.7	247.0	253.4	267.7	289.8	324.7	375.2
72.5°	201.6	202.2	203.6	204.0	205.9	211.2	215.9	225.0	241.4	267.7	308.5
75°	148.1	150.3	153.8	156.7	160.2	159.4	164.4	170.1	175.1	190.8	214.3
77.5°	110.2	109.1	109.5	111.9	112.4	113.1	116.6	121.0	124.8	132.2	140.5
80°	84.0	84.0	86.1	86.9	86.1	86.9	90.4	92.6	94.0	96.8	104.7
82.5°	63.5	64.6	63.9	64.6	65.1	65.8	68.8	69.2	70.6	71.8	75.1
85°	35.6	36.3	37.0	35.6	35.6	35.6	37.0	37.7	39.1	38.4	39.9
87.5°	18.7	18.1	18.5	18.5	18.9	18.2	18.5	19.4	17.9	18.2	17.8
90°	31.1	30.6	30.1	29.7	29.2	28.4	26.9	25.6	24.2	22.8	21.0
92.5°	46.0	45.7	45.5	45.2	44.9	44.3	43.5	42.7	41.8	41.0	39.8
95°	81.9	81.9	81.9	81.9	81.9	81.5	80.8	80.1	79.5	78.7	77.1
97.5°	128.2	128.2	128.2	128.2	128.2	127.9	127.0	126.2	125.4	124.5	122.6
100°	160.6	160.6	160.6	160.6	160.6	160.3	159.9	159.4	159.0	158.5	156.4
102.5°	197.1	196.9	196.7	196.5	196.3	195.9	195.3	194.6	193.9	193.3	191.5
105°	252.8	252.1	251.4	250.7	250.0	249.3	248.6	248.0	247.3	246.6	245.7
107.5°	307.1	307.1	307.2	307.2	307.3	306.9	306.3	305.7	305.1	304.3	304.3
110°	346.0	345.4	344.6	343.9	343.2	343.1	343.6	344.0	344.6	345.0	345.2



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	385.8	385.7	385.5	385.4	385.2	385.2	385.3	385.4	385.5	385.6	386.0
115°	447.5	447.8	448.0	448.3	448.4	448.7	448.9	449.2	449.4	449.6	450.0
117.5°	506.4	506.8	507.3	507.7	508.3	508.8	509.6	510.4	511.2	512.0	512.3
120°	551.2	550.7	550.2	549.7	549.3	549.7	550.8	552.0	553.1	554.3	554.9
122.5°	588.4	589.2	590.1	590.9	591.7	592.5	593.3	594.1	594.9	595.7	596.0
125°	652.6	653.1	653.6	654.1	654.5	655.0	655.4	655.9	656.4	656.8	657.0
127.5°	712.1	712.5	712.8	713.3	713.6	714.0	714.5	715.0	715.4	715.9	716.2
130°	751.1	752.0	753.0	753.9	754.7	755.5	755.9	756.3	756.9	757.3	757.3
132.5°	792.6	792.9	793.3	793.6	794.0	794.4	794.9	795.3	795.8	796.3	796.5
135°	849.5	850.2	850.9	851.6	852.3	852.8	853.3	853.8	854.3	854.7	854.7
137.5°	909.4	909.3	909.1	909.0	908.8	909.1	909.6	910.3	910.9	911.4	911.1
140°	945.8	946.1	946.3	946.6	946.8	947.0	947.3	947.4	947.7	947.9	947.9
142.5°	982.3	982.4	982.4	982.5	982.5	982.6	982.6	982.7	982.7	982.8	982.9
145°	1031.9	1032.5	1033.2	1033.9	1034.6	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7
147.5°	1082.0	1082.2	1082.4	1082.7	1082.9	1083.1	1083.3	1083.5	1083.7	1083.9	1084.1
150°	1112.7	1112.9	1113.1	1113.3	1113.6	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7
152.5°	1140.9	1141.4	1142.0	1142.6	1143.3	1143.3	1142.7	1142.1	1141.6	1141.0	1140.9
155°	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7	1182.8	1181.9	1180.9	1180.0	1180.2
157.5°	1215.0	1215.8	1216.6	1217.4	1218.2	1218.2	1217.5	1216.8	1216.1	1215.4	1215.5
160°	1234.9	1236.1	1237.2	1238.3	1239.5	1239.7	1239.0	1238.3	1237.7	1237.0	1237.2
162.5°	1255.6	1256.8	1257.9	1259.1	1260.3	1260.2	1258.9	1257.7	1256.4	1255.2	1255.4
165°	1282.5	1283.4	1284.4	1285.3	1286.2	1286.0	1284.6	1283.3	1281.8	1280.5	1280.9
167.5°	1301.8	1303.2	1304.7	1306.1	1307.5	1307.5	1306.2	1304.8	1303.4	1302.0	1302.0
170°	1312.6	1314.2	1315.8	1317.4	1319.0	1319.2	1317.8	1316.4	1315.0	1313.7	1313.4
172.5°	1321.7	1323.3	1324.9	1326.5	1328.2	1328.2	1326.6	1325.1	1323.5	1322.0	1321.9
175°	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7	1336.1	1334.4	1332.8	1331.2	1331.5
177.5°	1336.2	1337.7	1339.2	1340.6	1342.1	1342.2	1341.0	1339.6	1338.4	1337.0	1337.0
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1
2.5°	1820.6	1812.7	1808.7	1799.6	1788.7	1783.0	1777.9	1770.5	1760.8	1750.5	1743.1
5°	1913.0	1896.0	1874.6	1849.0	1826.1	1804.1	1784.8	1765.7	1743.6	1720.8	1698.0
7.5°	2007.9	1974.2	1938.0	1896.0	1855.0	1817.9	1783.7	1751.0	1714.0	1680.8	1650.6
10°	2073.9	2028.4	1977.8	1924.4	1871.0	1824.7	1779.1	1737.9	1692.3	1651.7	1617.6
12.5°	2127.4	2073.9	2013.1	1946.6	1882.4	1826.4	1774.1	1720.2	1668.4	1624.4	1578.9
15°	2216.3	2143.0	2061.1	1981.4	1898.1	1821.9	1751.4	1688.7	1629.7	1567.7	1524.3
17.5°	2277.4	2190.4	2090.9	1995.0	1896.7	1806.8	1725.5	1650.9	1582.7	1519.5	1467.8
20°	2313.8	2217.7	2107.4	1998.4	1888.1	1792.0	1704.4	1621.8	1551.3	1483.0	1429.6
22.5°	2334.3	2227.9	2107.4	1993.3	1879.0	1774.9	1678.7	1592.8	1516.0	1447.7	1388.6
25°	2340.9	2227.0	2103.8	1972.8	1847.5	1737.1	1637.4	1544.2	1458.7	1390.4	1327.8
27.5°	2331.8	2197.6	2071.5	1937.1	1807.8	1691.5	1586.8	1488.8	1403.3	1329.9	1265.7
30°	2318.1	2174.3	2039.0	1899.5	1768.4	1656.7	1546.3	1452.4	1363.4	1287.2	1222.4
32.5°	2288.5	2145.8	2000.3	1857.3	1724.7	1609.4	1504.8	1410.2	1322.9	1245.1	1176.3
35°	2229.8	2085.3	1927.3	1780.6	1650.3	1530.7	1432.4	1341.3	1258.0	1174.7	1102.1
37.5°	2152.5	2004.8	1847.6	1687.0	1556.6	1443.7	1353.5	1268.0	1186.7	1110.6	1030.2
40°	2079.6	1945.1	1782.7	1623.3	1489.4	1380.5	1297.2	1219.6	1137.7	1062.2	981.8
42.5°	1991.4	1876.7	1712.7	1552.6	1420.5	1315.5	1238.0	1162.1	1087.6	1014.4	930.5
45°	1844.0	1757.1	1603.3	1449.6	1316.4	1212.5	1141.3	1074.3	1008.8	939.1	860.1
47.5°	1675.1	1616.2	1483.5	1326.1	1202.9	1109.4	1040.6	985.9	930.5	860.8	791.4
50°	1557.7	1520.0	1391.9	1248.0	1130.6	1044.5	973.9	922.7	876.4	809.5	747.5
52.5°	1432.4	1412.4	1304.1	1166.6	1053.1	968.7	908.5	862.3	815.5	759.9	702.0
55°	1241.6	1252.3	1160.5	1041.6	934.8	863.6	808.8	770.3	730.5	683.5	638.6
57.5°	1046.6	1085.6	1024.0	919.5	819.5	753.7	712.4	680.0	646.6	607.6	569.3
60°	929.8	962.5	927.6	835.8	748.2	687.1	648.6	623.7	590.2	554.6	525.4
62.5°	815.9	851.0	830.3	756.1	674.8	622.1	588.2	565.0	540.1	509.1	478.8
65°	672.8	695.5	685.6	634.4	576.7	531.8	500.5	483.4	460.7	437.8	410.8
67.5°	515.3	559.3	553.5	526.3	476.4	441.4	420.9	405.8	385.0	368.1	349.7
70°	423.7	464.2	463.5	441.4	414.4	381.6	367.4	354.5	336.0	319.7	304.7
72.5°	346.7	383.9	389.4	372.5	354.0	329.2	315.6	306.7	288.7	277.5	265.4
75°	242.8	269.8	277.0	277.0	268.4	255.6	243.5	237.8	225.0	215.0	207.9
77.5°	159.2	176.3	187.3	189.9	191.3	187.0	177.0	173.0	163.2	159.6	152.8
80°	112.4	123.9	136.7	141.0	144.5	143.1	138.8	136.0	126.7	123.1	120.3
82.5°	77.8	84.0	94.5	104.0	102.9	106.6	102.9	100.7	93.7	92.4	89.5
85°	40.6	41.3	42.7	49.1	52.7	54.1	54.8	53.4	51.3	51.3	46.3
87.5°	17.5	16.6	17.3	16.9	16.9	18.7	19.9	20.0	18.8	17.6	16.4
90°	19.1	17.3	15.4	13.2	10.7	8.2	5.6	3.1	5.6	8.2	10.7
92.5°	38.4	37.2	35.8	33.8	30.9	28.0	25.1	22.2	25.1	28.0	30.9
95°	75.5	73.9	72.3	70.4	68.4	66.3	64.2	62.2	64.2	66.3	68.4
97.5°	120.7	118.9	117.0	115.2	113.5	111.9	110.2	108.6	110.2	111.9	113.5
100°	154.4	152.3	150.3	148.7	147.8	146.9	146.0	145.1	146.0	146.9	147.8
102.5°	189.6	187.6	185.7	184.7	184.2	183.9	183.5	183.2	183.5	183.9	184.2
105°	244.7	243.8	242.9	242.3	242.1	241.8	241.7	241.4	241.7	241.8	242.1
107.5°	304.1	304.0	303.8	303.6	303.4	303.1	302.8	302.5	302.8	303.1	303.4
110°	345.4	345.7	345.9	345.8	345.4	344.8	344.4	343.9	344.4	344.8	345.4



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	386.5	386.8	387.3	387.4	387.4	387.3	387.2	387.0	387.2	387.3	387.4
115°	450.6	451.0	451.5	451.7	451.7	451.7	451.7	451.7	451.7	451.7	451.7
117.5°	512.6	512.9	513.3	513.4	513.2	513.0	512.8	512.6	512.8	513.0	513.2
120°	555.6	556.3	557.1	556.9	556.0	555.1	554.1	553.2	554.1	555.1	556.0
122.5°	596.4	596.6	597.0	597.0	596.6	596.2	595.8	595.5	595.8	596.2	596.6
125°	657.3	657.5	657.7	657.8	657.8	657.8	657.8	657.8	657.8	657.8	657.8
127.5°	716.6	716.9	717.4	717.2	716.5	715.8	715.2	714.4	715.2	715.8	716.5
130°	757.3	757.3	757.3	757.0	756.3	755.5	754.9	754.2	754.9	755.5	756.3
132.5°	796.7	796.8	797.0	796.8	796.3	795.9	795.3	794.8	795.3	795.9	796.3
135°	854.7	854.7	854.7	854.0	852.7	851.2	849.9	848.5	849.9	851.2	852.7
137.5°	910.7	910.3	910.0	909.5	908.8	908.2	907.6	906.9	907.6	908.2	908.8
140°	947.9	947.9	947.9	947.7	947.3	946.8	946.3	945.8	946.3	946.8	947.3
142.5°	983.1	983.3	983.5	983.4	982.8	982.4	982.0	981.5	982.0	982.4	982.8
145°	1035.5	1035.3	1035.1	1034.5	1033.6	1032.7	1031.7	1030.8	1031.7	1032.7	1033.6
147.5°	1084.2	1084.4	1084.6	1084.1	1083.0	1081.9	1080.8	1079.7	1080.8	1081.9	1083.0
150°	1113.7	1113.7	1113.7	1113.2	1112.3	1111.4	1110.4	1109.6	1110.4	1111.4	1112.3
152.5°	1140.7	1140.5	1140.3	1140.0	1139.3	1138.8	1138.3	1137.7	1138.3	1138.8	1139.3
155°	1180.4	1180.7	1180.9	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0
157.5°	1215.5	1215.6	1215.6	1215.8	1216.3	1216.7	1217.1	1217.5	1217.1	1216.7	1216.3
160°	1237.4	1237.7	1237.9	1238.1	1238.3	1238.6	1238.9	1239.0	1238.9	1238.6	1238.3
162.5°	1255.7	1255.9	1256.2	1256.5	1257.1	1257.8	1258.3	1258.9	1258.3	1257.8	1257.1
165°	1281.4	1281.8	1282.3	1282.9	1283.6	1284.2	1285.0	1285.7	1285.0	1284.2	1283.6
167.5°	1301.9	1301.9	1301.8	1302.3	1303.2	1304.2	1305.2	1306.2	1305.2	1304.2	1303.2
170°	1313.1	1313.0	1312.7	1313.1	1314.3	1315.5	1316.6	1317.8	1316.6	1315.5	1314.3
172.5°	1321.9	1321.8	1321.7	1322.2	1323.1	1324.1	1325.1	1326.1	1325.1	1324.1	1323.1
175°	1331.7	1331.9	1332.1	1332.8	1334.0	1335.2	1336.3	1337.5	1336.3	1335.2	1334.0
177.5°	1337.0	1337.0	1337.0	1337.5	1338.5	1339.3	1340.2	1341.2	1340.2	1339.3	1338.5
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1
2.5°	1735.2	1729.5	1722.1	1713.5	1703.3	1694.2	1690.1	1693.6	1695.3	1690.8	1690.1
5°	1682.3	1664.6	1650.3	1629.0	1611.9	1597.6	1587.7	1583.4	1584.8	1573.4	1570.6
7.5°	1623.0	1601.9	1578.5	1553.2	1529.6	1508.6	1497.6	1491.7	1479.6	1474.4	1465.8
10°	1584.8	1556.3	1533.6	1503.6	1476.6	1451.7	1439.6	1429.6	1417.5	1411.8	1399.7
12.5°	1545.5	1512.4	1487.4	1456.3	1428.7	1398.7	1387.1	1368.7	1349.7	1337.7	1322.2
15°	1490.1	1450.3	1419.6	1382.6	1349.9	1315.7	1285.0	1250.9	1238.1	1211.0	1195.3
17.5°	1425.3	1384.9	1347.0	1297.4	1246.8	1204.3	1171.7	1139.0	1119.4	1102.1	1094.1
20°	1382.6	1345.6	1292.9	1235.2	1179.0	1132.0	1105.6	1084.3	1062.9	1050.9	1042.3
22.5°	1342.2	1294.9	1233.7	1171.4	1115.2	1078.4	1056.1	1034.2	1016.8	1005.3	993.9
25°	1274.4	1212.5	1147.6	1076.5	1038.0	1006.0	981.8	963.9	953.3	938.3	932.6
27.5°	1204.8	1129.7	1058.3	1010.4	970.4	941.0	920.0	906.6	893.0	883.5	876.1
30°	1151.2	1075.0	1010.9	965.4	924.8	900.6	883.5	867.9	857.2	849.4	843.6
32.5°	1098.2	1022.1	968.2	919.3	887.3	863.6	845.3	833.7	825.3	815.2	811.7
35°	1021.6	954.0	907.0	862.9	830.1	808.8	794.5	782.5	775.3	772.5	770.3
37.5°	948.1	892.6	842.1	805.9	776.8	759.9	743.2	737.2	732.3	727.2	729.5
40°	901.3	849.4	804.5	766.1	742.5	724.1	714.1	706.9	702.7	702.7	702.7
42.5°	860.9	810.0	766.3	731.9	708.4	692.8	681.6	675.6	674.2	673.7	677.1
45°	798.1	751.1	706.9	678.5	658.5	642.9	636.5	631.5	631.5	634.4	635.1
47.5°	735.8	691.9	656.4	624.6	606.3	596.5	590.9	588.4	588.6	591.5	594.8
50°	697.7	654.2	619.4	590.9	573.8	564.5	559.5	558.2	559.5	559.5	564.5
52.5°	656.1	617.2	582.9	559.0	539.7	531.0	528.2	526.3	527.1	529.4	531.5
55°	595.2	560.3	527.5	504.8	490.5	484.8	478.4	479.1	477.7	479.1	479.1
57.5°	534.1	502.7	472.3	454.2	441.7	433.5	426.4	428.5	426.3	426.1	424.9
60°	494.8	460.7	436.4	420.1	405.8	398.7	392.3	393.7	391.6	390.1	387.3
62.5°	452.1	423.7	400.6	384.8	373.4	365.1	358.6	357.2	352.3	347.4	341.2
65°	390.1	366.7	346.0	331.1	320.4	314.0	309.0	304.7	294.0	282.7	277.0
67.5°	329.9	313.0	293.7	281.1	272.4	264.0	254.5	247.2	237.2	231.0	227.4
70°	291.1	274.8	258.4	246.3	237.1	229.3	218.6	213.6	206.4	203.6	200.1
72.5°	254.1	238.9	223.7	212.8	202.9	196.8	188.4	183.4	180.3	179.1	175.6
75°	198.0	185.8	174.4	164.4	156.7	152.4	148.8	145.3	143.8	137.4	133.8
77.5°	144.4	136.4	129.3	122.2	116.6	113.8	106.9	102.8	100.4	97.4	96.7
80°	112.4	106.8	99.7	95.4	87.6	84.7	81.9	81.1	80.4	79.7	79.0
82.5°	84.6	78.9	71.8	69.2	67.1	65.4	63.7	63.0	62.2	62.7	62.5
85°	42.7	39.9	39.9	39.1	38.4	37.7	37.0	37.0	36.3	37.0	36.3
87.5°	16.9	16.8	17.1	16.3	17.3	17.7	17.4	17.7	18.5	17.7	17.8
90°	13.2	15.4	17.3	19.1	21.0	22.8	24.2	25.6	26.9	28.4	29.2
92.5°	33.8	35.8	37.2	38.4	39.8	41.0	41.8	42.7	43.5	44.3	44.9
95°	70.4	72.3	73.9	75.5	77.1	78.7	79.5	80.1	80.8	81.5	81.9
97.5°	115.2	117.0	118.9	120.7	122.6	124.5	125.4	126.2	127.0	127.9	128.2
100°	148.7	150.3	152.3	154.4	156.4	158.5	159.0	159.4	159.9	160.3	160.6
102.5°	184.7	185.7	187.6	189.6	191.5	193.3	193.9	194.6	195.3	195.9	196.3
105°	242.3	242.9	243.8	244.7	245.7	246.6	247.3	248.0	248.6	249.3	250.0
107.5°	303.6	303.8	304.0	304.1	304.3	304.3	305.1	305.7	306.3	306.9	307.3
110°	345.8	345.9	345.7	345.4	345.2	345.0	344.6	344.0	343.6	343.1	343.2



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	387.4	387.3	386.8	386.5	386.0	385.6	385.5	385.4	385.3	385.2	385.2
115°	451.7	451.5	451.0	450.6	450.0	449.6	449.4	449.2	448.9	448.7	448.4
117.5°	513.4	513.3	512.9	512.6	512.3	512.0	511.2	510.4	509.6	508.8	508.3
120°	556.9	557.1	556.3	555.6	554.9	554.3	553.1	552.0	550.8	549.7	549.3
122.5°	597.0	597.0	596.6	596.4	596.0	595.7	594.9	594.1	593.3	592.5	591.7
125°	657.8	657.7	657.5	657.3	657.0	656.8	656.4	655.9	655.4	655.0	654.5
127.5°	717.2	717.4	716.9	716.6	716.2	715.9	715.4	715.0	714.5	714.0	713.6
130°	757.0	757.3	757.3	757.3	757.3	757.3	756.9	756.3	755.9	755.5	754.7
132.5°	796.8	797.0	796.8	796.7	796.5	796.3	795.8	795.3	794.9	794.4	794.0
135°	854.0	854.7	854.7	854.7	854.7	854.7	854.3	853.8	853.3	852.8	852.3
137.5°	909.5	910.0	910.3	910.7	911.1	911.4	910.9	910.3	909.6	909.1	908.8
140°	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.4	947.3	947.0	946.8
142.5°	983.4	983.5	983.3	983.1	982.9	982.8	982.7	982.7	982.6	982.6	982.5
145°	1034.5	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7	1035.5	1035.3	1035.1	1034.6
147.5°	1084.1	1084.6	1084.4	1084.2	1084.1	1083.9	1083.7	1083.5	1083.3	1083.1	1082.9
150°	1113.2	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.6
152.5°	1140.0	1140.3	1140.5	1140.7	1140.9	1141.0	1141.6	1142.1	1142.7	1143.3	1143.3
155°	1181.0	1180.9	1180.7	1180.4	1180.2	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7
157.5°	1215.8	1215.6	1215.6	1215.5	1215.5	1215.4	1216.1	1216.8	1217.5	1218.2	1218.2
160°	1238.1	1237.9	1237.7	1237.4	1237.2	1237.0	1237.7	1238.3	1239.0	1239.7	1239.5
162.5°	1256.5	1256.2	1255.9	1255.7	1255.4	1255.2	1256.4	1257.7	1258.9	1260.2	1260.3
165°	1282.9	1282.3	1281.8	1281.4	1280.9	1280.5	1281.8	1283.3	1284.6	1286.0	1286.2
167.5°	1302.3	1301.8	1301.9	1301.9	1302.0	1302.0	1303.4	1304.8	1306.2	1307.5	1307.5
170°	1313.1	1312.7	1313.0	1313.1	1313.4	1313.7	1315.0	1316.4	1317.8	1319.2	1319.0
172.5°	1322.2	1321.7	1321.8	1321.9	1321.9	1322.0	1323.5	1325.1	1326.6	1328.2	1328.2
175°	1332.8	1332.1	1331.9	1331.7	1331.5	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7
177.5°	1337.5	1337.0	1337.0	1337.0	1337.0	1337.0	1338.4	1339.6	1341.0	1342.2	1342.1
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1
2.5°	1686.8	1687.9	1683.9	1682.7	1683.9	1687.9	1686.8	1690.1	1690.8	1695.3	1693.6
5°	1564.9	1563.4	1559.9	1560.6	1559.9	1563.4	1564.9	1570.6	1573.4	1584.8	1583.4
7.5°	1460.6	1455.1	1456.6	1451.0	1456.6	1455.1	1460.6	1465.8	1474.4	1479.6	1491.7
10°	1396.9	1389.0	1382.6	1376.9	1382.6	1389.0	1396.9	1399.7	1411.8	1417.5	1429.6
12.5°	1309.7	1303.0	1294.3	1296.0	1294.3	1303.0	1309.7	1322.2	1337.7	1349.7	1368.7
15°	1186.1	1175.5	1158.3	1160.5	1158.3	1175.5	1186.1	1195.3	1211.0	1238.1	1250.9
17.5°	1081.5	1081.6	1073.8	1075.6	1073.8	1081.6	1081.5	1094.1	1102.1	1119.4	1139.0
20°	1027.3	1022.3	1023.1	1020.9	1023.1	1022.3	1027.3	1042.3	1050.9	1062.9	1084.3
22.5°	989.7	983.6	978.7	974.2	978.7	983.6	989.7	993.9	1005.3	1016.8	1034.2
25°	926.2	921.9	915.6	914.2	915.6	921.9	926.2	932.6	938.3	953.3	963.9
27.5°	870.4	869.6	867.0	863.7	867.0	869.6	870.4	876.1	883.5	893.0	906.6
30°	837.9	836.5	835.1	832.9	835.1	836.5	837.9	843.6	849.4	857.2	867.9
32.5°	809.0	808.1	806.6	806.8	806.6	808.1	809.0	811.7	815.2	825.3	833.7
35°	767.5	766.8	765.4	764.6	765.4	766.8	767.5	770.3	772.5	775.3	782.5
37.5°	728.8	730.6	729.8	729.6	729.8	730.6	728.8	729.5	727.2	732.3	737.2
40°	702.0	702.7	704.1	703.4	704.1	702.7	702.0	702.7	702.7	702.7	706.9
42.5°	679.8	679.9	681.9	679.5	681.9	679.9	679.8	677.1	673.7	674.2	675.6
45°	640.1	644.4	643.6	643.6	643.6	644.4	640.1	635.1	634.4	631.5	631.5
47.5°	596.6	600.3	601.3	601.2	601.3	600.3	596.6	594.8	591.5	588.6	588.4
50°	568.1	566.7	568.8	568.1	568.8	566.7	568.1	564.5	559.5	559.5	558.2
52.5°	533.4	533.7	533.5	532.8	533.5	533.7	533.4	531.5	529.4	527.1	526.3
55°	479.8	480.5	479.1	479.8	479.1	480.5	479.8	479.1	479.1	477.7	479.1
57.5°	421.8	418.3	419.7	418.0	419.7	418.3	421.8	424.9	426.1	426.3	428.5
60°	380.2	374.5	373.1	370.2	373.1	374.5	380.2	387.3	390.1	391.6	393.7
62.5°	333.5	329.5	324.7	326.9	324.7	329.5	333.5	341.2	347.4	352.3	357.2
65°	271.3	268.4	266.3	269.1	266.3	268.4	271.3	277.0	282.7	294.0	304.7
67.5°	224.5	223.0	223.0	221.6	223.0	223.0	224.5	227.4	231.0	237.2	247.2
70°	200.1	198.0	198.0	196.5	198.0	198.0	200.1	200.1	203.6	206.4	213.6
72.5°	175.0	172.9	173.4	172.5	173.4	172.9	175.0	175.6	179.1	180.3	183.4
75°	129.6	126.0	126.0	126.7	126.0	126.0	129.6	133.8	137.4	143.8	145.3
77.5°	96.7	95.9	96.9	95.7	96.9	95.9	96.7	96.7	97.4	100.4	102.8
80°	79.0	78.3	77.6	79.7	77.6	78.3	79.0	79.0	79.7	80.4	81.1
82.5°	61.3	61.3	61.1	63.8	61.1	61.3	61.3	62.5	62.7	62.2	63.0
85°	37.0	35.6	37.0	35.6	37.0	35.6	37.0	36.3	37.0	36.3	37.0
87.5°	19.1	18.5	18.1	18.7	18.1	18.5	19.1	17.8	17.7	18.5	17.7
90°	29.7	30.1	30.6	31.1	30.6	30.1	29.7	29.2	28.4	26.9	25.6
92.5°	45.2	45.5	45.7	46.0	45.7	45.5	45.2	44.9	44.3	43.5	42.7
95°	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.5	80.8	80.1
97.5°	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	127.9	127.0	126.2
100°	160.6	160.6	160.6	160.6	160.6	160.6	160.6	160.6	160.3	159.9	159.4
102.5°	196.5	196.7	196.9	197.1	196.9	196.7	196.5	196.3	195.9	195.3	194.6
105°	250.7	251.4	252.1	252.8	252.1	251.4	250.7	250.0	249.3	248.6	248.0
107.5°	307.2	307.2	307.1	307.1	307.1	307.2	307.2	307.3	306.9	306.3	305.7
110°	343.9	344.6	345.4	346.0	345.4	344.6	343.9	343.2	343.1	343.6	344.0



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	385.4	385.5	385.7	385.8	385.7	385.5	385.4	385.2	385.2	385.3	385.4
115°	448.3	448.0	447.8	447.5	447.8	448.0	448.3	448.4	448.7	448.9	449.2
117.5°	507.7	507.3	506.8	506.4	506.8	507.3	507.7	508.3	508.8	509.6	510.4
120°	549.7	550.2	550.7	551.2	550.7	550.2	549.7	549.3	549.7	550.8	552.0
122.5°	590.9	590.1	589.2	588.4	589.2	590.1	590.9	591.7	592.5	593.3	594.1
125°	654.1	653.6	653.1	652.6	653.1	653.6	654.1	654.5	655.0	655.4	655.9
127.5°	713.3	712.8	712.5	712.1	712.5	712.8	713.3	713.6	714.0	714.5	715.0
130°	753.9	753.0	752.0	751.1	752.0	753.0	753.9	754.7	755.5	755.9	756.3
132.5°	793.6	793.3	792.9	792.6	792.9	793.3	793.6	794.0	794.4	794.9	795.3
135°	851.6	850.9	850.2	849.5	850.2	850.9	851.6	852.3	852.8	853.3	853.8
137.5°	909.0	909.1	909.3	909.4	909.3	909.1	909.0	908.8	909.1	909.6	910.3
140°	946.6	946.3	946.1	945.8	946.1	946.3	946.6	946.8	947.0	947.3	947.4
142.5°	982.5	982.4	982.4	982.3	982.4	982.4	982.5	982.5	982.6	982.6	982.7
145°	1033.9	1033.2	1032.5	1031.9	1032.5	1033.2	1033.9	1034.6	1035.1	1035.3	1035.5
147.5°	1082.7	1082.4	1082.2	1082.0	1082.2	1082.4	1082.7	1082.9	1083.1	1083.3	1083.5
150°	1113.3	1113.1	1112.9	1112.7	1112.9	1113.1	1113.3	1113.6	1113.7	1113.7	1113.7
152.5°	1142.6	1142.0	1141.4	1140.9	1141.4	1142.0	1142.6	1143.3	1143.3	1142.7	1142.1
155°	1182.8	1181.9	1180.9	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7	1182.8	1181.9
157.5°	1217.4	1216.6	1215.8	1215.0	1215.8	1216.6	1217.4	1218.2	1218.2	1217.5	1216.8
160°	1238.3	1237.2	1236.1	1234.9	1236.1	1237.2	1238.3	1239.5	1239.7	1239.0	1238.3
162.5°	1259.1	1257.9	1256.8	1255.6	1256.8	1257.9	1259.1	1260.3	1260.2	1258.9	1257.7
165°	1285.3	1284.4	1283.4	1282.5	1283.4	1284.4	1285.3	1286.2	1286.0	1284.6	1283.3
167.5°	1306.1	1304.7	1303.2	1301.8	1303.2	1304.7	1306.1	1307.5	1307.5	1306.2	1304.8
170°	1317.4	1315.8	1314.2	1312.6	1314.2	1315.8	1317.4	1319.0	1319.2	1317.8	1316.4
172.5°	1326.5	1324.9	1323.3	1321.7	1323.3	1324.9	1326.5	1328.2	1328.2	1326.6	1325.1
175°	1336.1	1334.4	1332.8	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7	1336.1	1334.4
177.5°	1340.6	1339.2	1337.7	1336.2	1337.7	1339.2	1340.6	1342.1	1342.2	1341.0	1339.6
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1
2.5°	1690.1	1694.2	1703.3	1713.5	1722.1	1729.5	1735.2	1743.1	1750.5	1760.8	1770.5
5°	1587.7	1597.6	1611.9	1629.0	1650.3	1664.6	1682.3	1698.0	1720.8	1743.6	1765.7
7.5°	1497.6	1508.6	1529.6	1553.2	1578.5	1601.9	1623.0	1650.6	1680.8	1714.0	1751.0
10°	1439.6	1451.7	1476.6	1503.6	1533.6	1556.3	1584.8	1617.6	1651.7	1692.3	1737.9
12.5°	1387.1	1398.7	1428.7	1456.3	1487.4	1512.4	1545.5	1578.9	1624.4	1668.4	1720.2
15°	1285.0	1315.7	1349.9	1382.6	1419.6	1450.3	1490.1	1524.3	1567.7	1629.7	1688.7
17.5°	1171.7	1204.3	1246.8	1297.4	1347.0	1384.9	1425.3	1467.8	1519.5	1582.7	1650.9
20°	1105.6	1132.0	1179.0	1235.2	1292.9	1345.6	1382.6	1429.6	1483.0	1551.3	1621.8
22.5°	1056.1	1078.4	1115.2	1171.4	1233.7	1294.9	1342.2	1388.6	1447.7	1516.0	1592.8
25°	981.8	1006.0	1038.0	1076.5	1147.6	1212.5	1274.4	1327.8	1390.4	1458.7	1544.2
27.5°	920.0	941.0	970.4	1010.4	1058.3	1129.7	1204.8	1265.7	1329.9	1403.3	1488.8
30°	883.5	900.6	924.8	965.4	1010.9	1075.0	1151.2	1222.4	1287.2	1363.4	1452.4
32.5°	845.3	863.6	887.3	919.3	968.2	1022.1	1098.2	1176.3	1245.1	1322.9	1410.2
35°	794.5	808.8	830.1	862.9	907.0	954.0	1021.6	1102.1	1174.7	1258.0	1341.3
37.5°	743.2	759.9	776.8	805.9	842.1	892.6	948.1	1030.2	1110.6	1186.7	1268.0
40°	714.1	724.1	742.5	766.1	804.5	849.4	901.3	981.8	1062.2	1137.7	1219.6
42.5°	681.6	692.8	708.4	731.9	766.3	810.0	860.9	930.5	1014.4	1087.6	1162.1
45°	636.5	642.9	658.5	678.5	706.9	751.1	798.1	860.1	939.1	1008.8	1074.3
47.5°	590.9	596.5	606.3	624.6	656.4	691.9	735.8	791.4	860.8	930.5	985.9
50°	559.5	564.5	573.8	590.9	619.4	654.2	697.7	747.5	809.5	876.4	922.7
52.5°	528.2	531.0	539.7	559.0	582.9	617.2	656.1	702.0	759.9	815.5	862.3
55°	478.4	484.8	490.5	504.8	527.5	560.3	595.2	638.6	683.5	730.5	770.3
57.5°	426.4	433.5	441.7	454.2	472.3	502.7	534.1	569.3	607.6	646.6	680.0
60°	392.3	398.7	405.8	420.1	436.4	460.7	494.8	525.4	554.6	590.2	623.7
62.5°	358.6	365.1	373.4	384.8	400.6	423.7	452.1	478.8	509.1	540.1	565.0
65°	309.0	314.0	320.4	331.1	346.0	366.7	390.1	410.8	437.8	460.7	483.4
67.5°	254.5	264.0	272.4	281.1	293.7	313.0	329.9	349.7	368.1	385.0	405.8
70°	218.6	229.3	237.1	246.3	258.4	274.8	291.1	304.7	319.7	336.0	354.5
72.5°	188.4	196.8	202.9	212.8	223.7	238.9	254.1	265.4	277.5	288.7	306.7
75°	148.8	152.4	156.7	164.4	174.4	185.8	198.0	207.9	215.0	225.0	237.8
77.5°	106.9	113.8	116.6	122.2	129.3	136.4	144.4	152.8	159.6	163.2	173.0
80°	81.9	84.7	87.6	95.4	99.7	106.8	112.4	120.3	123.1	126.7	136.0
82.5°	63.7	65.4	67.1	69.2	71.8	78.9	84.6	89.5	92.4	93.7	100.7
85°	37.0	37.7	38.4	39.1	39.9	39.9	42.7	46.3	51.3	51.3	53.4
87.5°	17.4	17.7	17.3	16.3	17.1	16.8	16.9	16.4	17.6	18.8	20.0
90°	24.2	22.8	21.0	19.1	17.3	15.4	13.2	10.7	8.2	5.6	3.1
92.5°	41.8	41.0	39.8	38.4	37.2	35.8	33.8	30.9	28.0	25.1	22.2
95°	79.5	78.7	77.1	75.5	73.9	72.3	70.4	68.4	66.3	64.2	62.2
97.5°	125.4	124.5	122.6	120.7	118.9	117.0	115.2	113.5	111.9	110.2	108.6
100°	159.0	158.5	156.4	154.4	152.3	150.3	148.7	147.8	146.9	146.0	145.1
102.5°	193.9	193.3	191.5	189.6	187.6	185.7	184.7	184.2	183.9	183.5	183.2
105°	247.3	246.6	245.7	244.7	243.8	242.9	242.3	242.1	241.8	241.7	241.4
107.5°	305.1	304.3	304.3	304.1	304.0	303.8	303.6	303.4	303.1	302.8	302.5
110°	344.6	345.0	345.2	345.4	345.7	345.9	345.8	345.4	344.8	344.4	343.9



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	385.5	385.6	386.0	386.5	386.8	387.3	387.4	387.4	387.3	387.2	387.0
115°	449.4	449.6	450.0	450.6	451.0	451.5	451.7	451.7	451.7	451.7	451.7
117.5°	511.2	512.0	512.3	512.6	512.9	513.3	513.4	513.2	513.0	512.8	512.6
120°	553.1	554.3	554.9	555.6	556.3	557.1	556.9	556.0	555.1	554.1	553.2
122.5°	594.9	595.7	596.0	596.4	596.6	597.0	597.0	596.6	596.2	595.8	595.5
125°	656.4	656.8	657.0	657.3	657.5	657.7	657.8	657.8	657.8	657.8	657.8
127.5°	715.4	715.9	716.2	716.6	716.9	717.4	717.2	716.5	715.8	715.2	714.4
130°	756.9	757.3	757.3	757.3	757.3	757.3	757.0	756.3	755.5	754.9	754.2
132.5°	795.8	796.3	796.5	796.7	796.8	797.0	796.8	796.3	795.9	795.3	794.8
135°	854.3	854.7	854.7	854.7	854.7	854.7	854.0	852.7	851.2	849.9	848.5
137.5°	910.9	911.4	911.1	910.7	910.3	910.0	909.5	908.8	908.2	907.6	906.9
140°	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.3	946.8	946.3	945.8
142.5°	982.7	982.8	982.9	983.1	983.3	983.5	983.4	982.8	982.4	982.0	981.5
145°	1035.7	1036.0	1035.7	1035.5	1035.3	1035.1	1034.5	1033.6	1032.7	1031.7	1030.8
147.5°	1083.7	1083.9	1084.1	1084.2	1084.4	1084.6	1084.1	1083.0	1081.9	1080.8	1079.7
150°	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.2	1112.3	1111.4	1110.4	1109.6
152.5°	1141.6	1141.0	1140.9	1140.7	1140.5	1140.3	1140.0	1139.3	1138.8	1138.3	1137.7
155°	1180.9	1180.0	1180.2	1180.4	1180.7	1180.9	1181.0	1181.0	1181.0	1181.0	1181.0
157.5°	1216.1	1215.4	1215.5	1215.5	1215.6	1215.6	1215.8	1216.3	1216.7	1217.1	1217.5
160°	1237.7	1237.0	1237.2	1237.4	1237.7	1237.9	1238.1	1238.3	1238.6	1238.9	1239.0
162.5°	1256.4	1255.2	1255.4	1255.7	1255.9	1256.2	1256.5	1257.1	1257.8	1258.3	1258.9
165°	1281.8	1280.5	1280.9	1281.4	1281.8	1282.3	1282.9	1283.6	1284.2	1285.0	1285.7
167.5°	1303.4	1302.0	1302.0	1301.9	1301.9	1301.8	1302.3	1303.2	1304.2	1305.2	1306.2
170°	1315.0	1313.7	1313.4	1313.1	1313.0	1312.7	1313.1	1314.3	1315.5	1316.6	1317.8
172.5°	1323.5	1322.0	1321.9	1321.9	1321.8	1321.7	1322.2	1323.1	1324.1	1325.1	1326.1
175°	1332.8	1331.2	1331.5	1331.7	1331.9	1332.1	1332.8	1334.0	1335.2	1336.3	1337.5
177.5°	1338.4	1337.0	1337.0	1337.0	1337.0	1337.0	1337.5	1338.5	1339.3	1340.2	1341.2
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1
2.5°	1777.9	1783.0	1788.7	1799.6	1808.7	1812.7	1820.6	1826.3	1824.6	1832.6	1846.2
5°	1784.8	1804.1	1826.1	1849.0	1874.6	1896.0	1913.0	1930.1	1943.7	1960.0	1984.2
7.5°	1783.7	1817.9	1855.0	1896.0	1938.0	1974.2	2007.9	2042.0	2072.3	2105.5	2148.9
10°	1779.1	1824.7	1871.0	1924.4	1977.8	2028.4	2073.9	2116.7	2157.2	2200.7	2255.5
12.5°	1774.1	1826.4	1882.4	1946.6	2013.1	2073.9	2127.4	2189.0	2239.8	2295.8	2359.1
15°	1751.4	1821.9	1898.1	1981.4	2061.1	2143.0	2216.3	2291.8	2362.2	2429.2	2508.9
17.5°	1725.5	1806.8	1896.7	1995.0	2090.9	2190.4	2277.4	2372.5	2444.5	2534.4	2608.4
20°	1704.4	1792.0	1888.1	1998.4	2107.4	2217.7	2313.8	2410.7	2491.8	2582.2	2676.2
22.5°	1678.7	1774.9	1879.0	1993.3	2107.4	2227.9	2334.3	2430.6	2531.1	2633.0	2729.8
25°	1637.4	1737.1	1847.5	1972.8	2103.8	2227.0	2340.9	2460.5	2568.8	2679.1	2765.9
27.5°	1586.8	1691.5	1807.8	1937.1	2071.5	2197.6	2331.8	2459.2	2568.1	2674.3	2750.1
30°	1546.3	1656.7	1768.4	1899.5	2039.0	2174.3	2318.1	2445.5	2560.2	2655.6	2698.3
32.5°	1504.8	1609.4	1724.7	1857.3	2000.3	2145.8	2288.5	2418.8	2524.9	2582.1	2583.2
35°	1432.4	1530.7	1650.3	1780.6	1927.3	2085.3	2229.8	2358.0	2422.8	2427.8	2358.0
37.5°	1353.5	1443.7	1556.6	1687.0	1847.6	2004.8	2152.5	2237.9	2259.6	2187.1	2058.1
40°	1297.2	1380.5	1489.4	1623.3	1782.7	1945.1	2079.6	2142.2	2119.5	2002.0	1858.1
42.5°	1238.0	1315.5	1420.5	1552.6	1712.7	1876.7	1991.4	2024.9	1964.5	1828.9	1660.5
45°	1141.3	1212.5	1316.4	1449.6	1603.3	1757.1	1844.0	1826.8	1726.4	1565.6	1376.9
47.5°	1040.6	1109.4	1202.9	1326.1	1483.5	1616.2	1675.1	1623.5	1480.7	1303.7	1150.2
50°	973.9	1044.5	1130.6	1248.0	1391.9	1520.0	1557.7	1479.4	1320.6	1150.5	1009.5
52.5°	908.5	968.7	1053.1	1166.6	1304.1	1412.4	1432.4	1342.2	1178.3	1025.7	900.7
55°	808.8	863.6	934.8	1041.6	1160.5	1252.3	1241.6	1125.6	976.8	846.5	748.2
57.5°	712.4	753.7	819.5	919.5	1024.0	1085.6	1046.6	947.6	809.0	702.3	619.4
60°	648.6	687.1	748.2	835.8	927.6	962.5	929.8	822.3	712.7	615.1	545.4
62.5°	588.2	622.1	674.8	756.1	830.3	851.0	815.9	722.0	623.2	539.9	482.1
65°	500.5	531.8	576.7	634.4	685.6	695.5	672.8	576.7	501.9	432.1	392.3
67.5°	420.9	441.4	476.4	526.3	553.5	559.3	515.3	455.0	389.1	346.2	316.1
70°	367.4	381.6	414.4	441.4	463.5	464.2	423.7	375.2	324.7	289.8	267.7
72.5°	315.6	329.2	354.0	372.5	389.4	383.9	346.7	308.5	267.7	241.4	225.0
75°	243.5	255.6	268.4	277.0	277.0	269.8	242.8	214.3	190.8	175.1	170.1
77.5°	177.0	187.0	191.3	189.9	187.3	176.3	159.2	140.5	132.2	124.8	121.0
80°	138.8	143.1	144.5	141.0	136.7	123.9	112.4	104.7	96.8	94.0	92.6
82.5°	102.9	106.6	102.9	104.0	94.5	84.0	77.8	75.1	71.8	70.6	69.2
85°	54.8	54.1	52.7	49.1	42.7	41.3	40.6	39.9	38.4	39.1	37.7
87.5°	19.9	18.7	16.9	16.9	17.3	16.6	17.5	17.8	18.2	17.9	19.4
90°	5.6	8.2	10.7	13.2	15.4	17.3	19.1	21.0	22.8	24.2	25.6
92.5°	25.1	28.0	30.9	33.8	35.8	37.2	38.4	39.8	41.0	41.8	42.7
95°	64.2	66.3	68.4	70.4	72.3	73.9	75.5	77.1	78.7	79.5	80.1
97.5°	110.2	111.9	113.5	115.2	117.0	118.9	120.7	122.6	124.5	125.4	126.2
100°	146.0	146.9	147.8	148.7	150.3	152.3	154.4	156.4	158.5	159.0	159.4
102.5°	183.5	183.9	184.2	184.7	185.7	187.6	189.6	191.5	193.3	193.9	194.6
105°	241.7	241.8	242.1	242.3	242.9	243.8	244.7	245.7	246.6	247.3	248.0
107.5°	302.8	303.1	303.4	303.6	303.8	304.0	304.1	304.3	304.3	305.1	305.7
110°	344.4	344.8	345.4	345.8	345.9	345.7	345.4	345.2	345.0	344.6	344.0



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	387.2	387.3	387.4	387.4	387.3	386.8	386.5	386.0	385.6	385.5	385.4
115°	451.7	451.7	451.7	451.7	451.5	451.0	450.6	450.0	449.6	449.4	449.2
117.5°	512.8	513.0	513.2	513.4	513.3	512.9	512.6	512.3	512.0	511.2	510.4
120°	554.1	555.1	556.0	556.9	557.1	556.3	555.6	554.9	554.3	553.1	552.0
122.5°	595.8	596.2	596.6	597.0	597.0	596.6	596.4	596.0	595.7	594.9	594.1
125°	657.8	657.8	657.8	657.8	657.7	657.5	657.3	657.0	656.8	656.4	655.9
127.5°	715.2	715.8	716.5	717.2	717.4	716.9	716.6	716.2	715.9	715.4	715.0
130°	754.9	755.5	756.3	757.0	757.3	757.3	757.3	757.3	757.3	756.9	756.3
132.5°	795.3	795.9	796.3	796.8	797.0	796.8	796.7	796.5	796.3	795.8	795.3
135°	849.9	851.2	852.7	854.0	854.7	854.7	854.7	854.7	854.7	854.3	853.8
137.5°	907.6	908.2	908.8	909.5	910.0	910.3	910.7	911.1	911.4	910.9	910.3
140°	946.3	946.8	947.3	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.4
142.5°	982.0	982.4	982.8	983.4	983.5	983.3	983.1	982.9	982.8	982.7	982.7
145°	1031.7	1032.7	1033.6	1034.5	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7	1035.5
147.5°	1080.8	1081.9	1083.0	1084.1	1084.6	1084.4	1084.2	1084.1	1083.9	1083.7	1083.5
150°	1110.4	1111.4	1112.3	1113.2	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7
152.5°	1138.3	1138.8	1139.3	1140.0	1140.3	1140.5	1140.7	1140.9	1141.0	1141.6	1142.1
155°	1181.0	1181.0	1181.0	1181.0	1180.9	1180.7	1180.4	1180.2	1180.0	1180.9	1181.9
157.5°	1217.1	1216.7	1216.3	1215.8	1215.6	1215.6	1215.5	1215.5	1215.4	1216.1	1216.8
160°	1238.9	1238.6	1238.3	1238.1	1237.9	1237.7	1237.4	1237.2	1237.0	1237.7	1238.3
162.5°	1258.3	1257.8	1257.1	1256.5	1256.2	1255.9	1255.7	1255.4	1255.2	1256.4	1257.7
165°	1285.0	1284.2	1283.6	1282.9	1282.3	1281.8	1281.4	1280.9	1280.5	1281.8	1283.3
167.5°	1305.2	1304.2	1303.2	1302.3	1301.8	1301.9	1301.9	1302.0	1302.0	1303.4	1304.8
170°	1316.6	1315.5	1314.3	1313.1	1312.7	1313.0	1313.1	1313.4	1313.7	1315.0	1316.4
172.5°	1325.1	1324.1	1323.1	1322.2	1321.7	1321.8	1321.9	1321.9	1322.0	1323.5	1325.1
175°	1336.3	1335.2	1334.0	1332.8	1332.1	1331.9	1331.7	1331.5	1331.2	1332.8	1334.4
177.5°	1340.2	1339.3	1338.5	1337.5	1337.0	1337.0	1337.0	1337.0	1337.0	1338.4	1339.6
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1	1767.1
2.5°	1853.6	1855.9	1857.6	1863.3	1863.9	1869.0	1863.9
5°	2007.0	2017.0	2032.7	2048.3	2049.7	2059.7	2041.8
7.5°	2179.0	2202.1	2216.4	2241.8	2251.7	2258.0	2247.7
10°	2297.5	2318.8	2356.5	2375.1	2393.6	2396.4	2387.9
12.5°	2412.0	2445.9	2475.6	2510.6	2509.8	2534.9	2525.7
15°	2564.5	2599.3	2640.6	2679.8	2694.0	2694.0	2705.5
17.5°	2673.3	2737.2	2779.9	2810.7	2844.2	2850.1	2846.1
20°	2746.7	2815.8	2861.3	2901.2	2924.0	2930.4	2930.4
22.5°	2801.4	2860.2	2904.7	2940.5	2959.3	2966.8	2964.6
25°	2839.3	2889.8	2916.9	2927.6	2932.5	2931.1	2917.6
27.5°	2787.4	2785.2	2768.0	2735.3	2710.7	2695.7	2678.6
30°	2688.3	2651.3	2608.6	2561.6	2501.1	2454.8	2440.5
32.5°	2540.8	2457.6	2385.3	2307.0	2241.9	2195.7	2176.3
35°	2255.5	2123.8	2016.2	1922.3	1854.0	1811.2	1797.0
37.5°	1916.8	1789.4	1656.3	1565.1	1508.5	1465.3	1449.2
40°	1701.6	1562.7	1446.7	1361.3	1302.9	1260.9	1260.2
42.5°	1505.0	1372.5	1263.3	1201.8	1138.8	1111.1	1110.9
45°	1232.3	1126.3	1033.8	985.3	947.6	924.8	918.4
47.5°	1020.4	932.6	871.0	832.4	801.6	787.1	777.8
50°	901.3	824.5	775.3	741.8	724.8	706.2	704.8
52.5°	802.2	740.1	701.9	674.7	653.0	641.9	642.2
55°	674.2	625.1	598.1	577.4	560.3	551.8	548.2
57.5°	568.0	531.1	511.5	492.5	485.3	478.6	476.7
60°	501.9	477.0	458.5	443.5	432.8	430.7	430.0
62.5°	447.3	421.2	408.4	396.8	389.1	385.8	384.4
65°	368.8	349.6	338.1	329.0	326.1	321.1	320.4
67.5°	297.3	285.8	278.2	271.8	268.0	267.7	267.7
70°	253.4	247.0	240.7	237.1	235.0	233.5	233.5
72.5°	215.9	211.2	205.9	204.0	203.6	202.2	201.6
75°	164.4	159.4	160.2	156.7	153.8	150.3	148.1
77.5°	116.6	113.1	112.4	111.9	109.5	109.1	110.2
80°	90.4	86.9	86.1	86.9	86.1	84.0	84.0
82.5°	68.8	65.8	65.1	64.6	63.9	64.6	63.5
85°	37.0	35.6	35.6	35.6	37.0	36.3	35.6
87.5°	18.5	18.2	18.9	18.5	18.5	18.1	18.7
90°	26.9	28.4	29.2	29.7	30.1	30.6	31.1
92.5°	43.5	44.3	44.9	45.2	45.5	45.7	46.0
95°	80.8	81.5	81.9	81.9	81.9	81.9	81.9
97.5°	127.0	127.9	128.2	128.2	128.2	128.2	128.2
100°	159.9	160.3	160.6	160.6	160.6	160.6	160.6
102.5°	195.3	195.9	196.3	196.5	196.7	196.9	197.1
105°	248.6	249.3	250.0	250.7	251.4	252.1	252.8
107.5°	306.3	306.9	307.3	307.2	307.2	307.1	307.1
110°	343.6	343.1	343.2	343.9	344.6	345.4	346.0



TEST NUMBER: P333010-940

CATALOG NUMBER: SA4XXRDIP-C1195D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	385.3	385.2	385.2	385.4	385.5	385.7	385.8
115°	448.9	448.7	448.4	448.3	448.0	447.8	447.5
117.5°	509.6	508.8	508.3	507.7	507.3	506.8	506.4
120°	550.8	549.7	549.3	549.7	550.2	550.7	551.2
122.5°	593.3	592.5	591.7	590.9	590.1	589.2	588.4
125°	655.4	655.0	654.5	654.1	653.6	653.1	652.6
127.5°	714.5	714.0	713.6	713.3	712.8	712.5	712.1
130°	755.9	755.5	754.7	753.9	753.0	752.0	751.1
132.5°	794.9	794.4	794.0	793.6	793.3	792.9	792.6
135°	853.3	852.8	852.3	851.6	850.9	850.2	849.5
137.5°	909.6	909.1	908.8	909.0	909.1	909.3	909.4
140°	947.3	947.0	946.8	946.6	946.3	946.1	945.8
142.5°	982.6	982.6	982.5	982.5	982.4	982.4	982.3
145°	1035.3	1035.1	1034.6	1033.9	1033.2	1032.5	1031.9
147.5°	1083.3	1083.1	1082.9	1082.7	1082.4	1082.2	1082.0
150°	1113.7	1113.7	1113.6	1113.3	1113.1	1112.9	1112.7
152.5°	1142.7	1143.3	1143.3	1142.6	1142.0	1141.4	1140.9
155°	1182.8	1183.7	1183.7	1182.8	1181.9	1180.9	1180.0
157.5°	1217.5	1218.2	1218.2	1217.4	1216.6	1215.8	1215.0
160°	1239.0	1239.7	1239.5	1238.3	1237.2	1236.1	1234.9
162.5°	1258.9	1260.2	1260.3	1259.1	1257.9	1256.8	1255.6
165°	1284.6	1286.0	1286.2	1285.3	1284.4	1283.4	1282.5
167.5°	1306.2	1307.5	1307.5	1306.1	1304.7	1303.2	1301.8
170°	1317.8	1319.2	1319.0	1317.4	1315.8	1314.2	1312.6
172.5°	1326.6	1328.2	1328.2	1326.5	1324.9	1323.3	1321.7
175°	1336.1	1337.7	1337.7	1336.1	1334.4	1332.8	1331.2
177.5°	1341.0	1342.2	1342.1	1340.6	1339.2	1337.7	1336.2
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5

(END OF REPORT)