

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332890-940

Luminaire Tested: **SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332890-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5044.5 lumens
Efficiency: N/A
Efficacy: 119.5 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 42.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

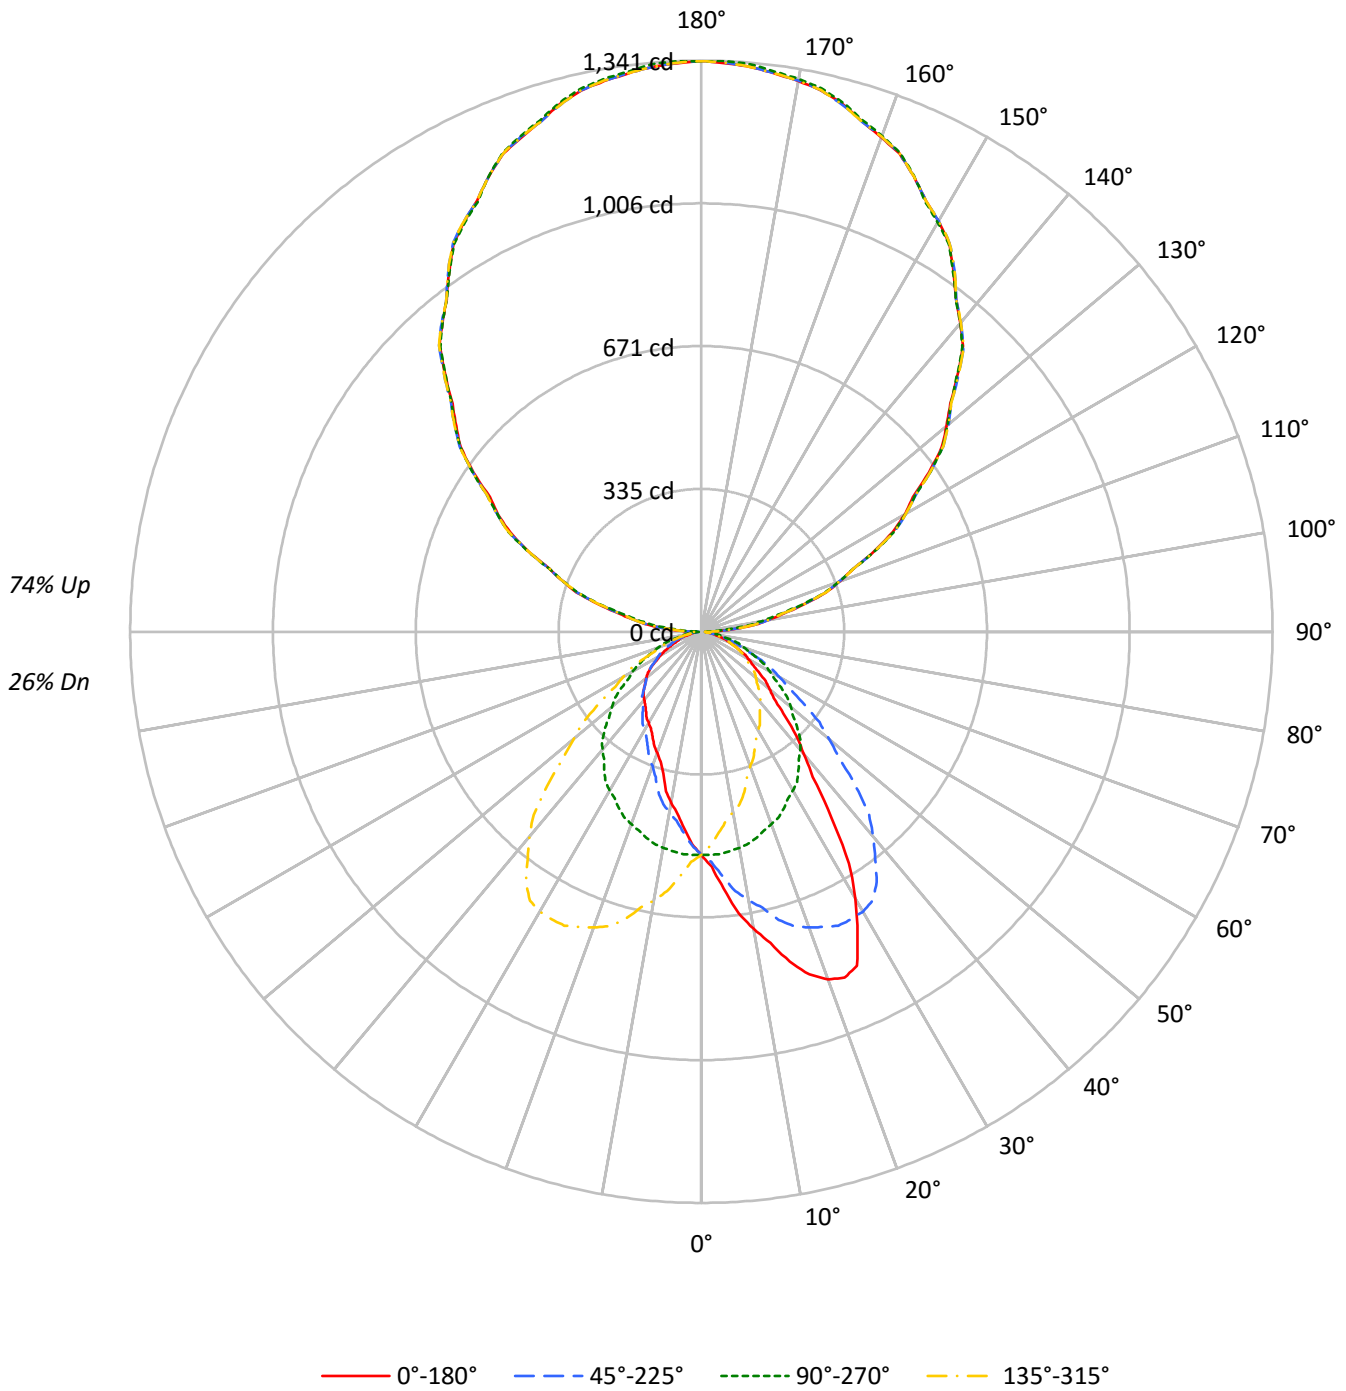



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	102	102	102	102	91	91	91	91	70	70	70	52	52	52	34	34	34	26				
1	93	89	85	82	83	79	76	73	62	60	58	46	44	43	31	30	29	23				
2	85	78	72	67	75	70	65	61	54	51	48	40	38	36	27	26	25	19				
3	77	68	61	56	69	61	55	51	48	44	41	36	33	31	24	23	22	17				
4	71	60	53	47	63	54	48	43	43	38	35	32	29	27	22	20	19	14				
5	65	54	46	41	58	48	42	37	38	34	30	29	26	23	20	18	16	13				
6	60	48	41	35	53	43	37	32	34	30	26	26	23	20	18	16	15	11				
7	55	43	36	31	49	39	33	28	31	26	23	24	20	18	16	14	13	10				
8	51	39	32	27	45	35	29	25	28	24	20	21	18	16	15	13	12	9				
9	47	36	29	24	42	32	26	22	26	21	18	20	17	14	14	12	10	8				
10	44	33	26	21	39	30	24	20	24	19	16	18	15	13	13	11	9	7				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	4229	4229	4229	4229
5°	4905	4241	3749	4241
10°	5802	4223	3345	4223
15°	6702	4184	2875	4184
20°	7462	4130	2600	4130
25°	7704	4077	2414	4077
30°	6743	4013	2302	4013
35°	5249	3918	2234	3918
40°	3936	3810	2197	3810
45°	3108	3635	2177	3635
50°	2624	3435	2115	3435
55°	2287	3215	2001	3215
60°	2057	2985	1773	2985
65°	1815	2737	1524	2737
70°	1633	2481	1374	2481
75°	1369	2196	1170	2196
80°	1158	1874	1097	1874
85°	973	1473	973	1473



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.8	1.0
10°-20°	153.1	3.0
20°-30°	239.4	4.7
30°-40°	266.2	5.3
40°-50°	236.2	4.7
50°-60°	184.0	3.6
60°-70°	120.5	2.4
70°-80°	59.3	1.2
80°-90°	18.6	0.4
90°-100°	88.4	1.8
100°-110°	261.7	5.2
110°-120°	444.2	8.8
120°-130°	585.7	11.6
130°-140°	657.8	13.0
140°-150°	646.4	12.8
150°-160°	543.7	10.8
160°-170°	361.7	7.2
170°-180°	126.7	2.5
0°-30°	443.3	8.8
0°-40°	709.5	14.1
0°-60°	1129.7	22.4
0°-90°	1328.0	26.3
90°-120°	794.3	15.7
90°-150°	2684.3	53.2
90°-180°	3716.0	73.7
0°-180°	5044.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	524	524	524	524	524	
5°	605	523	463	523	605	61
15°	802	501	344	501	802	228
25°	865	458	271	458	865	384
35°	533	398	227	398	533	334
45°	272	318	191	318	272	216
55°	162	228	142	228	162	148
65°	95	143	80	143	95	96
75°	44	70	38	70	44	48
85°	10	16	10	16	10	13
90°	31	3	31	3	31	16
95°	82	62	82	62	82	85
105°	253	241	253	241	253	266
115°	448	452	448	452	448	442
125°	653	658	653	658	653	582
135°	850	848	850	848	850	656
145°	1032	1031	1032	1031	1032	646
155°	1180	1181	1180	1181	1180	543
165°	1282	1286	1282	1286	1282	361
175°	1331	1338	1331	1338	1331	126
180°	1340	1340	1340	1340	1340	



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8
2.5°	552.5	554.0	552.5	552.3	550.6	550.1	549.5	547.2	543.2	540.8	541.4
5°	605.3	610.6	607.6	607.2	602.5	597.9	594.9	588.2	580.9	576.1	572.1
7.5°	666.3	669.3	667.4	664.5	657.0	652.7	645.9	637.0	624.1	614.3	605.3
10°	707.8	710.3	709.5	704.0	698.6	687.3	681.0	668.6	652.3	639.4	627.4
12.5°	748.7	751.4	744.0	744.2	733.8	725.0	715.0	699.3	680.6	664.0	648.9
15°	801.9	798.5	798.5	794.3	782.7	770.5	760.2	743.7	720.1	700.3	679.3
17.5°	843.6	844.8	843.1	833.1	824.0	811.4	792.4	773.2	751.3	724.6	703.3
20°	868.6	868.6	866.7	860.0	848.2	834.6	814.2	793.3	765.4	738.6	714.6
22.5°	878.8	879.4	877.2	871.6	861.0	847.8	830.4	809.1	780.4	750.3	720.5
25°	864.9	868.9	869.2	867.8	864.6	856.6	841.6	819.9	794.2	761.4	729.3
27.5°	794.0	799.1	803.5	810.8	820.6	825.5	826.3	815.2	792.7	761.3	729.0
30°	723.4	727.6	741.4	759.3	773.2	785.9	796.9	799.9	787.2	758.9	725.0
32.5°	645.1	650.9	664.6	683.9	707.0	728.5	753.1	765.7	765.4	748.4	717.0
35°	532.6	536.9	549.6	569.8	597.6	629.5	668.6	698.9	719.6	718.2	698.9
37.5°	429.6	434.4	447.1	464.0	491.0	530.4	568.2	610.1	648.3	669.8	663.3
40°	373.5	373.7	386.2	403.5	428.8	463.2	504.4	550.8	593.4	628.3	635.0
42.5°	329.3	329.3	337.6	356.2	374.4	406.8	446.1	492.2	542.2	582.4	600.2
45°	272.2	274.1	280.9	292.0	306.4	333.9	365.3	408.1	464.0	511.8	541.5
47.5°	230.5	233.4	237.6	246.7	258.2	276.4	302.5	341.0	386.5	438.9	481.3
50°	208.9	209.4	214.8	219.9	229.8	244.4	267.2	299.3	341.1	391.5	438.5
52.5°	190.4	190.3	193.6	200.0	208.0	219.4	237.8	267.0	304.1	349.3	397.9
55°	162.5	163.5	166.1	171.1	177.3	185.3	199.8	221.8	250.9	289.5	333.7
57.5°	141.3	141.9	143.8	146.0	151.6	157.5	168.4	183.6	208.1	239.8	280.9
60°	127.4	127.7	128.3	131.4	135.9	141.4	148.8	161.7	182.4	211.2	243.8
62.5°	114.0	114.3	115.3	117.6	121.1	124.8	132.6	142.9	160.1	184.8	214.0
65°	95.0	95.1	96.7	97.5	100.2	103.6	109.3	116.3	128.1	148.8	170.9
67.5°	79.4	79.4	79.5	80.6	82.5	84.7	88.1	93.7	102.6	115.3	134.8
70°	69.2	69.2	69.6	70.3	71.3	73.2	75.2	79.4	85.9	96.2	111.2
72.5°	59.7	59.9	60.4	60.5	61.0	62.6	64.0	66.7	71.5	79.4	91.5
75°	43.9	44.5	45.6	46.5	47.5	47.3	48.8	50.5	51.9	56.5	63.5
77.5°	32.6	32.4	32.5	33.2	33.3	33.5	34.6	35.8	37.0	39.1	41.6
80°	24.9	24.9	25.5	25.8	25.5	25.8	26.8	27.5	27.8	28.7	31.0
82.5°	18.8	19.2	19.0	19.2	19.3	19.5	20.4	20.5	21.0	21.3	22.2
85°	10.5	10.8	11.0	10.5	10.5	10.5	11.0	11.1	11.6	11.4	11.9
87.5°	9.9	9.6	9.7	9.6	9.7	9.4	9.3	9.4	8.7	8.6	8.2
90°	31.1	30.6	30.1	29.7	29.2	28.4	26.9	25.6	24.2	22.8	21.0
92.5°	46.0	45.7	45.5	45.2	44.9	44.3	43.5	42.7	41.8	41.0	39.8
95°	81.9	81.9	81.9	81.9	81.9	81.5	80.8	80.1	79.5	78.7	77.1
97.5°	128.2	128.2	128.2	128.2	128.2	127.9	127.0	126.2	125.4	124.5	122.6
100°	160.6	160.6	160.6	160.6	160.6	160.3	159.9	159.4	159.0	158.5	156.4
102.5°	197.1	196.9	196.7	196.5	196.3	195.9	195.3	194.6	193.9	193.3	191.5
105°	252.8	252.1	251.4	250.7	250.0	249.3	248.6	248.0	247.3	246.6	245.7
107.5°	307.1	307.1	307.2	307.2	307.3	306.9	306.3	305.7	305.1	304.3	304.3
110°	346.0	345.4	344.6	343.9	343.2	343.1	343.6	344.0	344.6	345.0	345.2



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	385.8	385.7	385.5	385.4	385.2	385.2	385.3	385.4	385.5	385.6	386.0
115°	447.5	447.8	448.0	448.3	448.4	448.7	448.9	449.2	449.4	449.6	450.0
117.5°	506.4	506.8	507.3	507.7	508.3	508.8	509.6	510.4	511.2	512.0	512.3
120°	551.2	550.7	550.2	549.7	549.3	549.7	550.8	552.0	553.1	554.3	554.9
122.5°	588.4	589.2	590.1	590.9	591.7	592.5	593.3	594.1	594.9	595.7	596.0
125°	652.6	653.1	653.6	654.1	654.5	655.0	655.4	655.9	656.4	656.8	657.0
127.5°	712.1	712.5	712.8	713.3	713.6	714.0	714.5	715.0	715.4	715.9	716.2
130°	751.1	752.0	753.0	753.9	754.7	755.5	755.9	756.3	756.9	757.3	757.3
132.5°	792.6	792.9	793.3	793.6	794.0	794.4	794.9	795.3	795.8	796.3	796.5
135°	849.5	850.2	850.9	851.6	852.3	852.8	853.3	853.8	854.3	854.7	854.7
137.5°	909.4	909.3	909.1	909.0	908.8	909.1	909.6	910.3	910.9	911.4	911.1
140°	945.8	946.1	946.3	946.6	946.8	947.0	947.3	947.4	947.7	947.9	947.9
142.5°	982.3	982.4	982.4	982.5	982.5	982.6	982.6	982.7	982.7	982.8	982.9
145°	1031.9	1032.5	1033.2	1033.9	1034.6	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7
147.5°	1082.0	1082.2	1082.4	1082.7	1082.9	1083.1	1083.3	1083.5	1083.7	1083.9	1084.1
150°	1112.7	1112.9	1113.1	1113.3	1113.6	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7
152.5°	1140.9	1141.4	1142.0	1142.6	1143.3	1143.3	1142.7	1142.1	1141.6	1141.0	1140.9
155°	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7	1182.8	1181.9	1180.9	1180.0	1180.2
157.5°	1215.0	1215.8	1216.6	1217.4	1218.2	1218.2	1217.5	1216.8	1216.1	1215.4	1215.5
160°	1234.9	1236.1	1237.2	1238.3	1239.5	1239.7	1239.0	1238.3	1237.7	1237.0	1237.2
162.5°	1255.6	1256.8	1257.9	1259.1	1260.3	1260.2	1258.9	1257.7	1256.4	1255.2	1255.4
165°	1282.5	1283.4	1284.4	1285.3	1286.2	1286.0	1284.6	1283.3	1281.8	1280.5	1280.9
167.5°	1301.8	1303.2	1304.7	1306.1	1307.5	1307.5	1306.2	1304.8	1303.4	1302.0	1302.0
170°	1312.6	1314.2	1315.8	1317.4	1319.0	1319.2	1317.8	1316.4	1315.0	1313.7	1313.4
172.5°	1321.7	1323.3	1324.9	1326.5	1328.2	1328.2	1326.6	1325.1	1323.5	1322.0	1321.9
175°	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7	1336.1	1334.4	1332.8	1331.2	1331.5
177.5°	1336.2	1337.7	1339.2	1340.6	1342.1	1342.2	1341.0	1339.6	1338.4	1337.0	1337.0
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8
2.5°	539.7	537.3	536.1	533.4	530.2	528.5	527.0	524.8	521.9	518.9	516.7
5°	567.0	562.0	555.6	548.0	541.4	534.8	529.1	523.3	516.8	510.1	503.4
7.5°	595.1	585.2	574.4	562.0	549.9	538.9	528.7	519.1	508.1	498.2	489.3
10°	614.7	601.3	586.3	570.4	554.6	540.9	527.4	515.1	501.7	489.6	479.5
12.5°	630.6	614.7	596.7	577.0	557.9	541.4	525.8	509.9	494.5	481.5	468.0
15°	656.9	635.3	611.0	587.3	562.7	540.0	519.2	500.6	483.0	464.7	451.8
17.5°	675.1	649.3	619.7	591.4	562.2	535.6	511.5	489.4	469.1	450.4	435.1
20°	685.9	657.4	624.6	592.4	559.6	531.2	505.2	480.7	459.9	439.6	423.7
22.5°	692.0	660.4	624.6	590.8	557.0	526.1	497.7	472.2	449.4	429.1	411.6
25°	693.9	660.1	623.7	584.8	547.7	515.0	485.4	457.7	432.4	412.1	393.6
27.5°	691.2	651.4	614.0	574.2	535.8	501.4	470.4	441.3	416.0	394.2	375.1
30°	687.2	644.5	604.4	563.0	524.2	491.1	458.3	430.5	404.1	381.6	362.4
32.5°	678.3	636.1	592.9	550.5	511.2	477.1	446.0	418.0	392.2	369.1	348.7
35°	660.9	618.1	571.3	527.8	489.2	453.7	424.6	397.6	372.9	348.2	326.7
37.5°	638.0	594.3	547.7	500.1	461.4	427.9	401.3	375.9	351.8	329.2	305.4
40°	616.4	576.6	528.4	481.2	441.5	409.2	384.5	361.5	337.2	314.9	291.1
42.5°	590.3	556.3	507.7	460.2	421.1	389.9	366.9	344.5	322.4	300.7	275.8
45°	546.6	520.8	475.3	429.7	390.2	359.4	338.3	318.4	299.1	278.4	254.9
47.5°	496.5	479.1	439.8	393.1	356.6	328.9	308.4	292.2	275.8	255.1	234.6
50°	461.7	450.6	412.6	370.0	335.1	309.6	288.7	273.5	259.8	240.0	221.6
52.5°	424.6	418.7	386.6	345.8	312.2	287.1	269.3	255.7	241.7	225.2	208.1
55°	368.0	371.2	344.0	308.7	277.1	256.0	239.8	228.4	216.5	202.6	189.3
57.5°	310.2	321.8	303.5	272.6	242.9	223.4	211.2	201.6	191.6	180.1	168.7
60°	275.6	285.3	275.0	247.7	221.8	203.7	192.3	184.9	175.0	164.4	155.8
62.5°	241.8	252.3	246.1	224.1	200.0	184.4	174.3	167.5	160.1	150.9	141.9
65°	199.5	206.2	203.2	188.1	170.9	157.7	148.4	143.3	136.5	129.8	121.8
67.5°	152.8	165.8	164.1	156.0	141.2	130.8	124.8	120.3	114.1	109.1	103.7
70°	125.6	137.6	137.4	130.8	122.8	113.2	108.9	105.1	99.6	94.8	90.3
72.5°	102.8	113.8	115.5	110.4	105.0	97.6	93.5	91.0	85.6	82.3	78.6
75°	72.0	80.0	82.1	82.1	79.5	75.8	72.1	70.4	66.7	63.8	61.6
77.5°	47.2	52.3	55.6	56.3	56.7	55.4	52.4	51.3	48.3	47.3	45.3
80°	33.3	36.7	40.5	41.8	42.8	42.4	41.2	40.3	37.5	36.5	35.7
82.5°	23.0	24.9	28.0	30.9	30.5	31.7	30.5	29.9	27.7	27.4	26.6
85°	12.0	12.2	12.7	14.5	15.6	16.1	16.2	15.9	15.2	15.2	13.7
87.5°	7.8	7.3	7.3	6.9	6.5	6.7	6.7	6.3	6.3	6.3	6.3
90°	19.1	17.3	15.4	13.2	10.7	8.2	5.6	3.1	5.6	8.2	10.7
92.5°	38.4	37.2	35.8	33.8	30.9	28.0	25.1	22.2	25.1	28.0	30.9
95°	75.5	73.9	72.3	70.4	68.4	66.3	64.2	62.2	64.2	66.3	68.4
97.5°	120.7	118.9	117.0	115.2	113.5	111.9	110.2	108.6	110.2	111.9	113.5
100°	154.4	152.3	150.3	148.7	147.8	146.9	146.0	145.1	146.0	146.9	147.8
102.5°	189.6	187.6	185.7	184.7	184.2	183.9	183.5	183.2	183.5	183.9	184.2
105°	244.7	243.8	242.9	242.3	242.1	241.8	241.7	241.4	241.7	241.8	242.1
107.5°	304.1	304.0	303.8	303.6	303.4	303.1	302.8	302.5	302.8	303.1	303.4
110°	345.4	345.7	345.9	345.8	345.4	344.8	344.4	343.9	344.4	344.8	345.4



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	386.5	386.8	387.3	387.4	387.4	387.3	387.2	387.0	387.2	387.3	387.4
115°	450.6	451.0	451.5	451.7	451.7	451.7	451.7	451.7	451.7	451.7	451.7
117.5°	512.6	512.9	513.3	513.4	513.2	513.0	512.8	512.6	512.8	513.0	513.2
120°	555.6	556.3	557.1	556.9	556.0	555.1	554.1	553.2	554.1	555.1	556.0
122.5°	596.4	596.6	597.0	597.0	596.6	596.2	595.8	595.5	595.8	596.2	596.6
125°	657.3	657.5	657.7	657.8	657.8	657.8	657.8	657.8	657.8	657.8	657.8
127.5°	716.6	716.9	717.4	717.2	716.5	715.8	715.2	714.4	715.2	715.8	716.5
130°	757.3	757.3	757.3	757.0	756.3	755.5	754.9	754.2	754.9	755.5	756.3
132.5°	796.7	796.8	797.0	796.8	796.3	795.9	795.3	794.8	795.3	795.9	796.3
135°	854.7	854.7	854.7	854.0	852.7	851.2	849.9	848.5	849.9	851.2	852.7
137.5°	910.7	910.3	910.0	909.5	908.8	908.2	907.6	906.9	907.6	908.2	908.8
140°	947.9	947.9	947.9	947.7	947.3	946.8	946.3	945.8	946.3	946.8	947.3
142.5°	983.1	983.3	983.5	983.4	982.8	982.4	982.0	981.5	982.0	982.4	982.8
145°	1035.5	1035.3	1035.1	1034.5	1033.6	1032.7	1031.7	1030.8	1031.7	1032.7	1033.6
147.5°	1084.2	1084.4	1084.6	1084.1	1083.0	1081.9	1080.8	1079.7	1080.8	1081.9	1083.0
150°	1113.7	1113.7	1113.7	1113.2	1112.3	1111.4	1110.4	1109.6	1110.4	1111.4	1112.3
152.5°	1140.7	1140.5	1140.3	1140.0	1139.3	1138.8	1138.3	1137.7	1138.3	1138.8	1139.3
155°	1180.4	1180.7	1180.9	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0
157.5°	1215.5	1215.6	1215.6	1215.8	1216.3	1216.7	1217.1	1217.5	1217.1	1216.7	1216.3
160°	1237.4	1237.7	1237.9	1238.1	1238.3	1238.6	1238.9	1239.0	1238.9	1238.6	1238.3
162.5°	1255.7	1255.9	1256.2	1256.5	1257.1	1257.8	1258.3	1258.9	1258.3	1257.8	1257.1
165°	1281.4	1281.8	1282.3	1282.9	1283.6	1284.2	1285.0	1285.7	1285.0	1284.2	1283.6
167.5°	1301.9	1301.9	1301.8	1302.3	1303.2	1304.2	1305.2	1306.2	1305.2	1304.2	1303.2
170°	1313.1	1313.0	1312.7	1313.1	1314.3	1315.5	1316.6	1317.8	1316.6	1315.5	1314.3
172.5°	1321.9	1321.8	1321.7	1322.2	1323.1	1324.1	1325.1	1326.1	1325.1	1324.1	1323.1
175°	1331.7	1331.9	1332.1	1332.8	1334.0	1335.2	1336.3	1337.5	1336.3	1335.2	1334.0
177.5°	1337.0	1337.0	1337.0	1337.5	1338.5	1339.3	1340.2	1341.2	1340.2	1339.3	1338.5
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8
2.5°	514.3	512.6	510.5	507.9	504.9	502.2	501.0	502.0	502.6	501.1	501.0
5°	498.6	493.4	489.2	482.9	477.8	473.6	470.6	469.3	469.8	466.4	465.6
7.5°	481.1	474.8	467.9	460.4	453.4	447.2	444.0	442.2	438.5	437.0	434.4
10°	469.8	461.4	454.6	445.7	437.7	430.3	426.7	423.7	420.2	418.5	414.9
12.5°	458.2	448.4	440.9	431.7	423.5	414.6	411.2	405.7	400.1	396.5	391.9
15°	441.7	429.9	420.8	409.8	400.1	390.0	380.9	370.8	367.0	359.0	354.4
17.5°	422.5	410.5	399.3	384.6	369.6	357.0	347.3	337.6	331.8	326.7	324.3
20°	409.8	398.9	383.3	366.1	349.5	335.6	327.7	321.4	315.0	311.5	309.0
22.5°	397.9	383.8	365.7	347.2	330.6	319.7	313.1	306.6	301.4	298.0	294.6
25°	377.7	359.4	340.2	319.1	307.7	298.2	291.1	285.7	282.6	278.1	276.4
27.5°	357.1	334.8	313.7	299.5	287.7	278.9	272.7	268.8	264.7	261.9	259.7
30°	341.3	318.7	299.7	286.1	274.1	267.0	261.9	257.3	254.0	251.7	250.1
32.5°	325.6	303.0	287.0	272.5	263.0	256.0	250.6	247.1	244.6	241.7	240.6
35°	302.8	282.8	268.9	255.7	246.1	239.8	235.5	231.9	229.8	229.0	228.4
37.5°	281.0	264.6	249.6	238.9	230.2	225.2	220.3	218.5	217.0	215.5	216.2
40°	267.2	251.7	238.4	227.1	220.1	214.6	211.7	209.6	208.3	208.3	208.3
42.5°	255.2	240.1	227.1	217.0	210.0	205.4	202.1	200.3	199.8	199.7	200.7
45°	236.6	222.7	209.6	201.1	195.2	190.6	188.7	187.2	187.2	188.1	188.2
47.5°	218.1	205.1	194.6	185.1	179.7	176.8	175.1	174.4	174.5	175.3	176.3
50°	206.8	193.9	183.6	175.1	170.1	167.4	165.9	165.4	165.9	165.9	167.4
52.5°	194.5	183.0	172.8	165.7	160.0	157.4	156.6	156.0	156.2	156.9	157.6
55°	176.5	166.1	156.4	149.6	145.4	143.7	141.8	142.0	141.6	142.0	142.0
57.5°	158.3	149.0	140.0	134.6	130.9	128.5	126.4	127.0	126.4	126.3	125.9
60°	146.7	136.5	129.4	124.5	120.3	118.2	116.3	116.7	116.1	115.7	114.8
62.5°	134.0	125.6	118.7	114.0	110.7	108.3	106.3	105.9	104.4	103.0	101.1
65°	115.7	108.7	102.5	98.2	95.0	93.1	91.6	90.3	87.1	83.8	82.1
67.5°	97.8	92.7	87.0	83.3	80.7	78.3	75.4	73.3	70.4	68.5	67.4
70°	86.3	81.5	76.6	73.0	70.3	67.9	64.8	63.3	61.2	60.4	59.3
72.5°	75.3	70.8	66.3	63.0	60.2	58.3	55.8	54.4	53.4	53.1	52.1
75°	58.7	55.1	51.7	48.8	46.5	45.1	44.1	43.1	42.6	40.8	39.7
77.5°	42.8	40.4	38.3	36.2	34.6	33.7	31.7	30.5	29.8	28.9	28.6
80°	33.3	31.7	29.5	28.3	25.9	25.1	24.3	24.1	23.8	23.6	23.5
82.5°	25.1	23.4	21.3	20.5	19.9	19.4	18.9	18.6	18.5	18.5	18.5
85°	12.7	11.9	11.9	11.6	11.4	11.1	11.0	11.0	10.8	11.0	10.8
87.5°	6.9	7.1	7.5	7.6	8.1	8.5	8.6	8.8	9.3	9.2	9.4
90°	13.2	15.4	17.3	19.1	21.0	22.8	24.2	25.6	26.9	28.4	29.2
92.5°	33.8	35.8	37.2	38.4	39.8	41.0	41.8	42.7	43.5	44.3	44.9
95°	70.4	72.3	73.9	75.5	77.1	78.7	79.5	80.1	80.8	81.5	81.9
97.5°	115.2	117.0	118.9	120.7	122.6	124.5	125.4	126.2	127.0	127.9	128.2
100°	148.7	150.3	152.3	154.4	156.4	158.5	159.0	159.4	159.9	160.3	160.6
102.5°	184.7	185.7	187.6	189.6	191.5	193.3	193.9	194.6	195.3	195.9	196.3
105°	242.3	242.9	243.8	244.7	245.7	246.6	247.3	248.0	248.6	249.3	250.0
107.5°	303.6	303.8	304.0	304.1	304.3	304.3	305.1	305.7	306.3	306.9	307.3
110°	345.8	345.9	345.7	345.4	345.2	345.0	344.6	344.0	343.6	343.1	343.2



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	387.4	387.3	386.8	386.5	386.0	385.6	385.5	385.4	385.3	385.2	385.2
115°	451.7	451.5	451.0	450.6	450.0	449.6	449.4	449.2	448.9	448.7	448.4
117.5°	513.4	513.3	512.9	512.6	512.3	512.0	511.2	510.4	509.6	508.8	508.3
120°	556.9	557.1	556.3	555.6	554.9	554.3	553.1	552.0	550.8	549.7	549.3
122.5°	597.0	597.0	596.6	596.4	596.0	595.7	594.9	594.1	593.3	592.5	591.7
125°	657.8	657.7	657.5	657.3	657.0	656.8	656.4	655.9	655.4	655.0	654.5
127.5°	717.2	717.4	716.9	716.6	716.2	715.9	715.4	715.0	714.5	714.0	713.6
130°	757.0	757.3	757.3	757.3	757.3	757.3	756.9	756.3	755.9	755.5	754.7
132.5°	796.8	797.0	796.8	796.7	796.5	796.3	795.8	795.3	794.9	794.4	794.0
135°	854.0	854.7	854.7	854.7	854.7	854.7	854.3	853.8	853.3	852.8	852.3
137.5°	909.5	910.0	910.3	910.7	911.1	911.4	910.9	910.3	909.6	909.1	908.8
140°	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.4	947.3	947.0	946.8
142.5°	983.4	983.5	983.3	983.1	982.9	982.8	982.7	982.7	982.6	982.6	982.5
145°	1034.5	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7	1035.5	1035.3	1035.1	1034.6
147.5°	1084.1	1084.6	1084.4	1084.2	1084.1	1083.9	1083.7	1083.5	1083.3	1083.1	1082.9
150°	1113.2	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.6
152.5°	1140.0	1140.3	1140.5	1140.7	1140.9	1141.0	1141.6	1142.1	1142.7	1143.3	1143.3
155°	1181.0	1180.9	1180.7	1180.4	1180.2	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7
157.5°	1215.8	1215.6	1215.6	1215.5	1215.5	1215.4	1216.1	1216.8	1217.5	1218.2	1218.2
160°	1238.1	1237.9	1237.7	1237.4	1237.2	1237.0	1237.7	1238.3	1239.0	1239.7	1239.5
162.5°	1256.5	1256.2	1255.9	1255.7	1255.4	1255.2	1256.4	1257.7	1258.9	1260.2	1260.3
165°	1282.9	1282.3	1281.8	1281.4	1280.9	1280.5	1281.8	1283.3	1284.6	1286.0	1286.2
167.5°	1302.3	1301.8	1301.9	1301.9	1302.0	1302.0	1303.4	1304.8	1306.2	1307.5	1307.5
170°	1313.1	1312.7	1313.0	1313.1	1313.4	1313.7	1315.0	1316.4	1317.8	1319.2	1319.0
172.5°	1322.2	1321.7	1321.8	1321.9	1321.9	1322.0	1323.5	1325.1	1326.6	1328.2	1328.2
175°	1332.8	1332.1	1331.9	1331.7	1331.5	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7
177.5°	1337.5	1337.0	1337.0	1337.0	1337.0	1337.0	1338.4	1339.6	1341.0	1342.2	1342.1
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8
2.5°	500.0	500.3	499.2	498.8	499.2	500.3	500.0	501.0	501.1	502.6	502.0
5°	463.9	463.4	462.4	462.6	462.4	463.4	463.9	465.6	466.4	469.8	469.3
7.5°	432.9	431.3	431.8	430.1	431.8	431.3	432.9	434.4	437.0	438.5	442.2
10°	414.0	411.7	409.8	408.1	409.8	411.7	414.0	414.9	418.5	420.2	423.7
12.5°	388.3	386.2	383.7	384.1	383.7	386.2	388.3	391.9	396.5	400.1	405.7
15°	351.6	348.4	343.4	344.0	343.4	348.4	351.6	354.4	359.0	367.0	370.8
17.5°	320.6	320.6	318.3	318.9	318.3	320.6	320.6	324.3	326.7	331.8	337.6
20°	304.5	303.1	303.3	302.6	303.3	303.1	304.5	309.0	311.5	315.0	321.4
22.5°	293.4	291.6	290.1	288.8	290.1	291.6	293.4	294.6	298.0	301.4	306.6
25°	274.6	273.3	271.4	271.0	271.4	273.3	274.6	276.4	278.1	282.6	285.7
27.5°	258.0	257.8	257.0	256.0	257.0	257.8	258.0	259.7	261.9	264.7	268.8
30°	248.4	248.0	247.5	246.9	247.5	248.0	248.4	250.1	251.7	254.0	257.3
32.5°	239.8	239.5	239.1	239.2	239.1	239.5	239.8	240.6	241.7	244.6	247.1
35°	227.5	227.3	226.9	226.7	226.9	227.3	227.5	228.4	229.0	229.8	231.9
37.5°	216.1	216.6	216.3	216.2	216.3	216.6	216.1	216.2	215.5	217.0	218.5
40°	208.1	208.3	208.7	208.5	208.7	208.3	208.1	208.3	208.3	208.3	209.6
42.5°	201.5	201.5	202.2	201.4	202.2	201.5	201.5	200.7	199.7	199.8	200.3
45°	189.8	191.0	190.7	190.7	190.7	191.0	189.8	188.2	188.1	187.2	187.2
47.5°	176.8	178.0	178.3	178.2	178.3	178.0	176.8	176.3	175.3	174.5	174.4
50°	168.4	168.0	168.6	168.4	168.6	168.0	168.4	167.4	165.9	165.9	165.4
52.5°	158.1	158.2	158.2	157.9	158.2	158.2	158.1	157.6	156.9	156.2	156.0
55°	142.2	142.5	142.0	142.2	142.0	142.5	142.2	142.0	142.0	141.6	142.0
57.5°	125.0	124.0	124.4	123.9	124.4	124.0	125.0	125.9	126.3	126.4	127.0
60°	112.7	111.0	110.6	109.8	110.6	111.0	112.7	114.8	115.7	116.1	116.7
62.5°	98.9	97.6	96.2	96.9	96.2	97.6	98.9	101.1	103.0	104.4	105.9
65°	80.4	79.5	78.9	79.8	78.9	79.5	80.4	82.1	83.8	87.1	90.3
67.5°	66.5	66.1	66.1	65.7	66.1	66.1	66.5	67.4	68.5	70.4	73.3
70°	59.3	58.7	58.7	58.2	58.7	58.7	59.3	59.3	60.4	61.2	63.3
72.5°	51.9	51.3	51.5	51.2	51.5	51.3	51.9	52.1	53.1	53.4	54.4
75°	38.4	37.4	37.4	37.5	37.4	37.4	38.4	39.7	40.8	42.6	43.1
77.5°	28.6	28.4	28.7	28.4	28.7	28.4	28.6	28.6	28.9	29.8	30.5
80°	23.5	23.2	23.0	23.6	23.0	23.2	23.5	23.5	23.6	23.8	24.1
82.5°	18.2	18.2	18.1	18.9	18.1	18.2	18.2	18.5	18.5	18.5	18.6
85°	11.0	10.5	11.0	10.5	11.0	10.5	11.0	10.8	11.0	10.8	11.0
87.5°	9.8	9.7	9.6	9.9	9.6	9.7	9.8	9.4	9.2	9.3	8.8
90°	29.7	30.1	30.6	31.1	30.6	30.1	29.7	29.2	28.4	26.9	25.6
92.5°	45.2	45.5	45.7	46.0	45.7	45.5	45.2	44.9	44.3	43.5	42.7
95°	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.5	80.8	80.1
97.5°	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	127.9	127.0	126.2
100°	160.6	160.6	160.6	160.6	160.6	160.6	160.6	160.6	160.3	159.9	159.4
102.5°	196.5	196.7	196.9	197.1	196.9	196.7	196.5	196.3	195.9	195.3	194.6
105°	250.7	251.4	252.1	252.8	252.1	251.4	250.7	250.0	249.3	248.6	248.0
107.5°	307.2	307.2	307.1	307.1	307.1	307.2	307.2	307.3	306.9	306.3	305.7
110°	343.9	344.6	345.4	346.0	345.4	344.6	343.9	343.2	343.1	343.6	344.0



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	385.4	385.5	385.7	385.8	385.7	385.5	385.4	385.2	385.2	385.3	385.4
115°	448.3	448.0	447.8	447.5	447.8	448.0	448.3	448.4	448.7	448.9	449.2
117.5°	507.7	507.3	506.8	506.4	506.8	507.3	507.7	508.3	508.8	509.6	510.4
120°	549.7	550.2	550.7	551.2	550.7	550.2	549.7	549.3	549.7	550.8	552.0
122.5°	590.9	590.1	589.2	588.4	589.2	590.1	590.9	591.7	592.5	593.3	594.1
125°	654.1	653.6	653.1	652.6	653.1	653.6	654.1	654.5	655.0	655.4	655.9
127.5°	713.3	712.8	712.5	712.1	712.5	712.8	713.3	713.6	714.0	714.5	715.0
130°	753.9	753.0	752.0	751.1	752.0	753.0	753.9	754.7	755.5	755.9	756.3
132.5°	793.6	793.3	792.9	792.6	792.9	793.3	793.6	794.0	794.4	794.9	795.3
135°	851.6	850.9	850.2	849.5	850.2	850.9	851.6	852.3	852.8	853.3	853.8
137.5°	909.0	909.1	909.3	909.4	909.3	909.1	909.0	908.8	909.1	909.6	910.3
140°	946.6	946.3	946.1	945.8	946.1	946.3	946.6	946.8	947.0	947.3	947.4
142.5°	982.5	982.4	982.4	982.3	982.4	982.4	982.5	982.5	982.6	982.6	982.7
145°	1033.9	1033.2	1032.5	1031.9	1032.5	1033.2	1033.9	1034.6	1035.1	1035.3	1035.5
147.5°	1082.7	1082.4	1082.2	1082.0	1082.2	1082.4	1082.7	1082.9	1083.1	1083.3	1083.5
150°	1113.3	1113.1	1112.9	1112.7	1112.9	1113.1	1113.3	1113.6	1113.7	1113.7	1113.7
152.5°	1142.6	1142.0	1141.4	1140.9	1141.4	1142.0	1142.6	1143.3	1143.3	1142.7	1142.1
155°	1182.8	1181.9	1180.9	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7	1182.8	1181.9
157.5°	1217.4	1216.6	1215.8	1215.0	1215.8	1216.6	1217.4	1218.2	1218.2	1217.5	1216.8
160°	1238.3	1237.2	1236.1	1234.9	1236.1	1237.2	1238.3	1239.5	1239.7	1239.0	1238.3
162.5°	1259.1	1257.9	1256.8	1255.6	1256.8	1257.9	1259.1	1260.3	1260.2	1258.9	1257.7
165°	1285.3	1284.4	1283.4	1282.5	1283.4	1284.4	1285.3	1286.2	1286.0	1284.6	1283.3
167.5°	1306.1	1304.7	1303.2	1301.8	1303.2	1304.7	1306.1	1307.5	1307.5	1306.2	1304.8
170°	1317.4	1315.8	1314.2	1312.6	1314.2	1315.8	1317.4	1319.0	1319.2	1317.8	1316.4
172.5°	1326.5	1324.9	1323.3	1321.7	1323.3	1324.9	1326.5	1328.2	1328.2	1326.6	1325.1
175°	1336.1	1334.4	1332.8	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7	1336.1	1334.4
177.5°	1340.6	1339.2	1337.7	1336.2	1337.7	1339.2	1340.6	1342.1	1342.2	1341.0	1339.6
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8
2.5°	501.0	502.2	504.9	507.9	510.5	512.6	514.3	516.7	518.9	521.9	524.8
5°	470.6	473.6	477.8	482.9	489.2	493.4	498.6	503.4	510.1	516.8	523.3
7.5°	444.0	447.2	453.4	460.4	467.9	474.8	481.1	489.3	498.2	508.1	519.1
10°	426.7	430.3	437.7	445.7	454.6	461.4	469.8	479.5	489.6	501.7	515.1
12.5°	411.2	414.6	423.5	431.7	440.9	448.4	458.2	468.0	481.5	494.5	509.9
15°	380.9	390.0	400.1	409.8	420.8	429.9	441.7	451.8	464.7	483.0	500.6
17.5°	347.3	357.0	369.6	384.6	399.3	410.5	422.5	435.1	450.4	469.1	489.4
20°	327.7	335.6	349.5	366.1	383.3	398.9	409.8	423.7	439.6	459.9	480.7
22.5°	313.1	319.7	330.6	347.2	365.7	383.8	397.9	411.6	429.1	449.4	472.2
25°	291.1	298.2	307.7	319.1	340.2	359.4	377.7	393.6	412.1	432.4	457.7
27.5°	272.7	278.9	287.7	299.5	313.7	334.8	357.1	375.1	394.2	416.0	441.3
30°	261.9	267.0	274.1	286.1	299.7	318.7	341.3	362.4	381.6	404.1	430.5
32.5°	250.6	256.0	263.0	272.5	287.0	303.0	325.6	348.7	369.1	392.2	418.0
35°	235.5	239.8	246.1	255.7	268.9	282.8	302.8	326.7	348.2	372.9	397.6
37.5°	220.3	225.2	230.2	238.9	249.6	264.6	281.0	305.4	329.2	351.8	375.9
40°	211.7	214.6	220.1	227.1	238.4	251.7	267.2	291.1	314.9	337.2	361.5
42.5°	202.1	205.4	210.0	217.0	227.1	240.1	255.2	275.8	300.7	322.4	344.5
45°	188.7	190.6	195.2	201.1	209.6	222.7	236.6	254.9	278.4	299.1	318.4
47.5°	175.1	176.8	179.7	185.1	194.6	205.1	218.1	234.6	255.1	275.8	292.2
50°	165.9	167.4	170.1	175.1	183.6	193.9	206.8	221.6	240.0	259.8	273.5
52.5°	156.6	157.4	160.0	165.7	172.8	183.0	194.5	208.1	225.2	241.7	255.7
55°	141.8	143.7	145.4	149.6	156.4	166.1	176.5	189.3	202.6	216.5	228.4
57.5°	126.4	128.5	130.9	134.6	140.0	149.0	158.3	168.7	180.1	191.6	201.6
60°	116.3	118.2	120.3	124.5	129.4	136.5	146.7	155.8	164.4	175.0	184.9
62.5°	106.3	108.3	110.7	114.0	118.7	125.6	134.0	141.9	150.9	160.1	167.5
65°	91.6	93.1	95.0	98.2	102.5	108.7	115.7	121.8	129.8	136.5	143.3
67.5°	75.4	78.3	80.7	83.3	87.0	92.7	97.8	103.7	109.1	114.1	120.3
70°	64.8	67.9	70.3	73.0	76.6	81.5	86.3	90.3	94.8	99.6	105.1
72.5°	55.8	58.3	60.2	63.0	66.3	70.8	75.3	78.6	82.3	85.6	91.0
75°	44.1	45.1	46.5	48.8	51.7	55.1	58.7	61.6	63.8	66.7	70.4
77.5°	31.7	33.7	34.6	36.2	38.3	40.4	42.8	45.3	47.3	48.3	51.3
80°	24.3	25.1	25.9	28.3	29.5	31.7	33.3	35.7	36.5	37.5	40.3
82.5°	18.9	19.4	19.9	20.5	21.3	23.4	25.1	26.6	27.4	27.7	29.9
85°	11.0	11.1	11.4	11.6	11.9	11.9	12.7	13.7	15.2	15.2	15.9
87.5°	8.6	8.5	8.1	7.6	7.5	7.1	6.9	6.3	6.3	6.3	6.3
90°	24.2	22.8	21.0	19.1	17.3	15.4	13.2	10.7	8.2	5.6	3.1
92.5°	41.8	41.0	39.8	38.4	37.2	35.8	33.8	30.9	28.0	25.1	22.2
95°	79.5	78.7	77.1	75.5	73.9	72.3	70.4	68.4	66.3	64.2	62.2
97.5°	125.4	124.5	122.6	120.7	118.9	117.0	115.2	113.5	111.9	110.2	108.6
100°	159.0	158.5	156.4	154.4	152.3	150.3	148.7	147.8	146.9	146.0	145.1
102.5°	193.9	193.3	191.5	189.6	187.6	185.7	184.7	184.2	183.9	183.5	183.2
105°	247.3	246.6	245.7	244.7	243.8	242.9	242.3	242.1	241.8	241.7	241.4
107.5°	305.1	304.3	304.3	304.1	304.0	303.8	303.6	303.4	303.1	302.8	302.5
110°	344.6	345.0	345.2	345.4	345.7	345.9	345.8	345.4	344.8	344.4	343.9



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	385.5	385.6	386.0	386.5	386.8	387.3	387.4	387.4	387.3	387.2	387.0
115°	449.4	449.6	450.0	450.6	451.0	451.5	451.7	451.7	451.7	451.7	451.7
117.5°	511.2	512.0	512.3	512.6	512.9	513.3	513.4	513.2	513.0	512.8	512.6
120°	553.1	554.3	554.9	555.6	556.3	557.1	556.9	556.0	555.1	554.1	553.2
122.5°	594.9	595.7	596.0	596.4	596.6	597.0	597.0	596.6	596.2	595.8	595.5
125°	656.4	656.8	657.0	657.3	657.5	657.7	657.8	657.8	657.8	657.8	657.8
127.5°	715.4	715.9	716.2	716.6	716.9	717.4	717.2	716.5	715.8	715.2	714.4
130°	756.9	757.3	757.3	757.3	757.3	757.3	757.0	756.3	755.5	754.9	754.2
132.5°	795.8	796.3	796.5	796.7	796.8	797.0	796.8	796.3	795.9	795.3	794.8
135°	854.3	854.7	854.7	854.7	854.7	854.7	854.0	852.7	851.2	849.9	848.5
137.5°	910.9	911.4	911.1	910.7	910.3	910.0	909.5	908.8	908.2	907.6	906.9
140°	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.3	946.8	946.3	945.8
142.5°	982.7	982.8	982.9	983.1	983.3	983.5	983.4	982.8	982.4	982.0	981.5
145°	1035.7	1036.0	1035.7	1035.5	1035.3	1035.1	1034.5	1033.6	1032.7	1031.7	1030.8
147.5°	1083.7	1083.9	1084.1	1084.2	1084.4	1084.6	1084.1	1083.0	1081.9	1080.8	1079.7
150°	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.2	1112.3	1111.4	1110.4	1109.6
152.5°	1141.6	1141.0	1140.9	1140.7	1140.5	1140.3	1140.0	1139.3	1138.8	1138.3	1137.7
155°	1180.9	1180.0	1180.2	1180.4	1180.7	1180.9	1181.0	1181.0	1181.0	1181.0	1181.0
157.5°	1216.1	1215.4	1215.5	1215.5	1215.6	1215.6	1215.8	1216.3	1216.7	1217.1	1217.5
160°	1237.7	1237.0	1237.2	1237.4	1237.7	1237.9	1238.1	1238.3	1238.6	1238.9	1239.0
162.5°	1256.4	1255.2	1255.4	1255.7	1255.9	1256.2	1256.5	1257.1	1257.8	1258.3	1258.9
165°	1281.8	1280.5	1280.9	1281.4	1281.8	1282.3	1282.9	1283.6	1284.2	1285.0	1285.7
167.5°	1303.4	1302.0	1302.0	1301.9	1301.9	1301.8	1302.3	1303.2	1304.2	1305.2	1306.2
170°	1315.0	1313.7	1313.4	1313.1	1313.0	1312.7	1313.1	1314.3	1315.5	1316.6	1317.8
172.5°	1323.5	1322.0	1321.9	1321.9	1321.8	1321.7	1322.2	1323.1	1324.1	1325.1	1326.1
175°	1332.8	1331.2	1331.5	1331.7	1331.9	1332.1	1332.8	1334.0	1335.2	1336.3	1337.5
177.5°	1338.4	1337.0	1337.0	1337.0	1337.0	1337.0	1337.5	1338.5	1339.3	1340.2	1341.2
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8	523.8
2.5°	527.0	528.5	530.2	533.4	536.1	537.3	539.7	541.4	540.8	543.2	547.2
5°	529.1	534.8	541.4	548.0	555.6	562.0	567.0	572.1	576.1	580.9	588.2
7.5°	528.7	538.9	549.9	562.0	574.4	585.2	595.1	605.3	614.3	624.1	637.0
10°	527.4	540.9	554.6	570.4	586.3	601.3	614.7	627.4	639.4	652.3	668.6
12.5°	525.8	541.4	557.9	577.0	596.7	614.7	630.6	648.9	664.0	680.6	699.3
15°	519.2	540.0	562.7	587.3	611.0	635.3	656.9	679.3	700.3	720.1	743.7
17.5°	511.5	535.6	562.2	591.4	619.7	649.3	675.1	703.3	724.6	751.3	773.2
20°	505.2	531.2	559.6	592.4	624.6	657.4	685.9	714.6	738.6	765.4	793.3
22.5°	497.7	526.1	557.0	590.8	624.6	660.4	692.0	720.5	750.3	780.4	809.1
25°	485.4	515.0	547.7	584.8	623.7	660.1	693.9	729.3	761.4	794.2	819.9
27.5°	470.4	501.4	535.8	574.2	614.0	651.4	691.2	729.0	761.3	792.7	815.2
30°	458.3	491.1	524.2	563.0	604.4	644.5	687.2	725.0	758.9	787.2	799.9
32.5°	446.0	477.1	511.2	550.5	592.9	636.1	678.3	717.0	748.4	765.4	765.7
35°	424.6	453.7	489.2	527.8	571.3	618.1	660.9	698.9	718.2	719.6	698.9
37.5°	401.3	427.9	461.4	500.1	547.7	594.3	638.0	663.3	669.8	648.3	610.1
40°	384.5	409.2	441.5	481.2	528.4	576.6	616.4	635.0	628.3	593.4	550.8
42.5°	366.9	389.9	421.1	460.2	507.7	556.3	590.3	600.2	582.4	542.2	492.2
45°	338.3	359.4	390.2	429.7	475.3	520.8	546.6	541.5	511.8	464.0	408.1
47.5°	308.4	328.9	356.6	393.1	439.8	479.1	496.5	481.3	438.9	386.5	341.0
50°	288.7	309.6	335.1	370.0	412.6	450.6	461.7	438.5	391.5	341.1	299.3
52.5°	269.3	287.1	312.2	345.8	386.6	418.7	424.6	397.9	349.3	304.1	267.0
55°	239.8	256.0	277.1	308.7	344.0	371.2	368.0	333.7	289.5	250.9	221.8
57.5°	211.2	223.4	242.9	272.6	303.5	321.8	310.2	280.9	239.8	208.1	183.6
60°	192.3	203.7	221.8	247.7	275.0	285.3	275.6	243.8	211.2	182.4	161.7
62.5°	174.3	184.4	200.0	224.1	246.1	252.3	241.8	214.0	184.8	160.1	142.9
65°	148.4	157.7	170.9	188.1	203.2	206.2	199.5	170.9	148.8	128.1	116.3
67.5°	124.8	130.8	141.2	156.0	164.1	165.8	152.8	134.8	115.3	102.6	93.7
70°	108.9	113.2	122.8	130.8	137.4	137.6	125.6	111.2	96.2	85.9	79.4
72.5°	93.5	97.6	105.0	110.4	115.5	113.8	102.8	91.5	79.4	71.5	66.7
75°	72.1	75.8	79.5	82.1	82.1	80.0	72.0	63.5	56.5	51.9	50.5
77.5°	52.4	55.4	56.7	56.3	55.6	52.3	47.2	41.6	39.1	37.0	35.8
80°	41.2	42.4	42.8	41.8	40.5	36.7	33.3	31.0	28.7	27.8	27.5
82.5°	30.5	31.7	30.5	30.9	28.0	24.9	23.0	22.2	21.3	21.0	20.5
85°	16.2	16.1	15.6	14.5	12.7	12.2	12.0	11.9	11.4	11.6	11.1
87.5°	6.7	6.7	6.5	6.9	7.3	7.3	7.8	8.2	8.6	8.7	9.4
90°	5.6	8.2	10.7	13.2	15.4	17.3	19.1	21.0	22.8	24.2	25.6
92.5°	25.1	28.0	30.9	33.8	35.8	37.2	38.4	39.8	41.0	41.8	42.7
95°	64.2	66.3	68.4	70.4	72.3	73.9	75.5	77.1	78.7	79.5	80.1
97.5°	110.2	111.9	113.5	115.2	117.0	118.9	120.7	122.6	124.5	125.4	126.2
100°	146.0	146.9	147.8	148.7	150.3	152.3	154.4	156.4	158.5	159.0	159.4
102.5°	183.5	183.9	184.2	184.7	185.7	187.6	189.6	191.5	193.3	193.9	194.6
105°	241.7	241.8	242.1	242.3	242.9	243.8	244.7	245.7	246.6	247.3	248.0
107.5°	302.8	303.1	303.4	303.6	303.8	304.0	304.1	304.3	304.3	305.1	305.7
110°	344.4	344.8	345.4	345.8	345.9	345.7	345.4	345.2	345.0	344.6	344.0



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	387.2	387.3	387.4	387.4	387.3	386.8	386.5	386.0	385.6	385.5	385.4
115°	451.7	451.7	451.7	451.7	451.5	451.0	450.6	450.0	449.6	449.4	449.2
117.5°	512.8	513.0	513.2	513.4	513.3	512.9	512.6	512.3	512.0	511.2	510.4
120°	554.1	555.1	556.0	556.9	557.1	556.3	555.6	554.9	554.3	553.1	552.0
122.5°	595.8	596.2	596.6	597.0	597.0	596.6	596.4	596.0	595.7	594.9	594.1
125°	657.8	657.8	657.8	657.8	657.7	657.5	657.3	657.0	656.8	656.4	655.9
127.5°	715.2	715.8	716.5	717.2	717.4	716.9	716.6	716.2	715.9	715.4	715.0
130°	754.9	755.5	756.3	757.0	757.3	757.3	757.3	757.3	757.3	756.9	756.3
132.5°	795.3	795.9	796.3	796.8	797.0	796.8	796.7	796.5	796.3	795.8	795.3
135°	849.9	851.2	852.7	854.0	854.7	854.7	854.7	854.7	854.7	854.3	853.8
137.5°	907.6	908.2	908.8	909.5	910.0	910.3	910.7	911.1	911.4	910.9	910.3
140°	946.3	946.8	947.3	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.4
142.5°	982.0	982.4	982.8	983.4	983.5	983.3	983.1	982.9	982.8	982.7	982.7
145°	1031.7	1032.7	1033.6	1034.5	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7	1035.5
147.5°	1080.8	1081.9	1083.0	1084.1	1084.6	1084.4	1084.2	1084.1	1083.9	1083.7	1083.5
150°	1110.4	1111.4	1112.3	1113.2	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7
152.5°	1138.3	1138.8	1139.3	1140.0	1140.3	1140.5	1140.7	1140.9	1141.0	1141.6	1142.1
155°	1181.0	1181.0	1181.0	1181.0	1180.9	1180.7	1180.4	1180.2	1180.0	1180.9	1181.9
157.5°	1217.1	1216.7	1216.3	1215.8	1215.6	1215.6	1215.5	1215.5	1215.4	1216.1	1216.8
160°	1238.9	1238.6	1238.3	1238.1	1237.9	1237.7	1237.4	1237.2	1237.0	1237.7	1238.3
162.5°	1258.3	1257.8	1257.1	1256.5	1256.2	1255.9	1255.7	1255.4	1255.2	1256.4	1257.7
165°	1285.0	1284.2	1283.6	1282.9	1282.3	1281.8	1281.4	1280.9	1280.5	1281.8	1283.3
167.5°	1305.2	1304.2	1303.2	1302.3	1301.8	1301.9	1301.9	1302.0	1302.0	1303.4	1304.8
170°	1316.6	1315.5	1314.3	1313.1	1312.7	1313.0	1313.1	1313.4	1313.7	1315.0	1316.4
172.5°	1325.1	1324.1	1323.1	1322.2	1321.7	1321.8	1321.9	1321.9	1322.0	1323.5	1325.1
175°	1336.3	1335.2	1334.0	1332.8	1332.1	1331.9	1331.7	1331.5	1331.2	1332.8	1334.4
177.5°	1340.2	1339.3	1338.5	1337.5	1337.0	1337.0	1337.0	1337.0	1337.0	1338.4	1339.6
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	523.8	523.8	523.8	523.8	523.8	523.8	523.8
2.5°	549.5	550.1	550.6	552.3	552.5	554.0	552.5
5°	594.9	597.9	602.5	607.2	607.6	610.6	605.3
7.5°	645.9	652.7	657.0	664.5	667.4	669.3	666.3
10°	681.0	687.3	698.6	704.0	709.5	710.3	707.8
12.5°	715.0	725.0	733.8	744.2	744.0	751.4	748.7
15°	760.2	770.5	782.7	794.3	798.5	798.5	801.9
17.5°	792.4	811.4	824.0	833.1	843.1	844.8	843.6
20°	814.2	834.6	848.2	860.0	866.7	868.6	868.6
22.5°	830.4	847.8	861.0	871.6	877.2	879.4	878.8
25°	841.6	856.6	864.6	867.8	869.2	868.9	864.9
27.5°	826.3	825.5	820.6	810.8	803.5	799.1	794.0
30°	796.9	785.9	773.2	759.3	741.4	727.6	723.4
32.5°	753.1	728.5	707.0	683.9	664.6	650.9	645.1
35°	668.6	629.5	597.6	569.8	549.6	536.9	532.6
37.5°	568.2	530.4	491.0	464.0	447.1	434.4	429.6
40°	504.4	463.2	428.8	403.5	386.2	373.7	373.5
42.5°	446.1	406.8	374.4	356.2	337.6	329.3	329.3
45°	365.3	333.9	306.4	292.0	280.9	274.1	272.2
47.5°	302.5	276.4	258.2	246.7	237.6	233.4	230.5
50°	267.2	244.4	229.8	219.9	214.8	209.4	208.9
52.5°	237.8	219.4	208.0	200.0	193.6	190.3	190.4
55°	199.8	185.3	177.3	171.1	166.1	163.5	162.5
57.5°	168.4	157.5	151.6	146.0	143.8	141.9	141.3
60°	148.8	141.4	135.9	131.4	128.3	127.7	127.4
62.5°	132.6	124.8	121.1	117.6	115.3	114.3	114.0
65°	109.3	103.6	100.2	97.5	96.7	95.1	95.0
67.5°	88.1	84.7	82.5	80.6	79.5	79.4	79.4
70°	75.2	73.2	71.3	70.3	69.6	69.2	69.2
72.5°	64.0	62.6	61.0	60.5	60.4	59.9	59.7
75°	48.8	47.3	47.5	46.5	45.6	44.5	43.9
77.5°	34.6	33.5	33.3	33.2	32.5	32.4	32.6
80°	26.8	25.8	25.5	25.8	25.5	24.9	24.9
82.5°	20.4	19.5	19.3	19.2	19.0	19.2	18.8
85°	11.0	10.5	10.5	10.5	11.0	10.8	10.5
87.5°	9.3	9.4	9.7	9.6	9.7	9.6	9.9
90°	26.9	28.4	29.2	29.7	30.1	30.6	31.1
92.5°	43.5	44.3	44.9	45.2	45.5	45.7	46.0
95°	80.8	81.5	81.9	81.9	81.9	81.9	81.9
97.5°	127.0	127.9	128.2	128.2	128.2	128.2	128.2
100°	159.9	160.3	160.6	160.6	160.6	160.6	160.6
102.5°	195.3	195.9	196.3	196.5	196.7	196.9	197.1
105°	248.6	249.3	250.0	250.7	251.4	252.1	252.8
107.5°	306.3	306.9	307.3	307.2	307.2	307.1	307.1
110°	343.6	343.1	343.2	343.9	344.6	345.4	346.0



TEST NUMBER: P332890-940

CATALOG NUMBER: SA4XXRDIP-C350D1205U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	385.3	385.2	385.2	385.4	385.5	385.7	385.8
115°	448.9	448.7	448.4	448.3	448.0	447.8	447.5
117.5°	509.6	508.8	508.3	507.7	507.3	506.8	506.4
120°	550.8	549.7	549.3	549.7	550.2	550.7	551.2
122.5°	593.3	592.5	591.7	590.9	590.1	589.2	588.4
125°	655.4	655.0	654.5	654.1	653.6	653.1	652.6
127.5°	714.5	714.0	713.6	713.3	712.8	712.5	712.1
130°	755.9	755.5	754.7	753.9	753.0	752.0	751.1
132.5°	794.9	794.4	794.0	793.6	793.3	792.9	792.6
135°	853.3	852.8	852.3	851.6	850.9	850.2	849.5
137.5°	909.6	909.1	908.8	909.0	909.1	909.3	909.4
140°	947.3	947.0	946.8	946.6	946.3	946.1	945.8
142.5°	982.6	982.6	982.5	982.5	982.4	982.4	982.3
145°	1035.3	1035.1	1034.6	1033.9	1033.2	1032.5	1031.9
147.5°	1083.3	1083.1	1082.9	1082.7	1082.4	1082.2	1082.0
150°	1113.7	1113.7	1113.6	1113.3	1113.1	1112.9	1112.7
152.5°	1142.7	1143.3	1143.3	1142.6	1142.0	1141.4	1140.9
155°	1182.8	1183.7	1183.7	1182.8	1181.9	1180.9	1180.0
157.5°	1217.5	1218.2	1218.2	1217.4	1216.6	1215.8	1215.0
160°	1239.0	1239.7	1239.5	1238.3	1237.2	1236.1	1234.9
162.5°	1258.9	1260.2	1260.3	1259.1	1257.9	1256.8	1255.6
165°	1284.6	1286.0	1286.2	1285.3	1284.4	1283.4	1282.5
167.5°	1306.2	1307.5	1307.5	1306.1	1304.7	1303.2	1301.8
170°	1317.8	1319.2	1319.0	1317.4	1315.8	1314.2	1312.6
172.5°	1326.6	1328.2	1328.2	1326.5	1324.9	1323.3	1321.7
175°	1336.1	1337.7	1337.7	1336.1	1334.4	1332.8	1331.2
177.5°	1341.0	1342.2	1342.1	1340.6	1339.2	1337.7	1336.2
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5

(END OF REPORT)