

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P334235

Luminaire Tested: **SA4XXRDP-C350D835-4F0-1E-UDD-F**

Issue Date: 10/11/2019

Test Information

Test Method: LM-79-08
Report Number: P334235
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1802-639-26)
Test Lab: INNOVATIONS CENTER
Issue Date: 10/11/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XRDP-C350D835-4F0-1E-UDD-F
Description: DEFINE 4 REGRESSED DIRECT LED LUMINAIRE, FLUSH SATIN WHITE DIFFUSER
PENDANT/SURFACE/WALL MOUNT, 350 LUMENS PER FOOT
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1317.6 lumens
Efficiency: N/A
Efficacy: 113.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 11.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P334235

CATALOG NUMBER: SA4XXRDP-C350D835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

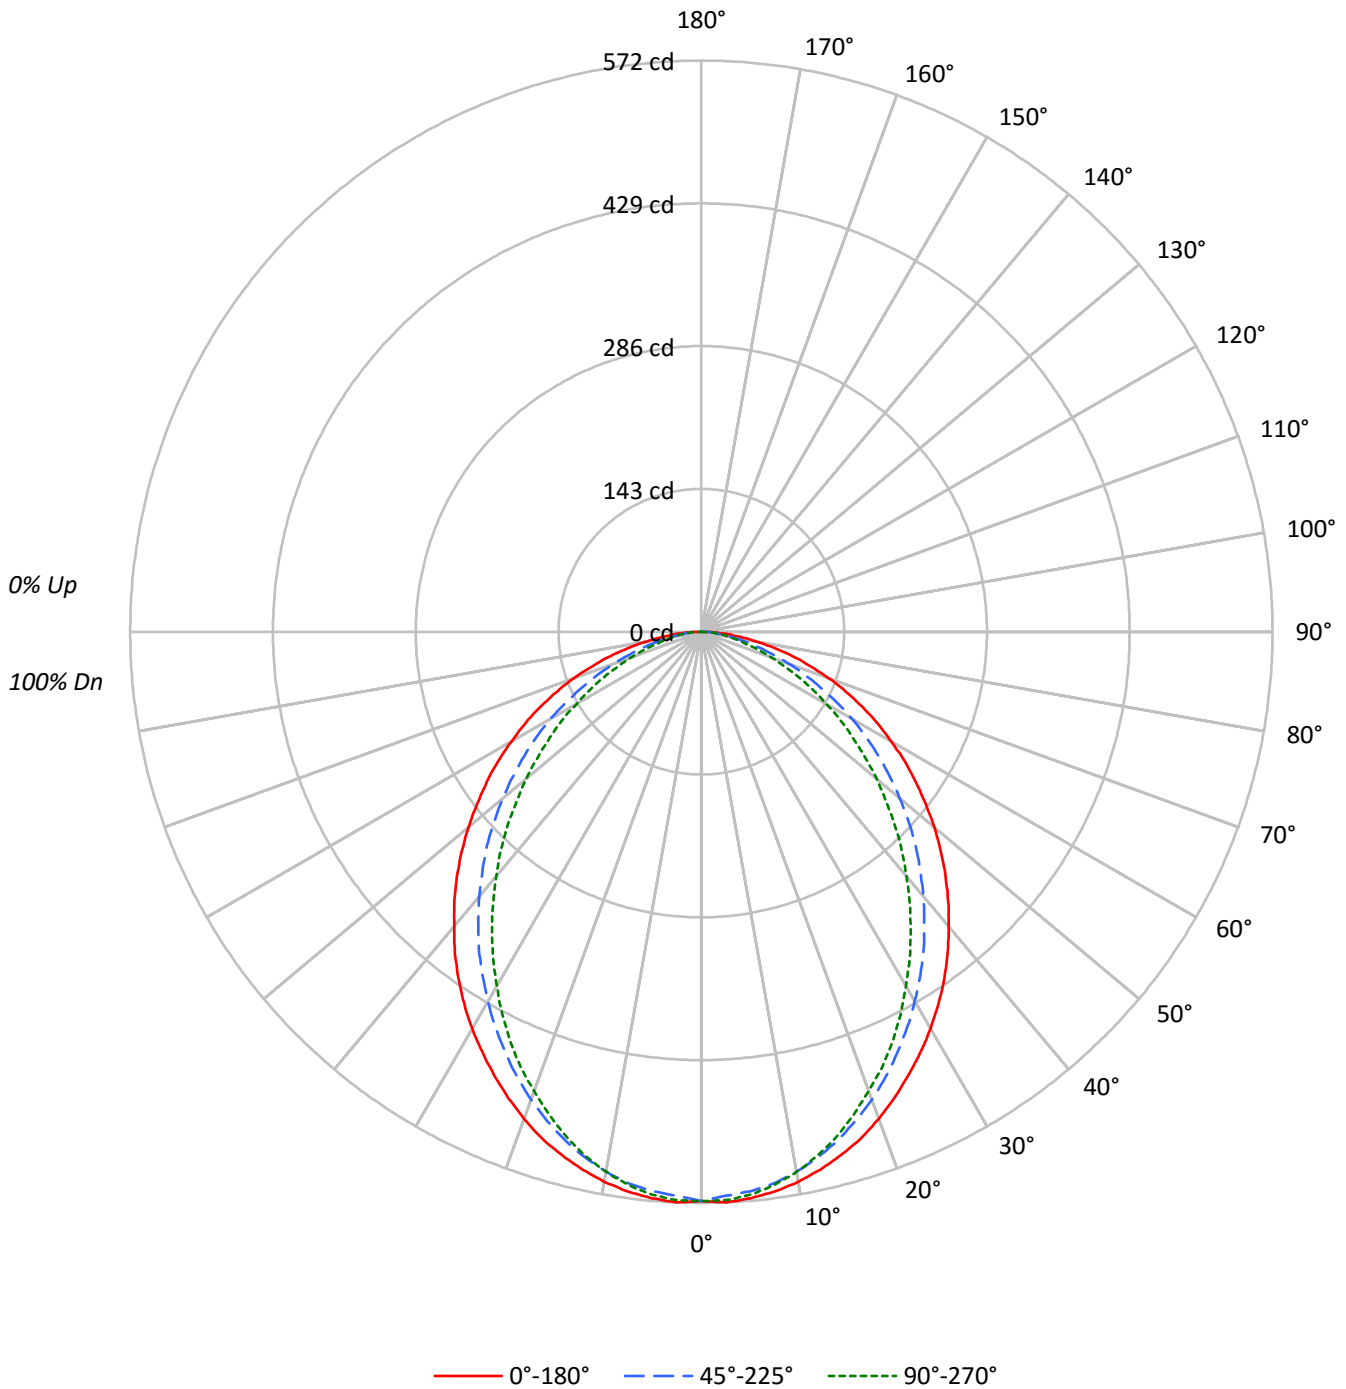



TEST NUMBER: P334235

CATALOG NUMBER: SA4XXRDP-C350D835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	110	105	101	98	107	103	99	96	99	96	93	95	92	90	91	89	87	85				
2	100	93	86	81	98	91	85	80	87	82	78	84	80	76	81	78	74	72				
3	92	82	74	68	89	80	73	67	77	71	66	75	69	65	72	68	64	62				
4	84	73	65	58	82	72	64	58	69	62	57	67	61	56	65	60	56	54				
5	78	66	57	51	76	65	56	50	62	55	50	61	54	49	59	53	49	47				
6	72	59	51	45	70	58	50	44	57	49	44	55	49	44	53	48	43	41				
7	67	54	46	40	65	53	45	40	52	45	39	50	44	39	49	43	39	37				
8	63	50	41	36	61	49	41	36	48	40	35	46	40	35	45	39	35	33				
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				
10	55	42	35	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4603	4603	4603
5°	4614	4558	4586
10°	4585	4503	4503
15°	4532	4408	4375
20°	4460	4283	4205
25°	4367	4138	4033
30°	4278	3985	3818
35°	4179	3826	3602
40°	4058	3644	3368
45°	3948	3465	3131
50°	3822	3258	2879
55°	3688	3042	2605
60°	3539	2806	2327
65°	3402	2510	2052
70°	3205	2186	1742
75°	2954	1812	1416
80°	2580	1381	1297
85°	2186	1250	1176



TEST NUMBER: P334235

CATALOG NUMBER: SA4XXRDP-C350D835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.6	4.1
10°-20°	149.5	11.3
20°-30°	215.8	16.4
30°-40°	244.6	18.6
40°-50°	236.2	17.9
50°-60°	196.4	14.9
60°-70°	135.5	10.3
70°-80°	68.5	5.2
80°-90°	17.4	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	419.0	31.8
0°-40°	663.6	50.4
0°-60°	1096.2	83.2
0°-90°	1317.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1317.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	570	570	570	570	570	
5°	569	568	562	567	566	54
15°	542	538	527	527	524	153
25°	490	482	465	457	453	226
35°	424	410	388	373	366	265
45°	346	330	304	282	274	267
55°	262	244	216	193	185	234
65°	178	159	131	113	107	176
75°	95	79	58	48	45	100
85°	24	15	14	13	13	27
90°	0	0	0	0	0	



TEST NUMBER: P334235

CATALOG NUMBER: SA4XXRDP-C350D835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	570.2	570.2	570.2	570.2	570.2
2.5°	572.0	570.2	565.4	570.2	569.8
5°	569.4	567.6	562.4	566.7	565.9
7.5°	565.4	563.7	557.1	560.2	558.9
10°	559.3	557.1	549.3	551.0	549.3
12.5°	551.5	548.8	539.2	540.1	537.5
15°	542.3	538.4	527.4	526.6	523.5
17.5°	531.8	526.1	513.5	511.3	506.9
20°	519.1	513.5	498.6	495.1	489.5
22.5°	505.2	498.6	482.5	476.8	472.4
25°	490.3	482.5	464.6	457.1	452.8
27.5°	475.0	465.4	446.7	437.9	431.8
30°	458.9	448.0	427.5	416.5	409.6
32.5°	441.9	429.2	407.8	394.7	388.2
35°	424.0	410.0	388.2	373.3	365.5
37.5°	405.2	390.8	366.8	350.6	342.7
40°	385.1	370.7	345.8	327.5	319.6
42.5°	365.9	350.6	324.4	305.6	297.3
45°	345.8	329.7	303.5	282.1	274.2
47.5°	325.3	308.7	281.6	259.4	250.6
50°	304.3	287.3	259.4	237.5	229.2
52.5°	282.9	266.3	237.5	215.3	206.5
55°	262.0	244.5	216.1	193.4	185.1
57.5°	241.5	223.1	195.2	172.0	165.9
60°	219.2	201.7	173.8	151.1	144.1
62.5°	199.1	180.8	151.9	131.4	126.2
65°	178.1	159.4	131.4	112.6	107.4
67.5°	156.3	138.4	112.2	95.6	89.5
70°	135.8	117.5	92.6	78.2	73.8
72.5°	114.0	97.8	74.7	62.9	58.9
75°	94.7	78.6	58.1	48.0	45.4
77.5°	74.7	60.7	43.2	36.2	35.4
80°	55.5	42.8	29.7	28.4	27.9
82.5°	38.9	27.5	21.4	20.5	20.1
85°	23.6	14.8	13.5	12.7	12.7
87.5°	10.0	6.5	6.1	5.7	6.1
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)