

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910338

Luminaire Tested: DFN2DIP-4P2F0-030D030US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910338
REPORT IS A COMBINATION OF REPORTS P899019 AND P895899
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P2F0-030D030US850-FLLFLL
Description: 2 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6238.1 lumens
Efficiency: N/A
Efficacy: 122.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.07' x L: 2.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 51
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910338

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US850-FLLFLL

Luminous Intensity Polar Plot

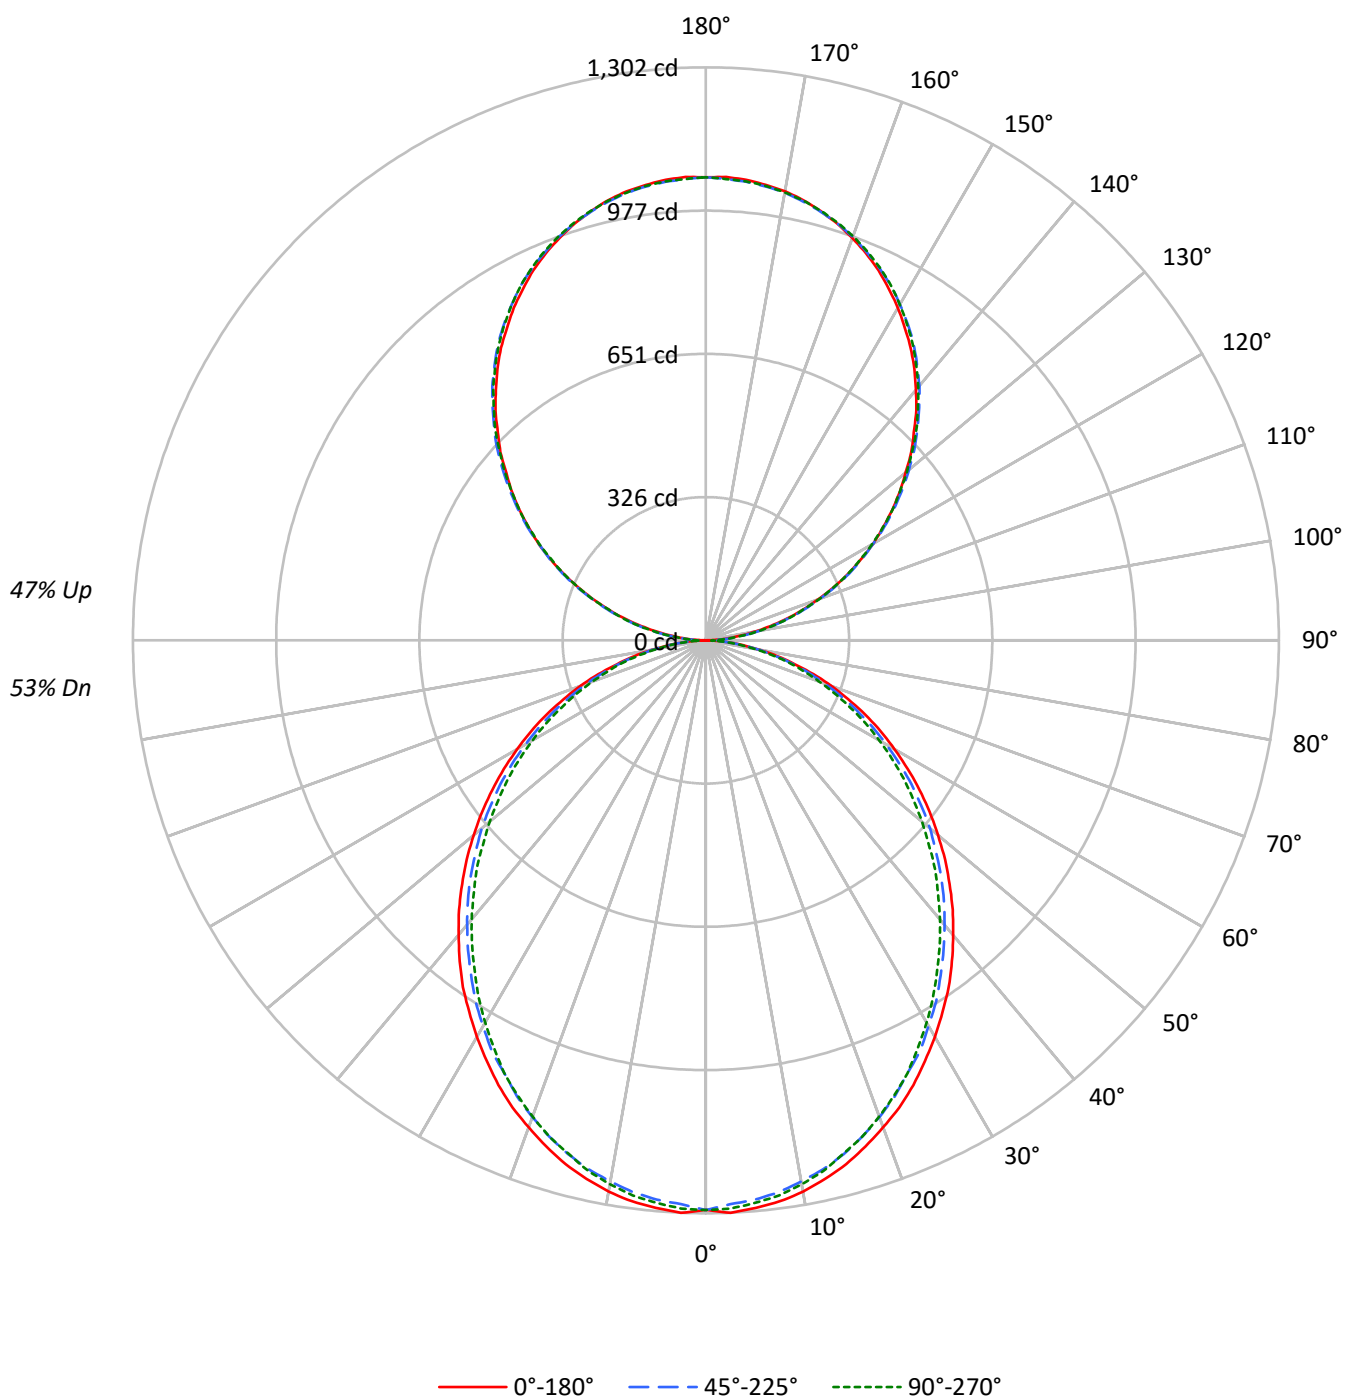

TEST NUMBER: P910338

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US850-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3241	3241	3241
5°	3240	3188	3212
10°	3207	3137	3164
15°	3154	3077	3090
20°	3084	2997	3015
25°	3014	2903	2930
30°	2928	2815	2822
35°	2845	2713	2709
40°	2745	2609	2601
45°	2645	2505	2489
50°	2536	2395	2362
55°	2420	2268	2243
60°	2290	2119	2106
65°	2146	1963	1945
70°	1964	1773	1771
75°	1714	1545	1603
80°	1410	1255	1298
85°	945	785	807

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2645 cd/sqm

TEST NUMBER: P910338

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US850-FLLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.8	2.0
10°-20°	342.8	5.5
20°-30°	503.8	8.1
30°-40°	585.2	9.4
40°-50°	584.4	9.4
50°-60°	509.6	8.2
60°-70°	376.7	6.0
70°-80°	213.1	3.4
80°-90°	59.2	0.9
90°-100°	65.1	1.0
100°-110°	206.9	3.3
110°-120°	354.0	5.7
120°-130°	465.6	7.5
130°-140°	522.6	8.4
140°-150°	512.5	8.2
150°-160°	429.9	6.9
160°-170°	285.1	4.6
170°-180°	99.7	1.6
0°-30°	968.5	15.5
0°-40°	1553.6	24.9
0°-60°	2647.7	42.4
0°-90°	3296.7	52.8
90°-120°	626.0	10.0
90°-150°	2126.7	34.1
90°-180°	2941.0	47.1
0°-180°	6238.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1294	1294	1294	1294	1294	
5°	1294	1290	1276	1286	1283	123
15°	1232	1225	1209	1214	1208	347
25°	1115	1106	1084	1087	1084	513
35°	962	950	930	922	916	601
45°	783	774	756	742	737	604
55°	593	585	570	555	549	530
65°	400	392	380	368	362	395
75°	209	207	200	193	196	223
85°	51	50	49	45	44	57
90°	1	11	31	29	30	6
95°	46	55	57	57	55	52
105°	191	194	195	197	197	202
115°	355	360	359	358	355	351
125°	517	525	522	519	518	462
135°	668	678	680	679	677	517
145°	812	818	823	824	820	507
155°	928	930	933	938	935	427
165°	1009	1008	1008	1015	1010	285
175°	1050	1048	1046	1052	1047	100
180°	1052	1052	1052	1052	1052	

TEST NUMBER: P910338

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1294.5	1294.5	1294.5	1294.5	1294.5
2.5°	1302.1	1295.9	1282.1	1294.5	1292.2
5°	1294.5	1289.7	1275.9	1285.9	1283.4
7.5°	1285.9	1278.5	1264.7	1274.8	1272.2
10°	1272.2	1263.5	1248.6	1258.5	1254.8
12.5°	1253.5	1246.1	1231.2	1237.3	1234.9
15°	1232.3	1225.0	1208.7	1213.7	1207.5
17.5°	1206.1	1198.8	1182.5	1188.7	1182.5
20°	1177.5	1170.1	1152.7	1156.4	1151.5
22.5°	1149.0	1137.8	1121.5	1121.5	1119.0
25°	1115.3	1105.5	1084.3	1086.7	1084.3
27.5°	1077.9	1069.2	1053.1	1049.4	1043.2
30°	1040.7	1030.7	1012.1	1008.3	1003.3
32.5°	1000.9	993.4	973.5	965.9	960.9
35°	962.3	949.9	929.9	922.4	916.1
37.5°	918.7	907.5	887.5	878.8	872.6
40°	873.9	863.9	843.9	832.9	827.9
42.5°	830.3	820.3	800.5	787.9	780.5
45°	783.1	774.3	755.6	741.9	736.9
47.5°	736.9	728.3	708.3	694.6	687.1
50°	688.4	682.1	664.7	647.3	641.1
52.5°	641.1	632.4	616.3	602.5	593.8
55°	592.6	585.1	570.1	555.3	549.1
57.5°	544.0	537.8	521.6	506.6	501.6
60°	495.4	490.5	473.1	459.3	455.7
62.5°	448.1	439.4	427.0	414.5	409.6
65°	399.7	392.1	379.7	368.5	362.3
67.5°	349.9	343.6	332.4	323.7	318.7
70°	303.8	298.8	287.6	278.8	273.9
72.5°	256.5	251.4	245.2	236.5	232.9
75°	209.0	206.7	200.4	193.0	195.5
77.5°	166.8	161.8	159.3	155.6	151.9
80°	124.5	123.2	120.7	117.0	114.6
82.5°	84.6	84.6	83.5	78.4	78.4
85°	51.0	49.8	48.6	44.8	43.6
87.5°	22.4	20.0	17.4	13.8	12.4
90°	1.0	11.4	31.1	29.2	30.2
92.5°	19.6	26.6	27.6	28.5	28.5
95°	46.4	55.2	56.8	56.8	55.2
97.5°	77.1	85.3	88.8	88.8	88.8
100°	112.6	119.9	122.4	122.4	121.5
102.5°	150.0	155.5	158.9	159.9	158.9
105°	191.0	193.5	195.4	197.0	197.0
107.5°	231.6	235.3	235.3	236.0	231.6
110°	270.9	276.0	276.0	276.0	273.5

TEST NUMBER: P910338

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	313.4	318.8	317.8	315.3	313.4
115°	355.3	360.3	358.8	357.9	355.3
117.5°	396.8	403.8	399.4	396.8	394.2
120°	438.7	445.7	438.7	438.7	435.8
122.5°	476.8	485.6	481.2	478.6	476.8
125°	516.8	524.7	522.1	519.2	518.3
127.5°	555.7	565.6	562.2	558.3	555.7
130°	592.2	603.6	602.1	600.2	596.6
132.5°	633.1	642.0	642.7	638.2	635.7
135°	668.4	678.2	680.1	679.2	676.6
137.5°	707.7	715.6	717.2	716.6	712.8
140°	742.3	750.2	754.7	754.7	751.1
142.5°	777.9	785.7	788.3	789.3	785.7
145°	811.5	817.8	822.9	823.8	820.3
147.5°	841.6	849.5	853.3	854.9	851.4
150°	872.7	878.1	881.5	884.4	881.5
152.5°	900.3	905.6	910.0	913.6	910.0
155°	927.9	930.3	933.2	937.7	934.9
157.5°	951.6	953.5	955.2	961.5	957.1
160°	972.9	974.8	975.8	981.1	977.4
162.5°	992.6	992.6	993.6	999.5	995.1
165°	1009.4	1008.4	1008.4	1014.7	1010.3
167.5°	1024.6	1021.7	1021.7	1028.0	1023.6
170°	1036.0	1033.5	1032.6	1038.9	1033.5
172.5°	1043.9	1041.5	1040.5	1046.8	1041.5
175°	1050.3	1047.8	1045.9	1052.2	1046.8
177.5°	1053.8	1051.2	1049.3	1054.8	1049.3
180°	1052.2	1052.2	1052.2	1052.2	1052.2

TEST NUMBER: P910338

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.48	12.37	12.41	13.32	14.55	11.04	11.92	11.97	12.87	14.10
	3H	13.12	13.92	14.07	14.88	16.13	12.63	13.43	13.57	14.39	15.64
	4H	13.70	14.45	14.65	15.41	16.67	13.20	13.95	14.16	14.92	16.18
	6H	14.08	14.77	15.05	15.74	17.02	13.58	14.27	14.55	15.24	16.52
	8H	14.18	14.84	15.15	15.82	17.09	13.67	14.34	14.65	15.32	16.59
	12H	14.22	14.85	15.20	15.83	17.12	13.71	14.34	14.69	15.32	16.61
4H	2H	11.93	12.69	12.90	13.65	14.91	11.58	12.33	12.54	13.29	14.56
	3H	13.78	14.40	14.75	15.40	16.67	13.37	14.00	14.34	14.99	16.27
	4H	14.47	15.05	15.45	16.03	17.33	14.05	14.62	15.03	15.61	16.91
	6H	14.97	15.46	15.96	16.47	17.77	14.54	15.03	15.53	16.04	17.34
	8H	15.11	15.57	16.10	16.57	17.89	14.67	15.13	15.67	16.14	17.45
	12H	15.17	15.59	16.19	16.61	17.93	14.72	15.14	15.74	16.16	17.48
8H	4H	14.66	15.12	15.65	16.12	17.44	14.28	14.74	15.28	15.75	17.06
	6H	15.26	15.65	16.28	16.69	18.00	14.88	15.26	15.90	16.31	17.62
	8H	15.47	15.80	16.50	16.84	18.17	15.07	15.41	16.10	16.44	17.77
	12H	15.58	15.88	16.62	16.91	18.28	15.18	15.47	16.21	16.50	17.87
12H	4H	14.64	15.06	15.66	16.08	17.40	14.27	14.69	15.29	15.71	17.03
	6H	15.29	15.62	16.32	16.66	17.99	14.91	15.25	15.94	16.28	17.61
	8H	15.51	15.81	16.54	16.84	18.21	15.13	15.43	16.16	16.45	17.83