

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915796

Luminaire Tested: DFN2DIP-4P2F0-030D030US930-RLFL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915796
REPORT IS A COMBINATION OF REPORTS P899020 AND P895899
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P2F0-030D030US930-RLLFLL
Description: 2 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4243.6 lumens
Efficiency: N/A
Efficacy: 83.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.07' x L: 2.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 51
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915796

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US930-RLLFLL

Luminous Intensity Polar Plot

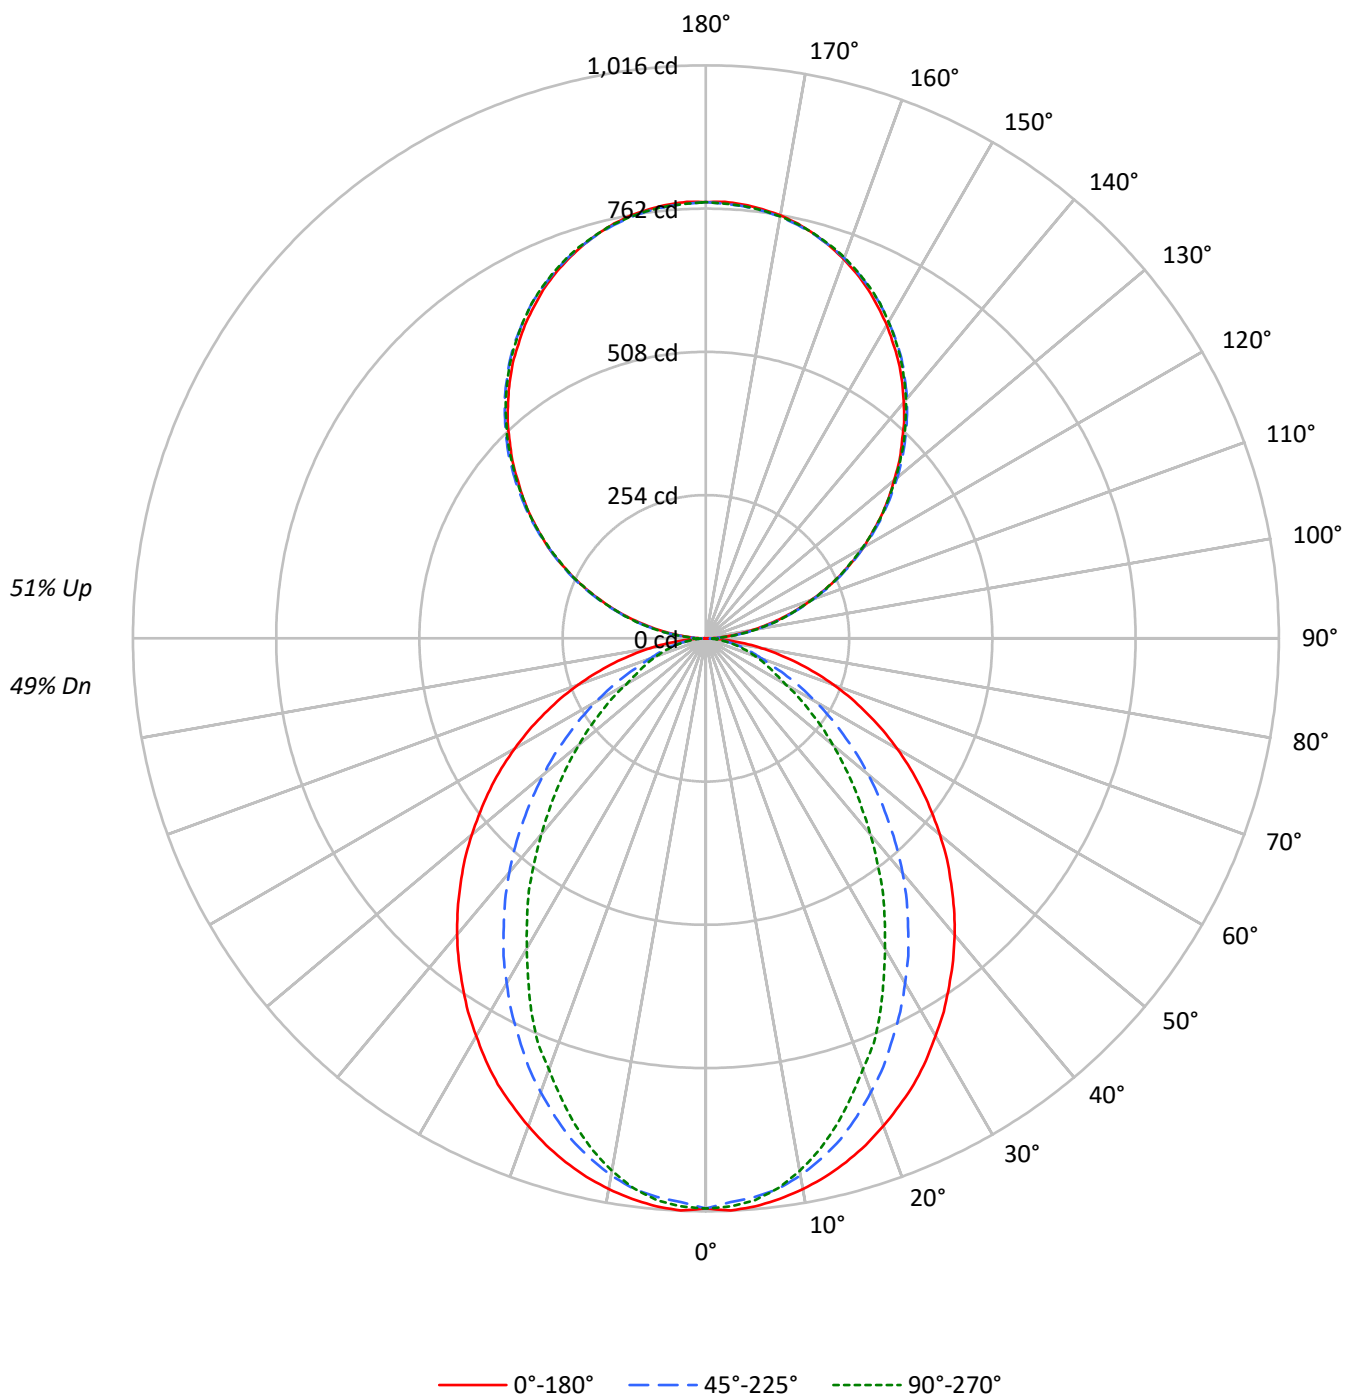

TEST NUMBER: P915796

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2531	2531	2531
5°	2530	2485	2503
10°	2500	2429	2417
15°	2461	2343	2287
20°	2410	2226	2130
25°	2358	2097	1977
30°	2290	1965	1786
35°	2224	1823	1618
40°	2156	1677	1426
45°	2077	1517	1252
50°	1995	1355	1082
55°	1909	1183	919
60°	1809	1004	753
65°	1695	822	673
70°	1555	654	603
75°	1380	564	540
80°	1129	456	456
85°	728	281	322

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2077 cd/sqm

TEST NUMBER: P915796

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US930-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.7	2.2
10°-20°	260.1	6.1
20°-30°	365.1	8.6
30°-40°	398.0	9.4
40°-50°	365.8	8.6
50°-60°	287.3	6.8
60°-70°	187.0	4.4
70°-80°	96.3	2.3
80°-90°	26.8	0.6
90°-100°	47.9	1.1
100°-110°	152.1	3.6
110°-120°	260.3	6.1
120°-130°	342.3	8.1
130°-140°	384.2	9.1
140°-150°	376.8	8.9
150°-160°	316.1	7.4
160°-170°	209.6	4.9
170°-180°	73.3	1.7
0°-30°	720.0	17.0
0°-40°	1118.0	26.3
0°-60°	1771.2	41.7
0°-90°	2081.2	49.0
90°-120°	460.2	10.8
90°-150°	1563.5	36.8
90°-180°	2162.0	50.9
0°-180°	4243.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1011	1011	1011	1011	1011	
5°	1011	1006	994	1003	1000	96
15°	962	951	920	903	894	271
25°	873	843	783	746	732	401
35°	752	705	625	567	547	471
45°	615	553	458	392	370	475
55°	467	396	297	242	225	418
65°	316	242	159	128	125	313
75°	168	104	73	67	66	178
85°	39	20	17	17	17	45
90°	1	8	23	21	22	4
95°	34	41	42	42	41	38
105°	140	142	144	145	145	148
115°	261	265	264	263	261	258
125°	380	386	384	382	381	339
135°	491	499	500	499	497	380
145°	597	601	605	606	603	373
155°	682	684	686	689	687	314
165°	742	741	741	746	743	209
175°	772	770	769	774	770	73
180°	774	774	774	774	774	

TEST NUMBER: P915796

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US930-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1010.9	1010.9	1010.9	1010.9	1010.9
2.5°	1015.5	1010.9	1000.8	1010.0	1008.2
5°	1010.9	1006.3	994.4	1002.7	999.9
7.5°	1002.7	997.2	984.4	988.0	983.4
10°	991.6	985.3	967.0	964.2	958.8
12.5°	978.0	969.7	945.0	939.5	929.4
15°	961.5	951.4	920.3	902.9	893.8
17.5°	942.2	927.6	889.2	869.1	854.4
20°	920.3	902.0	856.2	833.5	813.3
22.5°	896.6	875.5	822.4	791.3	777.6
25°	872.8	843.4	783.1	745.6	731.8
27.5°	844.4	813.3	746.5	703.5	682.4
30°	814.2	779.4	706.2	659.7	634.9
32.5°	784.9	742.8	667.9	612.9	590.0
35°	752.0	705.3	624.8	567.2	547.1
37.5°	720.0	669.6	584.6	521.4	498.6
40°	686.2	631.3	542.5	477.5	453.8
42.5°	651.3	592.9	500.4	432.7	409.9
45°	614.8	553.4	457.5	392.4	370.5
47.5°	580.0	515.1	416.3	351.2	331.2
50°	541.6	476.6	376.0	312.8	293.7
52.5°	504.0	435.5	337.6	277.2	259.8
55°	467.4	396.1	297.3	242.5	225.1
57.5°	430.0	356.8	261.7	210.4	195.8
60°	391.5	318.4	224.1	177.5	162.9
62.5°	354.1	280.9	192.1	148.2	141.0
65°	315.6	241.5	159.1	128.1	125.3
67.5°	279.1	204.9	128.1	112.5	109.7
70°	240.6	169.3	106.1	96.9	93.3
72.5°	204.0	136.2	88.7	81.4	79.6
75°	168.3	104.3	73.2	66.8	65.9
77.5°	132.6	74.0	57.6	54.0	52.1
80°	99.7	53.1	43.9	40.3	40.3
82.5°	69.5	35.7	30.2	28.4	28.4
85°	39.3	20.1	17.4	17.4	17.4
87.5°	14.7	7.3	7.3	6.4	6.4
90°	0.7	8.4	22.8	21.4	22.2
92.5°	14.4	19.6	20.3	21.0	21.0
95°	34.1	40.6	41.7	41.7	40.6
97.5°	56.7	62.7	65.3	65.3	65.3
100°	82.8	88.1	90.0	90.0	89.4
102.5°	110.3	114.3	116.8	117.6	116.8
105°	140.4	142.3	143.7	144.8	144.8
107.5°	170.2	173.0	173.0	173.5	170.2
110°	199.2	202.9	202.9	202.9	201.1



TEST NUMBER: P915796

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	230.4	234.4	233.7	231.8	230.4
115°	261.2	264.9	263.7	263.1	261.2
117.5°	291.7	296.9	293.6	291.7	289.8
120°	322.5	327.7	322.5	322.5	320.4
122.5°	350.5	357.0	353.8	351.9	350.5
125°	379.9	385.7	383.8	381.7	381.1
127.5°	408.5	415.8	413.3	410.4	408.5
130°	435.4	443.8	442.6	441.2	438.6
132.5°	465.5	472.0	472.5	469.2	467.3
135°	491.4	498.6	500.0	499.3	497.4
137.5°	520.2	526.1	527.3	526.8	524.0
140°	545.7	551.5	554.8	554.8	552.2
142.5°	571.9	577.6	579.5	580.2	577.6
145°	596.6	601.2	605.0	605.6	603.1
147.5°	618.7	624.5	627.3	628.5	625.9
150°	641.6	645.6	648.1	650.2	648.1
152.5°	661.9	665.8	669.0	671.6	669.0
155°	682.2	684.0	686.1	689.3	687.3
157.5°	699.6	701.0	702.2	706.9	703.6
160°	715.3	716.6	717.4	721.3	718.5
162.5°	729.7	729.7	730.4	734.8	731.6
165°	742.1	741.4	741.4	746.0	742.7
167.5°	753.3	751.1	751.1	755.8	752.5
170°	761.7	759.8	759.1	763.8	759.8
172.5°	767.4	765.6	764.9	769.6	765.6
175°	772.2	770.3	768.9	773.6	769.6
177.5°	774.7	772.8	771.4	775.4	771.4
180°	773.6	773.6	773.6	773.6	773.6

TEST NUMBER: P915796

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.15	10.97	11.12	11.95	13.24	6.11	6.93	7.08	7.91	9.20
	3H	11.80	12.54	12.78	13.53	14.84	7.27	8.01	8.26	9.00	10.31
	4H	12.39	13.09	13.39	14.08	15.40	7.71	8.41	8.71	9.40	10.72
	6H	12.80	13.44	13.80	14.44	15.77	8.01	8.65	9.02	9.65	10.98
	8H	12.91	13.52	13.93	14.54	15.86	8.09	8.70	9.11	9.72	11.04
	12H	12.97	13.54	13.98	14.55	15.90	8.13	8.71	9.14	9.71	11.07
4H	2H	10.16	10.85	11.16	11.85	13.17	6.69	7.38	7.69	8.38	9.70
	3H	11.96	12.54	12.97	13.56	14.89	8.01	8.59	9.03	9.62	10.95
	4H	12.64	13.16	13.65	14.18	15.53	8.54	9.07	9.56	10.09	11.44
	6H	13.13	13.58	14.16	14.62	15.97	8.94	9.39	9.97	10.43	11.79
	8H	13.29	13.71	14.32	14.75	16.11	9.06	9.48	10.09	10.51	11.88
	12H	13.37	13.75	14.42	14.80	16.17	9.11	9.49	10.16	10.54	11.91
8H	4H	12.60	13.02	13.63	14.05	15.42	8.81	9.23	9.84	10.27	11.63
	6H	13.14	13.49	14.19	14.56	15.92	9.30	9.65	10.35	10.72	12.09
	8H	13.34	13.65	14.40	14.71	16.09	9.48	9.78	10.54	10.84	12.23
	12H	13.46	13.73	14.53	14.78	16.21	9.58	9.85	10.64	10.90	12.33
12H	4H	12.55	12.93	13.60	13.98	15.35	8.81	9.19	9.86	10.24	11.61
	6H	13.11	13.42	14.17	14.48	15.86	9.34	9.65	10.41	10.71	12.09
	8H	13.31	13.59	14.38	14.64	16.06	9.54	9.81	10.60	10.86	12.29

END OF REPORT