

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915799

Luminaire Tested: DFN2DIP-4P2F0-030D040US930-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915799
REPORT IS A COMBINATION OF REPORTS P900545 AND P897455
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P2F0-030D040US930-FLLONL
Description: 2 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5650.0 lumens
Efficiency: N/A
Efficacy: 93.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.07' x L: 2.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 60.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915799

CATALOG NUMBER: DFN2DIP-4P2F0-030D040US930-FLLONL

Luminous Intensity Polar Plot

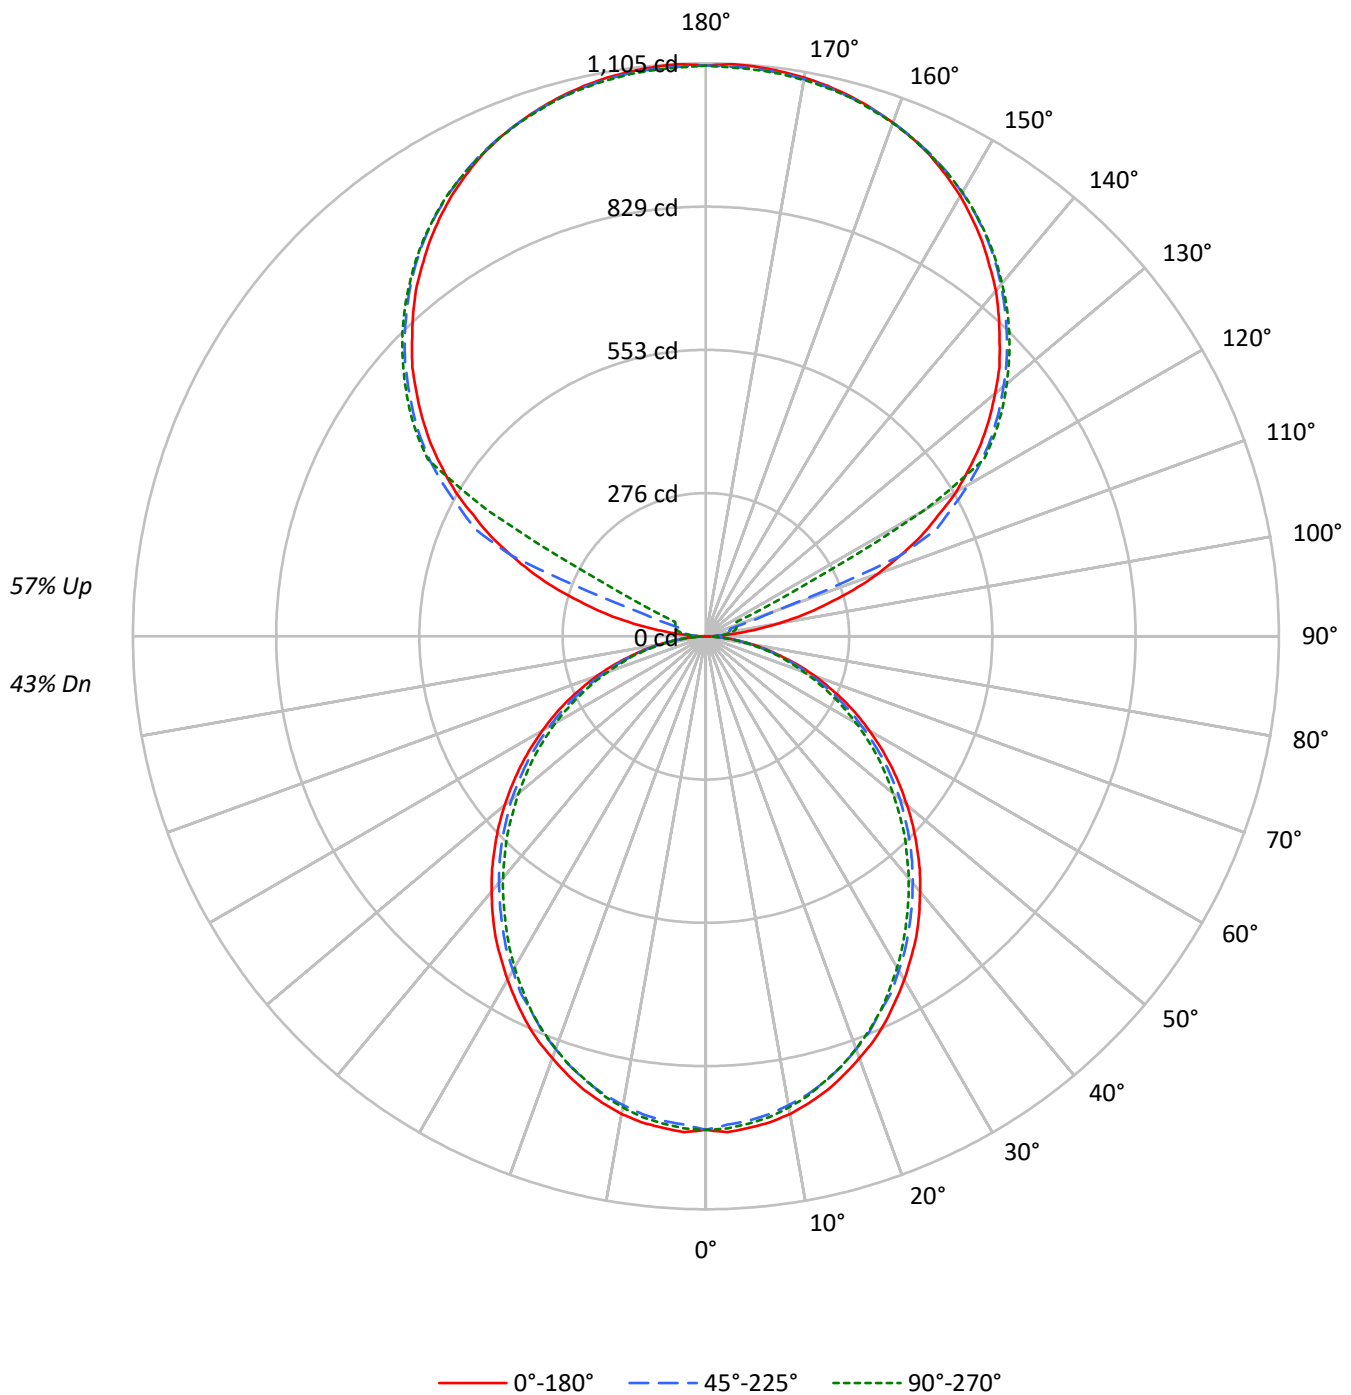

TEST NUMBER: P915799

CATALOG NUMBER: DFN2DIP-4P2F0-030D040US930-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50
1	96	92	88	85	88	84	81	78	70	67	65	56	55	53	44	43	42
2	88	80	74	69	80	74	68	64	61	57	54	49	47	44	39	37	35
3	80	71	63	58	73	65	58	53	54	49	45	44	40	38	34	32	30
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	31	28	26
5	67	56	48	42	61	51	44	39	43	37	33	35	31	28	28	25	23
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20
7	57	45	37	32	52	41	34	29	35	29	25	29	25	22	23	20	18
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14
10	46	34	27	22	42	31	25	21	27	22	18	22	18	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2383	2383	2383
5°	2382	2344	2362
10°	2358	2306	2326
15°	2319	2262	2272
20°	2267	2203	2217
25°	2215	2134	2154
30°	2152	2070	2075
35°	2092	1994	1991
40°	2018	1918	1912
45°	1945	1842	1830
50°	1864	1761	1736
55°	1780	1667	1649
60°	1683	1558	1548
65°	1578	1443	1430
70°	1444	1303	1302
75°	1260	1136	1178
80°	1037	922	953
85°	695	576	593

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1945 cd/sqm

TEST NUMBER: P915799

CATALOG NUMBER: DFN2DIP-4P2F0-030D040US930-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.6	1.6
10°-20°	252.0	4.5
20°-30°	370.4	6.6
30°-40°	430.2	7.6
40°-50°	429.7	7.6
50°-60°	374.6	6.6
60°-70°	277.0	4.9
70°-80°	156.7	2.8
80°-90°	43.3	0.8
90°-100°	36.3	0.6
100°-110°	135.3	2.4
110°-120°	358.8	6.4
120°-130°	595.1	10.5
130°-140°	632.1	11.2
140°-150°	587.5	10.4
150°-160°	472.3	8.4
160°-170°	304.4	5.4
170°-180°	104.8	1.9
0°-30°	712.0	12.6
0°-40°	1142.2	20.2
0°-60°	1946.5	34.5
0°-90°	2423.4	42.9
90°-120°	530.4	9.4
90°-150°	2345.2	41.5
90°-180°	3227.0	57.1
0°-180°	5650.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	952	952	952	952	952	
5°	952	948	938	945	944	90
15°	906	901	889	892	888	255
25°	820	813	797	799	797	377
35°	707	698	684	678	674	442
45°	576	569	556	545	542	444
55°	436	430	419	408	404	390
65°	294	288	279	271	266	290
75°	154	152	147	142	144	164
85°	38	37	36	33	32	42
90°	1	10	16	20	21	5
95°	52	25	31	35	34	61
105°	242	266	49	57	60	259
115°	458	471	491	123	65	451
125°	647	658	673	679	681	577
135°	801	814	821	829	828	619
145°	929	929	942	948	944	581
155°	1023	1016	1026	1030	1024	472
165°	1078	1074	1076	1082	1076	305
175°	1103	1097	1099	1105	1097	105
180°	1101	1101	1101	1101	1101	

TEST NUMBER: P915799

CATALOG NUMBER: DFN2DIP-4P2F0-030D040US930-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	951.7	951.7	951.7	951.7	951.7
2.5°	957.2	952.7	942.6	951.7	950.0
5°	951.7	948.1	938.0	945.3	943.5
7.5°	945.3	939.9	929.8	937.2	935.3
10°	935.3	928.9	917.9	925.2	922.5
12.5°	921.5	916.1	905.1	909.6	907.8
15°	906.0	900.6	888.6	892.3	887.7
17.5°	886.7	881.3	869.4	873.9	869.4
20°	865.7	860.2	847.4	850.1	846.5
22.5°	844.7	836.5	824.5	824.5	822.6
25°	819.9	812.7	797.1	798.9	797.1
27.5°	792.5	786.0	774.2	771.5	767.0
30°	765.1	757.7	744.0	741.3	737.6
32.5°	735.8	730.3	715.7	710.1	706.5
35°	707.4	698.3	683.6	678.1	673.5
37.5°	675.4	667.2	652.5	646.0	641.5
40°	642.5	635.1	620.4	612.3	608.6
42.5°	610.4	603.1	588.5	579.3	573.8
45°	575.7	569.2	555.5	545.4	541.8
47.5°	541.8	535.4	520.7	510.6	505.2
50°	506.1	501.5	488.7	475.9	471.3
52.5°	471.3	464.9	453.1	443.0	436.5
55°	435.7	430.2	419.1	408.2	403.7
57.5°	399.9	395.3	383.4	372.4	368.8
60°	364.2	360.6	347.8	337.7	335.0
62.5°	329.5	323.0	313.9	304.8	301.1
65°	293.8	288.3	279.2	270.9	266.4
67.5°	257.2	252.6	244.3	238.0	234.3
70°	223.3	219.6	211.4	205.0	201.4
72.5°	188.6	184.8	180.3	173.9	171.2
75°	153.7	152.0	147.3	141.9	143.7
77.5°	122.6	119.0	117.1	114.4	111.7
80°	91.6	90.6	88.7	86.0	84.2
82.5°	62.2	62.2	61.4	57.6	57.6
85°	37.5	36.6	35.7	32.9	32.0
87.5°	16.5	14.7	12.8	10.1	9.1
90°	0.7	9.5	15.9	20.0	21.4
92.5°	20.0	16.7	19.1	20.7	21.4
95°	51.7	25.4	31.0	35.1	34.2
97.5°	93.2	27.9	40.6	43.0	43.8
100°	141.0	31.9	45.4	51.7	53.3
102.5°	193.5	192.0	47.0	55.7	58.1
105°	242.1	266.0	48.6	57.3	60.5
107.5°	298.6	318.5	50.2	58.9	62.1
110°	352.9	369.5	139.4	59.8	62.9

TEST NUMBER: P915799

CATALOG NUMBER: DFN2DIP-4P2F0-030D040US930-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	403.8	418.1	404.6	61.3	63.8
115°	457.9	471.4	491.4	122.6	65.4
117.5°	504.9	520.8	534.4	420.4	211.8
120°	557.5	569.4	583.8	593.4	485.8
122.5°	602.0	614.8	630.8	635.5	636.3
125°	647.4	657.9	672.9	678.6	680.9
127.5°	688.8	700.0	712.0	720.0	720.7
130°	727.9	740.7	749.3	758.1	757.4
132.5°	767.7	778.1	786.8	794.0	793.3
135°	801.2	814.0	821.1	829.1	827.5
137.5°	836.2	845.7	853.8	861.7	859.3
140°	870.4	876.9	885.6	892.8	888.8
142.5°	899.2	904.7	915.1	921.4	917.5
145°	929.4	928.6	942.1	947.7	943.7
147.5°	955.6	953.2	966.8	970.8	967.7
150°	981.1	975.6	988.4	993.1	989.1
152.5°	1002.7	996.3	1008.2	1013.0	1007.5
155°	1023.4	1016.3	1025.8	1030.5	1024.2
157.5°	1040.1	1033.7	1041.0	1046.5	1040.1
160°	1054.4	1049.6	1054.4	1059.2	1053.6
162.5°	1067.1	1062.4	1066.4	1072.0	1064.8
165°	1078.3	1073.6	1075.9	1081.5	1075.9
167.5°	1087.1	1082.2	1084.8	1090.3	1083.1
170°	1094.3	1089.5	1091.0	1096.7	1089.5
172.5°	1099.0	1094.3	1095.9	1101.5	1094.3
175°	1102.9	1097.4	1099.0	1104.6	1096.7
177.5°	1104.6	1099.0	1099.8	1105.5	1098.3
180°	1100.7	1100.7	1100.7	1100.7	1100.7

TEST NUMBER: P915799

CATALOG NUMBER: DFN2DIP-4P2F0-030D040US930-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.46	10.26	10.47	11.28	12.65	9.01	9.82	10.03	10.84	12.21
	3H	11.09	11.81	12.12	12.84	14.23	10.60	11.32	11.63	12.35	13.74
	4H	11.66	12.34	12.70	13.38	14.78	11.17	11.85	12.21	12.89	14.28
	6H	12.04	12.67	13.09	13.71	15.12	11.54	12.17	12.59	13.21	14.62
	8H	12.14	12.73	13.19	13.79	15.19	11.63	12.23	12.69	13.29	14.69
	12H	12.17	12.74	13.23	13.79	15.22	11.67	12.23	12.72	13.28	14.71
4H	2H	9.90	10.58	10.95	11.62	13.01	9.55	10.23	10.59	11.26	12.66
	3H	11.73	12.30	12.79	13.37	14.78	11.33	11.89	12.38	12.96	14.37
	4H	12.43	12.95	13.49	14.00	15.44	12.00	12.52	13.06	13.58	15.01
	6H	12.92	13.37	13.99	14.44	15.87	12.49	12.93	13.56	14.01	15.44
	8H	13.06	13.47	14.12	14.54	15.99	12.62	13.04	13.69	14.11	15.55
	12H	13.11	13.49	14.20	14.58	16.03	12.67	13.04	13.75	14.13	15.58
8H	4H	12.61	13.02	13.68	14.10	15.54	12.23	12.65	13.30	13.72	15.16
	6H	13.21	13.55	14.30	14.67	16.11	12.82	13.17	13.92	14.28	15.72
	8H	13.41	13.72	14.51	14.81	16.27	13.02	13.32	14.12	14.42	15.88
	12H	13.53	13.79	14.63	14.88	16.38	13.12	13.38	14.22	14.47	15.97
12H	4H	12.59	12.96	13.67	14.05	15.50	12.22	12.59	13.30	13.68	15.13
	6H	13.23	13.53	14.33	14.63	16.09	12.86	13.16	13.96	14.26	15.72
	8H	13.45	13.72	14.56	14.81	16.31	13.07	13.34	14.17	14.43	15.93