

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915804

Luminaire Tested: DFN2DIP-4P2F0-040D020US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915804
REPORT IS A COMBINATION OF REPORTS P899016 AND P895899
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P2F0-040D020US930-RLLFLL
Description: 2 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4215.1 lumens
Efficiency: N/A
Efficacy: 75.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.07' x L: 2.07' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 56.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915804

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US930-RLLFLL

Luminous Intensity Polar Plot

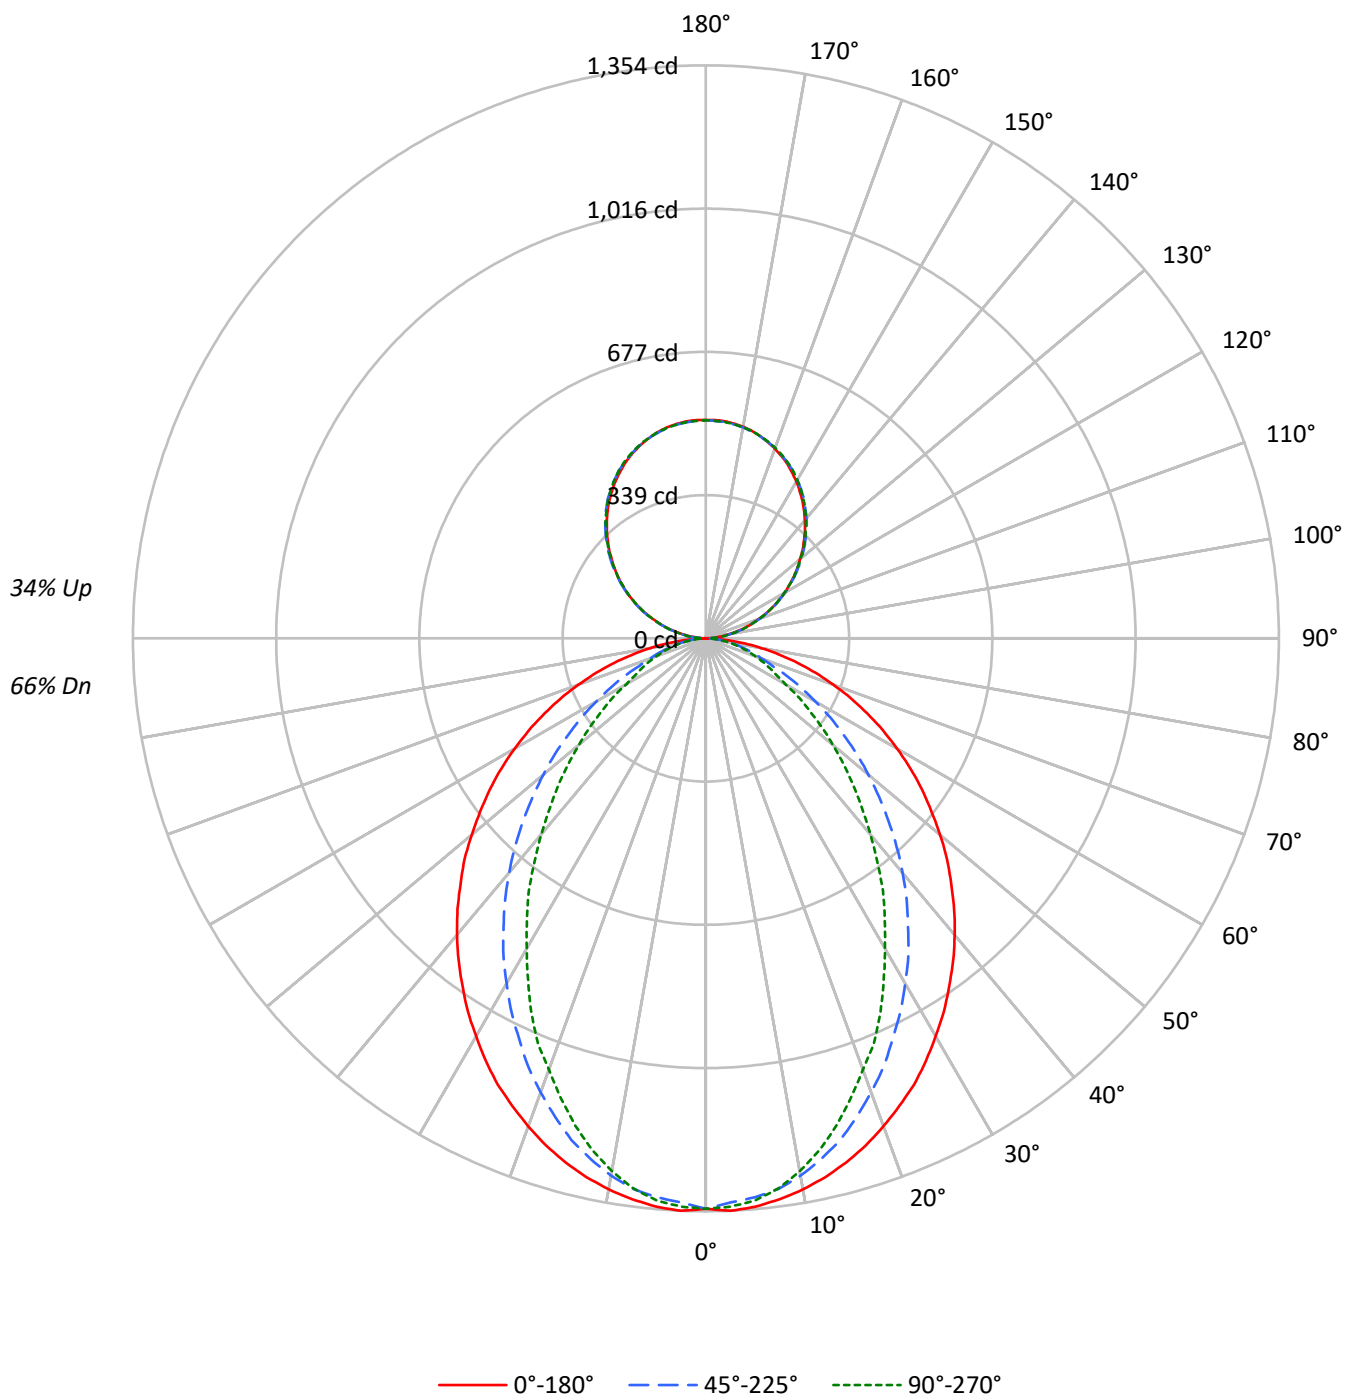

TEST NUMBER: P915804

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61
2	93	86	80	75	88	81	76	72	72	68	65	64	61	58	57	54	52
3	86	76	69	63	80	72	66	61	65	59	55	57	53	50	51	48	45
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	42	40
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35
6	67	55	47	41	63	52	45	40	47	41	37	42	38	34	38	34	31
7	62	50	42	37	59	48	40	35	43	37	33	39	34	30	35	31	28
8	58	46	38	33	55	44	37	32	40	34	29	36	31	27	32	28	25
9	54	42	35	29	51	40	33	29	36	31	27	33	28	25	30	26	23
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3375	3375	3375
5°	3374	3313	3337
10°	3334	3239	3223
15°	3281	3124	3050
20°	3213	2969	2839
25°	3144	2796	2636
30°	3054	2619	2381
35°	2965	2431	2157
40°	2874	2236	1901
45°	2769	2022	1669
50°	2660	1806	1443
55°	2546	1577	1226
60°	2413	1338	1004
65°	2260	1097	897
70°	2074	872	804
75°	1840	753	721
80°	1505	608	608
85°	970	375	430

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2769 cd/sqm

TEST NUMBER: P915804

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US930-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	126.3	3.0
10°-20°	346.8	8.2
20°-30°	486.9	11.6
30°-40°	530.7	12.6
40°-50°	487.8	11.6
50°-60°	383.1	9.1
60°-70°	249.3	5.9
70°-80°	128.4	3.0
80°-90°	34.2	0.8
90°-100°	31.9	0.8
100°-110°	101.4	2.4
110°-120°	173.5	4.1
120°-130°	228.2	5.4
130°-140°	256.1	6.1
140°-150°	251.2	6.0
150°-160°	210.7	5.0
160°-170°	139.7	3.3
170°-180°	48.8	1.2
0°-30°	960.0	22.8
0°-40°	1490.7	35.4
0°-60°	2361.5	56.0
0°-90°	2773.5	65.8
90°-120°	306.8	7.3
90°-150°	1042.3	24.7
90°-180°	1442.0	34.2
0°-180°	4215.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1348	1348	1348	1348	1348	
5°	1348	1342	1326	1337	1333	128
15°	1282	1268	1227	1204	1192	361
25°	1164	1125	1044	994	976	535
35°	1003	940	833	756	729	628
45°	820	738	610	523	494	633
55°	623	528	396	323	300	557
65°	421	322	212	171	167	417
75°	224	139	98	89	88	237
85°	52	27	23	23	23	60
90°	0	6	15	14	15	4
95°	23	27	28	28	27	25
105°	94	95	96	96	96	99
115°	174	177	176	175	174	172
125°	253	257	256	254	254	226
135°	328	332	333	333	332	253
145°	398	401	403	404	402	248
155°	455	456	457	460	458	209
165°	495	494	494	497	495	140
175°	515	514	513	516	513	49
180°	516	516	516	516	516	

TEST NUMBER: P915804

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US930-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1347.9	1347.9	1347.9	1347.9	1347.9
2.5°	1354.0	1347.9	1334.4	1346.7	1344.2
5°	1347.9	1341.7	1325.8	1336.8	1333.3
7.5°	1336.8	1329.6	1312.5	1317.3	1311.2
10°	1322.3	1313.7	1289.3	1285.6	1278.4
12.5°	1304.0	1293.0	1260.0	1252.7	1239.3
15°	1282.0	1268.5	1227.1	1204.0	1191.8
17.5°	1256.4	1236.8	1185.5	1158.8	1139.2
20°	1227.1	1202.6	1141.7	1111.3	1084.3
22.5°	1195.4	1167.3	1096.5	1055.1	1036.9
25°	1163.7	1124.6	1044.1	994.2	975.7
27.5°	1125.9	1084.3	995.3	938.0	909.9
30°	1085.7	1039.2	941.6	879.5	846.5
32.5°	1046.6	990.4	890.5	817.3	786.7
35°	1002.7	940.4	833.2	756.3	729.4
37.5°	960.0	892.8	779.4	695.2	664.8
40°	914.8	841.7	723.3	636.7	605.0
42.5°	868.5	790.4	667.2	576.9	546.5
45°	819.7	737.9	609.9	523.3	494.0
47.5°	773.4	686.8	555.1	468.4	441.6
50°	722.1	635.5	501.3	417.1	391.6
52.5°	672.1	580.6	450.1	369.6	346.4
55°	623.3	528.2	396.4	323.3	300.1
57.5°	573.3	475.7	348.9	280.5	261.1
60°	522.0	424.4	298.8	236.7	217.2
62.5°	472.1	374.5	256.1	197.6	187.9
65°	420.9	322.0	212.2	170.8	167.1
67.5°	372.1	273.2	170.8	150.0	146.3
70°	320.8	225.7	141.5	129.3	124.3
72.5°	272.1	181.7	118.3	108.6	106.2
75°	224.4	139.0	97.6	89.0	87.9
77.5°	176.9	98.7	76.9	72.0	69.5
80°	132.9	70.8	58.5	53.7	53.7
82.5°	92.7	47.6	40.3	37.7	37.7
85°	52.4	26.8	23.2	23.2	23.2
87.5°	19.6	9.7	9.7	8.6	8.6
90°	0.5	5.6	15.2	14.3	14.8
92.5°	9.6	13.0	13.5	14.0	14.0
95°	22.7	27.1	27.8	27.8	27.1
97.5°	37.7	41.8	43.5	43.5	43.5
100°	55.2	58.8	60.0	60.0	59.5
102.5°	73.5	76.1	77.9	78.4	77.9
105°	93.6	94.8	95.8	96.5	96.5
107.5°	113.5	115.4	115.4	115.7	113.5
110°	132.8	135.3	135.3	135.3	134.0



TEST NUMBER: P915804

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	153.6	156.2	155.8	154.5	153.6
115°	174.1	176.6	175.9	175.4	174.1
117.5°	194.5	198.0	195.8	194.5	193.2
120°	215.0	218.4	215.0	215.0	213.6
122.5°	233.7	238.0	235.9	234.6	233.7
125°	253.2	257.1	255.9	254.5	254.0
127.5°	272.4	277.2	275.5	273.6	272.4
130°	290.2	295.9	295.1	294.2	292.4
132.5°	310.3	314.7	314.9	312.8	311.5
135°	327.6	332.4	333.3	332.9	331.6
137.5°	346.8	350.7	351.6	351.2	349.4
140°	363.8	367.7	369.9	369.9	368.2
142.5°	381.2	385.1	386.4	386.8	385.1
145°	397.7	400.8	403.3	403.7	402.0
147.5°	412.5	416.4	418.2	419.0	417.3
150°	427.7	430.3	432.0	433.4	432.0
152.5°	441.2	443.8	446.0	447.8	446.0
155°	454.8	456.0	457.4	459.6	458.2
157.5°	466.4	467.3	468.1	471.2	469.0
160°	476.9	477.8	478.3	480.9	479.0
162.5°	486.5	486.5	486.9	489.9	487.7
165°	494.7	494.2	494.2	497.3	495.2
167.5°	502.1	500.8	500.8	503.9	501.7
170°	507.8	506.5	506.1	509.2	506.5
172.5°	511.7	510.4	510.0	513.1	510.4
175°	514.8	513.6	512.6	515.7	513.1
177.5°	516.5	515.3	514.3	516.9	514.3
180°	515.7	515.7	515.7	515.7	515.7

TEST NUMBER: P915804

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.60	13.58	13.41	14.41	15.44	8.56	9.54	9.37	10.37	11.40
	3H	14.26	15.14	15.09	15.98	17.04	9.74	10.61	10.57	11.46	12.51
	4H	14.86	15.69	15.71	16.54	17.61	10.18	11.01	11.03	11.86	12.92
	6H	15.28	16.04	16.13	16.89	17.97	10.49	11.25	11.35	12.11	13.19
	8H	15.40	16.12	16.26	16.99	18.08	10.57	11.30	11.44	12.17	13.26
	12H	15.45	16.14	16.33	17.01	18.12	10.61	11.30	11.49	12.17	13.28
4H	2H	12.63	13.45	13.48	14.30	15.37	9.16	9.99	10.01	10.84	11.90
	3H	14.45	15.13	15.31	16.01	17.10	10.50	11.18	11.36	12.07	13.15
	4H	15.13	15.75	16.00	16.63	17.74	11.04	11.66	11.91	12.54	13.65
	6H	15.63	16.16	16.52	17.07	18.18	11.44	11.98	12.33	12.88	14.00
	8H	15.79	16.29	16.68	17.19	18.32	11.56	12.06	12.45	12.96	14.09
	12H	15.88	16.33	16.79	17.25	18.38	11.62	12.07	12.53	12.99	14.12
8H	4H	15.10	15.60	15.99	16.50	17.63	11.31	11.81	12.20	12.71	13.84
	6H	15.65	16.06	16.56	17.00	18.13	11.81	12.22	12.73	13.16	14.29
	8H	15.85	16.21	16.78	17.15	18.29	11.98	12.35	12.91	13.28	14.43
	12H	15.98	16.30	16.91	17.22	18.42	12.09	12.42	13.02	13.34	14.54
12H	4H	15.06	15.51	15.97	16.43	17.56	11.32	11.77	12.23	12.69	13.82
	6H	15.62	15.99	16.55	16.92	18.06	11.85	12.22	12.78	13.15	14.30
	8H	15.83	16.15	16.76	17.08	18.27	12.05	12.37	12.98	13.30	14.49