

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921260

Luminaire Tested: DFN2DIP-4P2F0-040D020US940-RLFL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921260
REPORT IS A COMBINATION OF REPORTS P899016 AND P895899
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P2F0-040D020US940-RLLFLL
Description: 2 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4610.1 lumens
Efficiency: N/A
Efficacy: 82.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.07' x L: 2.07' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 56.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921260

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US940-RLLFLL

Luminous Intensity Polar Plot

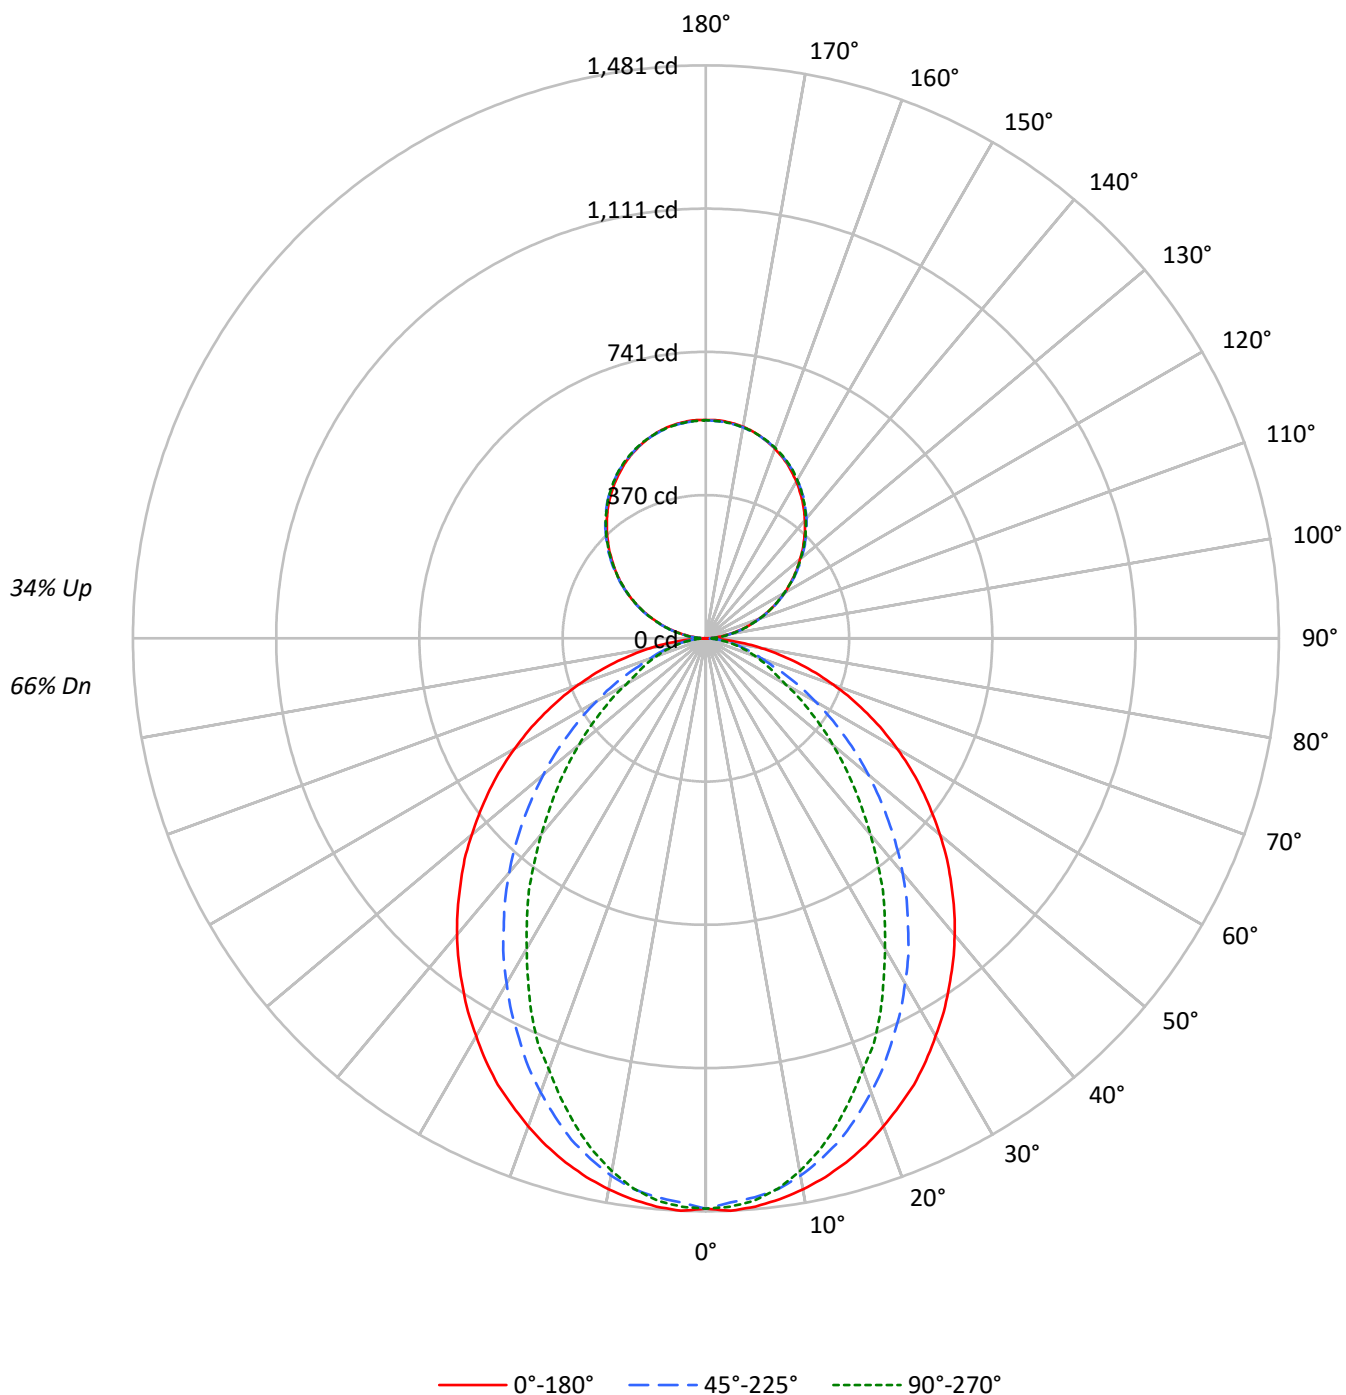

TEST NUMBER: P921260

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US940-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61
2	93	86	80	75	88	81	76	72	72	68	65	64	61	58	57	54	52
3	86	76	69	63	80	72	66	61	65	59	55	57	53	50	51	48	45
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	42	40
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35
6	67	55	47	41	63	52	45	40	47	41	37	42	38	34	38	34	31
7	62	50	42	37	59	48	40	35	43	37	33	39	34	30	35	31	28
8	58	46	38	33	55	44	37	32	40	34	29	36	31	27	32	28	25
9	54	42	35	29	51	40	33	29	36	31	27	33	28	25	30	26	23
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3691	3691	3691
5°	3690	3623	3650
10°	3646	3543	3525
15°	3588	3417	3336
20°	3515	3247	3106
25°	3439	3058	2884
30°	3340	2865	2605
35°	3243	2658	2359
40°	3143	2446	2079
45°	3029	2211	1825
50°	2909	1975	1578
55°	2784	1724	1340
60°	2639	1464	1098
65°	2472	1200	981
70°	2268	954	879
75°	2012	823	788
80°	1645	664	666
85°	1061	408	469

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3029 cd/sqm

TEST NUMBER: P921260

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US940-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	138.2	3.0
10°-20°	379.3	8.2
20°-30°	532.5	11.6
30°-40°	580.5	12.6
40°-50°	533.5	11.6
50°-60°	419.0	9.1
60°-70°	272.7	5.9
70°-80°	140.4	3.0
80°-90°	37.4	0.8
90°-100°	34.9	0.8
100°-110°	110.9	2.4
110°-120°	189.8	4.1
120°-130°	249.6	5.4
130°-140°	280.2	6.1
140°-150°	274.7	6.0
150°-160°	230.4	5.0
160°-170°	152.8	3.3
170°-180°	53.4	1.2
0°-30°	1049.9	22.8
0°-40°	1630.4	35.4
0°-60°	2582.9	56.0
0°-90°	3033.4	65.8
90°-120°	335.6	7.3
90°-150°	1140.0	24.7
90°-180°	1577.0	34.2
0°-180°	4610.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1474	1474	1474	1474	1474	
5°	1474	1468	1450	1462	1458	140
15°	1402	1387	1342	1317	1304	395
25°	1273	1230	1142	1087	1067	585
35°	1097	1029	911	827	798	686
45°	896	807	667	572	540	692
55°	682	578	434	354	328	609
65°	460	352	232	187	183	456
75°	245	152	107	97	96	260
85°	57	29	25	25	25	66
90°	0	6	17	16	16	5
95°	25	30	30	30	30	28
105°	102	104	105	106	106	108
115°	190	193	192	192	190	188
125°	277	281	280	278	278	248
135°	358	364	364	364	363	277
145°	435	438	441	442	440	272
155°	497	499	500	503	501	229
165°	541	541	541	544	542	153
175°	563	562	561	564	561	53
180°	564	564	564	564	564	

TEST NUMBER: P921260

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US940-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1474.2	1474.2	1474.2	1474.2	1474.2
2.5°	1480.9	1474.2	1459.5	1472.9	1470.2
5°	1474.2	1467.5	1450.1	1462.1	1458.2
7.5°	1462.1	1454.2	1435.6	1440.7	1434.1
10°	1446.2	1436.8	1410.2	1406.0	1398.2
12.5°	1426.2	1414.2	1378.0	1370.1	1355.4
15°	1402.1	1387.4	1342.1	1316.8	1303.5
17.5°	1374.1	1352.7	1296.6	1267.4	1246.0
20°	1342.1	1315.4	1248.7	1215.4	1186.0
22.5°	1307.4	1276.8	1199.3	1154.0	1134.1
25°	1272.7	1230.0	1141.9	1087.4	1067.2
27.5°	1231.5	1186.0	1088.6	1025.9	995.1
30°	1187.4	1136.6	1029.8	961.9	925.9
32.5°	1144.7	1083.2	973.9	893.9	860.4
35°	1096.7	1028.6	911.2	827.2	797.7
37.5°	1050.0	976.5	852.5	760.4	727.1
40°	1000.6	920.6	791.1	696.4	661.7
42.5°	949.8	864.5	729.8	631.0	597.7
45°	896.5	807.1	667.1	572.3	540.3
47.5°	845.9	751.2	607.1	512.3	483.0
50°	789.8	695.1	548.3	456.2	428.3
52.5°	735.0	635.0	492.3	404.2	378.9
55°	681.7	577.6	433.5	353.6	328.2
57.5°	627.1	520.3	381.6	306.8	285.5
60°	571.0	464.2	326.8	258.9	237.6
62.5°	516.4	409.7	280.1	216.2	205.5
65°	460.3	352.1	232.1	186.8	182.7
67.5°	407.0	298.8	186.8	164.1	160.1
70°	350.9	246.8	154.7	141.4	136.0
72.5°	297.6	198.8	129.4	118.8	116.1
75°	245.4	152.0	106.7	97.4	96.1
77.5°	193.5	108.0	84.1	78.7	76.0
80°	145.3	77.4	63.9	58.8	58.8
82.5°	101.4	52.1	44.1	41.3	41.3
85°	57.3	29.3	25.3	25.3	25.3
87.5°	21.4	10.6	10.6	9.4	9.4
90°	0.5	6.2	16.7	15.6	16.1
92.5°	10.5	14.3	14.8	15.3	15.3
95°	24.8	29.6	30.4	30.4	29.6
97.5°	41.3	45.7	47.6	47.6	47.6
100°	60.4	64.3	65.6	65.6	65.1
102.5°	80.4	83.3	85.2	85.7	85.2
105°	102.4	103.7	104.8	105.6	105.6
107.5°	124.1	126.2	126.2	126.5	124.1
110°	145.3	147.9	147.9	147.9	146.6



TEST NUMBER: P921260

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US940-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	168.0	170.9	170.4	169.0	168.0
115°	190.5	193.1	192.3	191.8	190.5
117.5°	212.8	216.5	214.1	212.8	211.3
120°	235.1	238.9	235.1	235.1	233.6
122.5°	255.6	260.3	258.0	256.6	255.6
125°	277.0	281.2	279.9	278.4	277.9
127.5°	297.9	303.2	301.3	299.3	297.9
130°	317.4	323.6	322.7	321.7	319.9
132.5°	339.4	344.2	344.5	342.1	340.7
135°	358.3	363.6	364.5	364.1	362.7
137.5°	379.3	383.6	384.5	384.1	382.1
140°	397.9	402.2	404.6	404.6	402.7
142.5°	417.0	421.2	422.6	423.0	421.2
145°	435.0	438.4	441.1	441.6	439.7
147.5°	451.1	455.4	457.4	458.2	456.4
150°	467.8	470.6	472.5	474.0	472.5
152.5°	482.6	485.4	487.9	489.7	487.9
155°	497.4	498.7	500.2	502.7	501.1
157.5°	510.1	511.1	512.0	515.4	513.0
160°	521.6	522.5	523.1	525.9	523.9
162.5°	532.1	532.1	532.5	535.8	533.4
165°	541.1	540.6	540.6	543.9	541.6
167.5°	549.2	547.7	547.7	551.1	548.8
170°	555.4	554.0	553.5	556.9	554.0
172.5°	559.6	558.2	557.8	561.2	558.2
175°	563.0	561.7	560.6	564.0	561.2
177.5°	564.9	563.6	562.5	565.3	562.5
180°	564.0	564.0	564.0	564.0	564.0

TEST NUMBER: P921260

CATALOG NUMBER: DFN2DIP-4P2F0-040D020US940-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.91	13.89	13.73	14.72	15.75	8.87	9.85	9.69	10.68	11.71
	3H	14.58	15.45	15.41	16.29	17.35	10.05	10.92	10.88	11.77	12.83
	4H	15.18	16.00	16.02	16.85	17.92	10.49	11.32	11.34	12.17	13.24
	6H	15.59	16.35	16.44	17.20	18.29	10.80	11.56	11.66	12.42	13.50
	8H	15.71	16.43	16.57	17.31	18.39	10.89	11.61	11.75	12.49	13.57
	12H	15.76	16.45	16.64	17.32	18.43	10.93	11.61	11.80	12.48	13.59
4H	2H	12.94	13.77	13.79	14.62	15.69	9.47	10.30	10.32	11.15	12.22
	3H	14.76	15.44	15.62	16.33	17.41	10.81	11.50	11.67	12.38	13.46
	4H	15.44	16.06	16.31	16.94	18.05	11.35	11.97	12.22	12.85	13.96
	6H	15.94	16.48	16.83	17.38	18.49	11.75	12.29	12.64	13.19	14.31
	8H	16.10	16.61	17.00	17.50	18.63	11.87	12.37	12.76	13.27	14.40
	12H	16.19	16.64	17.10	17.56	18.69	11.93	12.38	12.84	13.30	14.43
8H	4H	15.41	15.91	16.30	16.81	17.94	11.62	12.13	12.52	13.02	14.15
	6H	15.96	16.37	16.88	17.31	18.44	12.12	12.53	13.04	13.48	14.60
	8H	16.16	16.53	17.09	17.46	18.60	12.30	12.66	13.22	13.60	14.74
	12H	16.29	16.61	17.22	17.54	18.73	12.40	12.73	13.33	13.65	14.85
12H	4H	15.37	15.82	16.28	16.74	17.87	11.63	12.08	12.54	13.00	14.13
	6H	15.93	16.30	16.86	17.23	18.37	12.16	12.53	13.09	13.46	14.61
	8H	16.14	16.46	17.07	17.39	18.59	12.36	12.69	13.29	13.61	14.81