

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902187

Luminaire Tested: DFN2DIP-4P3F0-020D050US830-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902187
REPORT IS A COMBINATION OF REPORTS P900579 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-020D050US830-FLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6531.9 lumens
Efficiency: N/A
Efficacy: 121.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 53.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902187

CATALOG NUMBER: DFN2DIP-4P3F0-020D050US830-FLLONL

Luminous Intensity Polar Plot

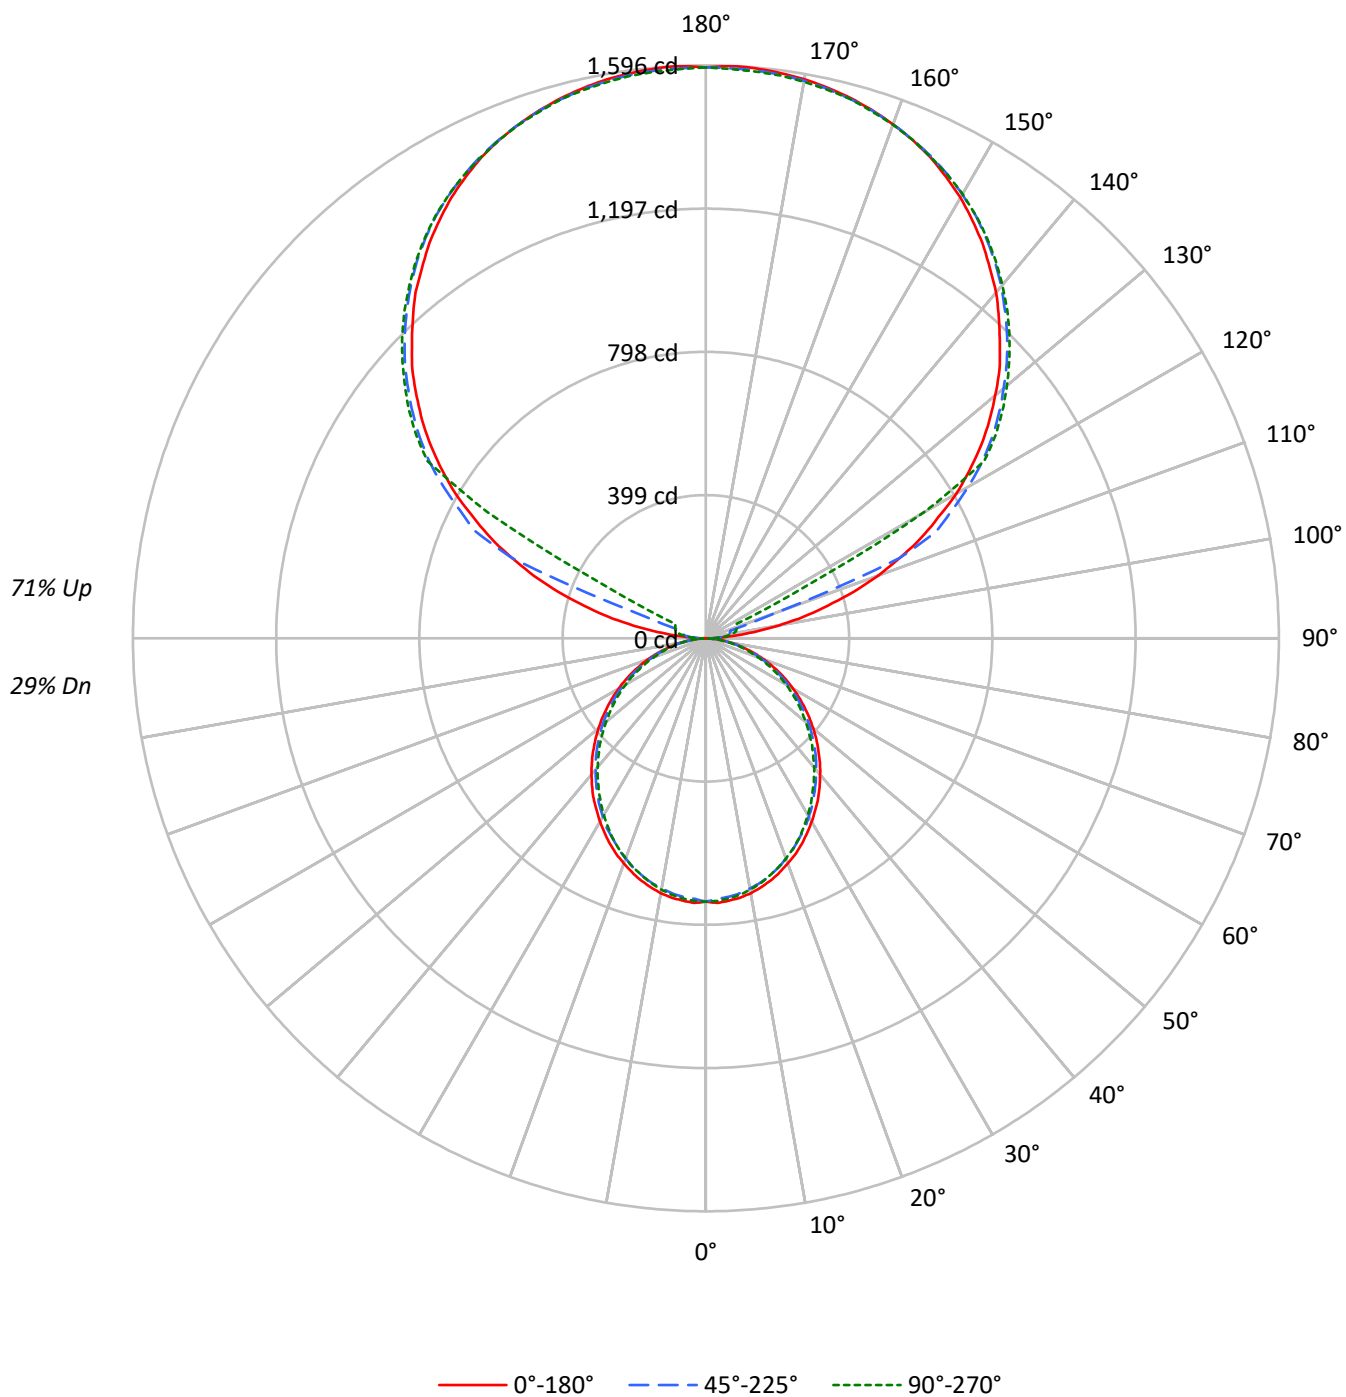

TEST NUMBER: P902187

CATALOG NUMBER: DFN2DIP-4P3F0-020D050US830-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36
1	93	89	85	82	83	80	77	74	62	60	58	47	45	44	32	31	31
2	85	77	72	67	76	70	65	60	55	51	48	41	39	37	28	27	26
3	77	68	61	55	69	61	55	50	48	44	41	36	33	31	25	23	22
4	71	60	53	47	63	54	48	43	43	38	34	32	29	27	22	21	19
5	65	53	46	40	58	48	41	36	38	33	30	29	26	23	20	18	16
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	14
7	55	43	35	30	49	39	32	27	31	26	23	24	20	18	17	14	13
8	51	39	31	26	45	35	29	24	28	23	20	22	18	16	15	13	11
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10
10	44	32	25	21	39	29	23	19	24	19	16	18	15	13	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	836	836	836
5°	837	824	830
10°	829	812	818
15°	817	798	800
20°	800	779	782
25°	783	756	761
30°	762	735	734
35°	742	710	706
40°	717	685	679
45°	693	660	652
50°	666	633	620
55°	637	602	590
60°	606	566	557
65°	571	528	517
70°	526	482	475
75°	465	427	435
80°	391	356	359
85°	274	236	235

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1086 cd/sqm

TEST NUMBER: P902187

CATALOG NUMBER: DFN2DIP-4P3F0-020D050US830-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.0	1.1
10°-20°	194.2	3.0
20°-30°	285.5	4.4
30°-40°	331.5	5.1
40°-50°	331.1	5.1
50°-60°	288.7	4.4
60°-70°	213.4	3.3
70°-80°	120.8	1.8
80°-90°	34.7	0.5
90°-100°	52.5	0.8
100°-110°	195.5	3.0
110°-120°	518.5	7.9
120°-130°	860.0	13.2
130°-140°	913.5	14.0
140°-150°	849.0	13.0
150°-160°	682.6	10.4
160°-170°	439.8	6.7
170°-180°	151.4	2.3
0°-30°	548.7	8.4
0°-40°	880.3	13.5
0°-60°	1500.2	23.0
0°-90°	1869.0	28.6
90°-120°	766.5	11.7
90°-150°	3389.0	51.9
90°-180°	4663.0	71.4
0°-180°	6531.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	734	734	734	734	734	
5°	734	731	723	729	727	70
15°	698	694	685	688	684	197
25°	632	626	614	616	614	291
35°	545	538	527	523	519	340
45°	444	439	428	420	418	342
55°	336	332	323	315	311	300
65°	226	222	215	209	205	224
75°	118	117	114	109	111	126
85°	29	28	28	25	25	32
90°	1	14	23	29	31	6
95°	75	37	45	51	50	89
105°	350	384	70	83	88	374
115°	662	681	710	177	94	651
125°	936	951	972	980	984	834
135°	1158	1176	1186	1198	1196	894
145°	1343	1342	1361	1370	1364	840
155°	1479	1469	1482	1489	1480	681
165°	1558	1551	1555	1563	1555	440
175°	1594	1586	1588	1596	1585	152
180°	1590	1590	1590	1590	1590	

TEST NUMBER: P902187

CATALOG NUMBER: DFN2DIP-4P3F0-020D050US830-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	733.5	733.5	733.5	733.5	733.5
2.5°	737.7	734.2	726.4	733.5	732.2
5°	733.5	730.8	722.9	728.6	727.2
7.5°	728.6	724.3	716.6	722.3	720.9
10°	720.9	716.0	707.5	713.0	711.0
12.5°	710.2	706.1	697.6	701.1	699.6
15°	698.2	694.1	684.9	687.7	684.2
17.5°	683.4	679.3	670.1	673.5	670.1
20°	667.2	663.0	653.1	655.3	652.4
22.5°	651.0	644.7	635.5	635.5	634.0
25°	632.0	626.3	614.3	615.7	614.3
27.5°	610.8	605.9	596.7	594.6	591.1
30°	589.7	584.0	573.4	571.4	568.4
32.5°	567.0	562.9	551.6	547.3	544.5
35°	545.3	538.2	526.9	522.6	519.1
37.5°	520.6	514.2	502.8	497.9	494.4
40°	495.1	489.5	478.2	471.9	469.0
42.5°	470.4	464.8	453.6	446.5	442.2
45°	443.7	438.8	428.1	420.4	417.5
47.5°	417.5	412.6	401.3	393.5	389.4
50°	390.0	386.5	376.6	366.7	363.3
52.5°	363.3	358.3	349.1	341.4	336.5
55°	335.7	331.5	323.0	314.6	311.0
57.5°	308.2	304.7	295.5	287.1	284.2
60°	280.7	278.0	268.1	260.2	258.2
62.5°	253.9	248.9	242.0	234.9	232.1
65°	226.4	222.2	215.2	208.8	205.3
67.5°	198.2	194.6	188.3	183.4	180.6
70°	172.1	169.3	162.9	158.0	155.2
72.5°	145.3	142.5	138.9	134.0	132.0
75°	118.5	117.2	113.5	109.3	110.7
77.5°	94.5	91.7	90.2	88.1	86.1
80°	70.6	69.8	68.4	66.3	64.8
82.5°	48.0	48.0	47.3	44.5	44.5
85°	28.8	28.2	27.5	25.4	24.7
87.5°	12.7	11.3	9.9	7.8	7.1
90°	1.1	13.8	23.0	28.8	31.0
92.5°	28.8	24.2	27.6	30.0	31.0
95°	74.7	36.8	44.9	50.7	49.5
97.5°	134.6	40.3	58.6	62.2	63.2
100°	203.8	46.1	65.6	74.7	77.1
102.5°	279.7	277.4	68.0	80.5	84.1
105°	349.9	384.5	70.2	82.8	87.5
107.5°	431.6	460.2	72.6	85.1	89.8
110°	509.9	534.0	201.4	86.3	90.9

TEST NUMBER: P902187

CATALOG NUMBER: DFN2DIP-4P3F0-020D050US830-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	583.5	604.2	584.7	88.6	92.1
115°	661.8	681.3	710.1	177.3	94.4
117.5°	729.6	752.6	772.3	607.6	306.1
120°	805.6	822.8	843.6	857.4	702.0
122.5°	870.0	888.4	911.5	918.4	919.6
125°	935.6	950.6	972.5	980.5	984.0
127.5°	995.4	1011.5	1029.0	1040.4	1041.5
130°	1051.9	1070.4	1082.9	1095.6	1094.6
132.5°	1109.5	1124.5	1137.0	1147.5	1146.3
135°	1157.8	1176.3	1186.5	1198.2	1195.8
137.5°	1208.3	1222.2	1233.8	1245.3	1241.9
140°	1257.8	1267.2	1279.7	1290.1	1284.4
142.5°	1299.4	1307.5	1322.4	1331.5	1325.8
145°	1343.1	1341.9	1361.4	1369.5	1363.8
147.5°	1381.0	1377.5	1397.1	1402.9	1398.4
150°	1417.9	1409.9	1428.2	1435.1	1429.4
152.5°	1448.9	1439.7	1457.0	1464.0	1455.9
155°	1478.8	1468.6	1482.3	1489.2	1480.1
157.5°	1503.0	1493.8	1504.2	1512.3	1503.0
160°	1523.8	1516.8	1523.8	1530.6	1522.6
162.5°	1542.1	1535.3	1541.0	1549.1	1538.7
165°	1558.2	1551.4	1554.8	1562.8	1554.8
167.5°	1570.9	1564.0	1567.5	1575.6	1565.2
170°	1581.3	1574.3	1576.7	1584.7	1574.3
172.5°	1588.2	1581.3	1583.7	1591.7	1581.3
175°	1593.9	1585.8	1588.2	1596.2	1584.7
177.5°	1596.2	1588.2	1589.4	1597.4	1587.1
180°	1590.4	1590.4	1590.4	1590.4	1590.4

TEST NUMBER: P902187

CATALOG NUMBER: DFN2DIP-4P3F0-020D050US830-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.21	4.91	5.33	6.02	7.57	3.77	4.46	4.89	5.58	7.12
	3H	5.85	6.48	6.98	7.60	9.16	5.36	5.99	6.49	7.11	8.67
	4H	6.43	7.02	7.57	8.15	9.71	5.94	6.53	7.07	7.65	9.22
	6H	6.82	7.36	7.96	8.49	10.07	6.32	6.86	7.46	7.99	9.57
	8H	6.92	7.43	8.07	8.58	10.15	6.41	6.93	7.56	8.07	9.65
	12H	6.96	7.45	8.11	8.58	10.18	6.45	6.94	7.60	8.08	9.67
4H	2H	4.65	5.24	5.79	6.36	7.93	4.29	4.89	5.44	6.01	7.58
	3H	6.49	6.99	7.64	8.14	9.72	6.08	6.58	7.24	7.73	9.31
	4H	7.20	7.65	8.35	8.79	10.39	6.77	7.23	7.93	8.36	9.97
	6H	7.70	8.09	8.86	9.25	10.84	7.26	7.65	8.42	8.82	10.41
	8H	7.84	8.20	9.00	9.36	10.97	7.40	7.77	8.56	8.92	10.53
	12H	7.90	8.23	9.08	9.40	11.01	7.45	7.78	8.63	8.95	10.56
8H	4H	7.37	7.74	8.53	8.89	10.50	7.00	7.36	8.16	8.51	10.12
	6H	7.99	8.29	9.17	9.49	11.09	7.61	7.91	8.79	9.10	10.71
	8H	8.21	8.47	9.39	9.64	11.27	7.82	8.08	9.00	9.25	10.88
	12H	8.33	8.56	9.52	9.73	11.39	7.92	8.15	9.11	9.32	10.98
12H	4H	7.35	7.68	8.53	8.85	10.46	6.98	7.31	8.16	8.48	10.09
	6H	8.02	8.28	9.21	9.46	11.08	7.65	7.91	8.83	9.08	10.71
	8H	8.25	8.48	9.44	9.65	11.31	7.87	8.10	9.06	9.27	10.93