

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902197

Luminaire Tested: DFN2DIP-4P3F0-030D020US830-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902197
REPORT IS A COMBINATION OF REPORTS P900552 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-030D020US830-RLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4269.7 lumens
Efficiency: N/A
Efficacy: 103.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 41.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902197

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US830-RLLONL

Luminous Intensity Polar Plot

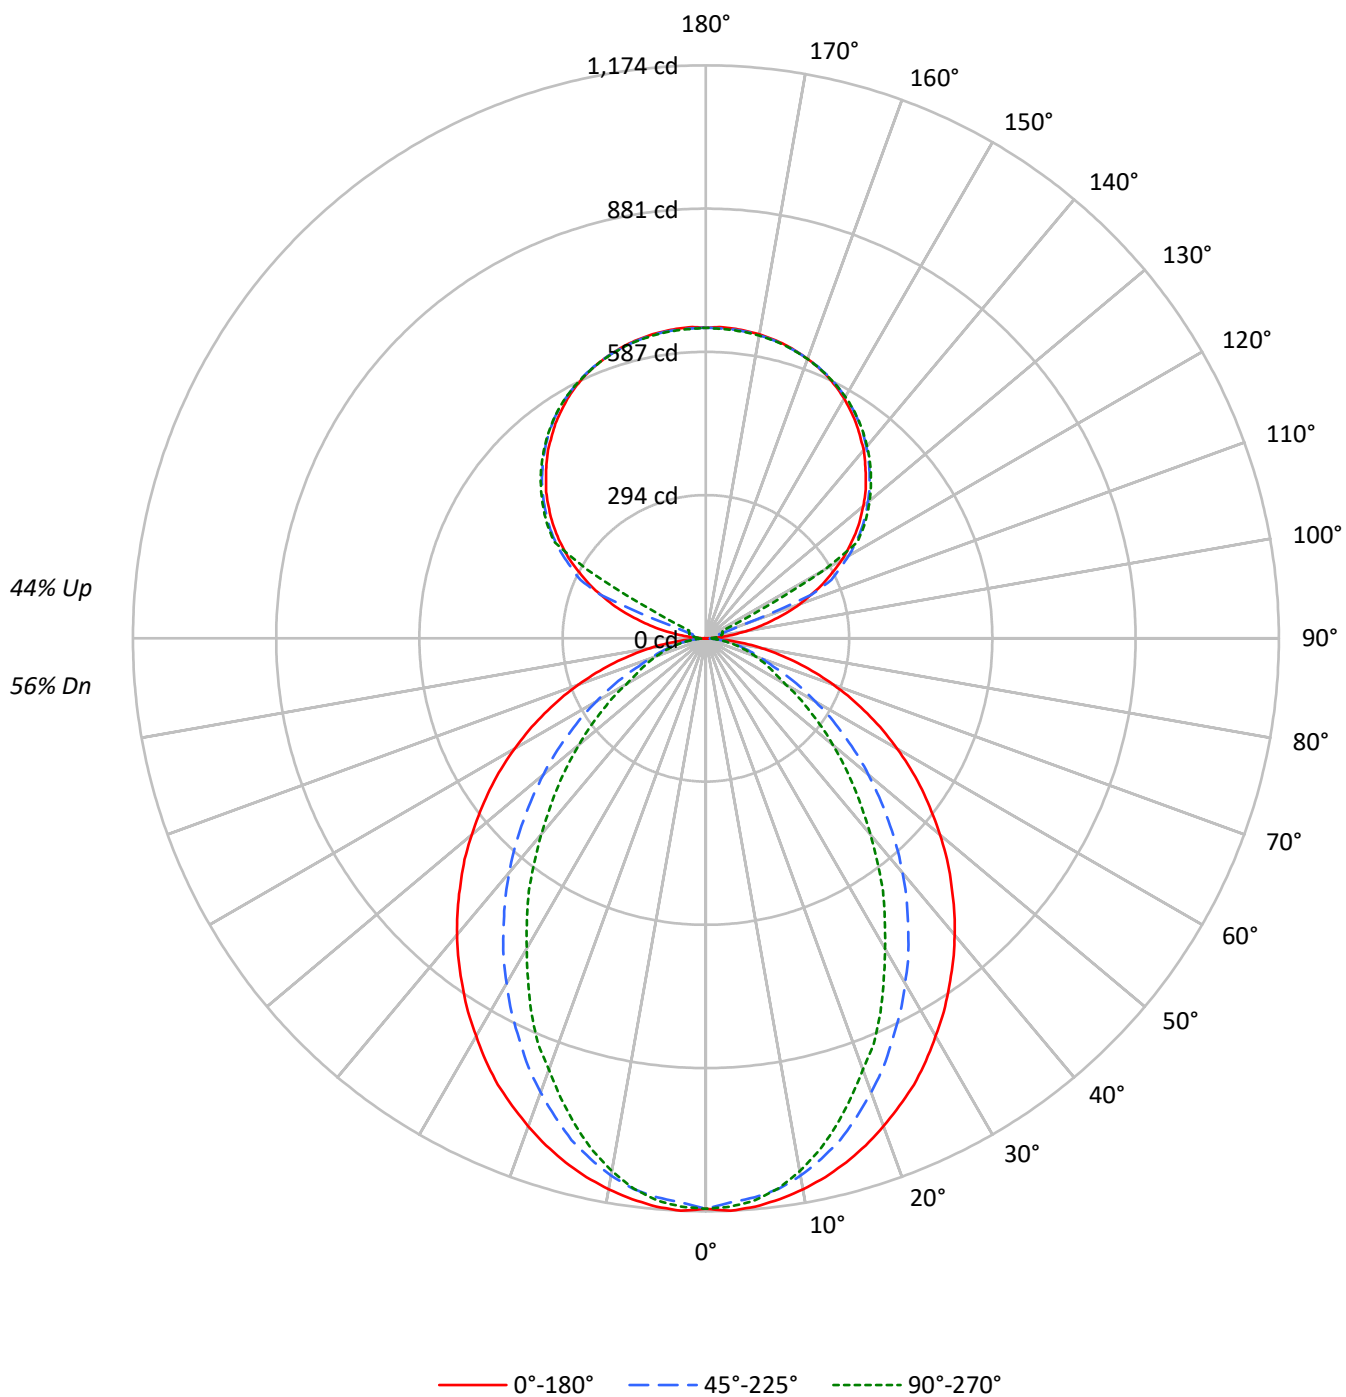

TEST NUMBER: P902197

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US830-RLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	56	54	53
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	50	48	46
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	31
6	65	54	46	40	61	50	43	38	44	39	34	39	34	31	33	30	27
7	61	49	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1332	1332	1332
5°	1333	1310	1319
10°	1319	1283	1275
15°	1300	1240	1209
20°	1275	1181	1127
25°	1250	1114	1048
30°	1216	1046	948
35°	1183	974	860
40°	1149	898	760
45°	1109	815	669
50°	1069	731	579
55°	1026	641	494
60°	977	547	406
65°	920	452	365
70°	851	363	330
75°	764	318	299
80°	639	264	258
85°	433	172	192

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1109 cd/sqm

TEST NUMBER: P902197

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	109.5	2.6
10°-20°	300.7	7.0
20°-30°	422.1	9.9
30°-40°	460.2	10.8
40°-50°	422.9	9.9
50°-60°	332.2	7.8
60°-70°	216.2	5.1
70°-80°	111.3	2.6
80°-90°	29.5	0.7
90°-100°	21.0	0.5
100°-110°	78.2	1.8
110°-120°	207.4	4.9
120°-130°	344.0	8.1
130°-140°	365.4	8.6
140°-150°	339.6	8.0
150°-160°	273.0	6.4
160°-170°	175.9	4.1
170°-180°	60.6	1.4
0°-30°	832.3	19.5
0°-40°	1292.5	30.3
0°-60°	2047.6	48.0
0°-90°	2404.6	56.3
90°-120°	306.6	7.2
90°-150°	1355.6	31.7
90°-180°	1865.0	43.7
0°-180°	4269.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1169	1169	1169	1169	1169	
5°	1169	1163	1150	1159	1156	111
15°	1112	1100	1064	1044	1033	313
25°	1009	975	905	862	846	464
35°	869	815	722	656	632	544
45°	711	640	529	454	428	549
55°	540	458	344	280	260	483
65°	365	279	184	148	145	362
75°	194	121	85	77	76	206
85°	45	23	20	20	20	52
90°	0	6	9	12	12	4
95°	30	15	18	20	20	35
105°	140	154	28	33	35	150
115°	265	272	284	71	38	261
125°	374	380	389	392	394	334
135°	463	470	475	479	478	358
145°	537	537	545	548	546	336
155°	592	587	593	596	592	273
165°	623	621	622	625	622	176
175°	638	634	635	638	634	61
180°	636	636	636	636	636	

TEST NUMBER: P902197

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1168.7	1168.7	1168.7	1168.7	1168.7
2.5°	1173.9	1168.7	1157.0	1167.6	1165.5
5°	1168.7	1163.4	1149.6	1159.1	1155.9
7.5°	1159.1	1152.8	1138.0	1142.2	1136.9
10°	1146.4	1139.1	1117.9	1114.7	1108.4
12.5°	1130.6	1121.1	1092.5	1086.2	1074.5
15°	1111.5	1099.9	1063.9	1043.9	1033.3
17.5°	1089.3	1072.4	1027.9	1004.8	987.8
20°	1063.9	1042.7	989.9	963.6	940.2
22.5°	1036.5	1012.1	950.7	914.8	899.0
25°	1009.0	975.1	905.3	862.0	846.0
27.5°	976.2	940.2	863.0	813.3	788.9
30°	941.3	901.1	816.4	762.6	734.0
32.5°	907.4	858.8	772.1	708.6	682.1
35°	869.4	815.4	722.4	655.7	632.4
37.5°	832.4	774.1	675.8	602.8	576.5
40°	793.2	729.8	627.2	552.0	524.6
42.5°	753.0	685.4	578.5	500.2	473.8
45°	710.8	639.8	528.9	453.6	428.3
47.5°	670.5	595.5	481.3	406.0	382.9
50°	626.1	551.0	434.7	361.7	339.5
52.5°	582.7	503.4	390.3	320.5	300.4
55°	540.4	457.9	343.7	280.3	260.2
57.5°	497.1	412.5	302.6	243.3	226.3
60°	452.6	368.1	259.1	205.2	188.3
62.5°	409.3	324.7	222.1	171.4	163.0
65°	364.9	279.2	184.0	148.1	144.9
67.5°	322.6	236.9	148.1	130.1	126.9
70°	278.1	195.7	122.6	112.1	107.8
72.5°	235.8	157.5	102.5	94.2	92.0
75°	194.5	120.6	84.6	77.2	76.2
77.5°	153.4	85.6	66.6	62.4	60.2
80°	115.3	61.4	50.7	46.6	46.6
82.5°	80.3	41.3	34.9	32.8	32.8
85°	45.4	23.2	20.1	20.1	20.1
87.5°	17.0	8.4	8.4	7.4	7.4
90°	0.5	5.6	9.1	11.5	12.4
92.5°	11.5	9.7	11.0	12.0	12.4
95°	29.9	14.7	17.9	20.3	19.8
97.5°	53.8	16.1	23.5	24.9	25.4
100°	81.5	18.4	26.2	29.9	30.8
102.5°	111.9	110.9	27.1	32.2	33.6
105°	140.0	153.7	28.1	33.1	35.0
107.5°	172.7	184.1	29.0	34.0	35.9
110°	204.0	213.6	80.6	34.6	36.4

TEST NUMBER: P902197

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US830-RLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	233.4	241.7	233.8	35.4	36.9
115°	264.7	272.5	284.1	70.9	37.8
117.5°	291.8	301.0	308.9	243.1	122.4
120°	322.3	329.1	337.4	343.0	280.8
122.5°	348.0	355.3	364.6	367.3	367.9
125°	374.3	380.2	389.0	392.2	393.6
127.5°	398.2	404.6	411.6	416.1	416.6
130°	420.8	428.1	433.2	438.3	437.8
132.5°	443.7	449.8	454.8	458.9	458.5
135°	463.2	470.5	474.6	479.3	478.3
137.5°	483.3	488.9	493.5	498.1	496.7
140°	503.1	506.9	511.9	516.0	513.8
142.5°	519.7	523.0	529.0	532.6	530.3
145°	537.2	536.8	544.6	547.8	545.5
147.5°	552.4	551.0	558.8	561.1	559.3
150°	567.1	563.9	571.3	574.0	571.7
152.5°	579.6	575.9	582.8	585.6	582.3
155°	591.5	587.4	593.0	595.7	592.0
157.5°	601.2	597.6	601.7	604.9	601.2
160°	609.5	606.7	609.5	612.3	609.1
162.5°	616.8	614.1	616.4	619.6	615.5
165°	623.3	620.6	621.9	625.2	621.9
167.5°	628.4	625.6	627.0	630.3	626.0
170°	632.5	629.7	630.7	633.9	629.7
172.5°	635.3	632.5	633.5	636.7	632.5
175°	637.5	634.3	635.3	638.5	633.9
177.5°	638.5	635.3	635.7	638.9	634.8
180°	636.2	636.2	636.2	636.2	636.2

TEST NUMBER: P902197

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.68	9.56	9.59	10.49	11.67	4.64	5.53	5.55	6.45	7.63
	3H	10.36	11.15	11.28	12.08	13.29	5.83	6.62	6.75	7.55	8.76
	4H	10.97	11.71	11.90	12.65	13.86	6.28	7.02	7.21	7.96	9.17
	6H	11.39	12.07	12.33	13.02	14.24	6.59	7.28	7.54	8.22	9.45
	8H	11.51	12.17	12.47	13.13	14.35	6.68	7.34	7.64	8.30	9.52
	12H	11.57	12.20	12.53	13.15	14.40	6.73	7.35	7.68	8.30	9.55
4H	2H	8.70	9.45	9.64	10.39	11.60	5.24	5.99	6.18	6.92	8.14
	3H	10.53	11.15	11.48	12.12	13.35	6.59	7.21	7.54	8.18	9.41
	4H	11.22	11.79	12.18	12.75	14.00	7.13	7.70	8.09	8.66	9.91
	6H	11.74	12.22	12.71	13.21	14.46	7.55	8.04	8.52	9.02	10.27
	8H	11.91	12.36	12.88	13.34	14.61	7.68	8.13	8.65	9.11	10.38
	12H	12.00	12.41	13.00	13.41	14.68	7.74	8.15	8.73	9.14	10.42
8H	4H	11.19	11.65	12.17	12.63	13.89	7.41	7.87	8.39	8.85	10.11
	6H	11.76	12.13	12.76	13.15	14.42	7.93	8.30	8.93	9.32	10.59
	8H	11.97	12.30	12.98	13.31	14.59	8.11	8.44	9.12	9.45	10.74
	12H	12.11	12.40	13.12	13.40	14.73	8.23	8.52	9.24	9.52	10.85
12H	4H	11.15	11.56	12.14	12.55	13.82	7.42	7.83	8.41	8.83	10.10
	6H	11.73	12.06	12.74	13.07	14.35	7.97	8.31	8.98	9.31	10.60
	8H	11.95	12.24	12.96	13.24	14.57	8.18	8.47	9.19	9.48	10.81

END OF REPORT