

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902207

Luminaire Tested: DFN2DIP-4P3F0-030D050US830-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902207
REPORT IS A COMBINATION OF REPORTS P900581 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-030D050US830-FLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7465.0 lumens
Efficiency: N/A
Efficacy: 116.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 64.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902207

CATALOG NUMBER: DFN2DIP-4P3F0-030D050US830-FLLONL

Luminous Intensity Polar Plot

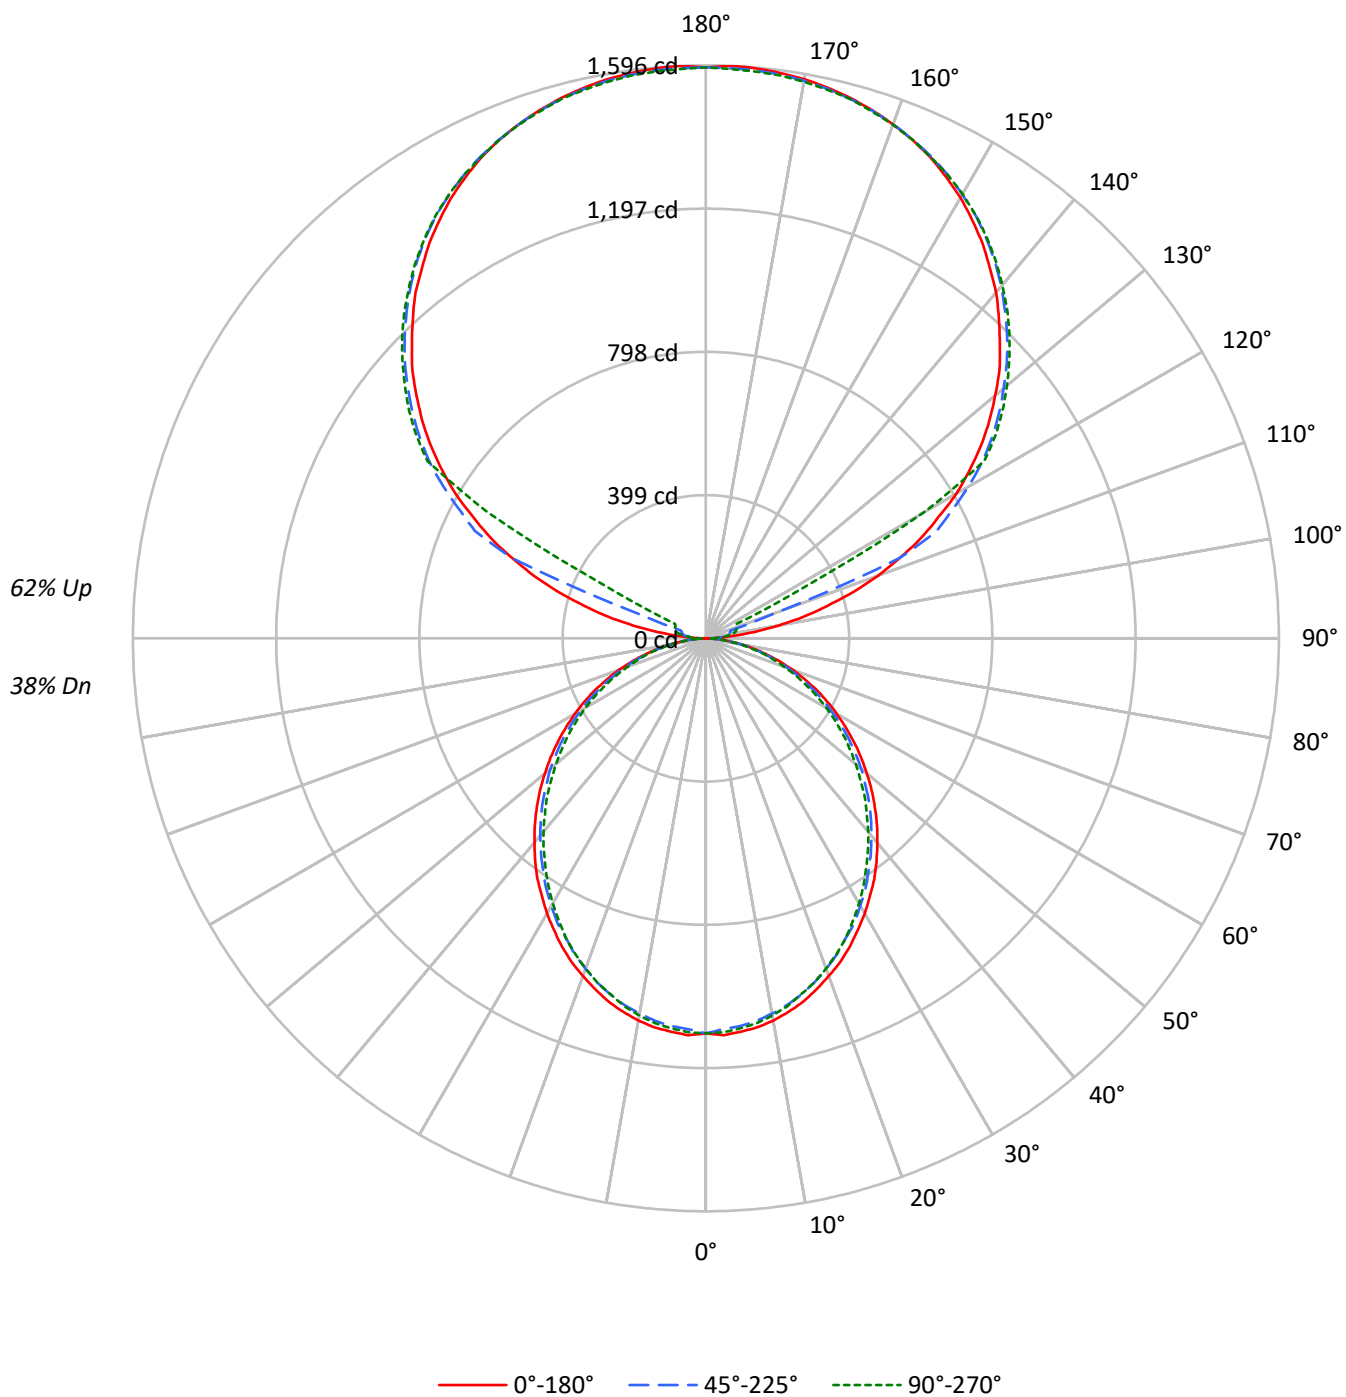

TEST NUMBER: P902207

CATALOG NUMBER: DFN2DIP-4P3F0-030D050US830-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45
1	95	91	87	83	86	82	79	76	67	65	63	53	51	50	39	39	38
2	86	79	73	68	78	72	67	63	59	55	52	46	44	42	35	33	32
3	79	70	62	57	71	63	57	52	52	47	44	41	38	35	31	29	27
4	72	62	54	48	65	56	49	44	46	41	37	36	33	30	27	25	23
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	22	20
6	61	49	41	35	55	45	38	33	37	32	28	29	26	23	22	20	18
7	56	44	36	31	51	40	34	29	33	28	24	27	23	20	20	18	16
8	52	40	32	27	47	37	30	25	30	25	22	24	21	18	19	16	14
9	48	36	29	24	44	33	27	23	28	23	19	22	19	16	17	15	13
10	45	33	26	22	41	31	24	20	26	21	17	21	17	14	16	13	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1254	1254	1254
5°	1255	1236	1244
10°	1244	1218	1227
15°	1225	1197	1200
20°	1199	1169	1173
25°	1174	1134	1141
30°	1142	1103	1101
35°	1112	1065	1059
40°	1076	1027	1019
45°	1039	989	978
50°	998	950	930
55°	956	903	886
60°	908	849	836
65°	856	792	776
70°	790	723	712
75°	698	640	653
80°	586	533	540
85°	414	354	353

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1086 cd/sqm

TEST NUMBER: P902207

CATALOG NUMBER: DFN2DIP-4P3F0-030D050US830-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.6	1.4
10°-20°	291.4	3.9
20°-30°	428.2	5.7
30°-40°	497.3	6.7
40°-50°	496.7	6.7
50°-60°	433.1	5.8
60°-70°	320.2	4.3
70°-80°	181.1	2.4
80°-90°	50.6	0.7
90°-100°	52.5	0.7
100°-110°	195.5	2.6
110°-120°	518.5	6.9
120°-130°	860.0	11.5
130°-140°	913.5	12.2
140°-150°	849.0	11.4
150°-160°	682.6	9.1
160°-170°	439.8	5.9
170°-180°	151.4	2.0
0°-30°	823.1	11.0
0°-40°	1320.4	17.7
0°-60°	2250.3	30.1
0°-90°	2802.2	37.5
90°-120°	766.5	10.3
90°-150°	3389.0	45.4
90°-180°	4663.0	62.5
0°-180°	7465.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1100	1100	1100	1100	1100	
5°	1100	1096	1084	1093	1091	104
15°	1047	1041	1027	1032	1026	295
25°	948	940	922	924	922	436
35°	818	807	790	784	779	511
45°	666	658	642	631	626	514
55°	504	497	485	472	467	450
65°	340	333	323	313	308	336
75°	178	176	170	164	166	190
85°	43	42	41	38	37	48
90°	1	14	23	29	31	7
95°	75	37	45	51	50	89
105°	350	384	70	83	88	374
115°	662	681	710	177	94	651
125°	936	951	972	980	984	834
135°	1158	1176	1186	1198	1196	894
145°	1343	1342	1361	1370	1364	840
155°	1479	1469	1482	1489	1480	681
165°	1558	1551	1555	1563	1555	440
175°	1594	1586	1588	1596	1585	152
180°	1590	1590	1590	1590	1590	

TEST NUMBER: P902207

CATALOG NUMBER: DFN2DIP-4P3F0-030D050US830-FLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1100.2	1100.2	1100.2	1100.2	1100.2
2.5°	1106.6	1101.4	1089.7	1100.2	1098.3
5°	1100.2	1096.1	1084.4	1092.9	1090.8
7.5°	1092.9	1086.6	1074.9	1083.5	1081.3
10°	1081.3	1073.8	1061.2	1069.6	1066.5
12.5°	1065.4	1059.0	1046.4	1051.6	1049.5
15°	1047.4	1041.1	1027.3	1031.5	1026.2
17.5°	1025.1	1018.9	1005.0	1010.3	1005.0
20°	1000.8	994.5	979.7	982.8	978.6
22.5°	976.6	967.0	953.2	953.2	951.0
25°	947.9	939.5	921.5	923.6	921.5
27.5°	916.2	908.7	895.0	891.9	886.6
30°	884.5	876.0	860.2	857.0	852.7
32.5°	850.6	844.3	827.4	821.0	816.7
35°	817.8	807.3	790.3	783.9	778.6
37.5°	780.8	771.3	754.3	746.9	741.6
40°	742.7	734.2	717.3	707.8	703.6
42.5°	705.7	697.2	680.3	669.7	663.4
45°	665.5	658.1	642.2	630.6	626.3
47.5°	626.3	619.0	602.0	590.3	584.0
50°	585.0	579.8	565.0	550.2	544.9
52.5°	544.9	537.4	523.8	512.1	504.6
55°	503.7	497.3	484.6	471.9	466.7
57.5°	462.3	457.0	443.3	430.6	426.3
60°	421.0	416.9	402.1	390.4	387.3
62.5°	380.9	373.4	362.9	352.3	348.1
65°	339.7	333.3	322.7	313.2	307.9
67.5°	297.4	292.0	282.5	275.1	270.9
70°	258.2	253.9	244.4	237.0	232.8
72.5°	218.0	213.7	208.4	201.0	197.9
75°	177.7	175.7	170.3	164.0	166.2
77.5°	141.8	137.5	135.3	132.2	129.1
80°	105.8	104.7	102.5	99.4	97.4
82.5°	71.9	71.9	71.0	66.6	66.6
85°	43.4	42.3	41.3	38.1	37.0
87.5°	19.0	17.0	14.8	11.7	10.6
90°	1.1	13.8	23.0	28.8	31.0
92.5°	28.8	24.2	27.6	30.0	31.0
95°	74.7	36.8	44.9	50.7	49.5
97.5°	134.6	40.3	58.6	62.2	63.2
100°	203.8	46.1	65.6	74.7	77.1
102.5°	279.7	277.4	68.0	80.5	84.1
105°	349.9	384.5	70.2	82.8	87.5
107.5°	431.6	460.2	72.6	85.1	89.8
110°	509.9	534.0	201.4	86.3	90.9

TEST NUMBER: P902207

CATALOG NUMBER: DFN2DIP-4P3F0-030D050US830-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	583.5	604.2	584.7	88.6	92.1
115°	661.8	681.3	710.1	177.3	94.4
117.5°	729.6	752.6	772.3	607.6	306.1
120°	805.6	822.8	843.6	857.4	702.0
122.5°	870.0	888.4	911.5	918.4	919.6
125°	935.6	950.6	972.5	980.5	984.0
127.5°	995.4	1011.5	1029.0	1040.4	1041.5
130°	1051.9	1070.4	1082.9	1095.6	1094.6
132.5°	1109.5	1124.5	1137.0	1147.5	1146.3
135°	1157.8	1176.3	1186.5	1198.2	1195.8
137.5°	1208.3	1222.2	1233.8	1245.3	1241.9
140°	1257.8	1267.2	1279.7	1290.1	1284.4
142.5°	1299.4	1307.5	1322.4	1331.5	1325.8
145°	1343.1	1341.9	1361.4	1369.5	1363.8
147.5°	1381.0	1377.5	1397.1	1402.9	1398.4
150°	1417.9	1409.9	1428.2	1435.1	1429.4
152.5°	1448.9	1439.7	1457.0	1464.0	1455.9
155°	1478.8	1468.6	1482.3	1489.2	1480.1
157.5°	1503.0	1493.8	1504.2	1512.3	1503.0
160°	1523.8	1516.8	1523.8	1530.6	1522.6
162.5°	1542.1	1535.3	1541.0	1549.1	1538.7
165°	1558.2	1551.4	1554.8	1562.8	1554.8
167.5°	1570.9	1564.0	1567.5	1575.6	1565.2
170°	1581.3	1574.3	1576.7	1584.7	1574.3
172.5°	1588.2	1581.3	1583.7	1591.7	1581.3
175°	1593.9	1585.8	1588.2	1596.2	1584.7
177.5°	1596.2	1588.2	1589.4	1597.4	1587.1
180°	1590.4	1590.4	1590.4	1590.4	1590.4

TEST NUMBER: P902207

CATALOG NUMBER: DFN2DIP-4P3F0-030D050US830-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.75	7.51	7.81	8.57	10.01	6.30	7.06	7.36	8.12	9.56
	3H	8.40	9.08	9.46	10.15	11.60	7.91	8.59	8.97	9.66	11.11
	4H	8.98	9.62	10.06	10.69	12.16	8.48	9.13	9.56	10.20	11.66
	6H	9.37	9.96	10.46	11.04	12.51	8.87	9.46	9.96	10.54	12.01
	8H	9.47	10.03	10.56	11.12	12.59	8.97	9.53	10.06	10.62	12.09
	12H	9.51	10.05	10.61	11.13	12.63	9.00	9.54	10.10	10.62	12.12
4H	2H	7.19	7.84	8.28	8.91	10.37	6.84	7.48	7.92	8.56	10.02
	3H	9.04	9.58	10.14	10.68	12.16	8.64	9.18	9.73	10.27	11.75
	4H	9.75	10.25	10.85	11.33	12.83	9.33	9.82	10.42	10.91	12.41
	6H	10.26	10.68	11.36	11.79	13.28	9.82	10.25	10.93	11.36	12.85
	8H	10.40	10.80	11.51	11.90	13.41	9.96	10.36	11.07	11.46	12.97
	12H	10.47	10.83	11.59	11.94	13.45	10.02	10.38	11.14	11.49	13.01
8H	4H	9.94	10.33	11.04	11.44	12.94	9.56	9.95	10.66	11.06	12.57
	6H	10.56	10.88	11.68	12.03	13.53	10.17	10.50	11.30	11.65	13.15
	8H	10.77	11.06	11.91	12.19	13.71	10.38	10.67	11.51	11.79	13.32
	12H	10.90	11.15	12.03	12.27	13.83	10.49	10.74	11.62	11.86	13.42
12H	4H	9.92	10.27	11.04	11.39	12.90	9.55	9.91	10.67	11.02	12.53
	6H	10.58	10.87	11.72	12.00	13.52	10.21	10.50	11.34	11.62	13.15
	8H	10.82	11.07	11.95	12.19	13.75	10.44	10.69	11.57	11.81	13.37