

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902216

Luminaire Tested: DFN2DIP-4P3F0-040D020US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902216
REPORT IS A COMBINATION OF REPORTS P899034 AND P895917
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-040D020US830-RLLFLL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4872.9 lumens
Efficiency: N/A
Efficacy: 91.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 53
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902216

CATALOG NUMBER: DFN2DIP-4P3F0-040D020US830-RLLFLL

Luminous Intensity Polar Plot

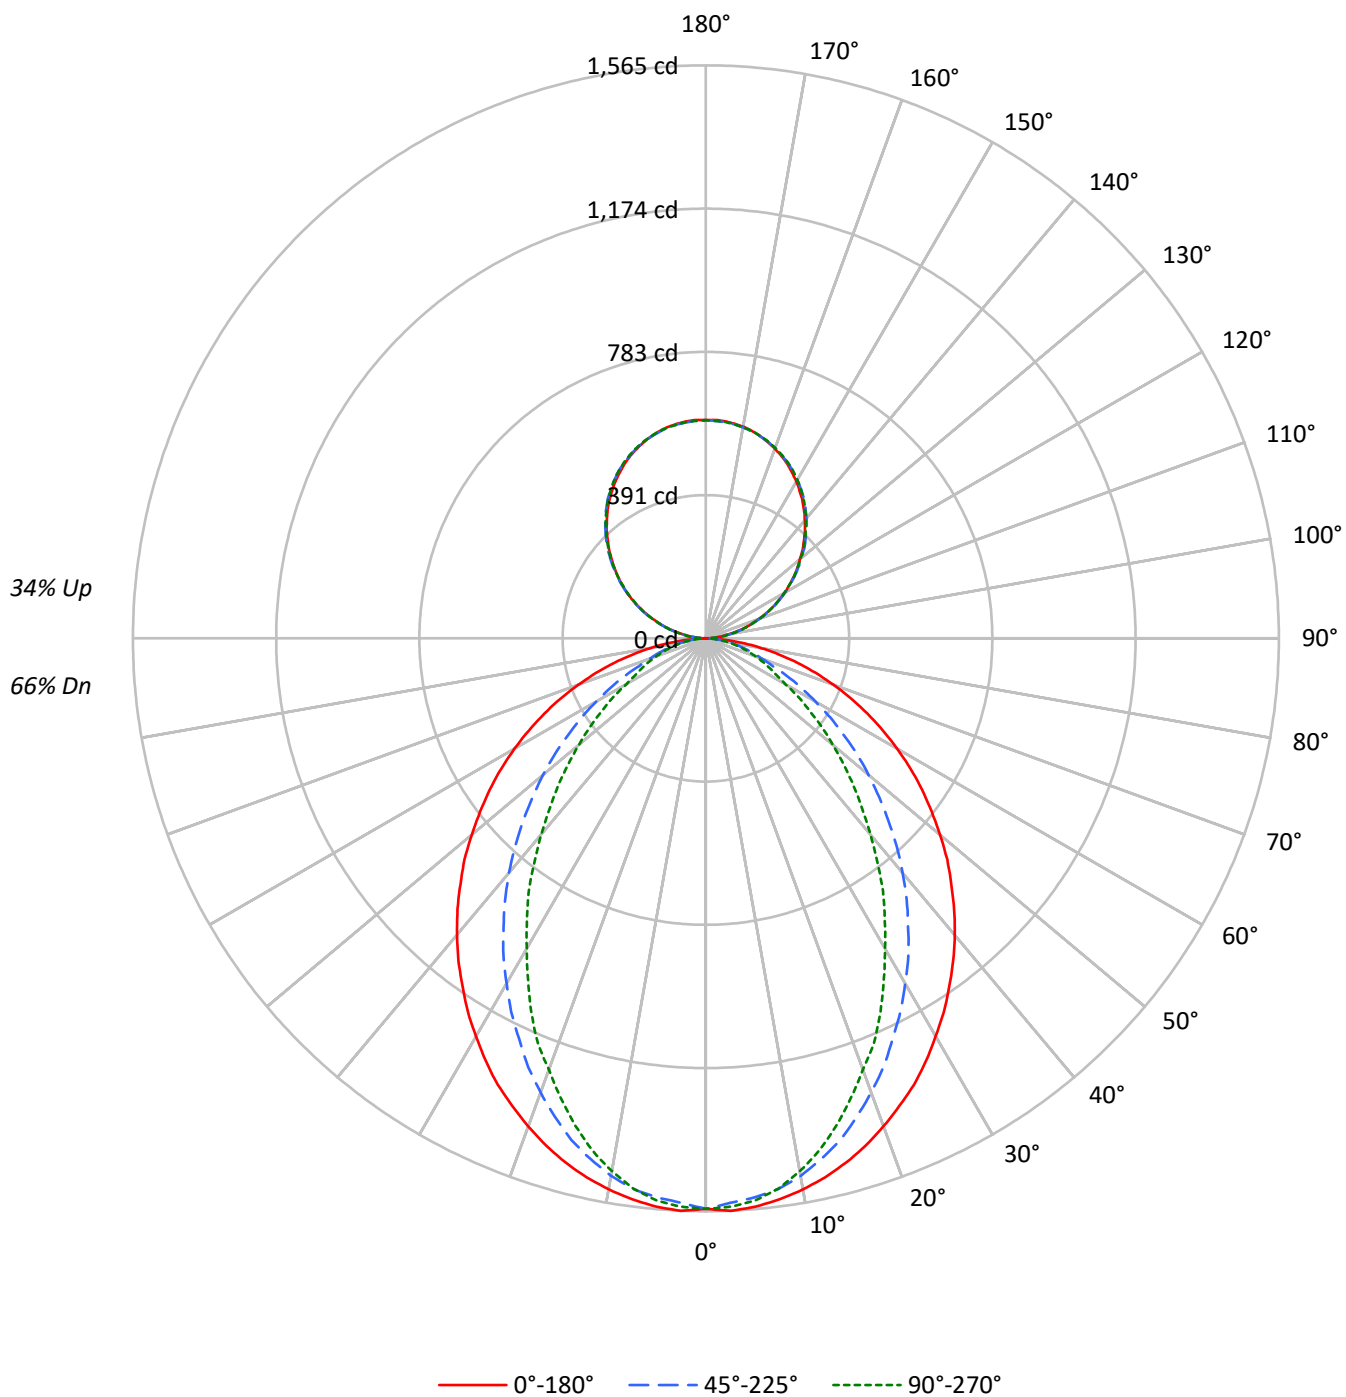

TEST NUMBER: P902216

CATALOG NUMBER: DFN2DIP-4P3F0-040D020US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61
2	93	86	80	75	88	81	76	72	72	68	65	64	61	58	57	54	52
3	86	76	69	63	80	72	66	61	65	59	55	57	53	50	51	48	45
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	42	40
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35
6	67	55	47	41	63	52	45	40	47	41	37	42	38	34	38	34	31
7	62	50	42	37	59	48	40	35	43	37	33	39	34	30	35	31	28
8	58	46	38	33	55	44	37	32	40	34	29	36	31	27	32	28	25
9	54	42	35	29	51	40	33	29	36	31	27	33	28	25	30	26	23
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1776	1776	1776
5°	1777	1746	1758
10°	1759	1711	1700
15°	1733	1653	1611
20°	1700	1574	1502
25°	1666	1486	1397
30°	1621	1395	1264
35°	1577	1298	1147
40°	1532	1198	1013
45°	1479	1086	891
50°	1425	974	773
55°	1368	854	659
60°	1302	729	542
65°	1226	602	487
70°	1134	484	440
75°	1018	424	399
80°	851	352	344
85°	578	230	255

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1479 cd/sqm

TEST NUMBER: P902216

CATALOG NUMBER: DFN2DIP-4P3F0-040D020US830-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.0	3.0
10°-20°	400.9	8.2
20°-30°	562.8	11.6
30°-40°	613.5	12.6
40°-50°	563.9	11.6
50°-60°	442.9	9.1
60°-70°	288.3	5.9
70°-80°	148.4	3.0
80°-90°	39.6	0.8
90°-100°	36.9	0.8
100°-110°	117.2	2.4
110°-120°	200.6	4.1
120°-130°	263.8	5.4
130°-140°	296.1	6.1
140°-150°	290.4	6.0
150°-160°	243.6	5.0
160°-170°	161.5	3.3
170°-180°	56.5	1.2
0°-30°	1109.8	22.8
0°-40°	1723.3	35.4
0°-60°	2730.1	56.0
0°-90°	3206.3	65.8
90°-120°	354.7	7.3
90°-150°	1205.0	24.7
90°-180°	1667.0	34.2
0°-180°	4872.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1558	1558	1558	1558	1558	
5°	1558	1551	1533	1546	1541	148
15°	1482	1466	1419	1392	1378	418
25°	1345	1300	1207	1149	1128	619
35°	1159	1087	963	874	843	726
45°	948	853	705	605	571	732
55°	721	611	458	374	347	644
65°	486	372	245	198	193	482
75°	259	161	113	103	102	274
85°	61	31	27	27	27	70
90°	1	6	18	16	17	5
95°	26	31	32	32	31	29
105°	108	110	111	112	112	114
115°	201	204	203	203	201	199
125°	293	297	296	294	294	262
135°	379	384	385	385	383	293
145°	460	463	466	467	465	287
155°	526	527	529	531	530	242
165°	572	571	571	575	572	161
175°	595	594	593	596	593	57
180°	596	596	596	596	596	

TEST NUMBER: P902216

CATALOG NUMBER: DFN2DIP-4P3F0-040D020US830-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1558.2	1558.2	1558.2	1558.2	1558.2
2.5°	1565.3	1558.2	1542.7	1556.9	1554.0
5°	1558.2	1551.1	1532.8	1545.5	1541.3
7.5°	1545.5	1537.1	1517.4	1522.9	1515.9
10°	1528.6	1518.7	1490.5	1486.2	1477.9
12.5°	1507.5	1494.8	1456.6	1448.2	1432.7
15°	1482.1	1466.5	1418.6	1391.9	1377.8
17.5°	1452.5	1429.8	1370.6	1339.6	1317.0
20°	1418.6	1390.3	1319.8	1284.7	1253.6
22.5°	1382.0	1349.5	1267.6	1219.7	1198.7
25°	1345.3	1300.1	1207.0	1149.3	1128.0
27.5°	1301.7	1253.6	1150.7	1084.4	1051.9
30°	1255.1	1201.4	1088.5	1016.7	978.6
32.5°	1209.9	1145.0	1029.4	944.8	909.5
35°	1159.2	1087.2	963.2	874.3	843.2
37.5°	1109.8	1032.2	901.1	803.7	768.5
40°	1057.6	973.1	836.2	736.1	699.5
42.5°	1004.0	913.8	771.4	666.9	631.8
45°	947.6	853.1	705.1	604.9	571.1
47.5°	894.1	794.0	641.7	541.5	510.5
50°	834.8	734.7	579.6	482.2	452.7
52.5°	776.9	671.2	520.4	427.3	400.5
55°	720.6	610.6	458.3	373.7	346.9
57.5°	662.8	550.0	403.3	324.3	301.8
60°	603.5	490.7	345.4	273.6	251.1
62.5°	545.8	433.0	296.1	228.5	217.3
65°	486.5	372.2	245.3	197.5	193.1
67.5°	430.2	315.8	197.5	173.4	169.2
70°	370.9	260.9	163.5	149.5	143.7
72.5°	314.5	210.1	136.8	125.5	122.7
75°	259.4	160.7	112.8	102.9	101.6
77.5°	204.5	114.1	88.9	83.2	80.3
80°	153.6	81.8	67.6	62.1	62.1
82.5°	107.2	55.0	46.6	43.6	43.6
85°	60.6	31.0	26.8	26.8	26.8
87.5°	22.6	11.2	11.2	9.9	9.9
90°	0.6	6.5	17.6	16.5	17.1
92.5°	11.1	15.1	15.6	16.2	16.2
95°	26.2	31.3	32.1	32.1	31.3
97.5°	43.6	48.4	50.3	50.3	50.3
100°	63.8	68.0	69.4	69.4	68.8
102.5°	85.0	88.0	90.0	90.6	90.0
105°	108.2	109.6	110.7	111.6	111.6
107.5°	131.2	133.4	133.4	133.7	131.2
110°	153.5	156.4	156.4	156.4	155.0

TEST NUMBER: P902216

CATALOG NUMBER: DFN2DIP-4P3F0-040D020US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	177.6	180.6	180.1	178.6	177.6
115°	201.3	204.2	203.3	202.7	201.3
117.5°	224.9	228.8	226.3	224.9	223.4
120°	248.5	252.5	248.5	248.5	246.9
122.5°	270.1	275.1	272.7	271.3	270.1
125°	292.8	297.3	295.9	294.3	293.7
127.5°	314.9	320.5	318.5	316.3	314.9
130°	335.5	342.0	341.1	340.1	338.1
132.5°	358.7	363.8	364.1	361.7	360.1
135°	378.7	384.3	385.3	384.8	383.3
137.5°	401.0	405.5	406.4	406.0	403.9
140°	420.6	425.1	427.6	427.6	425.7
142.5°	440.7	445.2	446.7	447.1	445.2
145°	459.8	463.4	466.3	466.7	464.8
147.5°	476.8	481.4	483.5	484.4	482.4
150°	494.5	497.5	499.5	501.1	499.5
152.5°	510.1	513.1	515.7	517.6	515.7
155°	525.8	527.2	528.8	531.3	529.7
157.5°	539.2	540.3	541.2	544.8	542.2
160°	551.3	552.3	552.9	555.9	553.7
162.5°	562.4	562.4	562.9	566.4	563.8
165°	571.9	571.4	571.4	575.0	572.5
167.5°	580.5	578.9	578.9	582.5	580.0
170°	587.0	585.6	585.0	588.6	585.6
172.5°	591.5	590.0	589.6	593.1	590.0
175°	595.1	593.7	592.6	596.2	593.1
177.5°	597.1	595.7	594.6	597.6	594.6
180°	596.2	596.2	596.2	596.2	596.2

TEST NUMBER: P902216

CATALOG NUMBER: DFN2DIP-4P3F0-040D020US830-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.47	11.45	11.29	12.28	13.31	6.43	7.41	7.24	8.24	9.27
	3H	12.15	13.03	12.98	13.87	14.93	7.62	8.50	8.45	9.34	10.40
	4H	12.77	13.59	13.61	14.44	15.51	8.08	8.90	8.92	9.75	10.82
	6H	13.19	13.95	14.05	14.81	15.89	8.40	9.16	9.26	10.02	11.10
	8H	13.32	14.04	14.19	14.92	16.00	8.49	9.21	9.36	10.09	11.17
	12H	13.38	14.07	14.26	14.94	16.05	8.53	9.22	9.41	10.09	11.20
4H	2H	10.50	11.33	11.35	12.18	13.25	7.04	7.86	7.89	8.71	9.78
	3H	12.34	13.03	13.20	13.91	14.99	8.40	9.08	9.26	9.96	11.05
	4H	13.04	13.66	13.91	14.54	15.65	8.94	9.57	9.82	10.45	11.56
	6H	13.55	14.09	14.44	14.99	16.11	9.36	9.90	10.25	10.81	11.92
	8H	13.73	14.23	14.62	15.13	16.26	9.49	9.99	10.38	10.89	12.02
	12H	13.83	14.28	14.74	15.20	16.33	9.56	10.01	10.47	10.93	12.06
8H	4H	13.01	13.51	13.90	14.41	15.54	9.23	9.73	10.12	10.63	11.76
	6H	13.58	13.99	14.50	14.93	16.06	9.75	10.16	10.67	11.10	12.23
	8H	13.79	14.16	14.72	15.09	16.24	9.93	10.30	10.86	11.23	12.38
	12H	13.93	14.26	14.86	15.18	16.38	10.05	10.38	10.99	11.30	12.50
12H	4H	12.97	13.42	13.88	14.34	15.47	9.24	9.69	10.15	10.61	11.74
	6H	13.55	13.92	14.48	14.85	16.00	9.80	10.16	10.73	11.10	12.24
	8H	13.78	14.10	14.71	15.03	16.22	10.01	10.33	10.94	11.26	12.45

END OF REPORT