

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902224

Luminaire Tested: DFN2DIP-4P3F0-040D040US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902224
REPORT IS A COMBINATION OF REPORTS P899054 AND P895917
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-040D040US830-RLLFLL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6541.2 lumens
Efficiency: N/A
Efficacy: 97.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 67.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902224

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US830-RLLFLL

Luminous Intensity Polar Plot

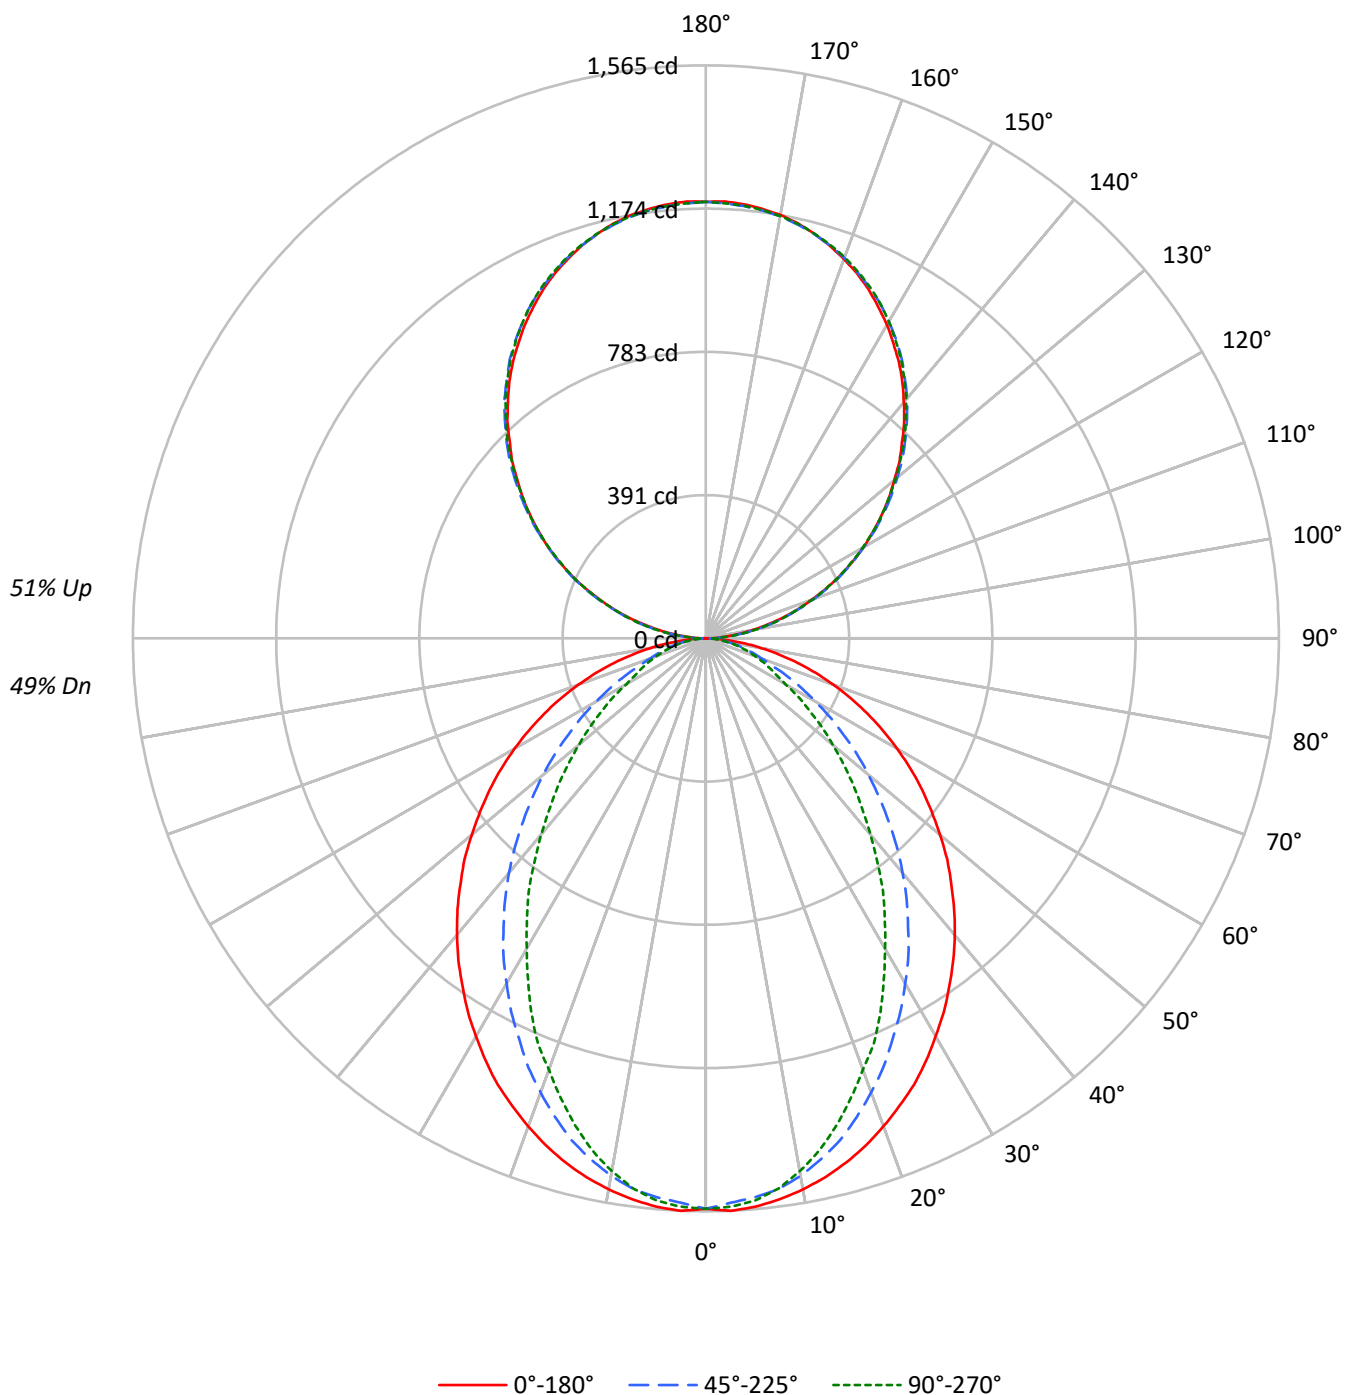

TEST NUMBER: P902224

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1776	1776	1776
5°	1777	1746	1758
10°	1759	1711	1700
15°	1733	1653	1611
20°	1700	1574	1502
25°	1666	1486	1397
30°	1621	1395	1264
35°	1577	1298	1147
40°	1532	1198	1013
45°	1479	1086	891
50°	1425	974	773
55°	1368	854	659
60°	1302	729	542
65°	1226	602	487
70°	1134	484	440
75°	1018	424	399
80°	851	352	344
85°	578	230	255

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1479 cd/sqm

TEST NUMBER: P902224

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US830-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.0	2.2
10°-20°	400.9	6.1
20°-30°	562.8	8.6
30°-40°	613.5	9.4
40°-50°	563.9	8.6
50°-60°	442.9	6.8
60°-70°	288.3	4.4
70°-80°	148.4	2.3
80°-90°	41.3	0.6
90°-100°	73.8	1.1
100°-110°	234.4	3.6
110°-120°	401.2	6.1
120°-130°	527.6	8.1
130°-140°	592.2	9.1
140°-150°	580.8	8.9
150°-160°	487.2	7.4
160°-170°	323.1	4.9
170°-180°	112.9	1.7
0°-30°	1109.8	17.0
0°-40°	1723.3	26.3
0°-60°	2730.1	41.7
0°-90°	3208.0	49.0
90°-120°	709.4	10.8
90°-150°	2410.0	36.8
90°-180°	3333.0	51.0
0°-180°	6541.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1558	1558	1558	1558	1558	
5°	1558	1551	1533	1546	1541	148
15°	1482	1466	1419	1392	1378	418
25°	1345	1300	1207	1149	1128	619
35°	1159	1087	963	874	843	726
45°	948	853	705	605	571	732
55°	721	611	458	374	347	644
65°	486	372	245	198	193	482
75°	259	161	113	103	102	274
85°	61	31	27	27	27	70
90°	1	13	35	33	34	6
95°	52	63	64	64	63	58
105°	216	219	221	223	223	228
115°	403	408	406	406	403	398
125°	586	595	592	588	587	523
135°	757	768	771	770	767	585
145°	920	927	932	934	930	575
155°	1051	1054	1058	1063	1059	484
165°	1144	1143	1143	1150	1145	323
175°	1190	1187	1185	1192	1186	113
180°	1192	1192	1192	1192	1192	

TEST NUMBER: P902224

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US830-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1558.2	1558.2	1558.2	1558.2	1558.2
2.5°	1565.3	1558.2	1542.7	1556.9	1554.0
5°	1558.2	1551.1	1532.8	1545.5	1541.3
7.5°	1545.5	1537.1	1517.4	1522.9	1515.9
10°	1528.6	1518.7	1490.5	1486.2	1477.9
12.5°	1507.5	1494.8	1456.6	1448.2	1432.7
15°	1482.1	1466.5	1418.6	1391.9	1377.8
17.5°	1452.5	1429.8	1370.6	1339.6	1317.0
20°	1418.6	1390.3	1319.8	1284.7	1253.6
22.5°	1382.0	1349.5	1267.6	1219.7	1198.7
25°	1345.3	1300.1	1207.0	1149.3	1128.0
27.5°	1301.7	1253.6	1150.7	1084.4	1051.9
30°	1255.1	1201.4	1088.5	1016.7	978.6
32.5°	1209.9	1145.0	1029.4	944.8	909.5
35°	1159.2	1087.2	963.2	874.3	843.2
37.5°	1109.8	1032.2	901.1	803.7	768.5
40°	1057.6	973.1	836.2	736.1	699.5
42.5°	1004.0	913.8	771.4	666.9	631.8
45°	947.6	853.1	705.1	604.9	571.1
47.5°	894.1	794.0	641.7	541.5	510.5
50°	834.8	734.7	579.6	482.2	452.7
52.5°	776.9	671.2	520.4	427.3	400.5
55°	720.6	610.6	458.3	373.7	346.9
57.5°	662.8	550.0	403.3	324.3	301.8
60°	603.5	490.7	345.4	273.6	251.1
62.5°	545.8	433.0	296.1	228.5	217.3
65°	486.5	372.2	245.3	197.5	193.1
67.5°	430.2	315.8	197.5	173.4	169.2
70°	370.9	260.9	163.5	149.5	143.7
72.5°	314.5	210.1	136.8	125.5	122.7
75°	259.4	160.7	112.8	102.9	101.6
77.5°	204.5	114.1	88.9	83.2	80.3
80°	153.6	81.8	67.6	62.1	62.1
82.5°	107.2	55.0	46.6	43.6	43.6
85°	60.6	31.0	26.8	26.8	26.8
87.5°	22.6	11.2	11.2	9.9	9.9
90°	1.0	12.9	35.3	33.1	34.1
92.5°	22.2	30.2	31.3	32.3	32.3
95°	52.5	62.6	64.4	64.4	62.6
97.5°	87.4	96.7	100.7	100.7	100.7
100°	127.6	135.9	138.7	138.7	137.7
102.5°	170.0	176.2	180.1	181.2	180.1
105°	216.4	219.2	221.4	223.2	223.2
107.5°	262.4	266.7	266.7	267.4	262.4
110°	307.0	312.7	312.7	312.7	309.9

TEST NUMBER: P902224

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	355.1	361.3	360.1	357.3	355.1
115°	402.6	408.4	406.5	405.5	402.6
117.5°	449.7	457.6	452.6	449.7	446.9
120°	497.2	505.0	497.2	497.2	493.9
122.5°	540.3	550.4	545.4	542.4	540.3
125°	585.6	594.6	591.7	588.4	587.4
127.5°	629.8	640.9	637.0	632.6	629.8
130°	671.1	684.1	682.3	680.1	676.2
132.5°	717.5	727.5	728.3	723.2	720.4
135°	757.4	768.5	770.7	769.6	766.8
137.5°	802.0	811.0	812.8	812.0	807.8
140°	841.1	850.2	855.2	855.2	851.2
142.5°	881.5	890.4	893.2	894.4	890.4
145°	919.5	926.7	932.5	933.6	929.6
147.5°	953.7	962.6	967.0	968.7	964.8
150°	988.9	995.0	999.0	1002.2	999.0
152.5°	1020.2	1026.2	1031.3	1035.3	1031.3
155°	1051.4	1054.3	1057.5	1062.6	1059.3
157.5°	1078.5	1080.5	1082.3	1089.6	1084.5
160°	1102.5	1104.7	1105.7	1111.8	1107.5
162.5°	1124.7	1124.7	1125.9	1132.7	1127.7
165°	1143.9	1142.7	1142.7	1149.9	1144.9
167.5°	1161.1	1157.8	1157.8	1165.1	1160.0
170°	1174.0	1171.1	1170.1	1177.2	1171.1
172.5°	1183.0	1180.2	1179.0	1186.3	1180.2
175°	1190.2	1187.3	1185.2	1192.3	1186.3
177.5°	1194.2	1191.3	1189.1	1195.2	1189.1
180°	1192.3	1192.3	1192.3	1192.3	1192.3

TEST NUMBER: P902224

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US830-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.02	9.84	9.99	10.82	12.11	4.98	5.80	5.95	6.78	8.07
	3H	10.69	11.42	11.67	12.42	13.73	6.16	6.89	7.14	7.88	9.19
	4H	11.29	11.99	12.29	12.98	14.30	6.60	7.30	7.60	8.29	9.61
	6H	11.71	12.35	12.72	13.35	14.68	6.92	7.56	7.93	8.56	9.89
	8H	11.84	12.45	12.85	13.46	14.79	7.01	7.61	8.02	8.63	9.96
	12H	11.90	12.47	12.91	13.48	14.83	7.05	7.62	8.06	8.63	9.98
4H	2H	9.03	9.73	10.03	10.72	12.04	5.57	6.26	6.57	7.26	8.58
	3H	10.86	11.43	11.87	12.46	13.79	6.91	7.49	7.92	8.51	9.84
	4H	11.54	12.07	12.56	13.09	14.44	7.45	7.98	8.47	9.00	10.35
	6H	12.05	12.51	13.08	13.55	14.90	7.87	8.32	8.90	9.36	10.71
	8H	12.23	12.65	13.26	13.68	15.05	7.99	8.41	9.02	9.45	10.81
	12H	12.32	12.70	13.37	13.75	15.12	8.05	8.43	9.10	9.48	10.85
8H	4H	11.51	11.93	12.54	12.97	14.33	7.73	8.15	8.76	9.19	10.55
	6H	12.07	12.42	13.12	13.49	14.86	8.24	8.59	9.29	9.66	11.03
	8H	12.28	12.59	13.34	13.65	15.03	8.43	8.73	9.49	9.79	11.17
	12H	12.42	12.69	13.48	13.74	15.17	8.54	8.81	9.60	9.86	11.29
12H	4H	11.46	11.84	12.51	12.89	14.26	7.73	8.12	8.78	9.16	10.53
	6H	12.04	12.35	13.11	13.41	14.79	8.29	8.60	9.35	9.65	11.04
	8H	12.26	12.53	13.33	13.59	15.01	8.49	8.76	9.56	9.82	11.24

END OF REPORT