

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904910

Luminaire Tested: DFN2DIP-4P3F0-020D040US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904910
REPORT IS A COMBINATION OF REPORTS P899049 AND P895917
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-020D040US835-FLLFLL
Description: 3 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5520.0 lumens
Efficiency: N/A
Efficacy: 121.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 45.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904910

CATALOG NUMBER: DFN2DIP-4P3F0-020D040US835-FLLFLL

Luminous Intensity Polar Plot

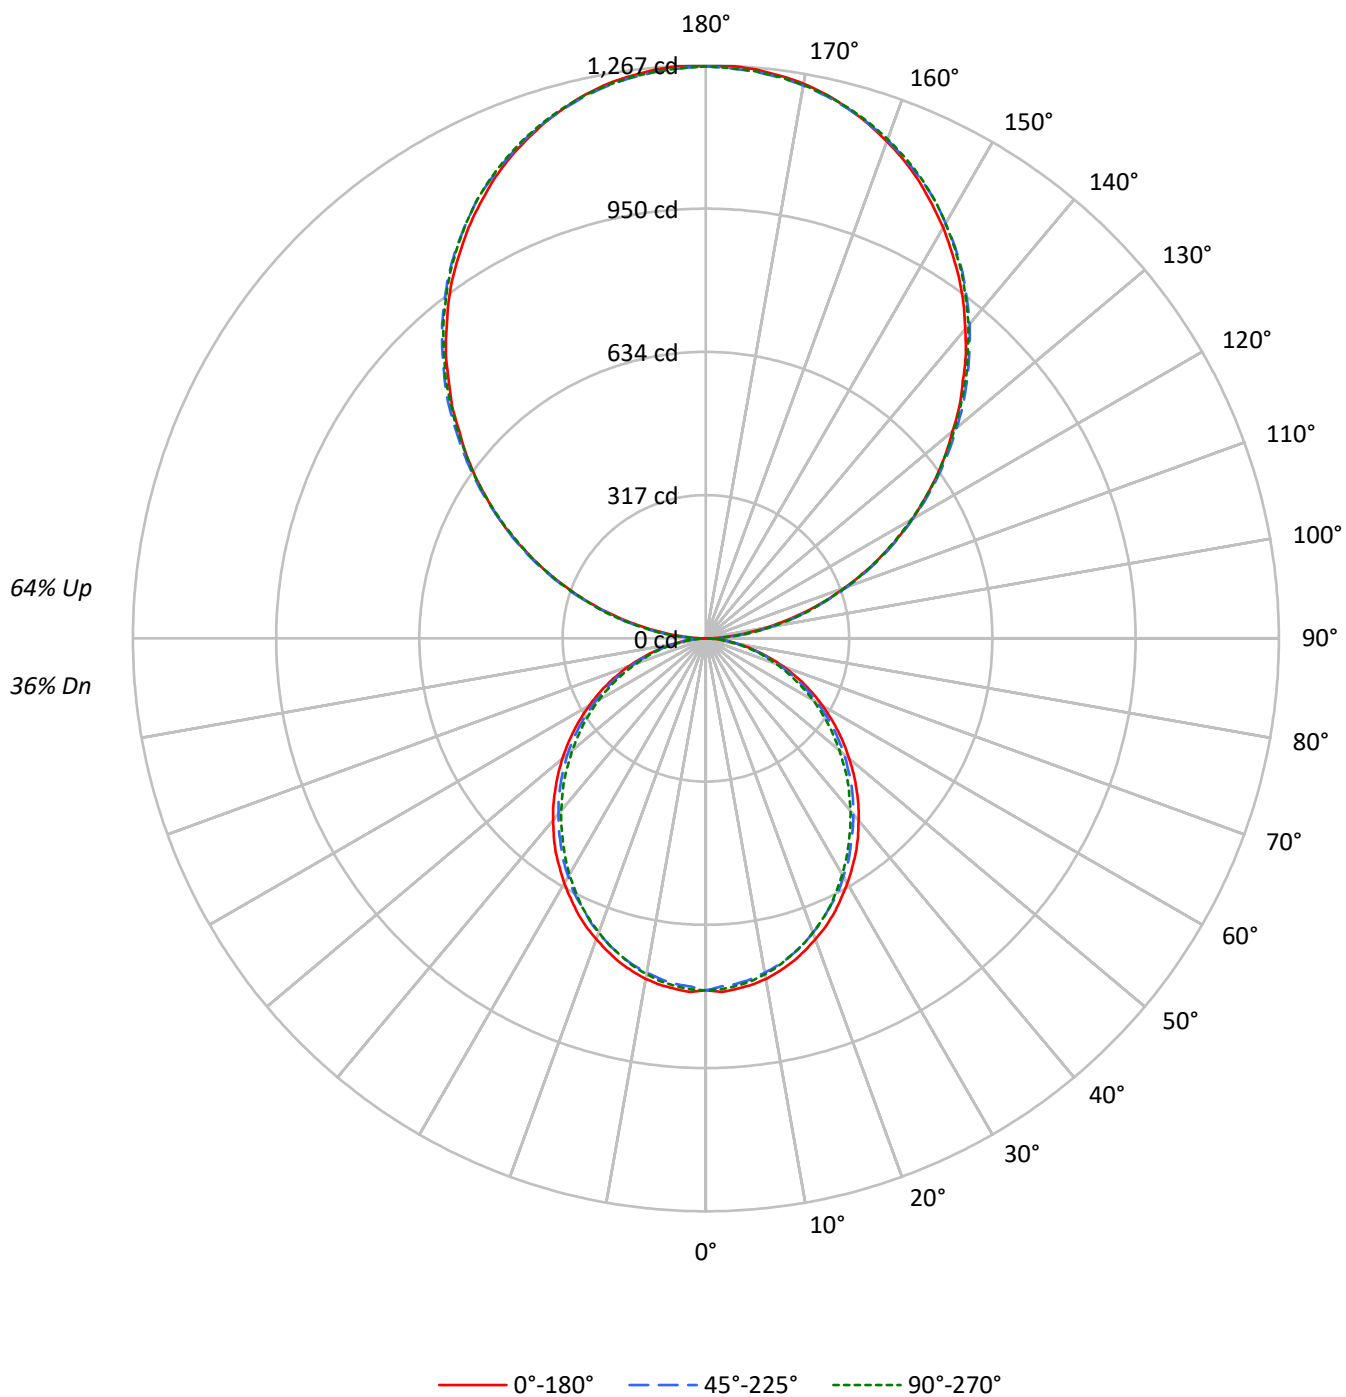

TEST NUMBER: P904910

CATALOG NUMBER: DFN2DIP-4P3F0-020D040US835-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	43	43	43
1	95	90	87	83	85	82	79	76	66	64	62	52	50	49	38	37	36
2	86	79	73	68	78	72	66	62	58	54	51	45	43	41	34	32	31
3	79	69	62	56	71	63	57	52	51	47	43	40	37	34	30	28	26
4	72	61	54	48	65	56	49	44	45	40	37	36	32	29	27	24	22
5	66	54	47	41	59	50	43	38	40	35	31	32	28	25	24	22	20
6	61	49	41	35	55	45	38	33	36	31	27	29	25	22	22	19	17
7	56	44	36	31	50	40	33	28	33	28	24	26	22	20	20	17	15
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	16	14
9	48	36	29	24	44	33	27	22	27	22	19	22	18	16	17	14	12
10	45	33	26	21	41	30	24	20	25	20	17	20	17	14	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	887	887	887
5°	888	874	880
10°	880	862	868
15°	866	847	849
20°	848	826	830
25°	830	802	807
30°	808	780	779
35°	787	753	749
40°	761	727	721
45°	735	700	691
50°	706	672	658
55°	676	639	627
60°	643	600	591
65°	605	560	549
70°	558	511	504
75°	494	452	461
80°	415	378	381
85°	292	250	250

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1268 cd/sqm

TEST NUMBER: P904910

CATALOG NUMBER: DFN2DIP-4P3F0-020D040US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.2	1.3
10°-20°	206.1	3.7
20°-30°	302.9	5.5
30°-40°	351.8	6.4
40°-50°	351.3	6.4
50°-60°	306.3	5.5
60°-70°	226.5	4.1
70°-80°	128.1	2.3
80°-90°	37.4	0.7
90°-100°	78.3	1.4
100°-110°	248.7	4.5
110°-120°	425.6	7.7
120°-130°	559.8	10.1
130°-140°	628.3	11.4
140°-150°	616.2	11.2
150°-160°	516.9	9.4
160°-170°	342.8	6.2
170°-180°	119.8	2.2
0°-30°	582.2	10.5
0°-40°	934.0	16.9
0°-60°	1591.6	28.8
0°-90°	1983.6	35.9
90°-120°	752.7	13.6
90°-150°	2556.9	46.3
90°-180°	3536.0	64.1
0°-180°	5520.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	778	778	778	778	778	
5°	778	775	767	773	772	74
15°	741	736	727	730	726	209
25°	670	664	652	653	652	309
35°	578	571	559	554	551	361
45°	471	466	454	446	443	363
55°	356	352	343	334	330	318
65°	240	236	228	222	218	238
75°	126	124	120	116	118	134
85°	31	30	29	27	26	34
90°	1	14	37	35	36	5
95°	56	66	68	68	66	62
105°	230	233	235	237	237	242
115°	427	433	431	430	427	422
125°	621	631	628	624	623	555
135°	804	815	818	816	814	621
145°	976	983	989	990	986	610
155°	1116	1119	1122	1127	1124	513
165°	1214	1212	1212	1220	1215	342
175°	1263	1260	1257	1265	1259	120
180°	1265	1265	1265	1265	1265	

TEST NUMBER: P904910

CATALOG NUMBER: DFN2DIP-4P3F0-020D040US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	778.2	778.2	778.2	778.2	778.2
2.5°	782.7	779.0	770.7	778.2	776.8
5°	778.2	775.3	767.0	773.0	771.5
7.5°	773.0	768.5	760.3	766.3	764.8
10°	764.8	759.6	750.6	756.5	754.3
12.5°	753.5	749.1	740.1	743.8	742.3
15°	740.8	736.4	726.6	729.6	725.9
17.5°	725.1	720.7	710.9	714.6	710.9
20°	707.9	703.4	692.9	695.2	692.2
22.5°	690.7	684.0	674.2	674.2	672.7
25°	670.5	664.5	651.8	653.2	651.8
27.5°	648.0	642.8	633.1	630.9	627.1
30°	625.6	619.6	608.4	606.2	603.1
32.5°	601.6	597.2	585.2	580.7	577.7
35°	578.5	571.0	559.0	554.5	550.7
37.5°	552.3	545.5	533.5	528.3	524.5
40°	525.3	519.3	507.3	500.7	497.6
42.5°	499.1	493.1	481.2	473.7	469.2
45°	470.7	465.5	454.2	446.0	443.0
47.5°	443.0	437.8	425.8	417.5	413.1
50°	413.8	410.1	399.6	389.1	385.4
52.5°	385.4	380.1	370.4	362.2	357.0
55°	356.2	351.7	342.7	333.8	330.0
57.5°	327.0	323.3	313.5	304.6	301.5
60°	297.8	294.9	284.4	276.1	273.9
62.5°	269.4	264.1	256.7	249.2	246.2
65°	240.2	235.7	228.3	221.5	217.8
67.5°	210.3	206.5	199.8	194.6	191.6
70°	182.6	179.6	172.8	167.6	164.7
72.5°	154.2	151.2	147.4	142.2	140.0
75°	125.7	124.3	120.4	116.0	117.5
77.5°	100.3	97.3	95.7	93.5	91.3
80°	74.9	74.1	72.6	70.3	68.8
82.5°	50.9	50.9	50.2	47.2	47.2
85°	30.6	29.9	29.2	26.9	26.2
87.5°	13.5	12.0	10.5	8.3	7.5
90°	1.1	13.7	37.4	35.1	36.2
92.5°	23.6	32.0	33.2	34.3	34.3
95°	55.7	66.4	68.3	68.3	66.4
97.5°	92.7	102.6	106.8	106.8	106.8
100°	135.4	144.2	147.2	147.2	146.1
102.5°	180.4	186.9	191.1	192.2	191.1
105°	229.6	232.6	234.9	236.8	236.8
107.5°	278.4	283.0	283.0	283.7	278.4
110°	325.7	331.8	331.8	331.8	328.8

TEST NUMBER: P904910

CATALOG NUMBER: DFN2DIP-4P3F0-020D040US835-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	376.8	383.3	382.1	379.1	376.8
115°	427.1	433.3	431.3	430.2	427.1
117.5°	477.1	485.5	480.2	477.1	474.1
120°	527.5	535.8	527.5	527.5	524.0
122.5°	573.2	583.9	578.6	575.5	573.2
125°	621.3	630.8	627.8	624.3	623.2
127.5°	668.2	680.0	675.8	671.2	668.2
130°	712.0	725.8	723.9	721.6	717.4
132.5°	761.2	771.9	772.7	767.3	764.3
135°	803.6	815.4	817.7	816.5	813.5
137.5°	850.9	860.4	862.3	861.5	857.0
140°	892.4	902.0	907.3	907.3	903.1
142.5°	935.2	944.7	947.7	948.9	944.7
145°	975.6	983.2	989.3	990.5	986.3
147.5°	1011.8	1021.3	1025.9	1027.8	1023.6
150°	1049.2	1055.7	1059.9	1063.3	1059.9
152.5°	1082.4	1088.8	1094.2	1098.4	1094.2
155°	1115.5	1118.6	1122.0	1127.4	1123.9
157.5°	1144.2	1146.4	1148.3	1156.0	1150.6
160°	1169.7	1172.0	1173.1	1179.6	1175.0
162.5°	1193.3	1193.3	1194.5	1201.7	1196.4
165°	1213.6	1212.4	1212.4	1220.0	1214.7
167.5°	1231.9	1228.4	1228.4	1236.1	1230.7
170°	1245.6	1242.5	1241.4	1249.0	1242.5
172.5°	1255.1	1252.1	1250.9	1258.6	1252.1
175°	1262.8	1259.7	1257.4	1265.0	1258.6
177.5°	1267.0	1263.9	1261.6	1268.1	1261.6
180°	1265.0	1265.0	1265.0	1265.0	1265.0

TEST NUMBER: P904910

CATALOG NUMBER: DFN2DIP-4P3F0-020D040US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.36	6.10	6.43	7.18	8.63	4.91	5.66	5.98	6.73	8.19
	3H	7.00	7.67	8.08	8.75	10.23	6.51	7.18	7.59	8.26	9.74
	4H	7.58	8.22	8.67	9.30	10.78	7.09	7.73	8.18	8.81	10.29
	6H	7.97	8.56	9.07	9.64	11.14	7.47	8.06	8.57	9.14	10.64
	8H	8.07	8.63	9.18	9.73	11.22	7.57	8.13	8.68	9.23	10.72
	12H	8.12	8.65	9.22	9.74	11.25	7.61	8.14	8.71	9.23	10.74
4H	2H	5.80	6.44	6.90	7.52	9.00	5.45	6.08	6.54	7.16	8.65
	3H	7.65	8.18	8.75	9.29	10.78	7.24	7.77	8.35	8.88	10.38
	4H	8.36	8.84	9.46	9.94	11.46	7.93	8.42	9.04	9.52	11.03
	6H	8.86	9.28	9.98	10.40	11.91	8.43	8.85	9.54	9.97	11.48
	8H	9.01	9.40	10.12	10.51	12.03	8.57	8.96	9.68	10.07	11.60
	12H	9.07	9.42	10.20	10.55	12.08	8.62	8.98	9.75	10.10	11.63
8H	4H	8.54	8.93	9.66	10.04	11.57	8.16	8.55	9.28	9.67	11.19
	6H	9.16	9.48	10.30	10.64	12.16	8.78	9.10	9.91	10.25	11.78
	8H	9.38	9.66	10.52	10.79	12.34	8.98	9.27	10.13	10.40	11.94
	12H	9.50	9.75	10.65	10.88	12.46	9.09	9.34	10.24	10.47	12.05
12H	4H	8.52	8.87	9.65	10.00	11.53	8.15	8.50	9.28	9.63	11.16
	6H	9.19	9.47	10.33	10.61	12.15	8.81	9.10	9.96	10.23	11.77
	8H	9.42	9.67	10.57	10.80	12.38	9.04	9.29	10.19	10.42	12.00

END OF REPORT