

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904938

Luminaire Tested: DFN2DIP-4P3F0-030D060US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904938
REPORT IS A COMBINATION OF REPORTS P899071 AND P895917
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-030D060US835-FLLFLL
Description: 3 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8280.0 lumens
Efficiency: N/A
Efficacy: 113.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 73.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904938

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-FLLFLL

Luminous Intensity Polar Plot

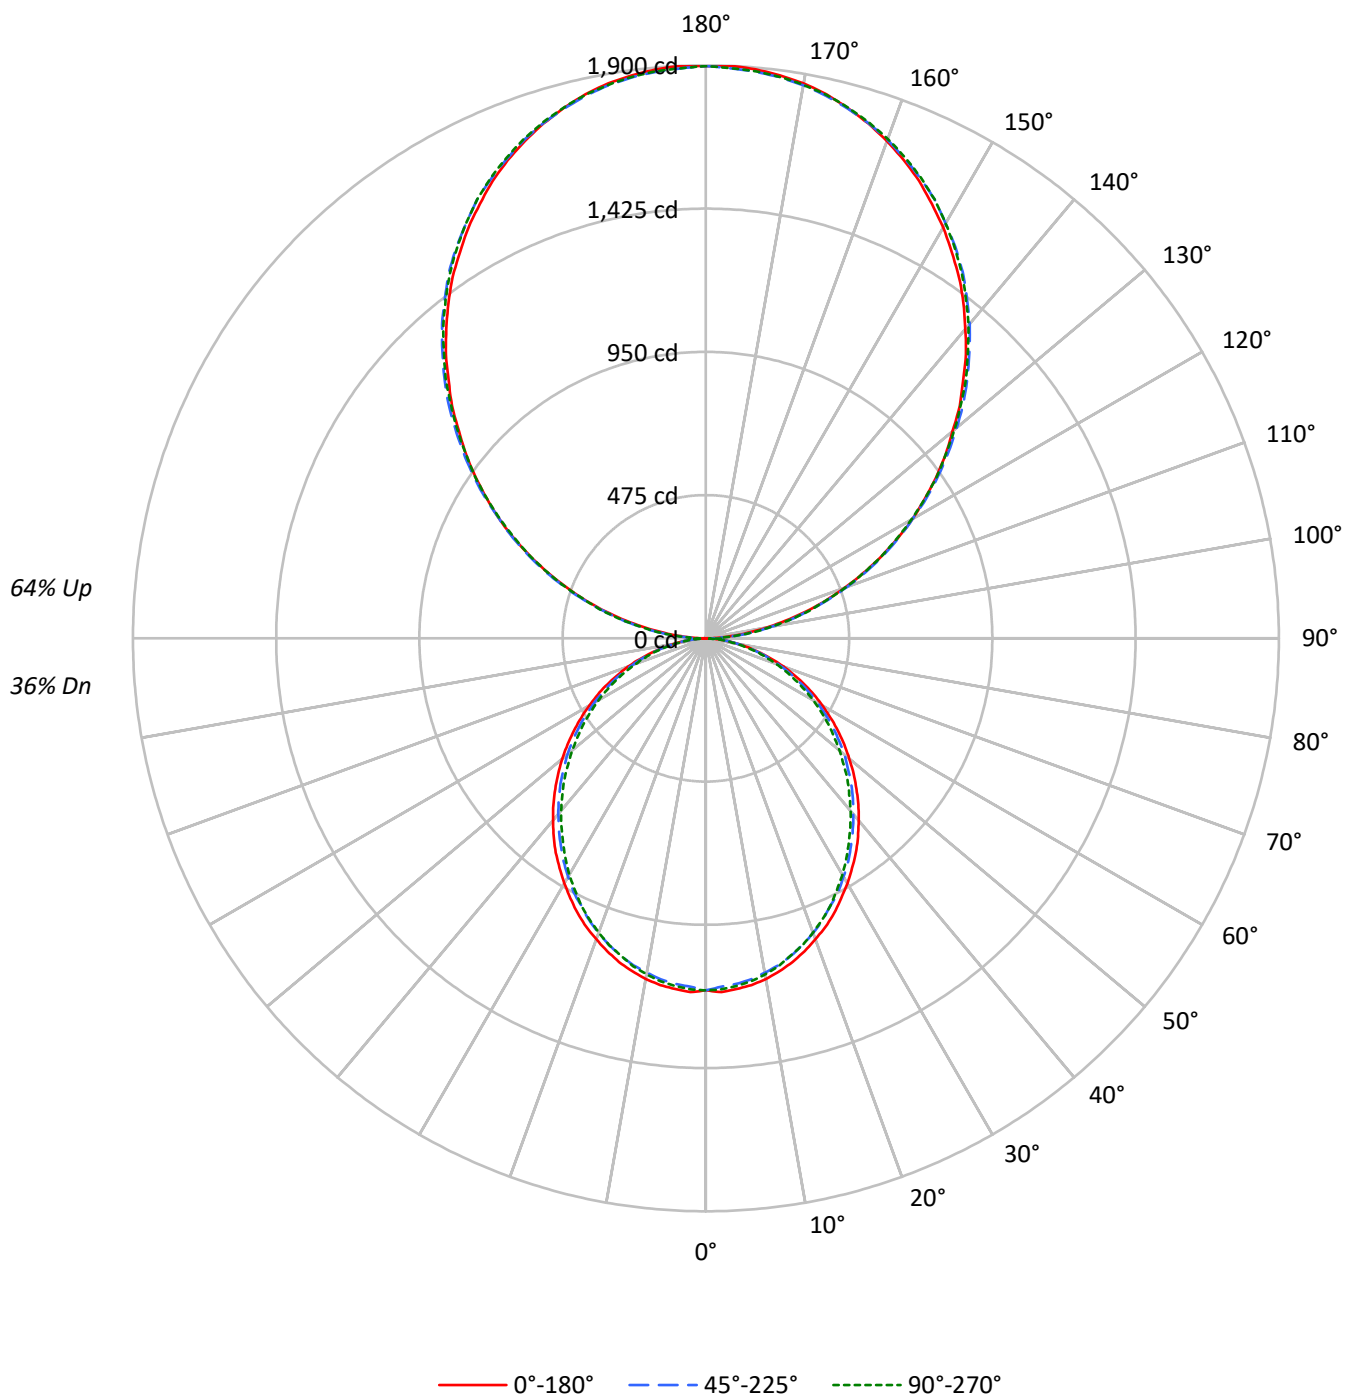

TEST NUMBER: P904938

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	104	104	104	104	94	94	94	94	76	76	76		59	59	59		43
1	95	90	87	83	85	82	79	76	66	64	62		52	50	49		38
2	86	79	73	68	78	72	66	62	58	54	51		45	43	41		34
3	79	69	62	56	71	63	57	52	51	47	43		40	37	34		30
4	72	61	54	48	65	56	49	44	45	40	37		36	32	29		27
5	66	54	47	41	59	50	43	38	40	35	31		32	28	25		24
6	61	49	41	35	55	45	38	33	36	31	27		29	25	22		22
7	56	44	36	31	50	40	33	28	33	28	24		26	22	20		20
8	52	40	32	27	47	36	30	25	30	25	21		24	20	17		18
9	48	36	29	24	44	33	27	22	27	22	19		22	18	16		17
10	45	33	26	21	41	30	24	20	25	20	17		20	17	14		16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1330	1330	1330
5°	1332	1311	1320
10°	1320	1292	1302
15°	1300	1270	1273
20°	1273	1240	1244
25°	1246	1204	1211
30°	1212	1170	1169
35°	1180	1130	1124
40°	1141	1090	1081
45°	1102	1050	1037
50°	1059	1007	987
55°	1015	958	940
60°	964	901	887
65°	908	840	823
70°	838	767	755
75°	740	679	692
80°	622	566	572
85°	438	375	375

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1902 cd/sqm

TEST NUMBER: P904938

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	109.9	1.3
10°-20°	309.1	3.7
20°-30°	454.3	5.5
30°-40°	527.6	6.4
40°-50°	527.0	6.4
50°-60°	459.5	5.5
60°-70°	339.7	4.1
70°-80°	192.2	2.3
80°-90°	56.1	0.7
90°-100°	117.4	1.4
100°-110°	373.1	4.5
110°-120°	638.5	7.7
120°-130°	839.7	10.1
130°-140°	942.5	11.4
140°-150°	924.2	11.2
150°-160°	775.3	9.4
160°-170°	514.2	6.2
170°-180°	179.7	2.2
0°-30°	873.3	10.5
0°-40°	1400.9	16.9
0°-60°	2387.4	28.8
0°-90°	2975.4	35.9
90°-120°	1129.0	13.6
90°-150°	3835.4	46.3
90°-180°	5305.0	64.1
0°-180°	8280.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1167	1167	1167	1167	1167	
5°	1167	1163	1150	1160	1157	111
15°	1111	1105	1090	1094	1089	313
25°	1006	997	978	980	978	463
35°	868	856	838	832	826	542
45°	706	698	681	669	664	545
55°	534	528	514	501	495	478
65°	360	354	342	332	327	356
75°	188	186	181	174	176	201
85°	46	45	44	40	39	51
90°	2	21	56	53	54	8
95°	84	100	102	102	100	93
105°	344	349	352	355	355	363
115°	641	650	647	645	641	634
125°	932	946	942	936	935	833
135°	1205	1223	1226	1225	1220	932
145°	1463	1475	1484	1486	1479	914
155°	1673	1678	1683	1691	1686	770
165°	1820	1819	1819	1830	1822	514
175°	1894	1890	1886	1898	1888	180
180°	1898	1898	1898	1898	1898	

TEST NUMBER: P904938

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1167.3	1167.3	1167.3	1167.3	1167.3
2.5°	1174.1	1168.5	1156.1	1167.3	1165.2
5°	1167.3	1162.9	1150.5	1159.5	1157.3
7.5°	1159.5	1152.8	1140.4	1149.5	1147.2
10°	1147.2	1139.3	1125.9	1134.8	1131.5
12.5°	1130.3	1123.6	1110.2	1115.7	1113.5
15°	1111.2	1104.6	1089.9	1094.4	1088.8
17.5°	1087.6	1081.0	1066.3	1071.9	1066.3
20°	1061.8	1055.1	1039.4	1042.7	1038.3
22.5°	1036.1	1026.0	1011.3	1011.3	1009.0
25°	1005.7	996.8	977.7	979.9	977.7
27.5°	972.0	964.1	949.6	946.3	940.7
30°	938.4	929.4	912.6	909.2	904.7
32.5°	902.5	895.8	877.8	871.0	866.5
35°	867.7	856.5	838.5	831.7	826.1
37.5°	828.4	818.3	800.3	792.4	786.8
40°	788.0	779.0	761.0	751.0	746.5
42.5°	748.7	739.7	721.8	710.5	703.8
45°	706.1	698.2	681.3	669.0	664.5
47.5°	664.5	656.7	638.7	626.3	619.6
50°	620.7	615.1	599.4	583.7	578.1
52.5°	578.1	570.2	555.7	543.3	535.4
55°	534.4	527.6	514.1	500.7	495.1
57.5°	490.5	484.9	470.3	456.8	452.3
60°	446.7	442.3	426.6	414.2	410.9
62.5°	404.1	396.2	385.0	373.8	369.3
65°	360.4	353.6	342.4	332.3	326.7
67.5°	315.5	309.8	299.7	291.9	287.4
70°	273.9	269.4	259.3	251.4	247.0
72.5°	231.3	226.7	221.1	213.3	210.0
75°	188.5	186.4	180.7	174.0	176.3
77.5°	150.4	145.9	143.6	140.3	137.0
80°	112.3	111.1	108.8	105.5	103.3
82.5°	76.3	76.3	75.3	70.7	70.7
85°	46.0	44.9	43.8	40.4	39.3
87.5°	20.2	18.0	15.7	12.4	11.2
90°	1.7	20.6	56.1	52.6	54.3
92.5°	35.5	48.1	49.8	51.5	51.5
95°	83.5	99.5	102.4	102.4	99.5
97.5°	139.0	153.9	160.2	160.2	160.2
100°	203.1	216.2	220.8	220.8	219.1
102.5°	270.6	280.3	286.6	288.3	286.6
105°	344.4	349.0	352.4	355.3	355.3
107.5°	417.6	424.5	424.5	425.6	417.6
110°	488.6	497.7	497.7	497.7	493.1

TEST NUMBER: P904938

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-FLLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	565.2	574.9	573.2	568.6	565.2
115°	640.7	649.9	647.0	645.3	640.7
117.5°	715.7	728.3	720.2	715.7	711.1
120°	791.2	803.8	791.2	791.2	786.0
122.5°	859.8	875.8	867.8	863.3	859.8
125°	931.9	946.2	941.6	936.5	934.8
127.5°	1002.3	1020.0	1013.7	1006.9	1002.3
130°	1068.1	1088.7	1085.8	1082.4	1076.1
132.5°	1141.9	1157.9	1159.0	1151.0	1146.4
135°	1205.4	1223.1	1226.5	1224.8	1220.2
137.5°	1276.3	1290.6	1293.5	1292.3	1285.5
140°	1338.7	1353.0	1361.0	1361.0	1354.7
142.5°	1402.7	1417.0	1421.6	1423.3	1417.0
145°	1463.4	1474.8	1484.0	1485.7	1479.4
147.5°	1517.7	1532.0	1538.9	1541.7	1535.4
150°	1573.8	1583.5	1589.8	1594.9	1589.8
152.5°	1623.5	1633.3	1641.3	1647.6	1641.3
155°	1673.3	1677.9	1683.0	1691.1	1685.9
157.5°	1716.2	1719.7	1722.5	1734.0	1726.0
160°	1754.6	1758.0	1759.7	1769.4	1762.6
162.5°	1790.0	1790.0	1791.7	1802.6	1794.6
165°	1820.3	1818.6	1818.6	1830.1	1822.1
167.5°	1847.8	1842.7	1842.7	1854.1	1846.1
170°	1868.4	1863.8	1862.1	1873.5	1863.8
172.5°	1882.7	1878.1	1876.4	1887.8	1878.1
175°	1894.1	1889.6	1886.1	1897.6	1887.8
177.5°	1900.4	1895.9	1892.4	1902.1	1892.4
180°	1897.6	1897.6	1897.6	1897.6	1897.6

TEST NUMBER: P904938

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.77	7.51	7.83	8.58	10.04	6.32	7.07	7.39	8.14	9.60
	3H	8.41	9.08	9.49	10.16	11.64	7.92	8.59	9.00	9.67	11.15
	4H	8.99	9.63	10.08	10.71	12.19	8.50	9.13	9.59	10.22	11.70
	6H	9.38	9.97	10.48	11.05	12.55	8.88	9.47	9.98	10.55	12.05
	8H	9.48	10.04	10.58	11.14	12.63	8.98	9.54	10.08	10.64	12.13
	12H	9.53	10.05	10.63	11.15	12.66	9.02	9.55	10.12	10.64	12.15
4H	2H	7.21	7.84	8.31	8.93	10.41	6.85	7.49	7.95	8.57	10.05
	3H	9.06	9.59	10.16	10.70	12.19	8.65	9.18	9.75	10.29	11.79
	4H	9.77	10.25	10.87	11.35	12.87	9.34	9.83	10.45	10.93	12.44
	6H	10.27	10.69	11.38	11.81	13.32	9.84	10.26	10.95	11.38	12.89
	8H	10.41	10.80	11.53	11.92	13.44	9.98	10.37	11.09	11.48	13.01
	12H	10.48	10.83	11.61	11.96	13.49	10.03	10.38	11.16	11.51	13.04
8H	4H	9.95	10.34	11.06	11.45	12.98	9.57	9.96	10.69	11.07	12.60
	6H	10.57	10.89	11.71	12.05	13.57	10.18	10.51	11.32	11.66	13.18
	8H	10.78	11.07	11.93	12.20	13.74	10.39	10.67	11.54	11.81	13.35
	12H	10.91	11.16	12.05	12.29	13.87	10.50	10.75	11.64	11.88	13.46
12H	4H	9.93	10.28	11.06	11.41	12.94	9.56	9.91	10.69	11.04	12.57
	6H	10.60	10.88	11.74	12.01	13.56	10.22	10.51	11.37	11.64	13.18
	8H	10.83	11.08	11.98	12.21	13.79	10.45	10.70	11.59	11.83	13.41

END OF REPORT