

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904985

Luminaire Tested: DFN2DIP-4P3F0-060D020US835-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904985
REPORT IS A COMBINATION OF REPORTS P900558 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-060D020US835-RLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open
No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7080.0 lumens
Efficiency: N/A
Efficacy: 91.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 77.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904985

CATALOG NUMBER: DFN2DIP-4P3F0-060D020US835-RLLONL

Luminous Intensity Polar Plot

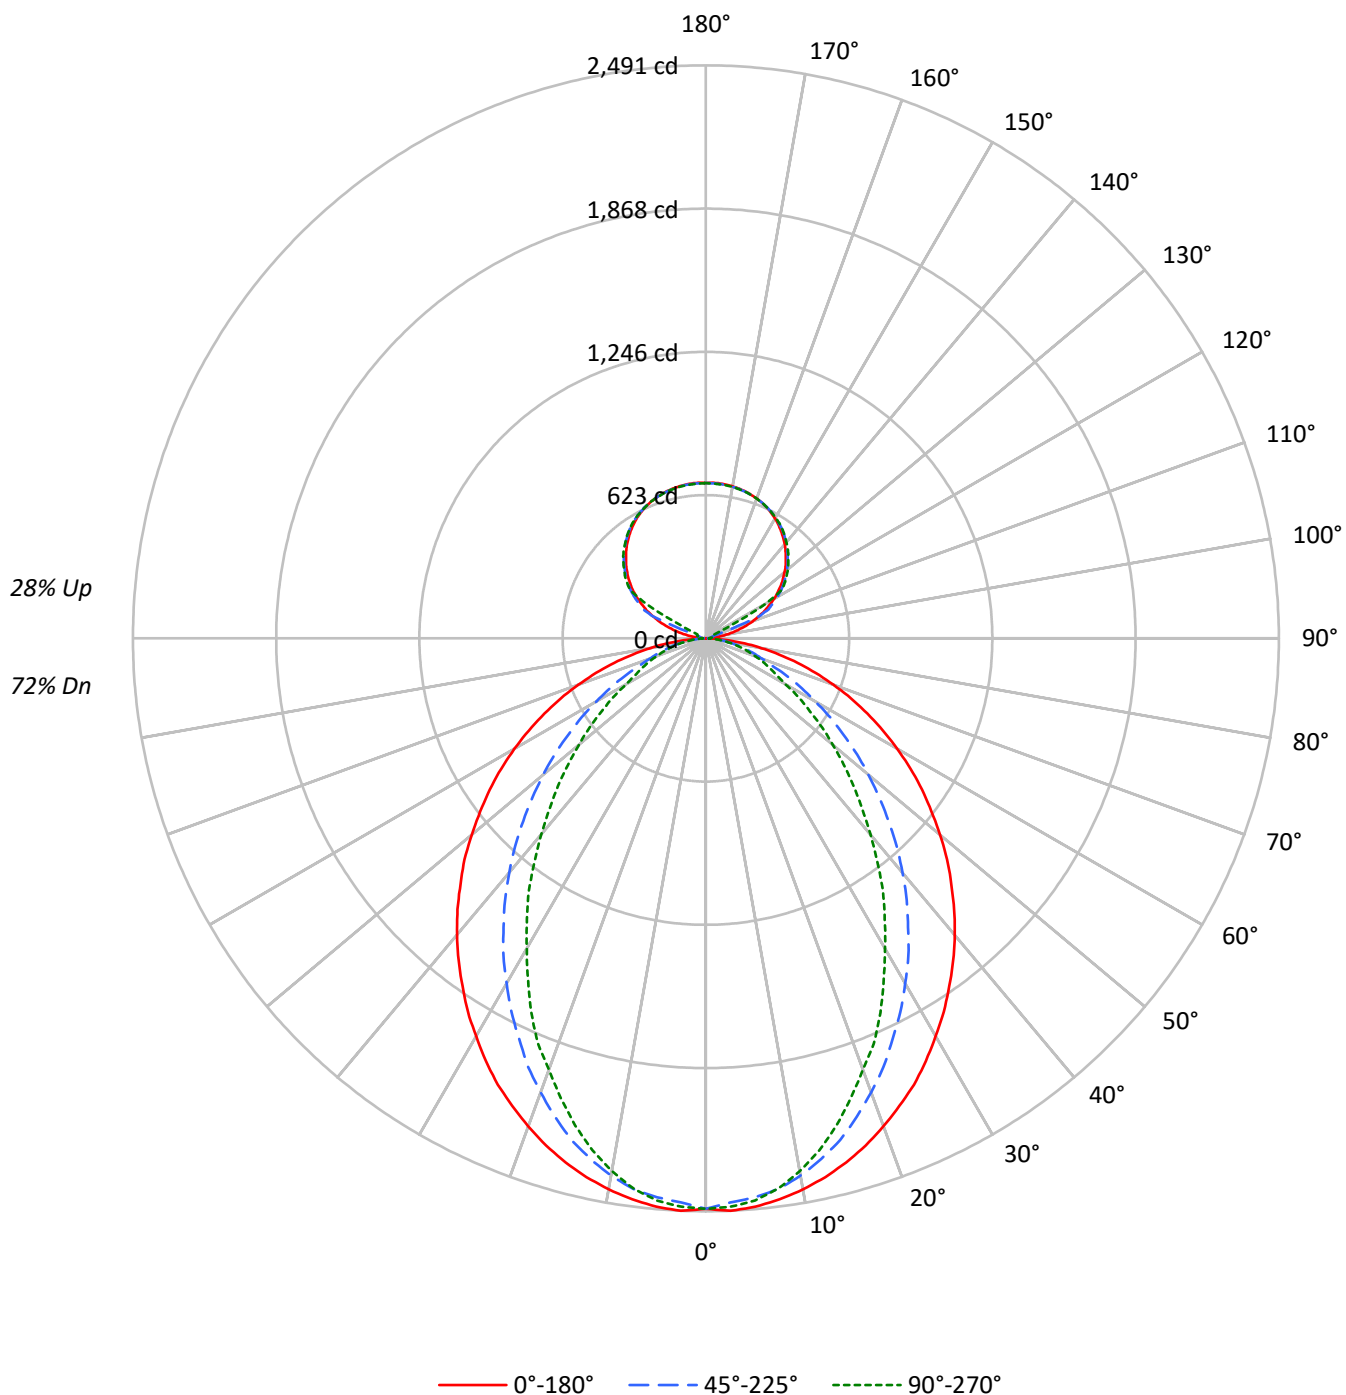

TEST NUMBER: P904985

CATALOG NUMBER: DFN2DIP-4P3F0-060D020US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	76	76	76
1	103	99	95	92	98	94	91	88	85	82	80	76	75	73	69	67	66
2	95	87	81	76	90	83	78	73	75	71	68	68	65	62	61	59	57
3	87	78	70	65	82	74	67	62	67	62	58	61	57	53	55	52	49
4	80	69	61	55	76	66	59	54	60	54	50	55	50	46	50	46	43
5	74	62	54	48	70	59	52	47	54	48	44	50	45	41	45	41	38
6	68	56	48	42	65	54	46	41	49	43	39	45	40	36	41	37	34
7	63	51	43	38	60	49	42	36	45	39	34	41	36	32	38	34	30
8	59	47	39	34	56	45	38	33	41	35	31	38	33	29	35	31	27
9	55	43	35	30	52	41	34	30	38	32	28	35	30	26	32	28	25
10	52	40	32	28	49	38	31	27	35	29	25	33	28	24	30	26	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2826	2826	2826
5°	2829	2779	2798
10°	2799	2723	2706
15°	2759	2631	2564
20°	2706	2505	2391
25°	2652	2365	2224
30°	2580	2221	2012
35°	2509	2066	1825
40°	2437	1906	1612
45°	2354	1729	1418
50°	2268	1550	1230
55°	2177	1360	1048
60°	2072	1161	862
65°	1952	958	775
70°	1805	770	700
75°	1621	675	635
80°	1355	560	547
85°	919	365	406

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2354 cd/sqm

TEST NUMBER: P904985

CATALOG NUMBER: DFN2DIP-4P3F0-060D020US835-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	3.3
10°-20°	638.0	9.0
20°-30°	895.7	12.7
30°-40°	976.4	13.8
40°-50°	897.4	12.7
50°-60°	704.8	10.0
60°-70°	458.8	6.5
70°-80°	236.1	3.3
80°-90°	61.5	0.9
90°-100°	22.3	0.3
100°-110°	83.0	1.2
110°-120°	220.1	3.1
120°-130°	365.0	5.2
130°-140°	387.7	5.5
140°-150°	360.3	5.1
150°-160°	289.7	4.1
160°-170°	186.7	2.6
170°-180°	64.2	0.9
0°-30°	1766.2	24.9
0°-40°	2742.6	38.7
0°-60°	4344.8	61.4
0°-90°	5101.2	72.1
90°-120°	325.3	4.6
90°-150°	1438.2	20.3
90°-180°	1979.0	28.0
0°-180°	7080.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	111
90°	0	6	10	12	13	7
95°	32	16	19	22	21	38
105°	148	163	30	35	37	159
115°	281	289	301	75	40	276
125°	397	403	413	416	418	354
135°	491	499	504	508	508	380
145°	570	570	578	581	579	356
155°	628	623	629	632	628	289
165°	661	658	660	663	660	187
175°	676	673	674	677	672	64
180°	675	675	675	675	675	

TEST NUMBER: P904985

CATALOG NUMBER: DFN2DIP-4P3F0-060D020US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	0.5	5.9	9.7	12.2	13.2
92.5°	12.2	10.3	11.7	12.7	13.2
95°	31.7	15.6	19.0	21.5	21.0
97.5°	57.1	17.1	24.9	26.4	26.9
100°	86.5	19.5	27.8	31.7	32.7
102.5°	118.7	117.7	28.8	34.2	35.7
105°	148.5	163.1	29.8	35.1	37.1
107.5°	183.2	195.3	30.8	36.1	38.1
110°	216.4	226.6	85.5	36.7	38.6

TEST NUMBER: P904985

CATALOG NUMBER: DFN2DIP-4P3F0-060D020US835-RLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	247.6	256.4	248.1	37.6	39.1
115°	280.8	289.1	301.4	75.2	40.1
117.5°	309.6	319.4	327.7	257.9	129.9
120°	341.9	349.2	358.0	363.9	297.9
122.5°	369.2	377.0	386.8	389.7	390.3
125°	397.1	403.4	412.7	416.1	417.6
127.5°	422.5	429.3	436.7	441.5	442.0
130°	446.4	454.2	459.6	465.0	464.5
132.5°	470.8	477.2	482.5	486.9	486.5
135°	491.4	499.2	503.5	508.5	507.5
137.5°	512.8	518.7	523.6	528.5	527.0
140°	533.8	537.8	543.1	547.5	545.1
142.5°	551.4	554.9	561.2	565.1	562.6
145°	570.0	569.5	577.8	581.2	578.8
147.5°	586.1	584.6	592.9	595.3	593.4
150°	601.7	598.3	606.1	609.0	606.6
152.5°	614.9	611.0	618.3	621.3	617.8
155°	627.6	623.2	629.1	632.0	628.1
157.5°	637.9	634.0	638.4	641.8	637.9
160°	646.7	643.7	646.7	649.6	646.2
162.5°	654.4	651.5	654.0	657.4	653.0
165°	661.3	658.4	659.8	663.3	659.8
167.5°	666.7	663.7	665.2	668.7	664.2
170°	671.1	668.1	669.1	672.5	668.1
172.5°	674.0	671.1	672.1	675.5	671.1
175°	676.4	673.0	674.0	677.4	672.5
177.5°	677.4	674.0	674.5	677.9	673.5
180°	675.0	675.0	675.0	675.0	675.0

TEST NUMBER: P904985

CATALOG NUMBER: DFN2DIP-4P3F0-060D020US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.57	13.62	13.32	14.39	15.31	8.53	9.58	9.28	10.35	11.27
	3H	14.26	15.20	15.03	15.98	16.93	9.73	10.67	10.50	11.45	12.40
	4H	14.88	15.76	15.66	16.55	17.51	10.19	11.07	10.97	11.86	12.82
	6H	15.31	16.12	16.10	16.92	17.89	10.52	11.33	11.31	12.12	13.10
	8H	15.44	16.21	16.24	17.03	18.00	10.61	11.39	11.41	12.20	13.17
	12H	15.51	16.25	16.31	17.05	18.05	10.66	11.40	11.47	12.20	13.21
4H	2H	12.62	13.50	13.40	14.29	15.25	9.15	10.04	9.94	10.82	11.79
	3H	14.46	15.20	15.26	16.01	16.99	10.52	11.25	11.31	12.07	13.05
	4H	15.16	15.82	15.97	16.64	17.65	11.07	11.74	11.88	12.55	13.56
	6H	15.68	16.26	16.51	17.10	18.11	11.49	12.07	12.32	12.91	13.93
	8H	15.86	16.39	16.69	17.23	18.26	11.62	12.16	12.45	13.00	14.02
	12H	15.96	16.44	16.81	17.30	18.33	11.69	12.18	12.54	13.04	14.07
8H	4H	15.14	15.68	15.97	16.52	17.54	11.36	11.90	12.19	12.74	13.76
	6H	15.71	16.15	16.57	17.03	18.06	11.88	12.32	12.74	13.20	14.23
	8H	15.92	16.32	16.79	17.19	18.24	12.07	12.46	12.94	13.34	14.38
	12H	16.07	16.42	16.94	17.28	18.38	12.19	12.54	13.06	13.40	14.50
12H	4H	15.10	15.58	15.95	16.44	17.47	11.38	11.86	12.23	12.72	13.75
	6H	15.68	16.08	16.55	16.96	18.00	11.93	12.32	12.80	13.20	14.24
	8H	15.91	16.26	16.78	17.13	18.22	12.14	12.49	13.01	13.36	14.46