

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907631

Luminaire Tested: DFN2DIP-4P3F0-020D020US840-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907631
REPORT IS A COMBINATION OF REPORTS P900549 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-020D020US840-FLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3999.1 lumens
Efficiency: N/A
Efficacy: 129.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 31
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907631

CATALOG NUMBER: DFN2DIP-4P3F0-020D020US840-FLLONL

Luminous Intensity Polar Plot

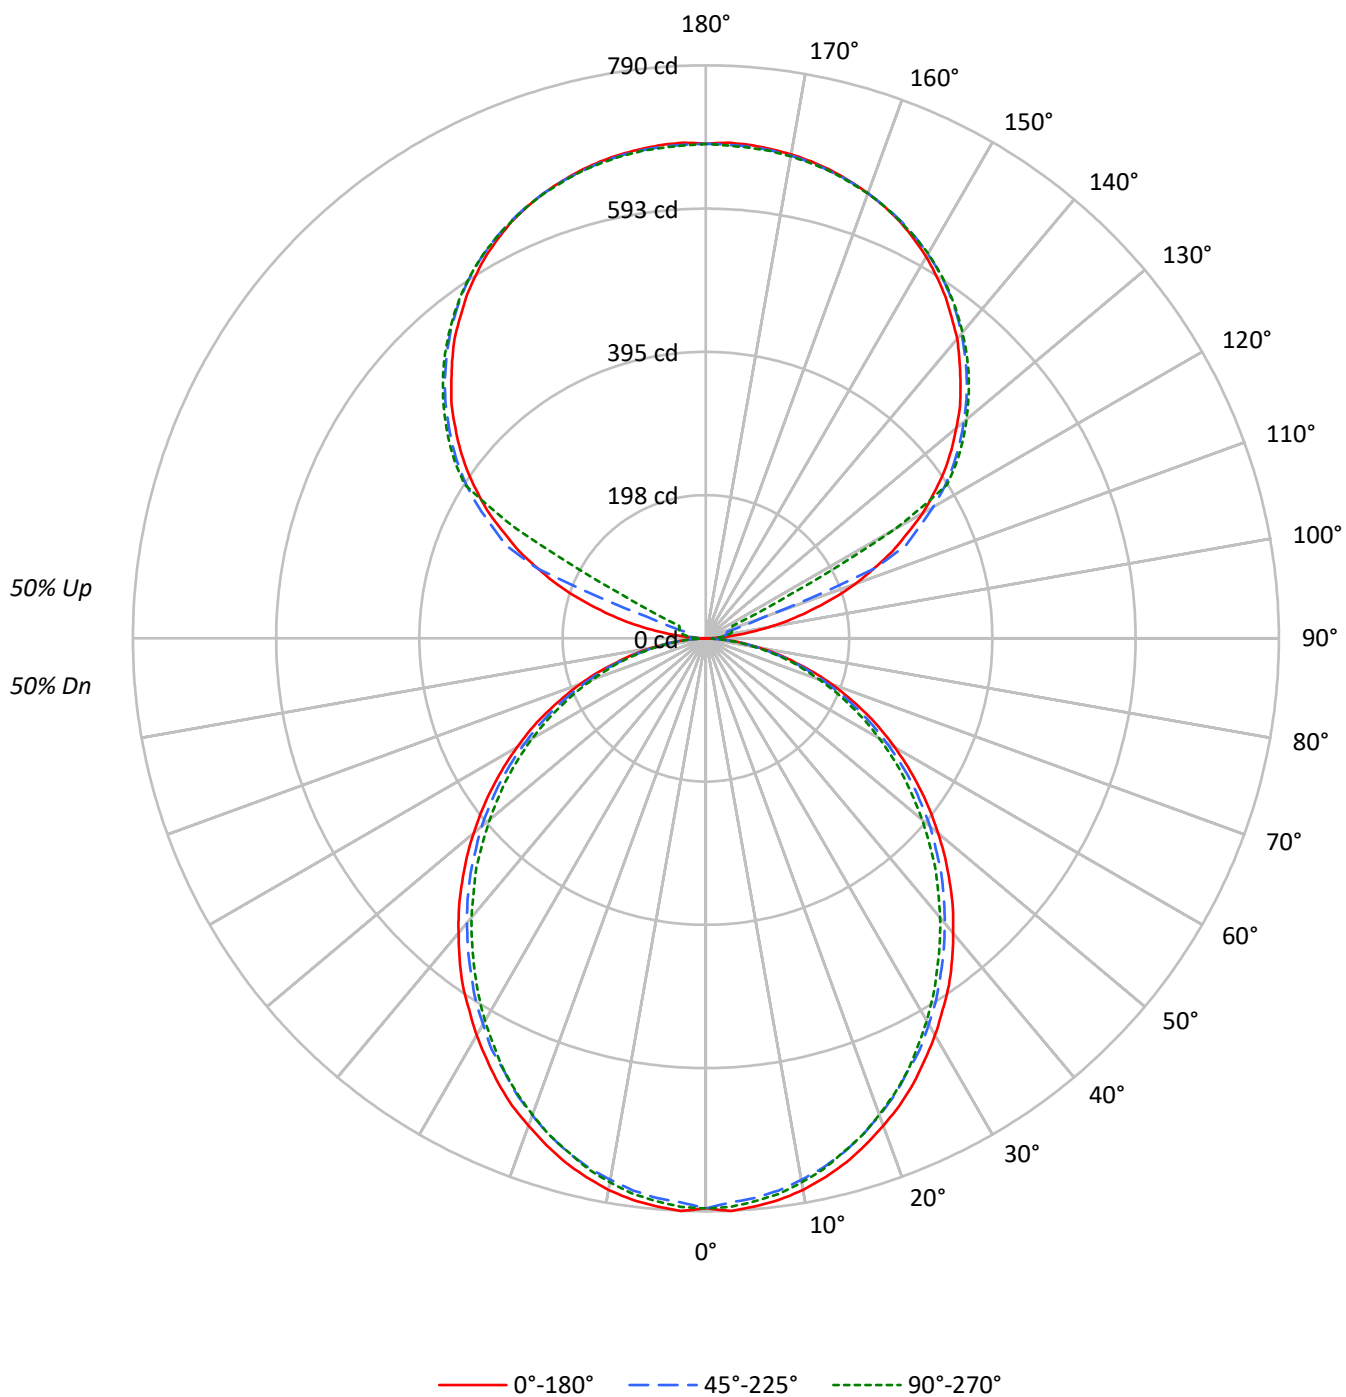

TEST NUMBER: P907631

CATALOG NUMBER: DFN2DIP-4P3F0-020D020US840-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56
1	98	93	90	86	90	86	83	80	73	71	68	61	59	58	50	48	47
2	89	82	75	70	82	76	70	66	64	60	57	53	51	48	44	42	40
3	81	72	64	59	75	66	60	55	56	52	48	47	44	41	39	36	34
4	74	64	56	50	68	59	52	47	50	45	41	42	38	35	35	32	29
5	68	57	48	42	63	53	45	40	45	39	35	38	34	30	31	28	26
6	63	51	43	37	58	47	40	35	40	35	31	34	30	27	28	25	23
7	58	46	38	32	53	43	36	30	37	31	27	31	27	23	26	23	20
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	24	20	18
9	50	38	30	25	46	35	29	24	31	25	21	26	22	19	22	19	16
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	896	896	896
5°	896	883	889
10°	889	870	876
15°	875	855	857
20°	857	835	838
25°	839	810	815
30°	816	788	787
35°	795	761	756
40°	768	734	728
45°	742	707	698
50°	713	678	664
55°	683	645	633
60°	649	606	597
65°	612	566	554
70°	564	516	509
75°	498	457	466
80°	419	381	385
85°	295	253	253

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 742 cd/sqm

TEST NUMBER: P907631

CATALOG NUMBER: DFN2DIP-4P3F0-020D020US840-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	74.0	1.8
10°-20°	208.1	5.2
20°-30°	305.8	7.6
30°-40°	355.2	8.9
40°-50°	354.8	8.9
50°-60°	309.4	7.7
60°-70°	228.7	5.7
70°-80°	129.4	3.2
80°-90°	35.4	0.9
90°-100°	22.5	0.6
100°-110°	83.8	2.1
110°-120°	222.2	5.6
120°-130°	368.6	9.2
130°-140°	391.5	9.8
140°-150°	363.9	9.1
150°-160°	292.5	7.3
160°-170°	188.5	4.7
170°-180°	64.9	1.6
0°-30°	587.9	14.7
0°-40°	943.2	23.6
0°-60°	1607.3	40.2
0°-90°	2000.7	50.0
90°-120°	328.5	8.2
90°-150°	1452.4	36.3
90°-180°	1998.0	50.0
0°-180°	3999.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	786	786	786	786	786	
5°	786	783	775	781	779	75
15°	748	744	734	737	733	211
25°	677	671	658	660	658	312
35°	584	577	564	560	556	365
45°	475	470	459	450	447	367
55°	360	355	346	337	333	322
65°	243	238	231	224	220	240
75°	127	126	122	117	119	135
85°	31	30	30	27	26	35
90°	0	6	10	12	13	4
95°	32	16	19	22	21	38
105°	150	165	30	35	38	160
115°	284	292	304	76	40	279
125°	401	407	417	420	422	358
135°	496	504	508	514	512	383
145°	576	575	584	587	584	360
155°	634	629	635	638	634	292
165°	668	665	666	670	666	189
175°	683	680	681	684	679	65
180°	682	682	682	682	682	

TEST NUMBER: P907631

CATALOG NUMBER: DFN2DIP-4P3F0-020D020US840-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	785.9	785.9	785.9	785.9	785.9
2.5°	790.4	786.7	778.3	785.9	784.5
5°	785.9	782.9	774.6	780.6	779.1
7.5°	780.6	776.1	767.8	773.9	772.3
10°	772.3	767.1	758.0	764.0	761.7
12.5°	760.9	756.5	747.4	751.1	749.6
15°	748.1	743.7	733.8	736.8	733.1
17.5°	732.3	727.8	717.9	721.6	717.9
20°	714.9	710.3	699.7	702.1	699.0
22.5°	697.5	690.7	680.9	680.9	679.3
25°	677.1	671.1	658.2	659.6	658.2
27.5°	654.4	649.1	639.3	637.1	633.3
30°	631.8	625.7	614.4	612.2	609.0
32.5°	607.5	603.1	591.0	586.4	583.4
35°	584.2	576.6	564.5	560.0	556.1
37.5°	557.7	550.9	538.8	533.5	529.7
40°	530.5	524.4	512.3	505.6	502.5
42.5°	504.0	498.0	485.9	478.4	473.8
45°	475.3	470.1	458.7	450.4	447.4
47.5°	447.4	442.1	430.0	421.6	417.2
50°	417.9	414.1	403.5	392.9	389.2
52.5°	389.2	383.8	374.1	365.8	360.5
55°	359.7	355.2	346.1	337.1	333.3
57.5°	330.2	326.5	316.6	307.6	304.5
60°	300.7	297.8	287.2	278.8	276.6
62.5°	272.1	266.7	259.2	251.7	248.6
65°	242.6	238.0	230.6	223.7	219.9
67.5°	212.4	208.5	201.8	196.5	193.5
70°	184.4	181.4	174.5	169.3	166.3
72.5°	155.7	152.7	148.9	143.6	141.4
75°	126.9	125.5	121.6	117.1	118.7
77.5°	101.3	98.3	96.6	94.4	92.2
80°	75.6	74.8	73.3	71.0	69.5
82.5°	51.4	51.4	50.7	47.7	47.7
85°	30.9	30.2	29.5	27.2	26.5
87.5°	13.6	12.1	10.6	8.4	7.6
90°	0.5	6.0	9.8	12.3	13.3
92.5°	12.3	10.4	11.8	12.8	13.3
95°	32.0	15.8	19.2	21.7	21.2
97.5°	57.7	17.3	25.1	26.7	27.2
100°	87.4	19.7	28.1	32.0	33.0
102.5°	119.9	118.9	29.1	34.5	36.1
105°	150.0	164.7	30.1	35.4	37.5
107.5°	185.0	197.2	31.1	36.5	38.5
110°	218.5	228.8	86.3	37.1	39.0



TEST NUMBER: P907631

CATALOG NUMBER: DFN2DIP-4P3F0-020D020US840-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	250.0	258.9	250.5	38.0	39.5
115°	283.6	292.0	304.4	75.9	40.5
117.5°	312.7	322.6	330.9	260.4	131.2
120°	345.3	352.6	361.5	367.5	300.8
122.5°	372.8	380.7	390.6	393.5	394.2
125°	401.0	407.4	416.8	420.2	421.7
127.5°	426.7	433.5	441.0	445.9	446.4
130°	450.8	458.7	464.1	469.6	469.1
132.5°	475.4	481.9	487.3	491.7	491.3
135°	496.2	504.1	508.5	513.5	512.5
137.5°	517.9	523.8	528.8	533.7	532.2
140°	539.1	543.1	548.5	552.9	550.5
142.5°	556.8	560.4	566.7	570.7	568.2
145°	575.6	575.1	583.5	586.9	584.5
147.5°	591.9	590.4	598.7	601.2	599.3
150°	607.6	604.2	612.1	615.0	612.6
152.5°	621.0	617.0	624.4	627.4	623.9
155°	633.8	629.3	635.3	638.2	634.3
157.5°	644.2	640.3	644.7	648.1	644.2
160°	653.1	650.1	653.1	656.0	652.6
162.5°	660.9	657.9	660.5	663.9	659.4
165°	667.8	664.9	666.3	669.8	666.3
167.5°	673.3	670.2	671.8	675.3	670.8
170°	677.7	674.7	675.7	679.1	674.7
172.5°	680.6	677.7	678.7	682.2	677.7
175°	683.1	679.6	680.6	684.1	679.1
177.5°	684.1	680.6	681.2	684.6	680.1
180°	681.7	681.7	681.7	681.7	681.7

TEST NUMBER: P907631

CATALOG NUMBER: DFN2DIP-4P3F0-020D020US840-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.86	7.72	7.82	8.69	9.96	6.41	7.28	7.37	8.25	9.52
	3H	8.51	9.29	9.48	10.27	11.56	8.02	8.80	8.99	9.78	11.07
	4H	9.10	9.83	10.08	10.82	12.12	8.61	9.34	9.59	10.32	11.62
	6H	9.50	10.17	10.49	11.16	12.47	9.00	9.67	9.99	10.66	11.97
	8H	9.60	10.24	10.60	11.25	12.56	9.10	9.74	10.10	10.75	12.06
	12H	9.65	10.26	10.65	11.26	12.59	9.14	9.75	10.14	10.75	12.08
4H	2H	7.32	8.05	8.30	9.03	10.33	6.96	7.69	7.95	8.68	9.98
	3H	9.18	9.79	10.17	10.80	12.12	8.77	9.38	9.77	10.39	11.71
	4H	9.89	10.45	10.89	11.45	12.79	9.46	10.02	10.47	11.03	12.37
	6H	10.40	10.88	11.42	11.91	13.25	9.97	10.45	10.98	11.48	12.81
	8H	10.55	11.00	11.56	12.02	13.37	10.11	10.56	11.13	11.58	12.93
	12H	10.62	11.02	11.65	12.06	13.42	10.17	10.57	11.20	11.61	12.97
8H	4H	10.08	10.53	11.10	11.55	12.90	9.70	10.15	10.72	11.18	12.53
	6H	10.71	11.08	11.75	12.14	13.49	10.32	10.69	11.36	11.76	13.11
	8H	10.92	11.25	11.97	12.30	13.67	10.53	10.86	11.58	11.91	13.28
	12H	11.05	11.34	12.10	12.38	13.79	10.64	10.93	11.69	11.97	13.38
12H	4H	10.06	10.47	11.10	11.51	12.87	9.70	10.10	10.73	11.14	12.50
	6H	10.73	11.06	11.78	12.11	13.48	10.36	10.69	11.41	11.74	13.11
	8H	10.97	11.26	12.03	12.31	13.72	10.59	10.88	11.64	11.92	13.33

END OF REPORT