

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910385

Luminaire Tested: DFN2DIP-4P3F0-030D030US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910385
REPORT IS A COMBINATION OF REPORTS P900562 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-030D030US850-RLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6121.7 lumens
Efficiency: N/A
Efficacy: 127.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 48.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910385

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US850-RLLONL

Luminous Intensity Polar Plot

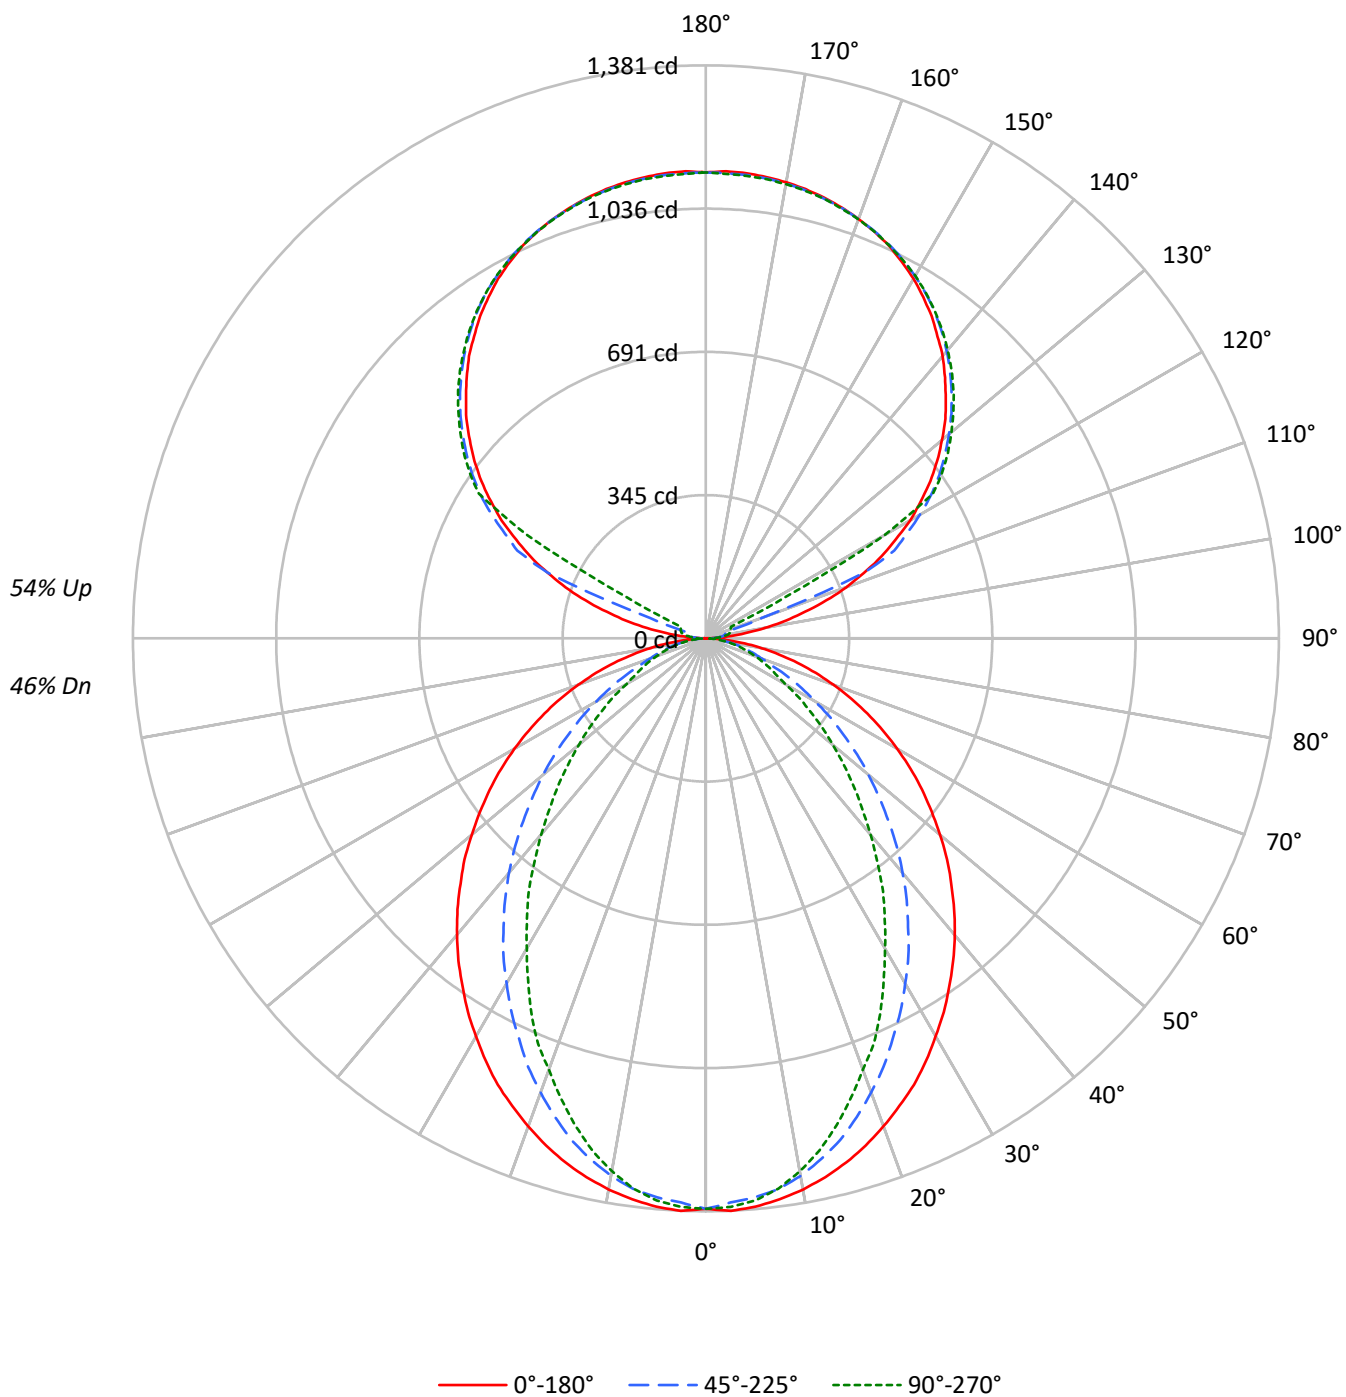

TEST NUMBER: P910385

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1567	1567	1567
5°	1568	1541	1551
10°	1552	1510	1501
15°	1530	1459	1422
20°	1500	1389	1326
25°	1470	1311	1233
30°	1431	1231	1115
35°	1391	1145	1012
40°	1352	1057	894
45°	1305	959	787
50°	1257	860	682
55°	1207	754	581
60°	1149	644	478
65°	1082	531	430
70°	1001	427	388
75°	899	374	352
80°	751	311	304
85°	510	202	225

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1305 cd/sqm

TEST NUMBER: P910385

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	128.9	2.1
10°-20°	353.8	5.8
20°-30°	496.7	8.1
30°-40°	541.4	8.8
40°-50°	497.6	8.1
50°-60°	390.8	6.4
60°-70°	254.4	4.2
70°-80°	130.9	2.1
80°-90°	35.4	0.6
90°-100°	37.0	0.6
100°-110°	138.0	2.3
110°-120°	366.1	6.0
120°-130°	607.1	9.9
130°-140°	644.9	10.5
140°-150°	599.4	9.8
150°-160°	481.9	7.9
160°-170°	310.5	5.1
170°-180°	106.9	1.7
0°-30°	979.3	16.0
0°-40°	1520.7	24.8
0°-60°	2409.2	39.4
0°-90°	2829.9	46.2
90°-120°	541.1	8.8
90°-150°	2392.5	39.1
90°-180°	3292.0	53.8
0°-180°	6121.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1375	1375	1375	1375	1375	
5°	1375	1369	1353	1364	1360	130
15°	1308	1294	1252	1228	1216	369
25°	1187	1147	1065	1014	995	546
35°	1023	959	850	772	744	640
45°	836	753	622	534	504	646
55°	636	539	404	330	306	568
65°	429	328	216	174	170	426
75°	229	142	100	91	90	242
85°	54	27	24	24	24	61
90°	1	10	16	20	22	6
95°	53	26	32	36	35	63
105°	247	271	50	58	62	264
115°	467	481	501	125	67	460
125°	660	671	687	692	695	589
135°	817	830	838	846	844	631
145°	948	947	961	967	963	593
155°	1044	1037	1046	1051	1045	481
165°	1100	1095	1098	1103	1098	311
175°	1125	1120	1121	1127	1119	107
180°	1123	1123	1123	1123	1123	

TEST NUMBER: P910385

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1375.0	1375.0	1375.0	1375.0	1375.0
2.5°	1381.3	1375.0	1361.3	1373.8	1371.4
5°	1375.0	1368.8	1352.6	1363.8	1360.1
7.5°	1363.8	1356.4	1339.0	1343.9	1337.7
10°	1348.9	1340.2	1315.4	1311.5	1304.2
12.5°	1330.2	1319.0	1285.4	1278.0	1264.3
15°	1307.8	1294.1	1251.8	1228.2	1215.8
17.5°	1281.7	1261.8	1209.5	1182.2	1162.2
20°	1251.8	1226.9	1164.7	1133.7	1106.2
22.5°	1219.6	1190.8	1118.6	1076.4	1057.8
25°	1187.2	1147.3	1065.2	1014.2	995.4
27.5°	1148.6	1106.2	1015.4	957.0	928.2
30°	1107.6	1060.2	960.6	897.3	863.6
32.5°	1067.6	1010.4	908.5	833.7	802.6
35°	1022.9	959.4	849.9	771.5	744.1
37.5°	979.4	910.8	795.2	709.2	678.3
40°	933.3	858.7	737.9	649.5	617.3
42.5°	886.0	806.5	680.7	588.5	557.5
45°	836.3	752.8	622.3	533.8	503.9
47.5°	788.9	700.7	566.3	477.8	450.5
50°	736.7	648.3	511.5	425.5	399.5
52.5°	685.6	592.3	459.2	377.1	353.4
55°	635.8	538.8	404.3	329.8	306.2
57.5°	584.9	485.3	356.0	286.2	266.3
60°	532.5	433.1	304.9	241.4	221.6
62.5°	481.6	382.1	261.3	201.6	191.7
65°	429.3	328.5	216.5	174.2	170.5
67.5°	379.6	278.7	174.2	153.0	149.3
70°	327.3	230.2	144.3	131.9	126.9
72.5°	277.5	185.3	120.7	110.8	108.2
75°	228.9	141.8	99.6	90.8	89.6
77.5°	180.4	100.7	78.4	73.4	70.9
80°	135.6	72.2	59.7	54.8	54.8
82.5°	94.5	48.6	41.0	38.6	38.6
85°	53.5	27.3	23.6	23.6	23.6
87.5°	20.0	9.9	9.9	8.8	8.8
90°	0.8	9.8	16.2	20.4	21.8
92.5°	20.4	17.1	19.5	21.2	21.8
95°	52.8	26.0	31.6	35.8	34.9
97.5°	95.0	28.5	41.4	43.9	44.7
100°	143.8	32.5	46.4	52.8	54.5
102.5°	197.4	195.8	47.9	56.8	59.3
105°	247.0	271.4	49.6	58.4	61.8
107.5°	304.6	324.9	51.2	60.1	63.4
110°	360.0	376.9	142.2	61.0	64.2

TEST NUMBER: P910385

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	412.0	426.5	412.8	62.5	65.0
115°	467.1	481.0	501.3	125.1	66.7
117.5°	515.1	531.3	545.2	429.0	216.1
120°	568.7	580.9	595.5	605.3	495.6
122.5°	614.2	627.3	643.6	648.3	649.2
125°	660.5	671.1	686.6	692.2	694.7
127.5°	702.8	714.1	726.4	734.5	735.3
130°	742.6	755.7	764.5	773.4	772.8
132.5°	783.2	793.8	802.7	810.0	809.2
135°	817.3	830.4	837.6	845.8	844.2
137.5°	853.0	862.8	871.0	879.1	876.7
140°	888.0	894.5	903.4	910.7	906.7
142.5°	917.4	923.0	933.6	940.0	936.0
145°	948.2	947.3	961.2	966.8	962.7
147.5°	974.9	972.5	986.3	990.3	987.1
150°	1001.0	995.3	1008.3	1013.1	1009.1
152.5°	1022.8	1016.4	1028.6	1033.5	1027.8
155°	1044.0	1036.8	1046.5	1051.3	1044.9
157.5°	1061.1	1054.7	1062.0	1067.6	1061.1
160°	1075.7	1070.9	1075.7	1080.6	1074.8
162.5°	1088.7	1083.8	1087.9	1093.6	1086.3
165°	1100.0	1095.2	1097.7	1103.3	1097.7
167.5°	1109.0	1104.1	1106.6	1112.3	1105.0
170°	1116.3	1111.4	1113.1	1118.8	1111.4
172.5°	1121.2	1116.3	1118.0	1123.6	1116.3
175°	1125.2	1119.5	1121.2	1126.9	1118.8
177.5°	1126.9	1121.2	1122.1	1127.7	1120.4
180°	1122.9	1122.9	1122.9	1122.9	1122.9

TEST NUMBER: P910385

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.31	9.11	9.31	10.11	11.44	4.27	5.07	5.27	6.07	7.40
	3H	9.98	10.70	10.99	11.71	13.06	5.45	6.17	6.46	7.18	8.53
	4H	10.59	11.26	11.60	12.28	13.63	5.90	6.57	6.91	7.59	8.94
	6H	11.00	11.62	12.03	12.64	14.01	6.21	6.83	7.24	7.85	9.22
	8H	11.13	11.72	12.16	12.75	14.12	6.30	6.89	7.33	7.92	9.29
	12H	11.18	11.75	12.22	12.78	14.16	6.34	6.90	7.37	7.93	9.32
4H	2H	8.32	9.00	9.35	10.02	11.37	4.86	5.54	5.89	6.55	7.91
	3H	10.14	10.71	11.18	11.75	13.12	6.20	6.76	7.23	7.81	9.18
	4H	10.83	11.35	11.87	12.38	13.77	6.74	7.26	7.78	8.29	9.68
	6H	11.34	11.78	12.39	12.84	14.23	7.15	7.59	8.20	8.65	10.04
	8H	11.51	11.93	12.56	12.98	14.38	7.28	7.69	8.33	8.74	10.14
	12H	11.60	11.98	12.67	13.04	14.45	7.34	7.71	8.41	8.78	10.18
8H	4H	10.80	11.21	11.85	12.26	13.66	7.02	7.43	8.07	8.48	9.88
	6H	11.36	11.70	12.43	12.79	14.19	7.53	7.87	8.60	8.96	10.36
	8H	11.57	11.87	12.65	12.94	14.36	7.71	8.01	8.79	9.09	10.51
	12H	11.70	11.97	12.79	13.04	14.50	7.83	8.09	8.91	9.16	10.62
12H	4H	10.75	11.12	11.82	12.18	13.59	7.02	7.39	8.09	8.46	9.87
	6H	11.33	11.63	12.41	12.71	14.13	7.57	7.87	8.66	8.95	10.37
	8H	11.55	11.81	12.63	12.88	14.34	7.78	8.04	8.86	9.11	10.57