

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910425

Luminaire Tested: DFN2DIP-4P3F0-050D030US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910425
REPORT IS A COMBINATION OF REPORTS P900566 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-050D030US850-RLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open
No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8007.0 lumens
Efficiency: N/A
Efficacy: 112.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 71.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910425

CATALOG NUMBER: DFN2DIP-4P3F0-050D030US850-RLLONL

Luminous Intensity Polar Plot

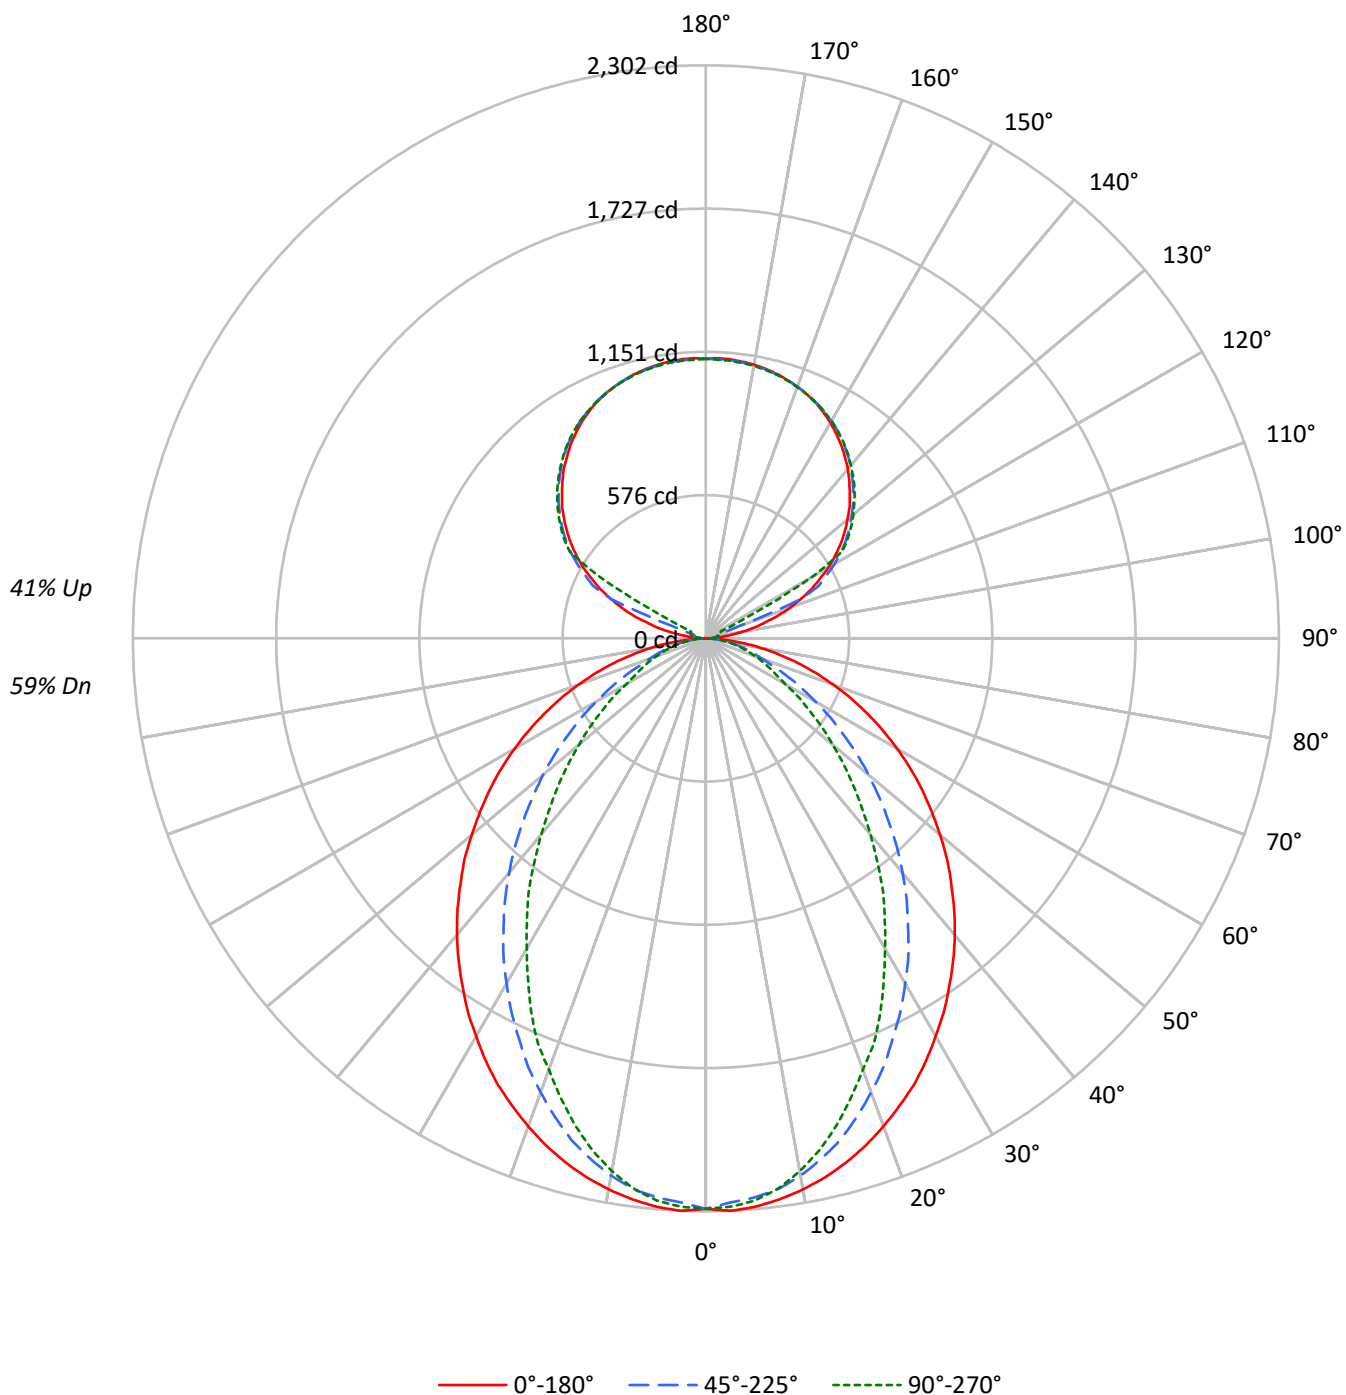

TEST NUMBER: P910425

CATALOG NUMBER: DFN2DIP-4P3F0-050D030US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64
1	100	96	92	89	94	90	87	84	78	76	74	68	66	64	58	57	55
2	92	85	79	74	86	79	74	70	69	65	62	60	57	55	51	49	48
3	84	75	68	62	78	70	64	59	62	57	53	54	50	47	46	43	41
4	77	67	59	53	72	63	56	51	55	50	46	48	44	41	42	39	36
5	71	60	52	46	66	56	49	44	50	44	40	44	39	36	38	34	32
6	66	54	46	40	61	51	44	38	45	39	35	40	35	32	35	31	28
7	61	49	41	36	57	46	39	34	41	35	31	36	32	28	32	28	25
8	57	45	37	32	53	42	35	30	38	32	28	33	29	25	29	26	23
9	53	41	34	29	50	39	32	27	35	29	25	31	26	23	27	23	21
10	50	38	31	26	46	36	29	25	32	27	23	29	24	21	25	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2612	2612	2612
5°	2614	2569	2586
10°	2587	2516	2501
15°	2549	2432	2370
20°	2501	2315	2210
25°	2451	2185	2055
30°	2384	2052	1859
35°	2319	1909	1687
40°	2253	1761	1490
45°	2176	1598	1311
50°	2096	1433	1136
55°	2012	1256	969
60°	1915	1072	797
65°	1804	886	716
70°	1668	711	647
75°	1498	623	587
80°	1252	518	506
85°	850	338	376

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2176 cd/sqm

TEST NUMBER: P910425

CATALOG NUMBER: DFN2DIP-4P3F0-050D030US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	214.8	2.7
10°-20°	589.6	7.4
20°-30°	827.8	10.3
30°-40°	902.4	11.3
40°-50°	829.4	10.4
50°-60°	651.3	8.1
60°-70°	424.0	5.3
70°-80°	218.2	2.7
80°-90°	57.7	0.7
90°-100°	37.0	0.5
100°-110°	138.0	1.7
110°-120°	366.1	4.6
120°-130°	607.1	7.6
130°-140°	644.9	8.1
140°-150°	599.4	7.5
150°-160°	481.9	6.0
160°-170°	310.5	3.9
170°-180°	106.9	1.3
0°-30°	1632.2	20.4
0°-40°	2534.6	31.7
0°-60°	4015.3	50.1
0°-90°	4715.3	58.9
90°-120°	541.1	6.8
90°-150°	2392.5	29.9
90°-180°	3292.0	41.1
0°-180°	8007.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2292	2292	2292	2292	2292	
5°	2292	2281	2254	2273	2267	217
15°	2180	2157	2086	2047	2026	614
25°	1979	1912	1775	1690	1659	910
35°	1705	1599	1417	1286	1240	1067
45°	1394	1255	1037	890	840	1076
55°	1060	898	674	550	510	947
65°	716	548	361	290	284	709
75°	382	236	166	151	149	404
85°	89	46	39	39	39	102
90°	1	10	16	20	22	8
95°	53	26	32	36	35	63
105°	247	271	50	58	62	264
115°	467	481	501	125	67	460
125°	660	671	687	692	695	589
135°	817	830	838	846	844	631
145°	948	947	961	967	963	593
155°	1044	1037	1046	1051	1045	481
165°	1100	1095	1098	1103	1098	311
175°	1125	1120	1121	1127	1119	107
180°	1123	1123	1123	1123	1123	

TEST NUMBER: P910425

CATALOG NUMBER: DFN2DIP-4P3F0-050D030US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2291.7	2291.7	2291.7	2291.7	2291.7
2.5°	2302.1	2291.7	2268.9	2289.8	2285.5
5°	2291.7	2281.4	2254.4	2273.0	2266.9
7.5°	2273.0	2260.7	2231.6	2239.8	2229.4
10°	2248.2	2233.6	2192.3	2185.9	2173.5
12.5°	2217.1	2198.5	2142.4	2130.1	2107.1
15°	2179.7	2156.9	2086.5	2047.1	2026.4
17.5°	2136.2	2103.0	2015.8	1970.2	1937.0
20°	2086.5	2044.9	1941.2	1889.5	1843.7
22.5°	2032.6	1984.8	1864.5	1794.0	1763.0
25°	1978.6	1912.1	1775.3	1690.3	1659.1
27.5°	1914.4	1843.7	1692.3	1594.9	1547.2
30°	1845.9	1767.0	1601.1	1495.4	1439.3
32.5°	1779.5	1684.0	1514.1	1389.6	1337.7
35°	1704.9	1599.1	1416.6	1285.9	1240.2
37.5°	1632.2	1518.1	1325.4	1182.1	1130.4
40°	1555.5	1431.2	1229.8	1082.6	1028.7
42.5°	1476.7	1344.0	1134.5	980.9	929.2
45°	1393.8	1254.7	1037.0	889.6	839.8
47.5°	1314.9	1167.8	943.8	796.4	750.8
50°	1227.9	1080.6	852.5	709.2	665.8
52.5°	1142.7	987.1	765.3	628.5	589.1
55°	1059.8	898.0	673.9	549.6	510.3
57.5°	974.8	808.9	593.2	477.1	443.8
60°	887.6	721.7	508.0	402.5	369.2
62.5°	802.7	636.8	435.5	336.0	319.5
65°	715.5	547.5	360.9	290.4	284.1
67.5°	632.6	464.6	290.4	255.1	248.9
70°	545.5	383.7	240.5	219.8	211.5
72.5°	462.6	309.0	201.2	184.6	180.4
75°	381.6	236.3	165.9	151.4	149.4
77.5°	300.8	167.9	130.8	122.3	118.1
80°	226.0	120.3	99.5	91.3	91.3
82.5°	157.6	81.0	68.4	64.2	64.2
85°	89.2	45.6	39.4	39.4	39.4
87.5°	33.3	16.5	16.5	14.5	14.5
90°	0.8	9.8	16.2	20.4	21.8
92.5°	20.4	17.1	19.5	21.2	21.8
95°	52.8	26.0	31.6	35.8	34.9
97.5°	95.0	28.5	41.4	43.9	44.7
100°	143.8	32.5	46.4	52.8	54.5
102.5°	197.4	195.8	47.9	56.8	59.3
105°	247.0	271.4	49.6	58.4	61.8
107.5°	304.6	324.9	51.2	60.1	63.4
110°	360.0	376.9	142.2	61.0	64.2

TEST NUMBER: P910425

CATALOG NUMBER: DFN2DIP-4P3F0-050D030US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	412.0	426.5	412.8	62.5	65.0
115°	467.1	481.0	501.3	125.1	66.7
117.5°	515.1	531.3	545.2	429.0	216.1
120°	568.7	580.9	595.5	605.3	495.6
122.5°	614.2	627.3	643.6	648.3	649.2
125°	660.5	671.1	686.6	692.2	694.7
127.5°	702.8	714.1	726.4	734.5	735.3
130°	742.6	755.7	764.5	773.4	772.8
132.5°	783.2	793.8	802.7	810.0	809.2
135°	817.3	830.4	837.6	845.8	844.2
137.5°	853.0	862.8	871.0	879.1	876.7
140°	888.0	894.5	903.4	910.7	906.7
142.5°	917.4	923.0	933.6	940.0	936.0
145°	948.2	947.3	961.2	966.8	962.7
147.5°	974.9	972.5	986.3	990.3	987.1
150°	1001.0	995.3	1008.3	1013.1	1009.1
152.5°	1022.8	1016.4	1028.6	1033.5	1027.8
155°	1044.0	1036.8	1046.5	1051.3	1044.9
157.5°	1061.1	1054.7	1062.0	1067.6	1061.1
160°	1075.7	1070.9	1075.7	1080.6	1074.8
162.5°	1088.7	1083.8	1087.9	1093.6	1086.3
165°	1100.0	1095.2	1097.7	1103.3	1097.7
167.5°	1109.0	1104.1	1106.6	1112.3	1105.0
170°	1116.3	1111.4	1113.1	1118.8	1111.4
172.5°	1121.2	1116.3	1118.0	1123.6	1116.3
175°	1125.2	1119.5	1121.2	1126.9	1118.8
177.5°	1126.9	1121.2	1122.1	1127.7	1120.4
180°	1122.9	1122.9	1122.9	1122.9	1122.9

TEST NUMBER: P910425

CATALOG NUMBER: DFN2DIP-4P3F0-050D030US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.24	12.15	12.13	13.05	14.19	7.20	8.11	8.09	9.01	10.15
	3H	12.92	13.73	13.82	14.64	15.81	8.39	9.20	9.29	10.11	11.28
	4H	13.53	14.30	14.44	15.21	16.39	8.84	9.61	9.75	10.52	11.70
	6H	13.95	14.66	14.87	15.58	16.77	9.16	9.86	10.08	10.79	11.98
	8H	14.08	14.75	15.01	15.69	16.88	9.25	9.92	10.18	10.86	12.05
	12H	14.14	14.78	15.08	15.71	16.92	9.29	9.93	10.23	10.86	12.07
4H	2H	11.27	12.03	12.18	12.95	14.13	7.80	8.57	8.72	9.49	10.66
	3H	13.10	13.74	14.03	14.68	15.87	9.15	9.79	10.08	10.74	11.93
	4H	13.79	14.37	14.73	15.31	16.53	9.70	10.28	10.64	11.22	12.44
	6H	14.30	14.80	15.26	15.77	16.99	10.12	10.62	11.07	11.58	12.80
	8H	14.48	14.95	15.43	15.90	17.13	10.24	10.71	11.20	11.67	12.90
	12H	14.57	14.99	15.55	15.97	17.21	10.31	10.73	11.28	11.70	12.94
8H	4H	13.76	14.23	14.71	15.19	16.42	9.98	10.45	10.94	11.41	12.64
	6H	14.33	14.71	15.30	15.71	16.94	10.50	10.88	11.47	11.88	13.11
	8H	14.54	14.88	15.53	15.87	17.12	10.68	11.02	11.67	12.01	13.26
	12H	14.68	14.98	15.67	15.96	17.25	10.80	11.10	11.79	12.08	13.38
12H	4H	13.72	14.14	14.69	15.11	16.35	9.99	10.41	10.96	11.39	12.62
	6H	14.30	14.64	15.29	15.63	16.88	10.54	10.88	11.53	11.87	13.12
	8H	14.52	14.82	15.51	15.80	17.10	10.75	11.05	11.74	12.03	13.33