

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913113

Luminaire Tested: DFN2DIP-4P3F0-030D030US927-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913113
REPORT IS A COMBINATION OF REPORTS P900562 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-030D030US927-RLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4372.8 lumens
Efficiency: N/A
Efficacy: 90.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 48.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913113

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US927-RLLONL

Luminous Intensity Polar Plot

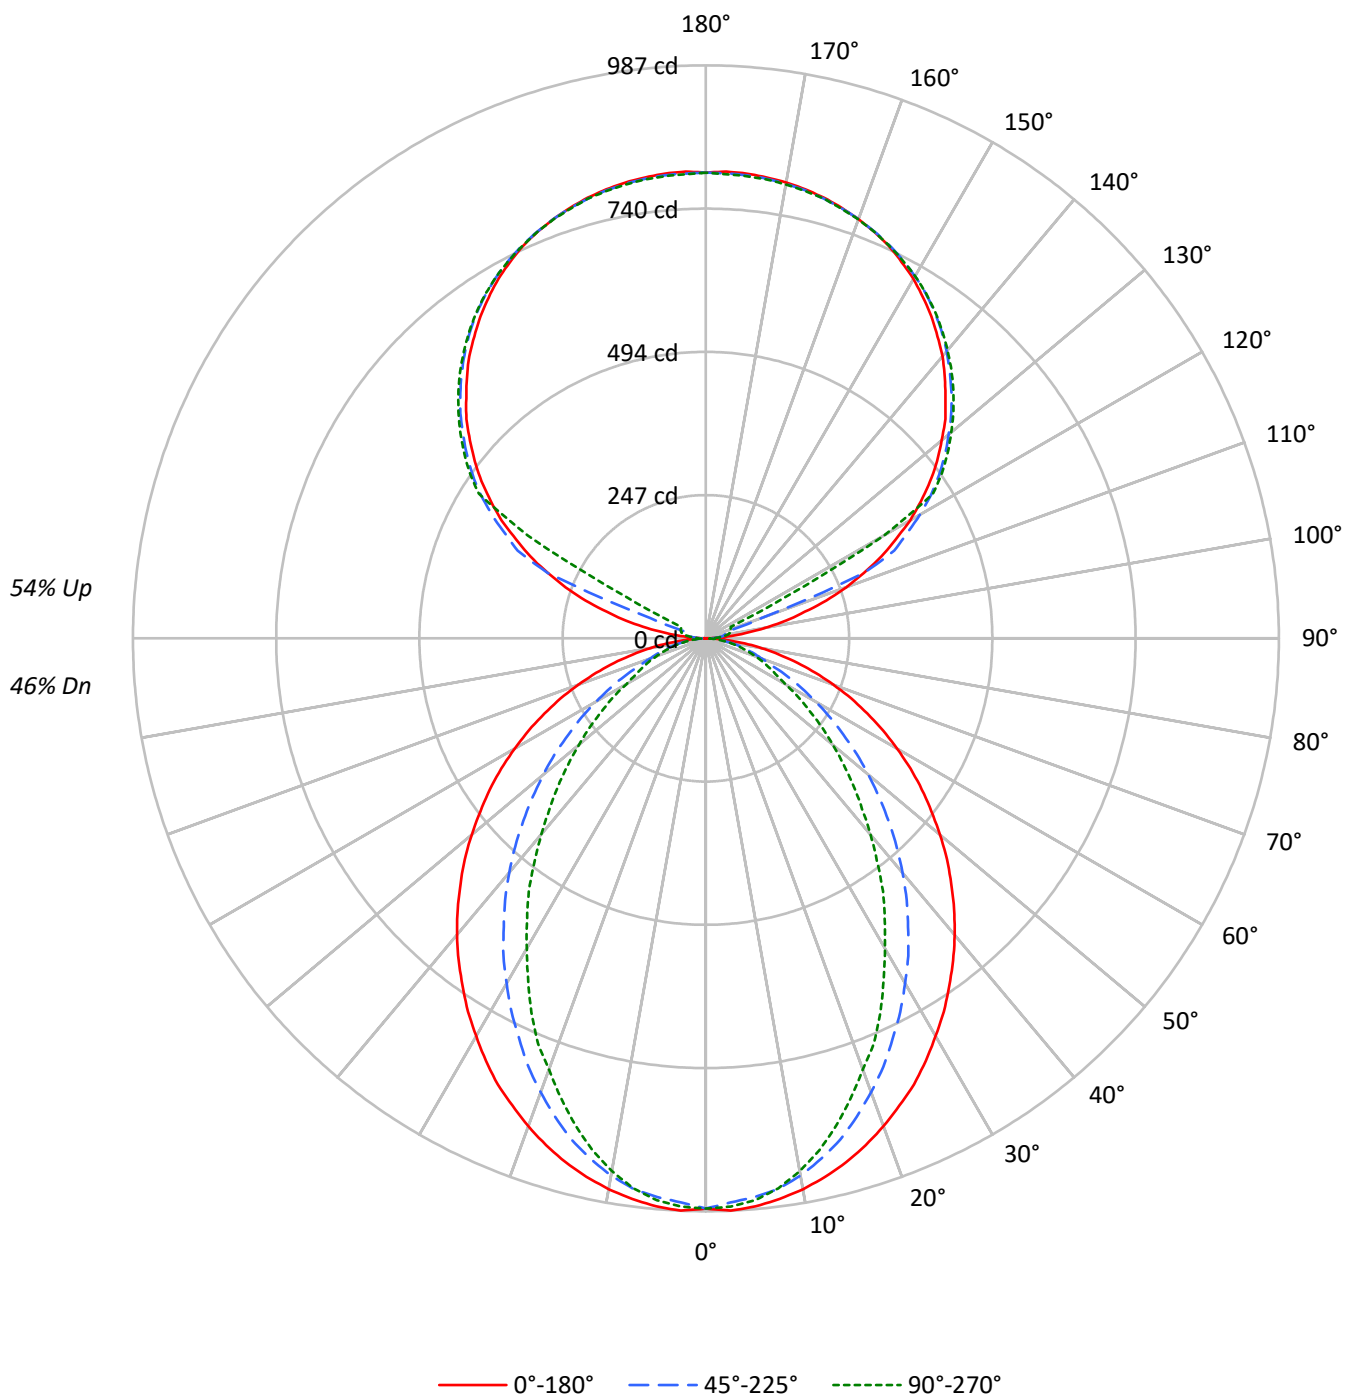

TEST NUMBER: P913113

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US927-RLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1119	1119	1119
5°	1120	1101	1108
10°	1109	1079	1072
15°	1093	1042	1016
20°	1072	992	947
25°	1050	937	881
30°	1022	880	797
35°	994	818	723
40°	965	755	638
45°	932	685	562
50°	898	614	487
55°	862	538	415
60°	821	460	342
65°	773	379	307
70°	715	305	277
75°	642	267	251
80°	537	222	217
85°	364	145	161

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 932 cd/sqm

TEST NUMBER: P913113

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.1	2.1
10°-20°	252.7	5.8
20°-30°	354.8	8.1
30°-40°	386.8	8.8
40°-50°	355.5	8.1
50°-60°	279.2	6.4
60°-70°	181.7	4.2
70°-80°	93.5	2.1
80°-90°	25.3	0.6
90°-100°	26.5	0.6
100°-110°	98.6	2.3
110°-120°	261.5	6.0
120°-130°	433.7	9.9
130°-140°	460.7	10.5
140°-150°	428.1	9.8
150°-160°	344.2	7.9
160°-170°	221.8	5.1
170°-180°	76.3	1.7
0°-30°	699.6	16.0
0°-40°	1086.3	24.8
0°-60°	1720.9	39.4
0°-90°	2021.5	46.2
90°-120°	386.5	8.8
90°-150°	1709.0	39.1
90°-180°	2351.0	53.8
0°-180°	4372.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	982	982	982	982	982	
5°	982	978	966	974	972	93
15°	934	924	894	877	868	263
25°	848	820	761	724	711	390
35°	731	685	607	551	532	457
45°	597	538	444	381	360	461
55°	454	385	289	236	219	406
65°	307	235	155	124	122	304
75°	164	101	71	65	64	173
85°	38	20	17	17	17	44
90°	1	7	12	15	16	4
95°	38	18	23	26	25	45
105°	176	194	35	42	44	188
115°	334	344	358	89	48	329
125°	472	479	490	494	496	421
135°	584	593	598	604	603	451
145°	677	677	687	691	688	424
155°	746	741	748	751	746	344
165°	786	782	784	788	784	222
175°	804	800	801	805	799	76
180°	802	802	802	802	802	

TEST NUMBER: P913113

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	982.2	982.2	982.2	982.2	982.2
2.5°	986.7	982.2	972.4	981.4	979.6
5°	982.2	977.8	966.2	974.2	971.5
7.5°	974.2	968.9	956.5	960.0	955.5
10°	963.5	957.4	939.6	936.8	931.6
12.5°	950.2	942.2	918.2	912.9	903.1
15°	934.2	924.4	894.2	877.3	868.5
17.5°	915.5	901.3	864.0	844.5	830.2
20°	894.2	876.4	831.9	809.8	790.2
22.5°	871.2	850.6	799.1	768.9	755.6
25°	848.0	819.5	760.9	724.4	711.1
27.5°	820.5	790.2	725.3	683.6	663.1
30°	791.2	757.3	686.2	641.0	616.9
32.5°	762.6	721.8	649.0	595.6	573.3
35°	730.7	685.3	607.1	551.1	531.6
37.5°	699.6	650.6	568.0	506.6	484.5
40°	666.7	613.4	527.1	464.0	440.9
42.5°	632.9	576.1	486.2	420.4	398.2
45°	597.4	537.7	444.5	381.3	360.0
47.5°	563.6	500.5	404.5	341.3	321.8
50°	526.2	463.1	365.4	304.0	285.3
52.5°	489.7	423.1	328.0	269.3	252.5
55°	454.2	384.8	288.8	235.6	218.7
57.5°	417.8	346.7	254.3	204.5	190.2
60°	380.4	309.3	217.8	172.5	158.3
62.5°	344.0	272.9	186.6	144.0	137.0
65°	306.7	234.6	154.6	124.5	121.8
67.5°	271.2	199.1	124.5	109.3	106.6
70°	233.8	164.5	103.1	94.2	90.6
72.5°	198.2	132.4	86.2	79.1	77.3
75°	163.5	101.3	71.1	64.9	64.0
77.5°	128.9	71.9	56.0	52.4	50.6
80°	96.9	51.6	42.6	39.1	39.1
82.5°	67.5	34.7	29.3	27.6	27.6
85°	38.2	19.5	16.9	16.9	16.9
87.5°	14.3	7.1	7.1	6.3	6.3
90°	0.6	7.0	11.6	14.6	15.6
92.5°	14.6	12.2	13.9	15.1	15.6
95°	37.7	18.5	22.6	25.6	25.0
97.5°	67.9	20.4	29.5	31.4	31.9
100°	102.7	23.2	33.1	37.7	38.9
102.5°	141.0	139.9	34.2	40.6	42.4
105°	176.4	193.8	35.4	41.7	44.1
107.5°	217.6	232.1	36.6	42.9	45.3
110°	257.1	269.3	101.6	43.6	45.9

TEST NUMBER: P913113

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	294.3	304.7	294.8	44.7	46.4
115°	333.7	343.6	358.1	89.4	47.6
117.5°	368.0	379.5	389.4	306.4	154.4
120°	406.2	414.9	425.4	432.4	354.0
122.5°	438.7	448.1	459.7	463.1	463.7
125°	471.8	479.3	490.4	494.5	496.2
127.5°	502.0	510.1	518.9	524.7	525.2
130°	530.4	539.8	546.1	552.5	552.0
132.5°	559.4	567.0	573.4	578.6	578.1
135°	583.8	593.2	598.3	604.2	603.0
137.5°	609.3	616.3	622.2	628.0	626.2
140°	634.3	639.0	645.3	650.5	647.7
142.5°	655.3	659.3	666.9	671.5	668.6
145°	677.3	676.7	686.6	690.6	687.7
147.5°	696.4	694.7	704.6	707.4	705.1
150°	715.0	711.0	720.3	723.7	720.8
152.5°	730.6	726.0	734.7	738.2	734.2
155°	745.8	740.6	747.5	751.0	746.4
157.5°	758.0	753.4	758.6	762.6	758.0
160°	768.4	764.9	768.4	771.9	767.8
162.5°	777.7	774.2	777.1	781.2	775.9
165°	785.8	782.4	784.1	788.1	784.1
167.5°	792.2	788.7	790.4	794.6	789.3
170°	797.4	793.9	795.1	799.2	793.9
172.5°	800.9	797.4	798.6	802.6	797.4
175°	803.7	799.7	800.9	804.9	799.2
177.5°	804.9	800.9	801.5	805.6	800.3
180°	802.1	802.1	802.1	802.1	802.1

TEST NUMBER: P913113

CATALOG NUMBER: DFN2DIP-4P3F0-030D030US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.14	7.94	8.14	8.95	10.27	3.10	3.90	4.10	4.91	6.23
	3H	8.81	9.53	9.82	10.54	11.89	4.28	5.00	5.29	6.01	7.36
	4H	9.42	10.09	10.44	11.11	12.46	4.73	5.40	5.75	6.42	7.77
	6H	9.83	10.46	10.86	11.48	12.84	5.04	5.66	6.07	6.68	8.05
	8H	9.96	10.55	10.99	11.59	12.95	5.13	5.72	6.16	6.75	8.12
	12H	10.02	10.58	11.06	11.61	13.00	5.17	5.73	6.21	6.76	8.15
4H	2H	7.15	7.83	8.18	8.85	10.20	3.69	4.37	4.72	5.38	6.74
	3H	8.98	9.54	10.01	10.58	11.95	5.03	5.59	6.07	6.64	8.01
	4H	9.66	10.18	10.70	11.21	12.61	5.57	6.09	6.61	7.12	8.51
	6H	10.17	10.61	11.22	11.67	13.06	5.98	6.43	7.03	7.48	8.87
	8H	10.34	10.76	11.40	11.81	13.21	6.11	6.52	7.16	7.57	8.97
	12H	10.44	10.81	11.50	11.87	13.28	6.17	6.54	7.24	7.61	9.01
8H	4H	9.63	10.04	10.68	11.09	12.49	5.85	6.26	6.90	7.31	8.71
	6H	10.19	10.53	11.26	11.62	13.02	6.36	6.70	7.43	7.79	9.19
	8H	10.40	10.70	11.48	11.78	13.20	6.54	6.84	7.62	7.92	9.34
	12H	10.53	10.80	11.62	11.87	13.33	6.66	6.92	7.74	7.99	9.45
12H	4H	9.58	9.95	10.65	11.02	12.42	5.85	6.22	6.92	7.29	8.70
	6H	10.16	10.46	11.24	11.54	12.96	6.40	6.70	7.49	7.78	9.20
	8H	10.38	10.64	11.46	11.71	13.17	6.61	6.87	7.69	7.94	9.40

END OF REPORT