

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913125

Luminaire Tested: DFN2DIP-4P3F0-030D060US927-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913125
REPORT IS A COMBINATION OF REPORTS P900592 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-030D060US927-RLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6725.6 lumens
Efficiency: N/A
Efficacy: 92.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 73.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913125

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US927-RLLONL

Luminous Intensity Polar Plot

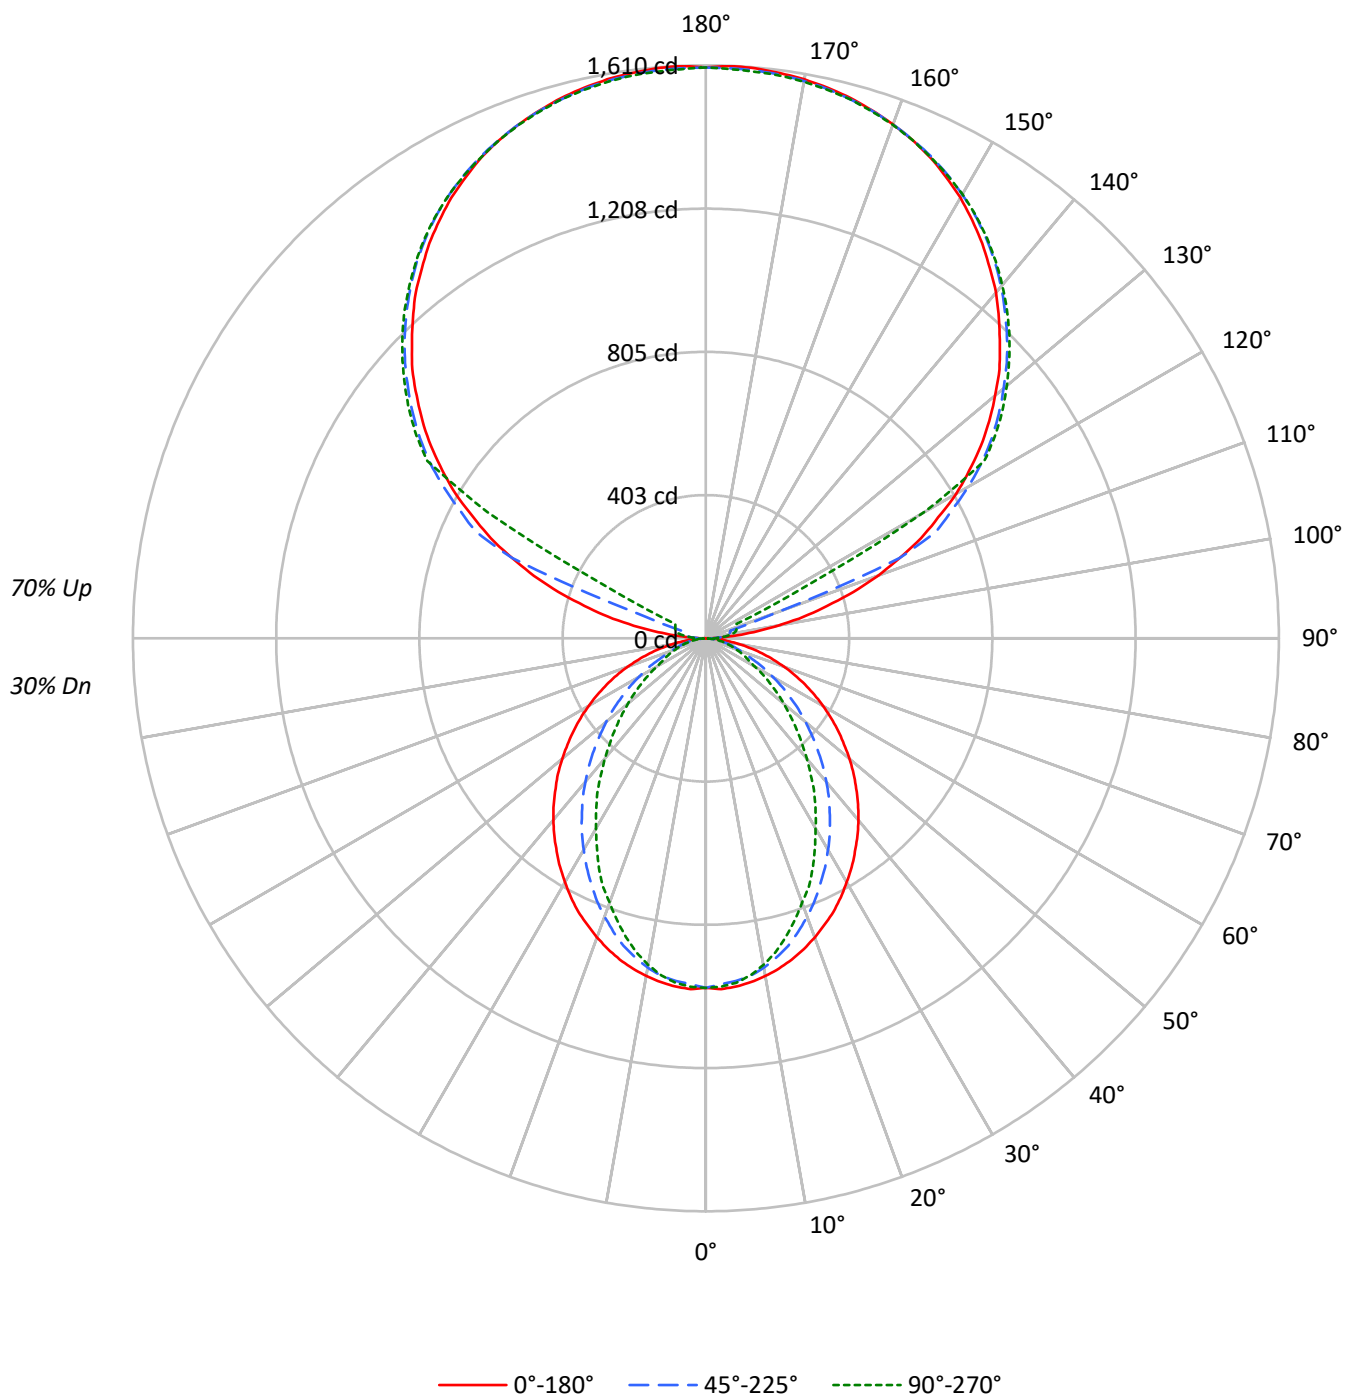

TEST NUMBER: P913125

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	94	90	86	83	84	81	77	75	64	62	60	48	47	46	34	33	32
2	85	78	73	68	76	71	66	62	56	53	50	43	40	39	30	29	28
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16
7	56	44	37	31	50	40	34	29	32	28	24	25	22	19	18	16	15
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13
9	48	37	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12
10	45	33	27	22	40	30	24	20	25	20	17	20	16	14	14	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1119	1119	1119
5°	1120	1101	1108
10°	1109	1079	1072
15°	1093	1042	1016
20°	1072	992	947
25°	1050	937	881
30°	1022	880	797
35°	994	818	723
40°	965	755	638
45°	932	685	562
50°	898	614	487
55°	862	538	415
60°	821	460	342
65°	773	379	307
70°	715	305	277
75°	642	267	251
80°	537	222	217
85°	364	145	161

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1096 cd/sqm

TEST NUMBER: P913125

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.1	1.4
10°-20°	252.7	3.8
20°-30°	354.8	5.3
30°-40°	386.8	5.8
40°-50°	355.5	5.3
50°-60°	279.2	4.2
60°-70°	181.7	2.7
70°-80°	93.5	1.4
80°-90°	26.7	0.4
90°-100°	52.9	0.8
100°-110°	197.2	2.9
110°-120°	523.0	7.8
120°-130°	867.4	12.9
130°-140°	921.3	13.7
140°-150°	856.3	12.7
150°-160°	688.4	10.2
160°-170°	443.6	6.6
170°-180°	152.7	2.3
0°-30°	699.6	10.4
0°-40°	1086.3	16.2
0°-60°	1720.9	25.6
0°-90°	2022.9	30.1
90°-120°	773.0	11.5
90°-150°	3418.0	50.8
90°-180°	4703.0	69.9
0°-180°	6725.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	982	982	982	982	982	
5°	982	978	966	974	972	93
15°	934	924	894	877	868	263
25°	848	820	761	724	711	390
35°	731	685	607	551	532	457
45°	597	538	444	381	360	461
55°	454	385	289	236	219	406
65°	307	235	155	124	122	304
75°	164	101	71	65	64	173
85°	38	20	17	17	17	44
90°	1	14	23	29	31	6
95°	75	37	45	51	50	89
105°	353	388	71	84	88	377
115°	667	687	716	179	95	657
125°	944	959	981	989	992	842
135°	1168	1186	1197	1208	1206	902
145°	1355	1353	1373	1381	1376	847
155°	1492	1481	1495	1502	1493	687
165°	1572	1565	1568	1576	1568	444
175°	1608	1599	1602	1610	1598	153
180°	1604	1604	1604	1604	1604	

TEST NUMBER: P913125

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	982.2	982.2	982.2	982.2	982.2
2.5°	986.7	982.2	972.4	981.4	979.6
5°	982.2	977.8	966.2	974.2	971.5
7.5°	974.2	968.9	956.5	960.0	955.5
10°	963.5	957.4	939.6	936.8	931.6
12.5°	950.2	942.2	918.2	912.9	903.1
15°	934.2	924.4	894.2	877.3	868.5
17.5°	915.5	901.3	864.0	844.5	830.2
20°	894.2	876.4	831.9	809.8	790.2
22.5°	871.2	850.6	799.1	768.9	755.6
25°	848.0	819.5	760.9	724.4	711.1
27.5°	820.5	790.2	725.3	683.6	663.1
30°	791.2	757.3	686.2	641.0	616.9
32.5°	762.6	721.8	649.0	595.6	573.3
35°	730.7	685.3	607.1	551.1	531.6
37.5°	699.6	650.6	568.0	506.6	484.5
40°	666.7	613.4	527.1	464.0	440.9
42.5°	632.9	576.1	486.2	420.4	398.2
45°	597.4	537.7	444.5	381.3	360.0
47.5°	563.6	500.5	404.5	341.3	321.8
50°	526.2	463.1	365.4	304.0	285.3
52.5°	489.7	423.1	328.0	269.3	252.5
55°	454.2	384.8	288.8	235.6	218.7
57.5°	417.8	346.7	254.3	204.5	190.2
60°	380.4	309.3	217.8	172.5	158.3
62.5°	344.0	272.9	186.6	144.0	137.0
65°	306.7	234.6	154.6	124.5	121.8
67.5°	271.2	199.1	124.5	109.3	106.6
70°	233.8	164.5	103.1	94.2	90.6
72.5°	198.2	132.4	86.2	79.1	77.3
75°	163.5	101.3	71.1	64.9	64.0
77.5°	128.9	71.9	56.0	52.4	50.6
80°	96.9	51.6	42.6	39.1	39.1
82.5°	67.5	34.7	29.3	27.6	27.6
85°	38.2	19.5	16.9	16.9	16.9
87.5°	14.3	7.1	7.1	6.3	6.3
90°	1.1	13.9	23.1	29.1	31.3
92.5°	29.1	24.4	27.8	30.2	31.3
95°	75.4	37.1	45.2	51.2	49.9
97.5°	135.8	40.6	59.1	62.7	63.8
100°	205.5	46.4	66.1	75.4	77.7
102.5°	282.0	279.8	68.5	81.2	84.8
105°	352.8	387.7	70.8	83.5	88.2
107.5°	435.3	464.2	73.2	85.9	90.5
110°	514.3	538.5	203.2	87.1	91.7

TEST NUMBER: P913125

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	588.5	609.3	589.6	89.3	92.9
115°	667.4	687.1	716.2	178.8	95.2
117.5°	735.9	759.1	778.9	612.8	308.7
120°	812.5	829.9	850.9	864.7	708.1
122.5°	877.4	896.0	919.3	926.2	927.5
125°	943.6	958.8	980.8	989.0	992.4
127.5°	1004.0	1020.3	1037.8	1049.3	1050.4
130°	1060.9	1079.5	1092.2	1105.0	1103.9
132.5°	1119.0	1134.1	1146.8	1157.2	1156.1
135°	1167.8	1186.4	1196.7	1208.4	1206.0
137.5°	1218.7	1232.6	1244.4	1255.9	1252.5
140°	1268.6	1278.0	1290.7	1301.2	1295.4
142.5°	1310.5	1318.7	1333.7	1342.9	1337.1
145°	1354.6	1353.4	1373.1	1381.2	1375.5
147.5°	1392.8	1389.3	1409.1	1414.8	1410.3
150°	1430.0	1421.9	1440.5	1447.4	1441.6
152.5°	1461.3	1452.1	1469.4	1476.5	1468.3
155°	1491.5	1481.1	1495.1	1502.0	1492.7
157.5°	1515.9	1506.6	1517.1	1525.3	1515.9
160°	1536.8	1529.8	1536.8	1543.7	1535.6
162.5°	1555.3	1548.4	1554.2	1562.3	1551.9
165°	1571.6	1564.7	1568.1	1576.3	1568.1
167.5°	1584.4	1577.4	1581.0	1589.1	1578.6
170°	1594.9	1587.8	1590.2	1598.3	1587.8
172.5°	1601.8	1594.9	1597.2	1605.4	1594.9
175°	1607.6	1599.4	1601.8	1609.9	1598.3
177.5°	1609.9	1601.8	1603.0	1611.1	1600.7
180°	1604.1	1604.1	1604.1	1604.1	1604.1

TEST NUMBER: P913125

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.28	5.97	6.40	7.08	8.61	1.25	1.94	2.36	3.04	4.58
	3H	6.95	7.56	8.07	8.68	10.23	2.42	3.03	3.54	4.15	5.70
	4H	7.55	8.13	8.68	9.25	10.80	2.86	3.44	3.99	4.56	6.11
	6H	7.96	8.49	9.10	9.61	11.18	3.16	3.70	4.30	4.82	6.39
	8H	8.08	8.59	9.22	9.72	11.28	3.25	3.76	4.39	4.89	6.45
	12H	8.13	8.62	9.28	9.75	11.33	3.28	3.77	4.43	4.90	6.48
4H	2H	5.28	5.87	6.42	6.99	8.54	1.82	2.41	2.96	3.52	5.08
	3H	7.09	7.58	8.24	8.72	10.29	3.15	3.64	4.30	4.78	6.35
	4H	7.78	8.23	8.93	9.36	10.94	3.69	4.14	4.84	5.27	6.85
	6H	8.28	8.66	9.44	9.82	11.39	4.09	4.47	5.25	5.63	7.21
	8H	8.45	8.81	9.60	9.95	11.55	4.21	4.57	5.37	5.72	7.31
	12H	8.54	8.86	9.71	10.02	11.61	4.27	4.59	5.44	5.75	7.35
8H	4H	7.73	8.09	8.89	9.24	10.83	3.95	4.31	5.11	5.46	7.05
	6H	8.29	8.58	9.46	9.77	11.36	4.46	4.75	5.63	5.94	7.53
	8H	8.50	8.76	9.68	9.93	11.54	4.64	4.90	5.82	6.07	7.68
	12H	8.63	8.86	9.81	10.02	11.66	4.75	4.98	5.94	6.14	7.79
12H	4H	7.68	8.00	8.85	9.16	10.76	3.95	4.28	5.12	5.43	7.03
	6H	8.26	8.52	9.44	9.69	11.30	4.51	4.76	5.69	5.93	7.54
	8H	8.47	8.70	9.66	9.86	11.51	4.71	4.93	5.89	6.09	7.74

END OF REPORT