

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915852

Luminaire Tested: DFN2DIP-4P3F0-030D060US930-RLFL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915852
REPORT IS A COMBINATION OF REPORTS P899072 AND P895917
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-030D060US930-RLLFLL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6408.3 lumens
Efficiency: N/A
Efficacy: 87.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 73.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915852

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US930-RLLFLL

Luminous Intensity Polar Plot

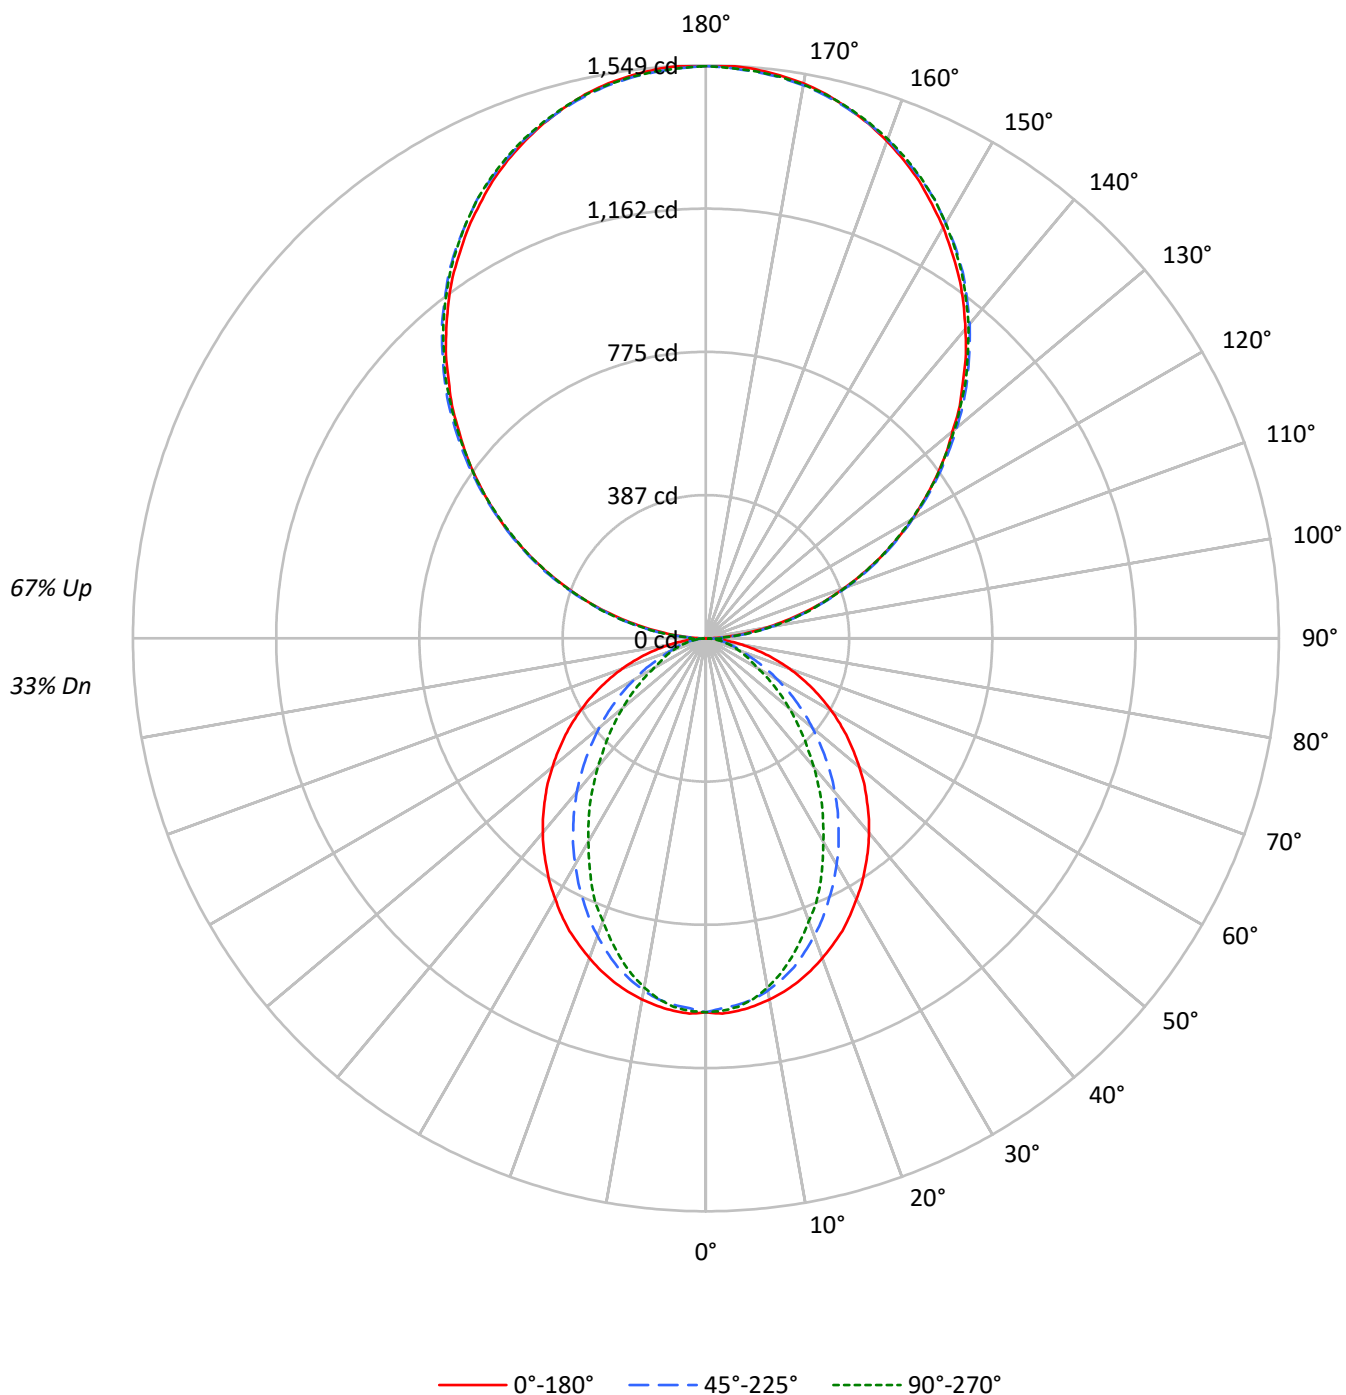

TEST NUMBER: P915852

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US930-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	79	73	68	77	71	67	62	57	54	51	44	42	40	32	31	29
3	79	70	63	57	71	63	57	52	51	46	43	39	36	34	29	27	25
4	72	62	54	49	65	56	50	45	45	41	37	35	32	29	26	24	22
5	66	55	47	42	59	50	43	38	40	36	32	32	28	26	23	21	19
6	61	49	42	36	55	45	38	33	36	32	28	29	25	23	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	19	17	15
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13
10	45	34	27	22	41	31	25	21	25	21	18	20	17	15	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1152	1152	1152
5°	1153	1133	1141
10°	1141	1110	1103
15°	1125	1073	1045
20°	1103	1021	975
25°	1081	964	906
30°	1052	905	820
35°	1023	842	744
40°	994	777	657
45°	960	705	578
50°	924	632	501
55°	887	554	427
60°	845	473	351
65°	796	390	316
70°	736	314	285
75°	661	275	259
80°	552	228	223
85°	375	149	166

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1552 cd/sqm

TEST NUMBER: P915852

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US930-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.7	1.5
10°-20°	260.1	4.1
20°-30°	365.1	5.7
30°-40°	398.0	6.2
40°-50°	365.8	5.7
50°-60°	287.3	4.5
60°-70°	187.0	2.9
70°-80°	96.3	1.5
80°-90°	29.0	0.5
90°-100°	95.7	1.5
100°-110°	304.2	4.7
110°-120°	520.6	8.1
120°-130°	684.6	10.7
130°-140°	768.4	12.0
140°-150°	753.5	11.8
150°-160°	632.1	9.9
160°-170°	419.2	6.5
170°-180°	146.5	2.3
0°-30°	720.0	11.2
0°-40°	1118.0	17.4
0°-60°	1771.2	27.6
0°-90°	2083.4	32.5
90°-120°	920.5	14.4
90°-150°	3127.0	48.8
90°-180°	4325.0	67.5
0°-180°	6408.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1011	1011	1011	1011	1011	
5°	1011	1006	994	1003	1000	96
15°	962	951	920	903	894	271
25°	873	843	783	746	732	401
35°	752	705	625	567	547	471
45°	615	553	458	392	370	475
55°	467	396	297	242	225	418
65°	316	242	159	128	125	313
75°	168	104	73	67	66	178
85°	39	20	17	17	17	45
90°	1	17	46	43	44	6
95°	68	81	84	84	81	76
105°	281	284	287	290	290	296
115°	522	530	528	526	522	517
125°	760	771	768	764	762	679
135°	983	997	1000	999	995	760
145°	1193	1202	1210	1211	1206	745
155°	1364	1368	1372	1379	1374	628
165°	1484	1483	1483	1492	1486	419
175°	1544	1541	1538	1547	1539	147
180°	1547	1547	1547	1547	1547	

TEST NUMBER: P915852

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US930-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1010.9	1010.9	1010.9	1010.9	1010.9
2.5°	1015.5	1010.9	1000.8	1010.0	1008.2
5°	1010.9	1006.3	994.4	1002.7	999.9
7.5°	1002.7	997.2	984.4	988.0	983.4
10°	991.6	985.3	967.0	964.2	958.8
12.5°	978.0	969.7	945.0	939.5	929.4
15°	961.5	951.4	920.3	902.9	893.8
17.5°	942.2	927.6	889.2	869.1	854.4
20°	920.3	902.0	856.2	833.5	813.3
22.5°	896.6	875.5	822.4	791.3	777.6
25°	872.8	843.4	783.1	745.6	731.8
27.5°	844.4	813.3	746.5	703.5	682.4
30°	814.2	779.4	706.2	659.7	634.9
32.5°	784.9	742.8	667.9	612.9	590.0
35°	752.0	705.3	624.8	567.2	547.1
37.5°	720.0	669.6	584.6	521.4	498.6
40°	686.2	631.3	542.5	477.5	453.8
42.5°	651.3	592.9	500.4	432.7	409.9
45°	614.8	553.4	457.5	392.4	370.5
47.5°	580.0	515.1	416.3	351.2	331.2
50°	541.6	476.6	376.0	312.8	293.7
52.5°	504.0	435.5	337.6	277.2	259.8
55°	467.4	396.1	297.3	242.5	225.1
57.5°	430.0	356.8	261.7	210.4	195.8
60°	391.5	318.4	224.1	177.5	162.9
62.5°	354.1	280.9	192.1	148.2	141.0
65°	315.6	241.5	159.1	128.1	125.3
67.5°	279.1	204.9	128.1	112.5	109.7
70°	240.6	169.3	106.1	96.9	93.3
72.5°	204.0	136.2	88.7	81.4	79.6
75°	168.3	104.3	73.2	66.8	65.9
77.5°	132.6	74.0	57.6	54.0	52.1
80°	99.7	53.1	43.9	40.3	40.3
82.5°	69.5	35.7	30.2	28.4	28.4
85°	39.3	20.1	17.4	17.4	17.4
87.5°	14.7	7.3	7.3	6.4	6.4
90°	1.4	16.8	45.7	42.9	44.3
92.5°	28.9	39.2	40.6	42.0	42.0
95°	68.1	81.1	83.5	83.5	81.1
97.5°	113.3	125.5	130.6	130.6	130.6
100°	165.6	176.3	180.0	180.0	178.6
102.5°	220.6	228.5	233.7	235.1	233.7
105°	280.8	284.5	287.3	289.7	289.7
107.5°	340.5	346.1	346.1	347.0	340.5
110°	398.4	405.8	405.8	405.8	402.0

TEST NUMBER: P915852

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	460.8	468.7	467.3	463.6	460.8
115°	522.4	529.9	527.5	526.1	522.4
117.5°	583.5	593.8	587.2	583.5	579.8
120°	645.1	655.3	645.1	645.1	640.8
122.5°	701.0	714.0	707.5	703.8	701.0
125°	759.8	771.4	767.7	763.5	762.1
127.5°	817.2	831.6	826.5	820.9	817.2
130°	870.8	887.6	885.3	882.5	877.3
132.5°	931.0	944.0	944.9	938.4	934.7
135°	982.8	997.2	1000.0	998.6	994.8
137.5°	1040.6	1052.2	1054.6	1053.6	1048.1
140°	1091.4	1103.1	1109.6	1109.6	1104.5
142.5°	1143.6	1155.3	1159.0	1160.4	1155.3
145°	1193.1	1202.4	1209.9	1211.3	1206.2
147.5°	1237.4	1249.0	1254.7	1256.9	1251.8
150°	1283.1	1291.0	1296.2	1300.3	1296.2
152.5°	1323.6	1331.6	1338.1	1343.3	1338.1
155°	1364.2	1368.0	1372.1	1378.8	1374.5
157.5°	1399.2	1402.1	1404.4	1413.7	1407.2
160°	1430.5	1433.3	1434.7	1442.6	1437.0
162.5°	1459.4	1459.4	1460.8	1469.7	1463.1
165°	1484.1	1482.7	1482.7	1492.1	1485.6
167.5°	1506.5	1502.4	1502.4	1511.6	1505.1
170°	1523.3	1519.6	1518.2	1527.5	1519.6
172.5°	1535.0	1531.2	1529.8	1539.1	1531.2
175°	1544.3	1540.6	1537.7	1547.1	1539.1
177.5°	1549.4	1545.7	1542.9	1550.8	1542.9
180°	1547.1	1547.1	1547.1	1547.1	1547.1



TEST NUMBER: P915852

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.70	6.41	6.80	7.50	9.01	1.66	2.37	2.76	3.46	4.97
	3H	7.37	8.00	8.48	9.10	10.62	2.84	3.47	3.94	4.57	6.09
	4H	7.97	8.57	9.09	9.67	11.19	3.28	3.87	4.39	4.98	6.50
	6H	8.38	8.93	9.51	10.03	11.57	3.59	4.14	4.71	5.24	6.78
	8H	8.50	9.02	9.63	10.14	11.67	3.67	4.19	4.80	5.31	6.84
	12H	8.56	9.05	9.69	10.17	11.72	3.71	4.20	4.84	5.32	6.87
4H	2H	5.70	6.30	6.83	7.41	8.93	2.24	2.84	3.37	3.94	5.47
	3H	7.52	8.02	8.65	9.14	10.68	3.57	4.07	4.70	5.20	6.74
	4H	8.20	8.66	9.34	9.78	11.33	4.11	4.57	5.24	5.69	7.24
	6H	8.70	9.10	9.85	10.24	11.79	4.52	4.91	5.66	6.05	7.60
	8H	8.87	9.24	10.01	10.37	11.94	4.64	5.00	5.78	6.14	7.70
	12H	8.96	9.29	10.12	10.44	12.01	4.70	5.03	5.85	6.17	7.74
8H	4H	8.16	8.52	9.30	9.66	11.22	4.38	4.74	5.52	5.88	7.44
	6H	8.71	9.02	9.87	10.19	11.75	4.88	5.19	6.05	6.36	7.92
	8H	8.93	9.19	10.09	10.34	11.93	5.07	5.33	6.24	6.49	8.07
	12H	9.06	9.29	10.23	10.44	12.06	5.18	5.41	6.35	6.56	8.18
12H	4H	8.10	8.43	9.26	9.58	11.15	4.38	4.71	5.53	5.85	7.42
	6H	8.69	8.95	9.85	10.11	11.69	4.93	5.19	6.10	6.35	7.93
	8H	8.90	9.13	10.07	10.28	11.90	5.13	5.36	6.30	6.51	8.13

END OF REPORT