

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915866

Luminaire Tested: DFN2DIP-4P3F0-040D050US930-FLLFLL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P915866  
REPORT IS A COMBINATION OF REPORTS P899063 AND P895917  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-4P3F0-040D050US930-FLLFLL  
Description: 3 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6836.3 lumens  
Efficiency: N/A  
Efficacy: 90.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')  
CIE Type: General Diffuse

Input Watts (W): 75.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9789  
Total Harmonic Distortion (THDi): 0.074  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P915866  
CATALOG NUMBER: DFN2DIP-4P3F0-040D050US930-FLLFL

### Luminous Intensity Polar Plot

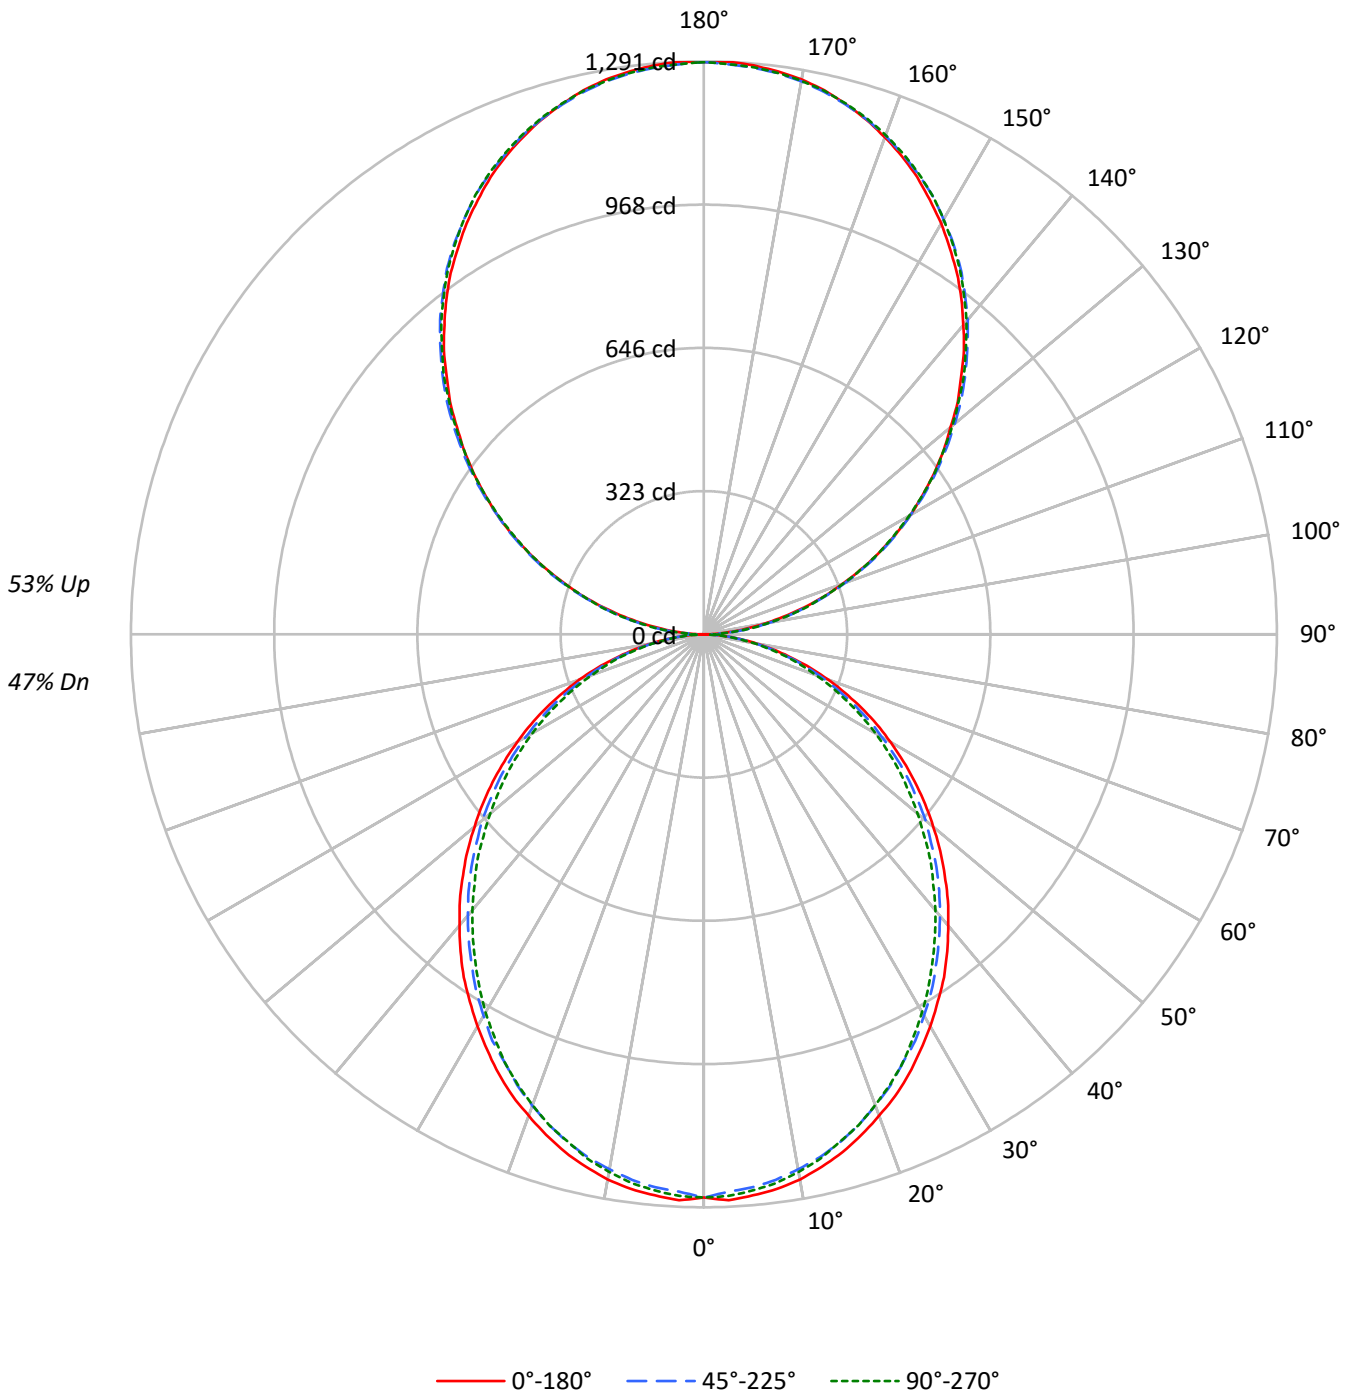



TEST NUMBER: P915866

CATALOG NUMBER: DFN2DIP-4P3F0-040D050US930-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54	47	47	47	47
1	97	93	89	85	89	85	82	79	72	69	67	59	57	56	47	46	45	40	40	40	40
2	88	81	75	70	81	75	69	65	63	59	56	52	49	47	42	40	38	33	33	33	33
3	81	71	64	58	74	66	59	54	55	51	47	46	42	39	37	35	32	28	28	28	28
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28	24	24	24	24
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	24	21	21	21	21
6	62	50	42	37	57	47	40	34	40	34	30	33	29	26	27	24	21	19	19	19	19
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	21	19	16	16	16	16
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	19	17	15	15	15	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13	13	13	13
10	47	35	27	23	43	32	26	21	28	22	19	23	19	16	19	16	14	12	12	12	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1446	1446	1446
5°	1447	1425	1435
10°	1435	1405	1415
15°	1413	1381	1384
20°	1383	1348	1353
25°	1354	1308	1316
30°	1318	1272	1270
35°	1283	1228	1222
40°	1240	1185	1175
45°	1198	1141	1128
50°	1152	1095	1072
55°	1103	1042	1022
60°	1048	979	964
65°	988	913	895
70°	911	834	821
75°	805	738	752
80°	676	616	622
85°	477	408	407

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 1292 cd/sqm



TEST NUMBER: P915866

CATALOG NUMBER: DFN2DIP-4P3F0-040D050US930-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	119.4	1.7
10°-20°	336.0	4.9
20°-30°	493.8	7.2
30°-40°	573.6	8.4
40°-50°	572.9	8.4
50°-60°	499.5	7.3
60°-70°	369.3	5.4
70°-80°	208.9	3.1
80°-90°	58.8	0.9
90°-100°	79.8	1.2
100°-110°	253.5	3.7
110°-120°	433.8	6.3
120°-130°	570.5	8.3
130°-140°	640.4	9.4
140°-150°	627.9	9.2
150°-160°	526.8	7.7
160°-170°	349.3	5.1
170°-180°	122.1	1.8
0°-30°	949.3	13.9
0°-40°	1522.9	22.3
0°-60°	2595.3	38.0
0°-90°	3232.2	47.3
90°-120°	767.0	11.2
90°-150°	2605.8	38.1
90°-180°	3604.0	52.7
0°-180°	6836.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1269	1269	1269	1269	1269	
5°	1269	1264	1251	1260	1258	120
15°	1208	1201	1185	1190	1184	340
25°	1093	1084	1063	1065	1063	503
35°	943	931	912	904	898	589
45°	768	759	741	727	722	592
55°	581	574	559	544	538	519
65°	392	384	372	361	355	387
75°	205	203	196	189	192	219
85°	50	49	48	44	43	56
90°	1	14	38	36	37	7
95°	57	68	70	70	68	63
105°	234	237	240	241	241	247
115°	435	442	440	438	435	431
125°	633	643	640	636	635	566
135°	819	831	833	832	829	633
145°	994	1002	1008	1009	1005	621
155°	1137	1140	1144	1149	1145	523
165°	1237	1236	1236	1243	1238	349
175°	1287	1284	1282	1289	1283	122
180°	1289	1289	1289	1289	1289	



TEST NUMBER: P915866

CATALOG NUMBER: DFN2DIP-4P3F0-040D050US930-FLLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1268.9	1268.9	1268.9	1268.9	1268.9
2.5°	1276.3	1270.2	1256.8	1268.9	1266.6
5°	1268.9	1264.1	1250.7	1260.4	1258.1
7.5°	1260.4	1253.1	1239.7	1249.5	1247.1
10°	1247.1	1238.5	1223.9	1233.6	1230.0
12.5°	1228.7	1221.4	1206.8	1212.9	1210.4
15°	1207.9	1200.7	1184.8	1189.7	1183.6
17.5°	1182.3	1175.1	1159.2	1165.2	1159.2
20°	1154.2	1147.0	1129.9	1133.5	1128.8
22.5°	1126.3	1115.2	1099.3	1099.3	1096.9
25°	1093.2	1083.5	1062.8	1065.2	1062.8
27.5°	1056.6	1048.1	1032.3	1028.7	1022.6
30°	1020.1	1010.3	992.1	988.4	983.5
32.5°	981.0	973.8	954.2	946.9	941.9
35°	943.2	931.1	911.5	904.2	898.1
37.5°	900.5	889.5	869.9	861.4	855.3
40°	856.6	846.8	827.2	816.4	811.5
42.5°	813.9	804.0	784.6	772.3	765.1
45°	767.5	759.0	740.6	727.3	722.4
47.5°	722.4	713.8	694.3	680.9	673.6
50°	674.7	668.6	651.6	634.5	628.4
52.5°	628.4	619.9	604.1	590.6	582.0
55°	580.9	573.5	558.9	544.2	538.2
57.5°	533.2	527.2	511.2	496.6	491.7
60°	485.6	480.8	463.7	450.3	446.6
62.5°	439.3	430.7	418.6	406.3	401.5
65°	391.8	384.3	372.2	361.2	355.1
67.5°	342.9	336.7	325.9	317.3	312.4
70°	297.7	292.9	281.8	273.3	268.5
72.5°	251.4	246.5	240.4	231.9	228.2
75°	205.0	202.6	196.4	189.1	191.6
77.5°	163.5	158.6	156.1	152.5	148.9
80°	122.1	120.7	118.3	114.7	112.3
82.5°	83.0	83.0	81.9	76.9	76.9
85°	50.0	48.8	47.6	43.9	42.7
87.5°	22.0	19.6	17.1	13.5	12.1
90°	1.1	14.0	38.1	35.8	36.9
92.5°	24.1	32.6	33.8	35.0	35.0
95°	56.7	67.7	69.5	69.5	67.7
97.5°	94.4	104.5	108.8	108.8	108.8
100°	137.9	146.9	150.0	150.0	148.9
102.5°	183.8	190.5	194.7	195.9	194.7
105°	234.0	237.1	239.5	241.3	241.3
107.5°	283.7	288.4	288.4	289.2	283.7
110°	331.9	338.2	338.2	338.2	335.0



TEST NUMBER: P915866

CATALOG NUMBER: DFN2DIP-4P3F0-040D050US930-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	384.0	390.6	389.5	386.4	384.0
115°	435.3	441.6	439.6	438.5	435.3
117.5°	486.2	494.8	489.3	486.2	483.1
120°	537.5	546.1	537.5	537.5	534.0
122.5°	584.2	595.1	589.6	586.5	584.2
125°	633.2	642.9	639.8	636.3	635.1
127.5°	680.9	693.0	688.8	684.0	680.9
130°	725.7	739.6	737.7	735.4	731.1
132.5°	775.8	786.7	787.5	782.0	778.9
135°	819.0	831.0	833.3	832.2	829.1
137.5°	867.2	876.9	878.8	878.0	873.3
140°	909.5	919.2	924.6	924.6	920.4
142.5°	953.0	962.8	965.9	967.0	962.8
145°	994.3	1002.0	1008.2	1009.4	1005.1
147.5°	1031.2	1040.9	1045.5	1047.5	1043.2
150°	1069.3	1075.9	1080.1	1083.6	1080.1
152.5°	1103.1	1109.7	1115.1	1119.4	1115.1
155°	1136.9	1140.0	1143.5	1148.9	1145.4
157.5°	1166.0	1168.3	1170.3	1178.1	1172.6
160°	1192.0	1194.4	1195.6	1202.2	1197.5
162.5°	1216.2	1216.2	1217.3	1224.7	1219.3
165°	1236.8	1235.6	1235.6	1243.4	1237.9
167.5°	1255.4	1251.9	1251.9	1259.7	1254.3
170°	1269.4	1266.3	1265.2	1272.9	1266.3
172.5°	1279.1	1276.0	1274.9	1282.6	1276.0
175°	1286.9	1283.8	1281.5	1289.2	1282.6
177.5°	1291.2	1288.1	1285.7	1292.3	1285.7
180°	1289.2	1289.2	1289.2	1289.2	1289.2



TEST NUMBER: P915866  
 CATALOG NUMBER: DFN2DIP-4P3F0-040D050US930-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.26	9.10	9.24	10.09	11.40	7.82	8.65	8.80	9.65	10.96
	3H	9.92	10.67	10.91	11.67	13.00	9.43	10.18	10.42	11.18	12.51
	4H	10.50	11.21	11.50	12.22	13.56	10.00	10.72	11.01	11.72	13.06
	6H	10.89	11.55	11.91	12.56	13.91	10.39	11.05	11.41	12.06	13.41
	8H	11.00	11.62	12.02	12.65	14.00	10.50	11.12	11.52	12.15	13.49
	12H	11.04	11.64	12.07	12.66	14.03	10.53	11.13	11.56	12.15	13.52
4H	2H	8.72	9.43	9.73	10.43	11.77	8.36	9.07	9.37	10.08	11.42
	3H	10.57	11.17	11.59	12.20	13.55	10.17	10.76	11.19	11.79	13.15
	4H	11.28	11.83	12.31	12.85	14.23	10.86	11.40	11.89	12.43	13.80
	6H	11.79	12.26	12.83	13.31	14.68	11.36	11.83	12.40	12.88	14.25
	8H	11.94	12.38	12.98	13.42	14.81	11.50	11.94	12.54	12.98	14.37
	12H	12.01	12.40	13.07	13.46	14.85	11.56	11.96	12.62	13.01	14.41
8H	4H	11.47	11.91	12.51	12.95	14.34	11.10	11.53	12.14	12.58	13.96
	6H	12.10	12.46	13.16	13.54	14.93	11.71	12.08	12.78	13.16	14.54
	8H	12.32	12.63	13.39	13.70	15.11	11.92	12.24	12.99	13.31	14.71
	12H	12.44	12.72	13.52	13.79	15.23	12.03	12.31	13.11	13.38	14.82
12H	4H	11.46	11.85	12.51	12.91	14.30	11.09	11.48	12.15	12.54	13.93
	6H	12.13	12.44	13.20	13.51	14.92	11.75	12.07	12.82	13.14	14.54
	8H	12.36	12.64	13.44	13.71	15.15	11.98	12.26	13.06	13.33	14.77