

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918582

Luminaire Tested: DFN2DIP-4P3F0-040D020US935-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918582
REPORT IS A COMBINATION OF REPORTS P899033 AND P895917
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-040D020US935-FLLFLL
Description: 3 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4933.5 lumens
Efficiency: N/A
Efficacy: 93.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 53
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918582
CATALOG NUMBER: DFN2DIP-4P3F0-040D020US935-FLLFLL

Luminous Intensity Polar Plot

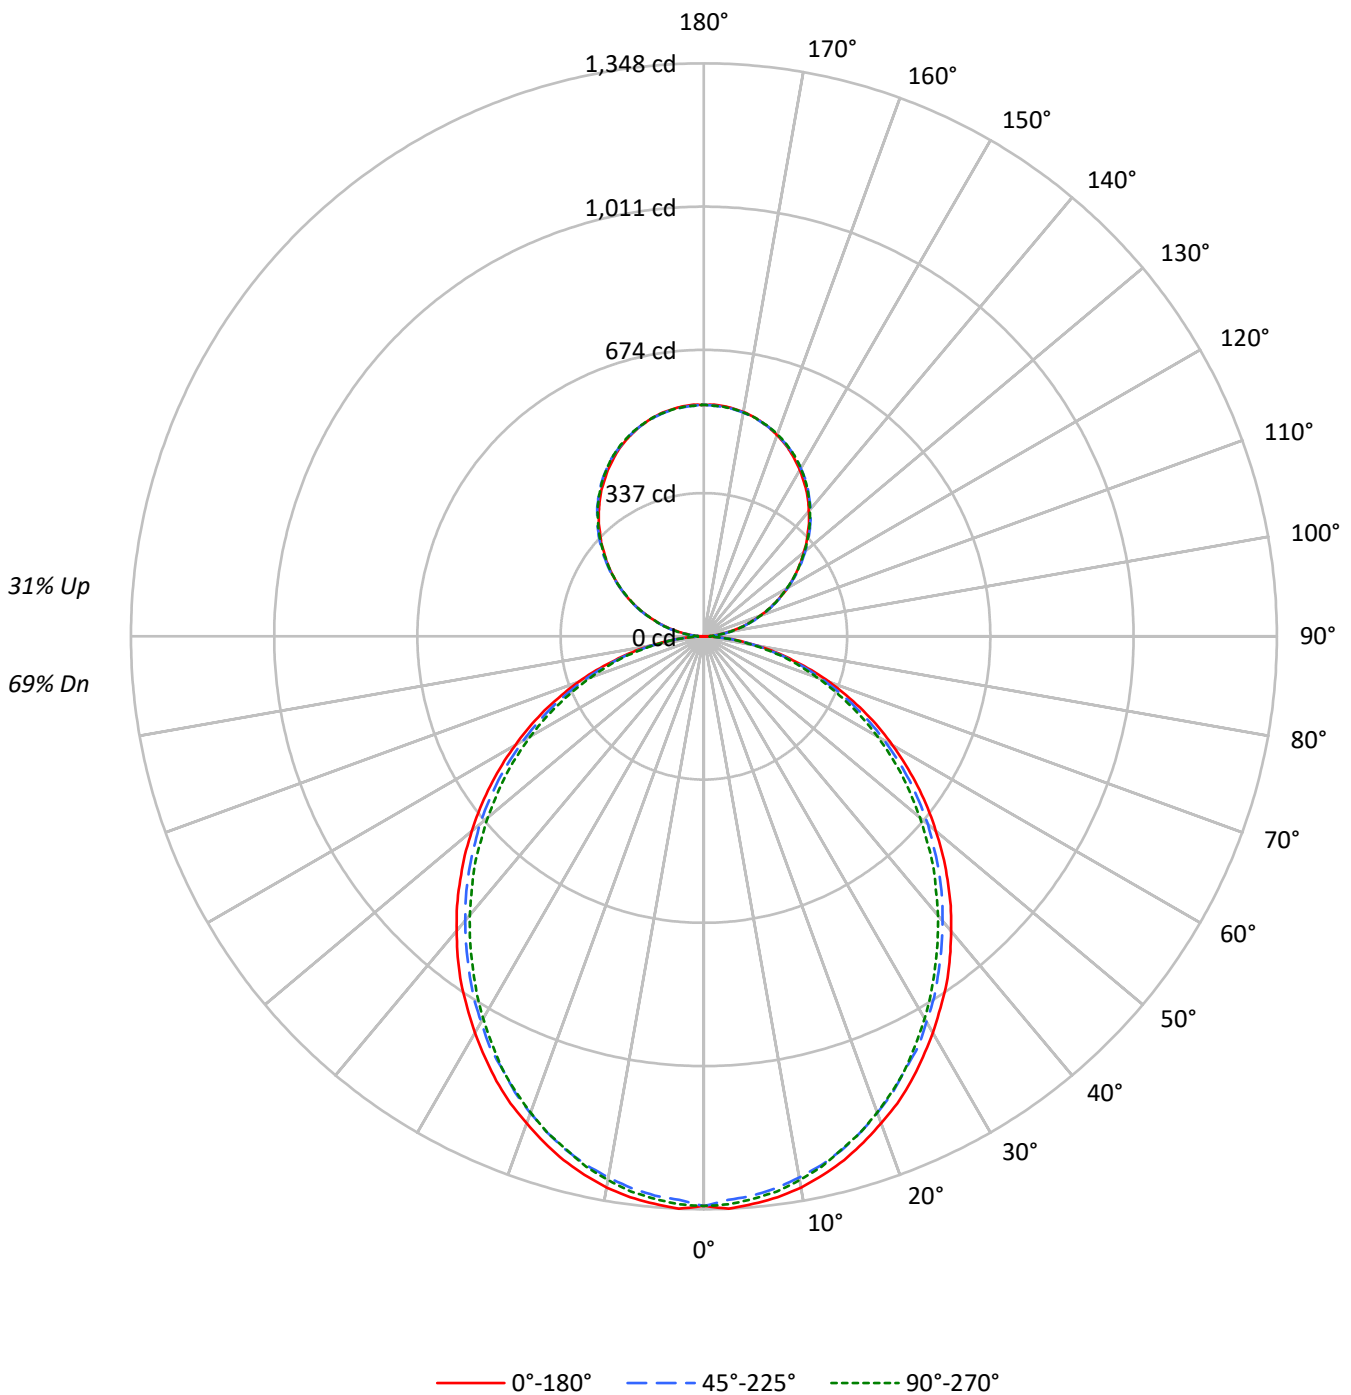



TEST NUMBER: P918582

CATALOG NUMBER: DFN2DIP-4P3F0-040D020US935-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	112	112	112	112	106	106	106	106	94	94	94	83	83	83	74	74	74	69			
1	102	98	94	90	96	92	89	86	83	80	77	74	71	70	65	64	62	58			
2	93	85	79	74	88	81	75	70	72	68	64	65	61	58	57	55	52	49			
3	85	75	67	61	80	71	64	59	64	58	54	57	53	49	51	48	45	41			
4	78	67	58	52	73	63	56	50	57	51	46	51	46	42	46	42	39	35			
5	71	59	51	45	67	56	49	43	51	45	40	46	41	37	41	37	34	31			
6	66	53	45	39	62	51	43	38	46	40	35	41	36	32	37	33	30	27			
7	61	48	40	34	58	46	39	33	42	36	31	38	33	29	34	30	26	24			
8	57	44	36	31	54	42	35	30	38	32	28	35	29	26	31	27	24	22			
9	53	40	33	27	50	39	31	26	35	29	25	32	27	23	29	25	21	19			
10	50	37	30	25	47	36	29	24	32	27	22	30	25	21	27	23	20	18			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1527	1527	1527
5°	1529	1505	1516
10°	1515	1484	1494
15°	1492	1458	1462
20°	1461	1423	1429
25°	1430	1382	1390
30°	1391	1343	1341
35°	1355	1297	1290
40°	1310	1251	1241
45°	1265	1205	1191
50°	1216	1157	1133
55°	1165	1100	1079
60°	1106	1034	1018
65°	1043	965	945
70°	962	880	867
75°	850	779	794
80°	714	650	657
85°	503	431	430

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1265 cd/sqm



TEST NUMBER: P918582

CATALOG NUMBER: DFN2DIP-4P3F0-040D020US935-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	126.1	2.6
10°-20°	354.9	7.2
20°-30°	521.5	10.6
30°-40°	605.7	12.3
40°-50°	605.0	12.3
50°-60°	527.5	10.7
60°-70°	389.9	7.9
70°-80°	220.6	4.5
80°-90°	59.8	1.2
90°-100°	33.7	0.7
100°-110°	107.1	2.2
110°-120°	183.2	3.7
120°-130°	241.0	4.9
130°-140°	270.5	5.5
140°-150°	265.3	5.4
150°-160°	222.5	4.5
160°-170°	147.6	3.0
170°-180°	51.6	1.0
0°-30°	1002.5	20.3
0°-40°	1608.3	32.6
0°-60°	2740.7	55.6
0°-90°	3411.1	69.1
90°-120°	324.0	6.6
90°-150°	1100.8	22.3
90°-180°	1522.0	30.9
0°-180°	4933.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1340	1340	1340	1340	1340	
5°	1340	1335	1321	1331	1329	127
15°	1276	1268	1251	1256	1250	359
25°	1154	1144	1122	1125	1122	531
35°	996	983	963	955	948	622
45°	810	802	782	768	763	626
55°	614	606	590	575	568	548
65°	414	406	393	381	375	409
75°	216	214	207	200	202	231
85°	53	52	50	46	45	59
90°	0	6	16	15	16	5
95°	24	29	29	29	29	27
105°	99	100	101	102	102	104
115°	184	186	186	185	184	182
125°	267	272	270	269	268	239
135°	346	351	352	352	350	267
145°	420	423	426	426	425	262
155°	480	482	483	485	484	221
165°	522	522	522	525	523	147
175°	544	542	541	545	542	52
180°	545	545	545	545	545	



TEST NUMBER: P918582

CATALOG NUMBER: DFN2DIP-4P3F0-040D020US935-FLLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1340.1	1340.1	1340.1	1340.1	1340.1
2.5°	1347.9	1341.4	1327.2	1340.1	1337.6
5°	1340.1	1335.0	1320.8	1331.0	1328.6
7.5°	1331.0	1323.4	1309.1	1319.6	1317.0
10°	1317.0	1307.9	1292.5	1302.8	1298.9
12.5°	1297.5	1289.9	1274.4	1280.9	1278.2
15°	1275.7	1268.0	1251.2	1256.4	1250.0
17.5°	1248.6	1241.0	1224.2	1230.5	1224.2
20°	1218.9	1211.3	1193.3	1197.0	1192.1
22.5°	1189.4	1177.8	1161.0	1161.0	1158.4
25°	1154.5	1144.3	1122.4	1124.9	1122.4
27.5°	1115.9	1106.8	1090.2	1086.3	1079.9
30°	1077.3	1066.9	1047.7	1043.8	1038.6
32.5°	1036.0	1028.4	1007.7	1000.0	994.7
35°	996.1	983.3	962.6	954.8	948.4
37.5°	951.0	939.3	918.7	909.7	903.3
40°	904.7	894.2	873.6	862.1	857.0
42.5°	859.5	849.1	828.6	815.6	808.0
45°	810.5	801.6	782.1	768.1	762.8
47.5°	762.8	753.8	733.2	719.0	711.4
50°	712.6	706.1	688.1	670.0	663.6
52.5°	663.6	654.6	637.9	623.7	614.7
55°	613.5	605.6	590.2	574.7	568.3
57.5°	563.1	556.7	539.8	524.4	519.3
60°	512.8	507.7	489.7	475.5	471.7
62.5°	463.9	454.9	442.0	429.1	424.0
65°	413.7	405.9	393.0	381.4	375.1
67.5°	362.1	355.6	344.1	335.1	329.9
70°	314.4	309.3	297.6	288.6	283.5
72.5°	265.5	260.3	253.9	244.9	241.0
75°	216.5	214.0	207.4	199.8	202.3
77.5°	172.6	167.5	164.9	161.0	157.2
80°	128.9	127.5	124.9	121.1	118.6
82.5°	87.6	87.6	86.4	81.2	81.2
85°	52.8	51.6	50.3	46.3	45.1
87.5°	23.2	20.7	18.1	14.2	12.8
90°	0.5	5.9	16.1	15.1	15.6
92.5°	10.2	13.8	14.3	14.8	14.8
95°	23.9	28.6	29.4	29.4	28.6
97.5°	39.9	44.2	46.0	46.0	46.0
100°	58.3	62.1	63.4	63.4	62.9
102.5°	77.7	80.4	82.2	82.7	82.2
105°	98.8	100.1	101.2	101.9	101.9
107.5°	119.9	121.8	121.8	122.2	119.9
110°	140.3	142.8	142.8	142.8	141.5



TEST NUMBER: P918582

CATALOG NUMBER: DFN2DIP-4P3F0-040D020US935-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	162.2	165.0	164.5	163.2	162.2
115°	183.9	186.5	185.7	185.2	183.9
117.5°	205.4	209.1	206.7	205.4	204.1
120°	227.0	230.7	227.0	227.0	225.6
122.5°	246.8	251.3	249.1	247.8	246.8
125°	267.4	271.6	270.3	268.8	268.3
127.5°	287.7	292.7	290.9	289.0	287.7
130°	306.5	312.5	311.6	310.6	308.8
132.5°	327.7	332.3	332.6	330.4	329.0
135°	345.9	351.0	352.0	351.5	350.2
137.5°	366.3	370.4	371.3	370.9	368.9
140°	384.2	388.3	390.6	390.6	388.8
142.5°	402.6	406.6	408.0	408.5	406.6
145°	420.0	423.3	425.9	426.4	424.6
147.5°	435.6	439.7	441.7	442.5	440.7
150°	451.7	454.4	456.2	457.7	456.2
152.5°	466.0	468.7	471.1	472.9	471.1
155°	480.3	481.6	483.0	485.3	483.9
157.5°	492.6	493.5	494.4	497.7	495.3
160°	503.6	504.5	505.1	507.8	505.8
162.5°	513.8	513.8	514.2	517.4	515.0
165°	522.5	521.9	521.9	525.2	523.0
167.5°	530.3	528.8	528.8	532.1	529.9
170°	536.2	534.9	534.4	537.7	534.9
172.5°	540.4	539.0	538.6	541.8	539.0
175°	543.6	542.3	541.3	544.6	541.8
177.5°	545.4	544.2	543.1	545.9	543.1
180°	544.6	544.6	544.6	544.6	544.6



TEST NUMBER: P918582
 CATALOG NUMBER: DFN2DIP-4P3F0-040D020US935-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.31	11.38	11.09	12.17	13.14	9.87	10.93	10.64	11.73	12.70
	3H	11.98	12.94	12.77	13.74	14.74	11.49	12.45	12.28	13.25	14.25
	4H	12.58	13.48	13.38	14.29	15.30	12.08	12.99	12.89	13.80	14.81
	6H	12.98	13.82	13.80	14.64	15.66	12.48	13.32	13.30	14.14	15.16
	8H	13.09	13.89	13.92	14.73	15.75	12.59	13.38	13.42	14.23	15.25
	12H	13.15	13.90	13.98	14.74	15.79	12.64	13.39	13.47	14.23	15.28
4H	2H	10.79	11.70	11.60	12.51	13.52	10.44	11.34	11.25	12.16	13.16
	3H	12.67	13.43	13.49	14.27	15.30	12.26	13.02	13.08	13.87	14.89
	4H	13.39	14.08	14.23	14.92	15.98	12.97	13.65	13.80	14.50	15.55
	6H	13.91	14.51	14.76	15.38	16.44	13.48	14.08	14.33	14.95	16.00
	8H	14.07	14.62	14.92	15.49	16.56	13.63	14.18	14.48	15.05	16.12
	12H	14.15	14.65	15.02	15.53	16.61	13.70	14.20	14.57	15.08	16.16
8H	4H	13.60	14.16	14.45	15.02	16.09	13.22	13.78	14.08	14.64	15.71
	6H	14.23	14.69	15.11	15.60	16.67	13.85	14.31	14.73	15.22	16.29
	8H	14.45	14.86	15.34	15.76	16.85	14.06	14.47	14.95	15.37	16.46
	12H	14.59	14.95	15.49	15.84	16.98	14.18	14.54	15.07	15.43	16.57
12H	4H	13.59	14.09	14.47	14.98	16.06	13.23	13.73	14.10	14.61	15.69
	6H	14.26	14.67	15.16	15.57	16.66	13.89	14.30	14.78	15.20	16.29
	8H	14.51	14.87	15.41	15.76	16.91	14.13	14.49	15.03	15.38	16.52