

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918586

Luminaire Tested: DFN2DIP-4P3F0-040D030US935-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918586
REPORT IS A COMBINATION OF REPORTS P899043 AND P895917
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-040D030US935-FLLFLL
Description: 3 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5695.4 lumens
Efficiency: N/A
Efficacy: 95.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 59.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918586

CATALOG NUMBER: DFN2DIP-4P3F0-040D030US935-FLLFLL

Luminous Intensity Polar Plot

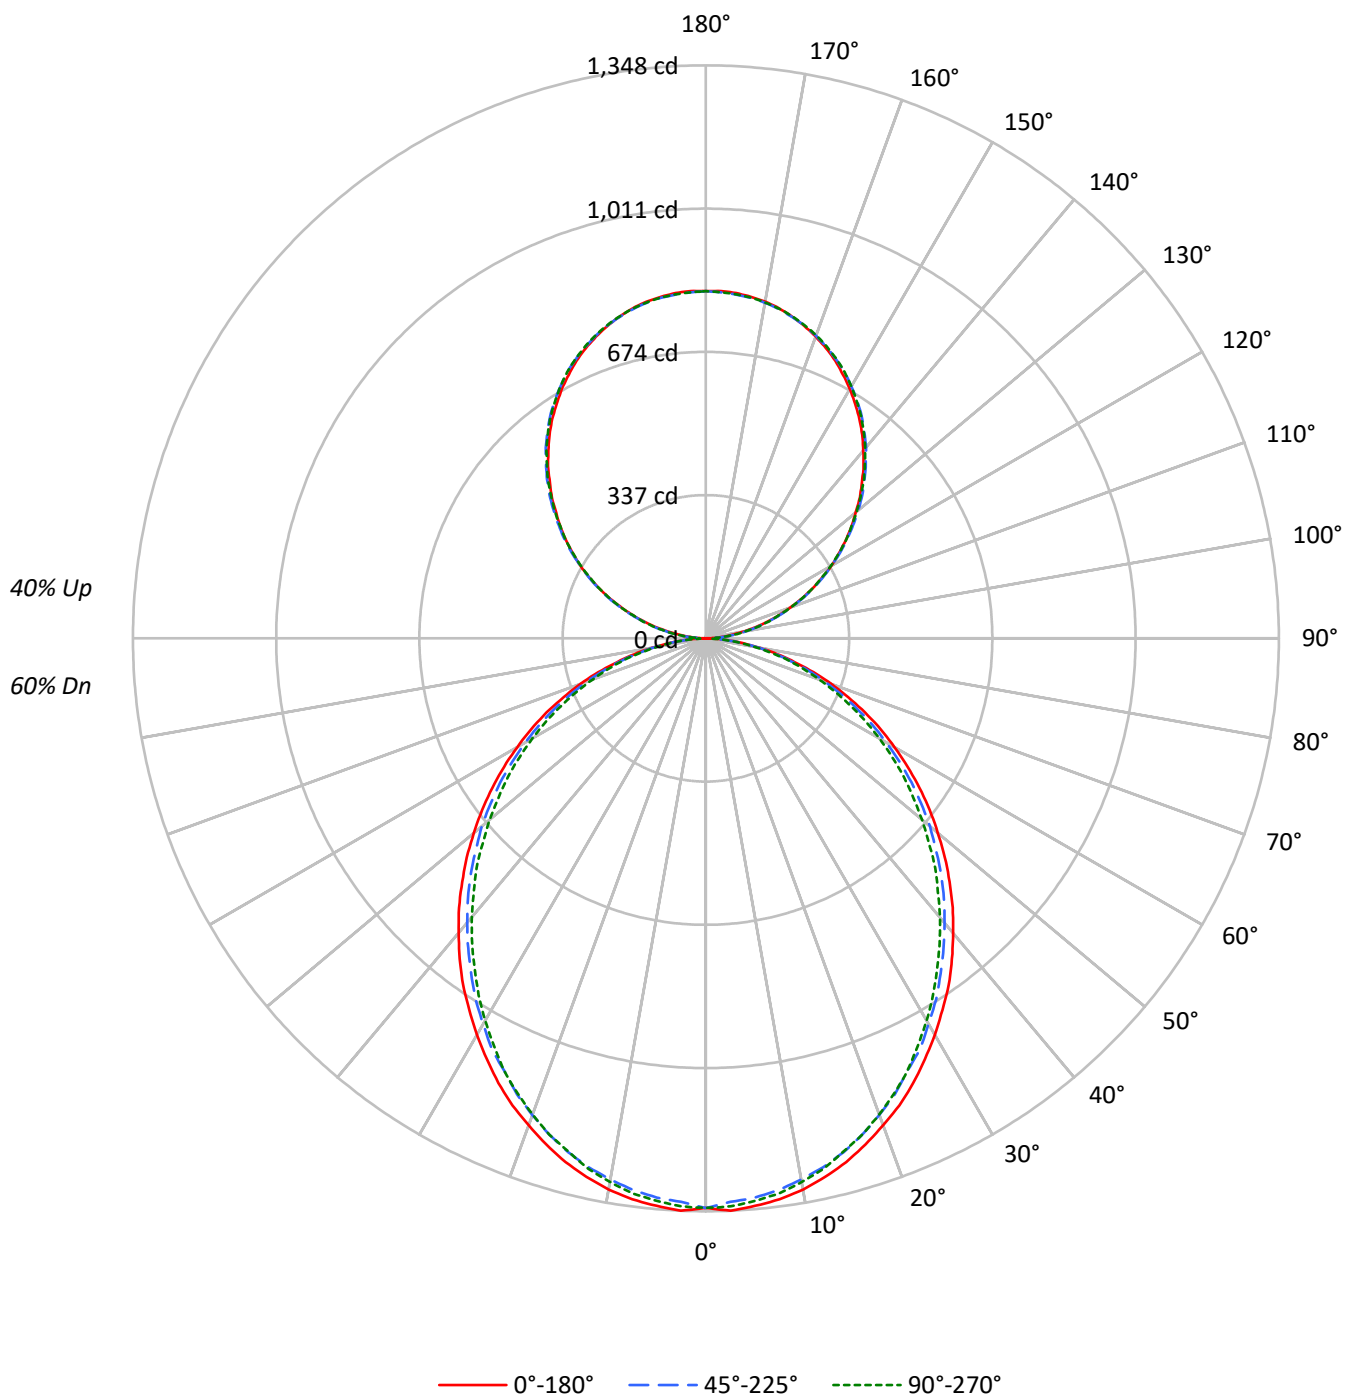

TEST NUMBER: P918586

CATALOG NUMBER: DFN2DIP-4P3F0-040D030US935-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65
1	100	96	92	88	93	89	86	83	78	75	73	67	66	64	58	56	55
2	91	84	77	72	85	78	73	68	68	64	61	59	56	53	51	48	46
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	45	42	40
4	76	65	57	51	71	61	54	48	54	48	43	47	42	39	40	37	34
5	70	58	50	44	65	55	47	42	48	42	38	42	37	34	36	33	30
6	64	52	44	38	60	49	42	36	43	37	33	38	33	29	33	29	26
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	26	23
8	55	43	35	30	52	40	33	28	36	30	26	32	27	23	28	24	21
9	52	39	32	26	48	37	30	25	33	27	23	29	24	21	26	22	19
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1527	1527	1527
5°	1529	1505	1516
10°	1515	1484	1494
15°	1492	1458	1462
20°	1461	1423	1429
25°	1430	1382	1390
30°	1391	1343	1341
35°	1355	1297	1290
40°	1310	1251	1241
45°	1265	1205	1191
50°	1216	1157	1133
55°	1165	1100	1079
60°	1106	1034	1018
65°	1043	965	945
70°	962	880	867
75°	850	779	794
80°	714	650	657
85°	503	431	430

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1265 cd/sqm

TEST NUMBER: P918586

CATALOG NUMBER: DFN2DIP-4P3F0-040D030US935-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	126.1	2.2
10°-20°	354.9	6.2
20°-30°	521.5	9.2
30°-40°	605.7	10.6
40°-50°	605.0	10.6
50°-60°	527.5	9.3
60°-70°	389.9	6.8
70°-80°	220.6	3.9
80°-90°	60.5	1.1
90°-100°	50.6	0.9
100°-110°	160.6	2.8
110°-120°	274.9	4.8
120°-130°	361.5	6.3
130°-140°	405.7	7.1
140°-150°	397.9	7.0
150°-160°	333.8	5.9
160°-170°	221.3	3.9
170°-180°	77.4	1.4
0°-30°	1002.5	17.6
0°-40°	1608.3	28.2
0°-60°	2740.7	48.1
0°-90°	3411.8	59.9
90°-120°	486.0	8.5
90°-150°	1651.1	29.0
90°-180°	2284.0	40.1
0°-180°	5695.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1340	1340	1340	1340	1340	
5°	1340	1335	1321	1331	1329	127
15°	1276	1268	1251	1256	1250	359
25°	1154	1144	1122	1125	1122	531
35°	996	983	963	955	948	622
45°	810	802	782	768	763	626
55°	614	606	590	575	568	548
65°	414	406	393	381	375	409
75°	216	214	207	200	202	231
85°	53	52	50	46	45	59
90°	1	9	24	23	23	5
95°	36	43	44	44	43	40
105°	148	150	152	153	153	156
115°	276	280	278	278	276	273
125°	401	407	405	403	402	358
135°	519	526	528	527	525	401
145°	630	635	639	640	637	394
155°	720	722	724	728	726	332
165°	784	783	783	788	784	221
175°	816	814	812	817	813	77
180°	817	817	817	817	817	

TEST NUMBER: P918586

CATALOG NUMBER: DFN2DIP-4P3F0-040D030US935-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1340.1	1340.1	1340.1	1340.1	1340.1
2.5°	1347.9	1341.4	1327.2	1340.1	1337.6
5°	1340.1	1335.0	1320.8	1331.0	1328.6
7.5°	1331.0	1323.4	1309.1	1319.6	1317.0
10°	1317.0	1307.9	1292.5	1302.8	1298.9
12.5°	1297.5	1289.9	1274.4	1280.9	1278.2
15°	1275.7	1268.0	1251.2	1256.4	1250.0
17.5°	1248.6	1241.0	1224.2	1230.5	1224.2
20°	1218.9	1211.3	1193.3	1197.0	1192.1
22.5°	1189.4	1177.8	1161.0	1161.0	1158.4
25°	1154.5	1144.3	1122.4	1124.9	1122.4
27.5°	1115.9	1106.8	1090.2	1086.3	1079.9
30°	1077.3	1066.9	1047.7	1043.8	1038.6
32.5°	1036.0	1028.4	1007.7	1000.0	994.7
35°	996.1	983.3	962.6	954.8	948.4
37.5°	951.0	939.3	918.7	909.7	903.3
40°	904.7	894.2	873.6	862.1	857.0
42.5°	859.5	849.1	828.6	815.6	808.0
45°	810.5	801.6	782.1	768.1	762.8
47.5°	762.8	753.8	733.2	719.0	711.4
50°	712.6	706.1	688.1	670.0	663.6
52.5°	663.6	654.6	637.9	623.7	614.7
55°	613.5	605.6	590.2	574.7	568.3
57.5°	563.1	556.7	539.8	524.4	519.3
60°	512.8	507.7	489.7	475.5	471.7
62.5°	463.9	454.9	442.0	429.1	424.0
65°	413.7	405.9	393.0	381.4	375.1
67.5°	362.1	355.6	344.1	335.1	329.9
70°	314.4	309.3	297.6	288.6	283.5
72.5°	265.5	260.3	253.9	244.9	241.0
75°	216.5	214.0	207.4	199.8	202.3
77.5°	172.6	167.5	164.9	161.0	157.2
80°	128.9	127.5	124.9	121.1	118.6
82.5°	87.6	87.6	86.4	81.2	81.2
85°	52.8	51.6	50.3	46.3	45.1
87.5°	23.2	20.7	18.1	14.2	12.8
90°	0.8	8.9	24.1	22.6	23.4
92.5°	15.2	20.7	21.4	22.1	22.1
95°	36.0	42.9	44.1	44.1	42.9
97.5°	59.8	66.2	69.0	69.0	69.0
100°	87.4	93.1	95.1	95.1	94.4
102.5°	116.5	120.7	123.4	124.2	123.4
105°	148.3	150.2	151.7	152.9	152.9
107.5°	179.8	182.7	182.7	183.2	179.8
110°	210.3	214.3	214.3	214.3	212.3



TEST NUMBER: P918586

CATALOG NUMBER: DFN2DIP-4P3F0-040D030US935-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	243.3	247.5	246.8	244.8	243.3
115°	275.9	279.7	278.5	277.8	275.9
117.5°	308.1	313.5	310.0	308.1	306.1
120°	340.6	346.0	340.6	340.6	338.4
122.5°	370.1	377.0	373.6	371.6	370.1
125°	401.2	407.3	405.4	403.1	402.4
127.5°	431.4	439.1	436.4	433.4	431.4
130°	459.8	468.6	467.4	466.0	463.2
132.5°	491.5	498.4	498.9	495.5	493.5
135°	518.9	526.5	528.0	527.3	525.3
137.5°	549.4	555.6	556.8	556.4	553.4
140°	576.3	582.5	585.9	585.9	583.2
142.5°	603.9	610.0	612.0	612.8	610.0
145°	630.0	634.9	638.9	639.5	636.9
147.5°	653.4	659.5	662.5	663.7	661.0
150°	677.5	681.7	684.4	686.6	684.4
152.5°	699.0	703.1	706.5	709.3	706.5
155°	720.4	722.3	724.5	728.0	725.8
157.5°	738.8	740.3	741.6	746.5	743.0
160°	755.4	756.8	757.6	761.7	758.8
162.5°	770.6	770.6	771.4	776.0	772.6
165°	783.7	782.9	782.9	787.8	784.4
167.5°	795.5	793.2	793.2	798.1	794.7
170°	804.3	802.4	801.7	806.6	802.4
172.5°	810.5	808.6	807.8	812.7	808.6
175°	815.5	813.5	812.0	816.9	812.7
177.5°	818.1	816.1	814.7	818.9	814.7
180°	816.9	816.9	816.9	816.9	816.9



TEST NUMBER: P918586

CATALOG NUMBER: DFN2DIP-4P3F0-040D030US935-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.58	10.53	10.44	11.42	12.54	9.13	10.09	10.00	10.98	12.10
	3H	11.24	12.10	12.12	13.00	14.14	10.75	11.61	11.63	12.51	13.65
	4H	11.83	12.64	12.72	13.54	14.70	11.33	12.15	12.23	13.05	14.21
	6H	12.23	12.98	13.14	13.89	15.06	11.73	12.48	12.64	13.39	14.56
	8H	12.33	13.05	13.25	13.98	15.15	11.83	12.55	12.75	13.48	14.65
	12H	12.38	13.06	13.31	13.99	15.18	11.88	12.56	12.80	13.48	14.67
4H	2H	10.04	10.86	10.94	11.76	12.92	9.69	10.50	10.59	11.41	12.56
	3H	11.91	12.59	12.82	13.53	14.70	11.51	12.18	12.42	13.12	14.29
	4H	12.63	13.25	13.55	14.18	15.38	12.20	12.82	13.13	13.75	14.95
	6H	13.14	13.68	14.08	14.63	15.83	12.71	13.25	13.65	14.20	15.40
	8H	13.29	13.79	14.23	14.74	15.96	12.86	13.36	13.80	14.30	15.52
	12H	13.37	13.82	14.33	14.79	16.01	12.92	13.37	13.88	14.34	15.56
8H	4H	12.83	13.33	13.77	14.28	15.49	12.45	12.95	13.39	13.90	15.11
	6H	13.46	13.87	14.42	14.86	16.07	13.07	13.49	14.04	14.48	15.69
	8H	13.68	14.04	14.65	15.02	16.25	13.28	13.65	14.26	14.63	15.86
	12H	13.81	14.13	14.79	15.10	16.38	13.40	13.72	14.38	14.69	15.97
12H	4H	12.82	13.27	13.78	14.23	15.45	12.45	12.90	13.41	13.87	15.08
	6H	13.49	13.85	14.46	14.83	16.06	13.11	13.48	14.09	14.46	15.69
	8H	13.73	14.05	14.71	15.02	16.30	13.35	13.67	14.33	14.64	15.92