

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918592

Luminaire Tested: DFN2DIP-4P3F0-040D040US935-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918592
REPORT IS A COMBINATION OF REPORTS P899054 AND P895917
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-040D040US935-RLLFLL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5975.3 lumens
Efficiency: N/A
Efficacy: 88.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 67.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918592

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US935-RLLFLL

Luminous Intensity Polar Plot

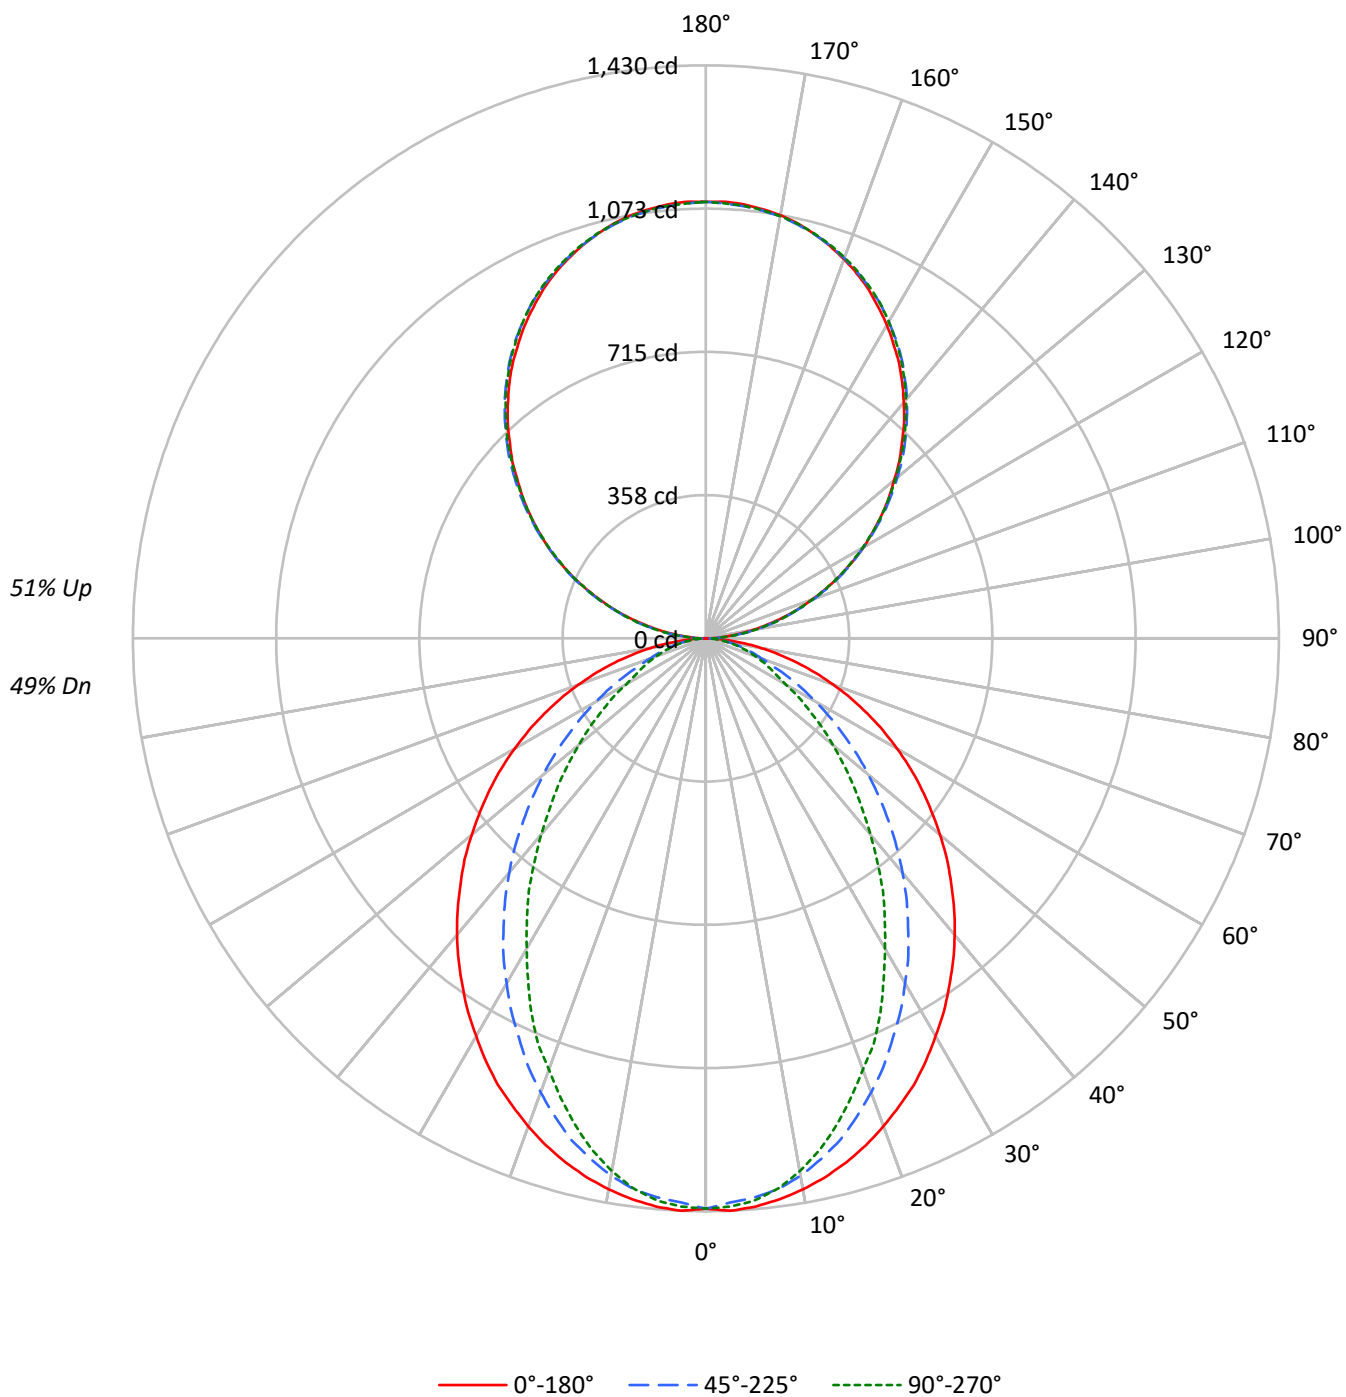

TEST NUMBER: P918592

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US935-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1622	1622	1622
5°	1624	1595	1606
10°	1607	1563	1553
15°	1583	1510	1472
20°	1553	1438	1372
25°	1522	1357	1276
30°	1481	1275	1155
35°	1440	1186	1048
40°	1399	1094	925
45°	1351	992	814
50°	1302	890	706
55°	1250	780	602
60°	1189	666	495
65°	1120	550	445
70°	1036	442	402
75°	930	387	364
80°	777	321	314
85°	528	210	234

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1351 cd/sqm

TEST NUMBER: P918592

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US935-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.4	2.2
10°-20°	366.2	6.1
20°-30°	514.2	8.6
30°-40°	560.5	9.4
40°-50°	515.1	8.6
50°-60°	404.5	6.8
60°-70°	263.3	4.4
70°-80°	135.6	2.3
80°-90°	37.7	0.6
90°-100°	67.4	1.1
100°-110°	214.2	3.6
110°-120°	366.5	6.1
120°-130°	482.0	8.1
130°-140°	541.0	9.1
140°-150°	530.5	8.9
150°-160°	445.0	7.4
160°-170°	295.1	4.9
170°-180°	103.2	1.7
0°-30°	1013.8	17.0
0°-40°	1574.2	26.3
0°-60°	2493.9	41.7
0°-90°	2930.5	49.0
90°-120°	648.0	10.8
90°-150°	2201.5	36.8
90°-180°	3045.0	51.0
0°-180°	5975.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1423	1423	1423	1423	1423	
5°	1423	1417	1400	1412	1408	135
15°	1354	1340	1296	1271	1259	382
25°	1229	1188	1103	1050	1030	565
35°	1059	993	880	799	770	663
45°	866	779	644	553	522	668
55°	658	558	419	341	317	588
65°	444	340	224	180	176	441
75°	237	147	103	94	93	251
85°	55	28	24	24	24	64
90°	1	12	32	30	31	6
95°	48	57	59	59	57	53
105°	198	200	202	204	204	209
115°	368	373	371	370	368	364
125°	535	543	540	538	537	478
135°	692	702	704	703	700	535
145°	840	846	852	853	849	525
155°	960	963	966	971	968	442
165°	1045	1044	1044	1050	1046	295
175°	1087	1085	1083	1089	1084	103
180°	1089	1089	1089	1089	1089	

TEST NUMBER: P918592

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US935-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1423.4	1423.4	1423.4	1423.4	1423.4
2.5°	1429.9	1423.4	1409.2	1422.2	1419.5
5°	1423.4	1416.9	1400.2	1411.8	1408.0
7.5°	1411.8	1404.1	1386.1	1391.1	1384.7
10°	1396.4	1387.3	1361.6	1357.6	1350.0
12.5°	1377.1	1365.5	1330.6	1322.9	1308.7
15°	1353.8	1339.6	1295.9	1271.4	1258.6
17.5°	1326.8	1306.1	1252.0	1223.7	1203.1
20°	1295.9	1270.1	1205.7	1173.5	1145.1
22.5°	1262.4	1232.8	1158.0	1114.2	1095.0
25°	1228.9	1187.7	1102.6	1049.9	1030.4
27.5°	1189.0	1145.1	1051.1	990.6	960.9
30°	1146.5	1097.4	994.4	928.8	894.0
32.5°	1105.3	1045.9	940.4	863.1	830.8
35°	1058.9	993.2	879.9	798.7	770.2
37.5°	1013.8	942.9	823.1	734.2	702.1
40°	966.1	888.9	763.9	672.4	638.9
42.5°	917.1	834.7	704.6	609.2	577.1
45°	865.6	779.3	644.1	552.6	521.7
47.5°	816.7	725.3	586.2	494.6	466.3
50°	762.6	671.1	529.4	440.5	413.5
52.5°	709.7	613.1	475.4	390.3	365.8
55°	658.2	557.8	418.6	341.4	316.9
57.5°	605.5	502.4	368.4	296.3	275.7
60°	551.3	448.2	315.6	249.9	229.4
62.5°	498.6	395.5	270.4	208.7	198.5
65°	444.4	340.0	224.1	180.4	176.4
67.5°	393.0	288.5	180.4	158.4	154.5
70°	338.8	238.3	149.4	136.6	131.3
72.5°	287.3	191.9	124.9	114.7	112.1
75°	236.9	146.8	103.1	94.0	92.8
77.5°	186.8	104.3	81.2	76.0	73.4
80°	140.3	74.7	61.7	56.7	56.7
82.5°	97.9	50.3	42.5	39.9	39.9
85°	55.4	28.3	24.5	24.5	24.5
87.5°	20.7	10.2	10.2	9.0	9.0
90°	0.9	11.8	32.2	30.2	31.2
92.5°	20.3	27.6	28.6	29.5	29.5
95°	48.0	57.2	58.8	58.8	57.2
97.5°	79.8	88.3	92.0	92.0	92.0
100°	116.6	124.2	126.7	126.7	125.8
102.5°	155.3	160.9	164.5	165.5	164.5
105°	197.7	200.3	202.2	203.9	203.9
107.5°	239.7	243.7	243.7	244.3	239.7
110°	280.4	285.7	285.7	285.7	283.1

TEST NUMBER: P918592

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US935-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	324.4	330.0	329.0	326.4	324.4
115°	367.7	373.1	371.3	370.4	367.7
117.5°	410.8	418.0	413.5	410.8	408.2
120°	454.2	461.3	454.2	454.2	451.2
122.5°	493.5	502.7	498.2	495.5	493.5
125°	534.9	543.1	540.5	537.5	536.6
127.5°	575.3	585.5	581.9	577.9	575.3
130°	613.0	624.9	623.3	621.3	617.7
132.5°	655.4	664.6	665.3	660.6	658.1
135°	691.9	702.1	704.0	703.0	700.4
137.5°	732.6	740.8	742.4	741.7	737.9
140°	768.4	776.6	781.2	781.2	777.6
142.5°	805.2	813.4	816.0	817.0	813.4
145°	840.0	846.5	851.8	852.8	849.2
147.5°	871.2	879.3	883.3	884.9	881.3
150°	903.4	909.0	912.6	915.5	912.6
152.5°	931.9	937.5	942.1	945.7	942.1
155°	960.4	963.1	966.0	970.7	967.7
157.5°	985.2	987.0	988.7	995.3	990.7
160°	1007.1	1009.1	1010.0	1015.6	1011.7
162.5°	1027.4	1027.4	1028.5	1034.7	1030.1
165°	1044.9	1043.9	1043.9	1050.4	1045.9
167.5°	1060.7	1057.6	1057.6	1064.3	1059.6
170°	1072.5	1069.8	1068.8	1075.4	1069.8
172.5°	1080.6	1078.1	1077.0	1083.7	1078.1
175°	1087.3	1084.6	1082.6	1089.2	1083.7
177.5°	1090.9	1088.2	1086.2	1091.8	1086.2
180°	1089.2	1089.2	1089.2	1089.2	1089.2

TEST NUMBER: P918592

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US935-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.70	9.53	9.67	10.51	11.79	4.66	5.49	5.64	6.47	7.75
	3H	10.38	11.11	11.36	12.10	13.41	5.84	6.58	6.83	7.57	8.88
	4H	10.98	11.68	11.98	12.67	13.99	6.29	6.99	7.29	7.98	9.30
	6H	11.40	12.04	12.40	13.04	14.37	6.61	7.25	7.61	8.24	9.57
	8H	11.52	12.13	12.53	13.15	14.47	6.69	7.30	7.71	8.32	9.64
	12H	11.58	12.16	12.60	13.17	14.52	6.73	7.31	7.75	8.32	9.67
4H	2H	8.72	9.41	9.72	10.41	11.73	5.25	5.95	6.26	6.94	8.26
	3H	10.54	11.12	11.55	12.14	13.47	6.60	7.18	7.61	8.20	9.53
	4H	11.23	11.76	12.25	12.77	14.13	7.14	7.67	8.16	8.68	10.04
	6H	11.74	12.19	12.77	13.23	14.58	7.55	8.01	8.58	9.04	10.40
	8H	11.91	12.34	12.94	13.37	14.73	7.68	8.10	8.71	9.13	10.50
	12H	12.00	12.39	13.05	13.43	14.80	7.74	8.12	8.79	9.17	10.54
8H	4H	11.20	11.62	12.23	12.65	14.02	7.42	7.84	8.45	8.87	10.24
	6H	11.76	12.10	12.81	13.18	14.54	7.93	8.28	8.98	9.35	10.71
	8H	11.97	12.28	13.03	13.34	14.72	8.11	8.42	9.17	9.48	10.86
	12H	12.10	12.37	13.17	13.43	14.85	8.23	8.50	9.29	9.55	10.97
12H	4H	11.15	11.53	12.19	12.58	13.95	7.42	7.80	8.47	8.85	10.22
	6H	11.73	12.04	12.79	13.10	14.48	7.97	8.28	9.04	9.34	10.72
	8H	11.95	12.22	13.01	13.27	14.70	8.18	8.45	9.24	9.50	10.93

END OF REPORT